


# Proiect Docker

Balog David Alexandru

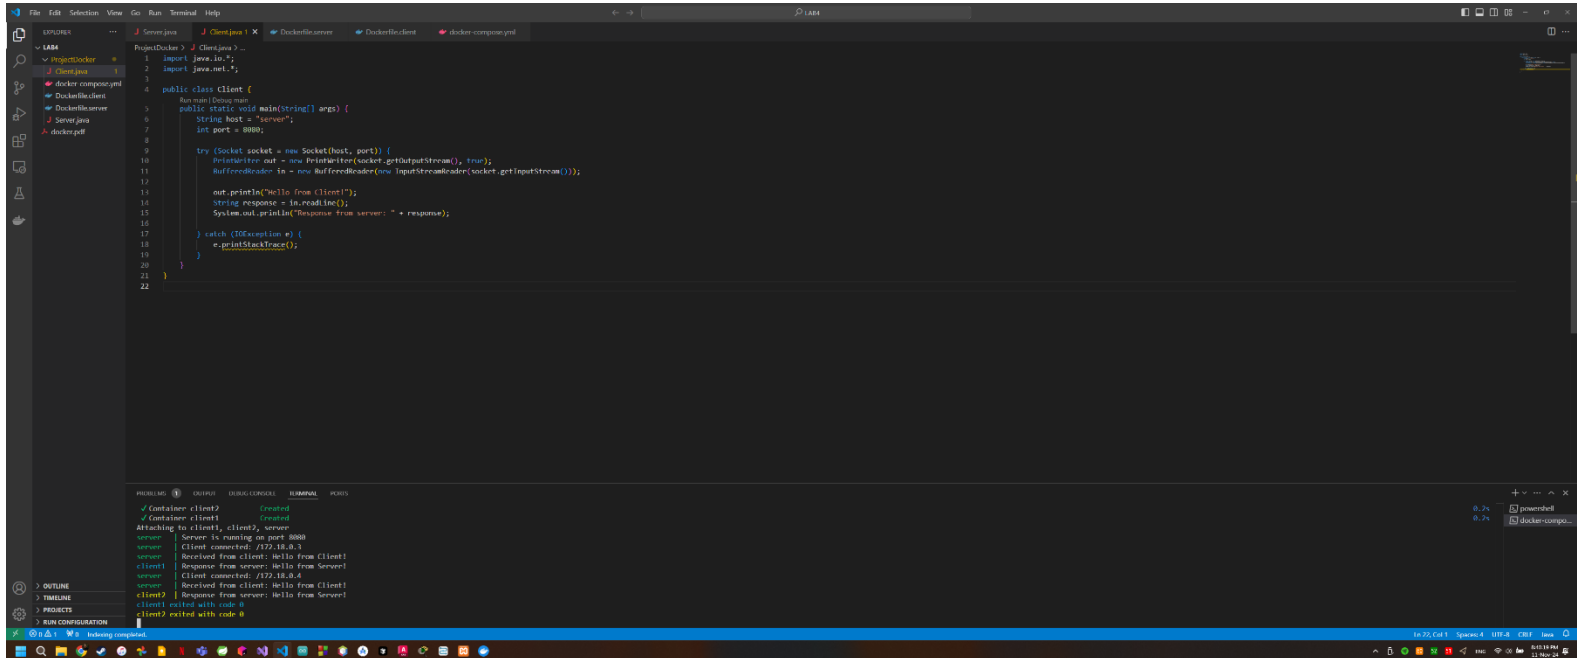

Server.java :

```
import java.io.*;
```

```
import java.net.*;
```

```
public class Server {
```

```
    public static void main(String[] args) {
```

```
        int port = 8080;
```

```
        try (ServerSocket serverSocket = new ServerSocket(port)) {
```

```
            System.out.println("Server is running on port " + port);
```

```
            while (true) {
```

```
                Socket clientSocket = serverSocket.accept();
```

```
                System.out.println("Client connected: " + clientSocket.getInetAddress());
```

```

        BufferedReader in = new BufferedReader(new
InputStreamReader(clientSocket.getInputStream()));

        PrintWriter out = new PrintWriter(clientSocket.getOutputStream(), true);

        String request = in.readLine();

        System.out.println("Received from client: " + request);

        out.println("Hello from Server!");

        clientSocket.close();
    }
} catch (IOException e) {
    e.printStackTrace();
}
}
}

```

### Client.java :

```

import java.io.*;
import java.net.*;

public class Client {

    public static void main(String[] args) {

        String host = "server";

        int port = 8080;

        try (Socket socket = new Socket(host, port)) {

            PrintWriter out = new PrintWriter(socket.getOutputStream(), true);

            BufferedReader in = new BufferedReader(new InputStreamReader(socket.getInputStream()));

```

```
        out.println("Hello from Client!");

        String response = in.readLine();

        System.out.println("Response from server: " + response);

    } catch (IOException e) {
        e.printStackTrace();
    }
}
}
```

### Dockerfile.server :

```
FROM openjdk:17
WORKDIR /app
COPY Server.java .
RUN javac Server.java
CMD ["java", "Server"]
```

### Dockerfile.client :

```
FROM openjdk:17
WORKDIR /app
COPY Client.java .
RUN javac Client.java
CMD ["java", "Client"]
```

### docker-compose.yml :

```
version: '3'

services:

    server:
```

build:

context: .

dockerfile: Dockerfile.server

container\_name: server

ports:

- "8080:8080"

networks:

- net

client1:

build:

context: .

dockerfile: Dockerfile.client

container\_name: client1

networks:

- net

depends\_on:

- server

client2:

build:

context: .

dockerfile: Dockerfile.client

container\_name: client2

networks:

- net

depends\_on:

- server

networks:

net:

driver: bridge