

Nama : Bambang Herlambang
NRP : 5803024019

Tugas Sesi 7 Praktikum Web Service

Github: <https://github.com/Bambang-code/lab04-neon-graphql>

Vercel: <https://lab04-neon-graphql.vercel.app>

Apollo Sandbox:

<https://studio.apollographql.com/sandbox/explorer?endpoint=https://lab04-neon-graphql.vercel.app/api/graphql>

Tanpa Authorization

The screenshot displays the Apollo GraphQL Sandbox interface in a web browser. The URL bar shows the endpoint: `studio.apollographql.com/sandbox/explorer`. The interface is divided into several sections:

- Left Sidebar:** Contains navigation options like "Development", "Schema", and "Governance".
- Documentation Panel:** Shows the "Root > Query" section with a list of available fields: `pelanggan: [Pelanggan!]!`, `pelangganById(...): Pelanggan`, `penjualan: [Penjualan!]!`, `penjualanById(...): Penjualan`, `produk(...): [Produk!]!`, and `produkById(...): Produk`.
- Operation Editor:** The "Operation" tab is active, showing a GraphQL mutation query:

```
1 mutation {
2   createProduk(input: {
3     namaProduk: "Bukti 0Auth
4     Sesi 07"
5     kategori: "Praktikum"
6     harga: 10000
7     stok: 1
8   }) {
9     id
10    namaProduk
11    harga
12    stok
13  }
}
```


A "Run" button is visible next to the query.
- Response Panel:** The "Response" tab shows the result of the query, which is an error:

```
{
  "errors": [
    {
      "message": "Unauthorized: silakan login
      terlebih dahulu",
      "locations": [
        {
          "line": 2,
          "column": 3
        }
      ],
      "path": [
        "createProduk"
      ],
      "extensions": {
        "code": "UNAUTHENTICATED"
      }
    }
  ],
  "data": null
}
```

The status bar at the bottom indicates a 200 status code, 833ms response time, and 183B body size.

The browser's taskbar at the bottom shows the Windows Start button and several open applications, including Chrome and File Explorer. The system clock shows 17:07 on 30-Sep-26.

Dengan JWT

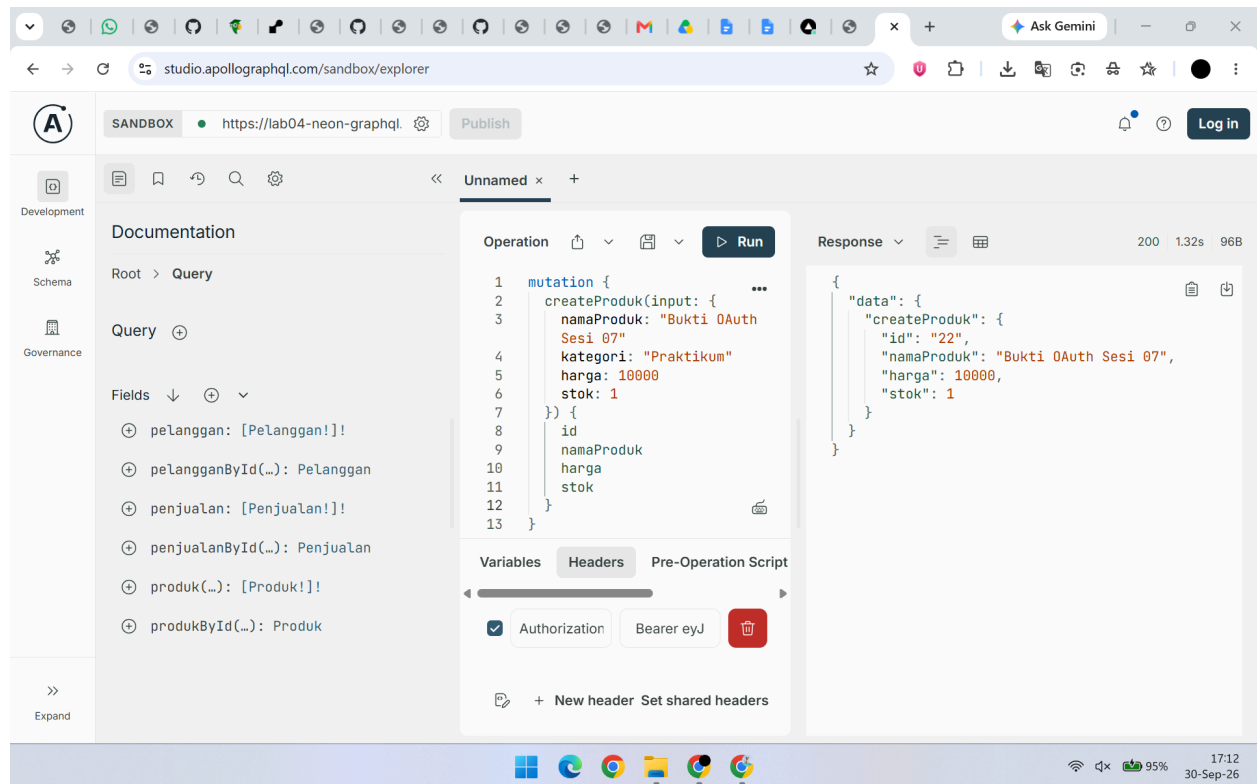

Refleksi:

Bagian yang paling membingungkan saat pertama mencoba adalah membedakan authorization code, access token GitHub, dan JWT aplikasi. Authorization code ditukar oleh server untuk mengambil profil GitHub, sedangkan JWT aplikasi digunakan pada header Authorization untuk menjalankan mutation. Perbedaan hasil tanpa dan dengan JWT membantu saya memahami bagaimana resolver GraphQL dilindungi.