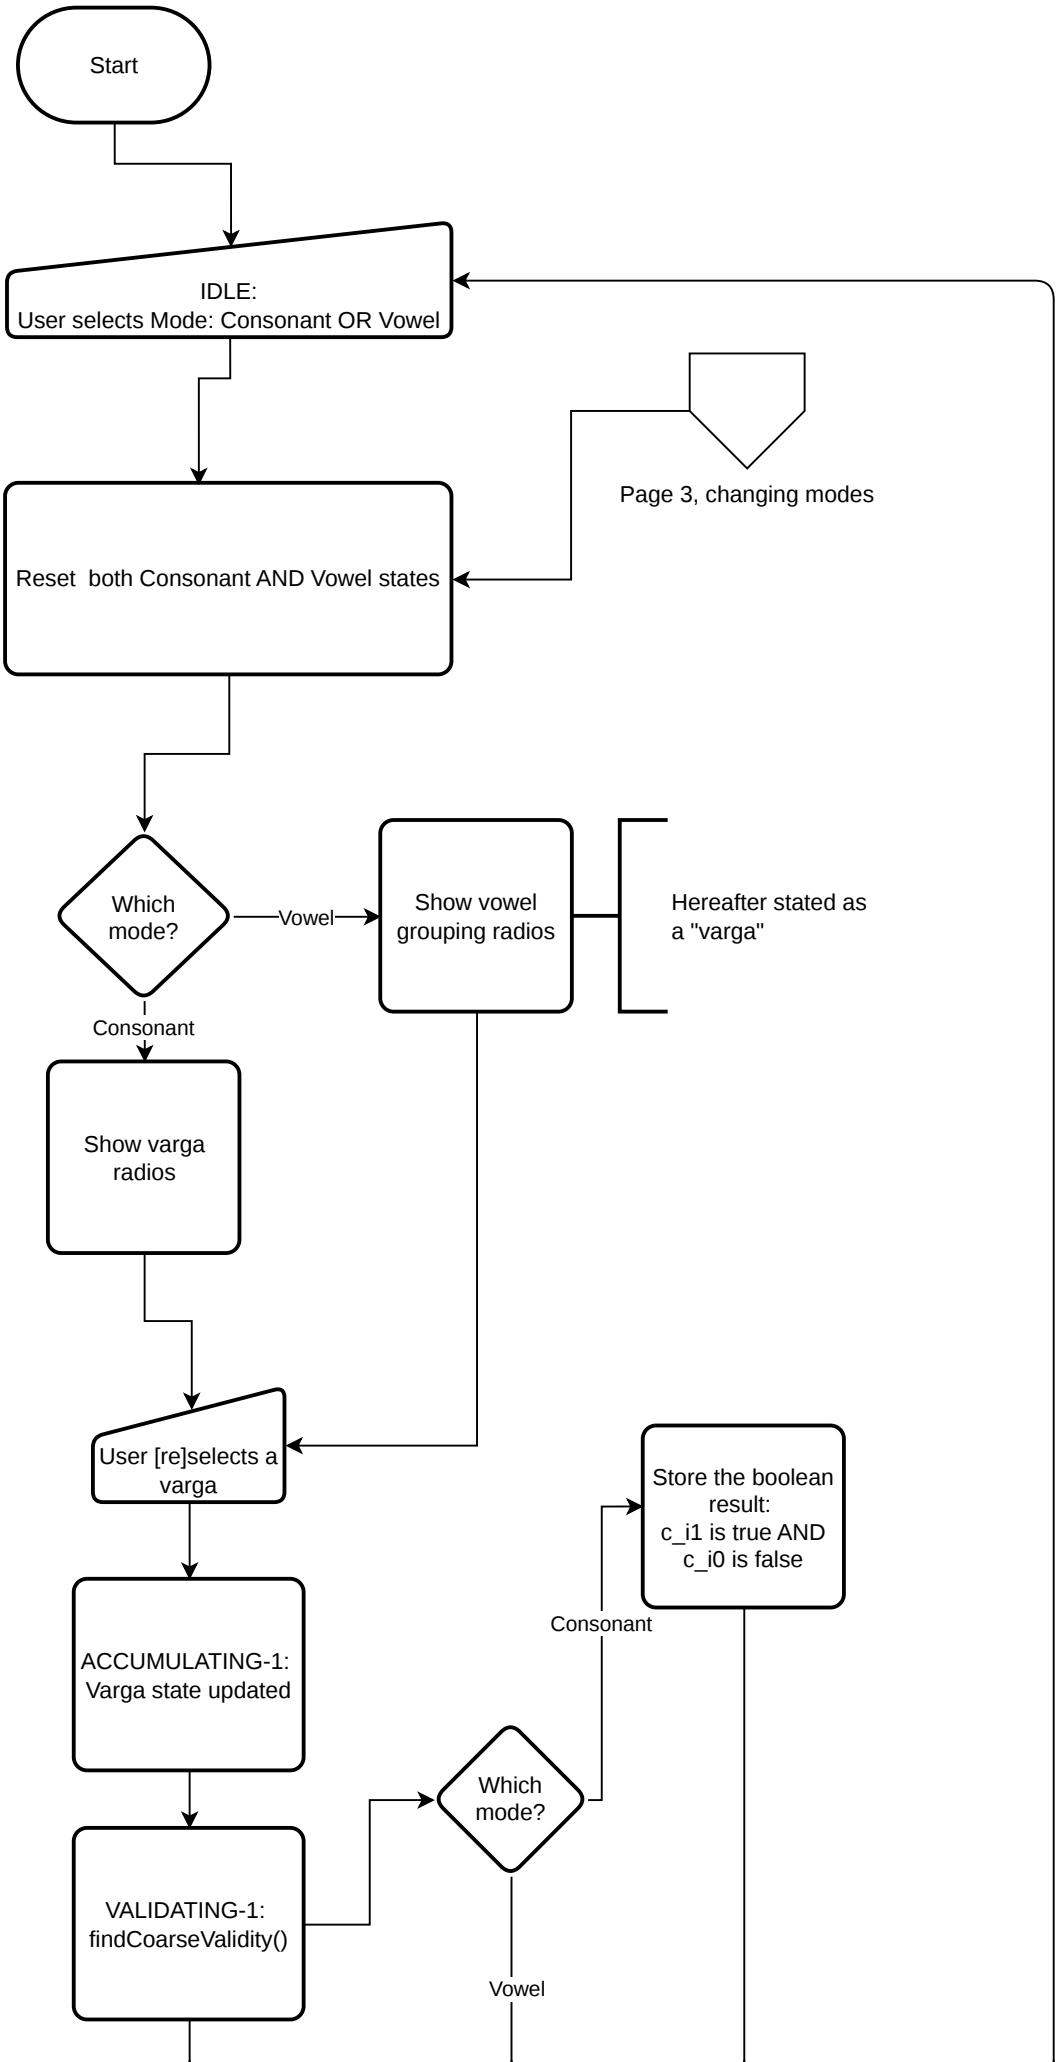
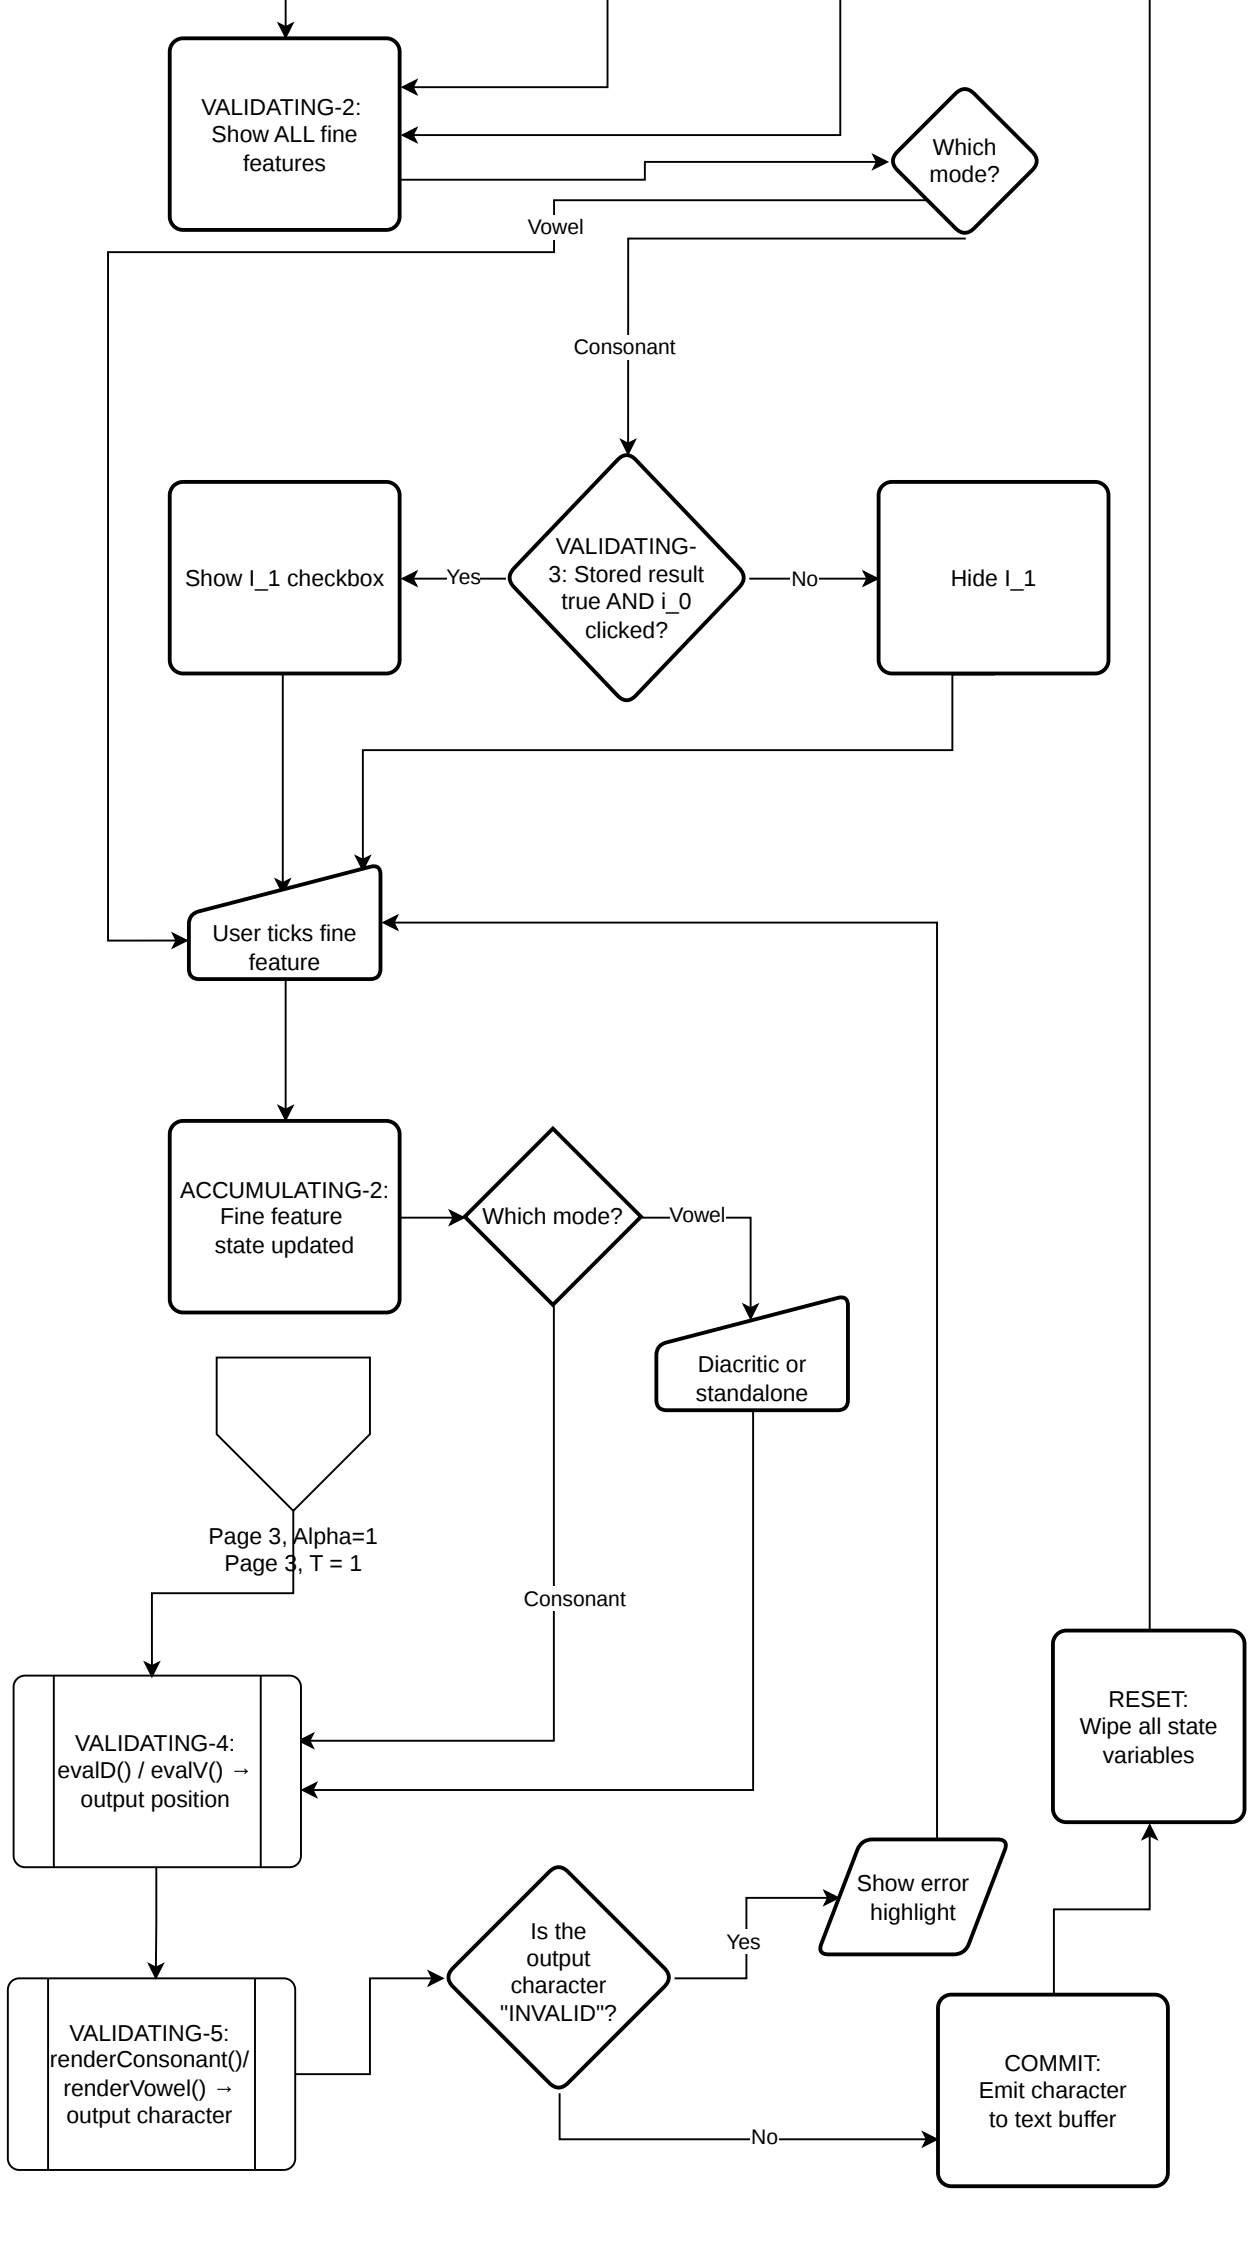
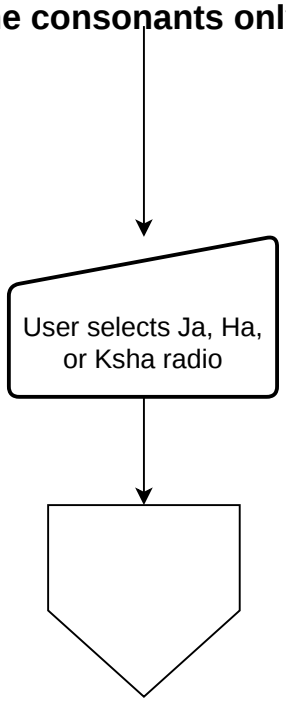

Start
IDLE:
User selects Mode: Consonant OR Vowel
Page 3, changing modes
Reset both Consonant AND Vowel states
Which mode?
Vowel
Show vowel grouping radios
Hereafter stated as a "varga"
Consonant
Show varga radios
User [re]selects a varga
Store the boolean result:
c_i1 is true AND
c_i0 is false
ACCUMULATING-1:
Varga state updated
Consonant
Which mode?
VALIDATING-1:
findCoarseValidity()
Vowel

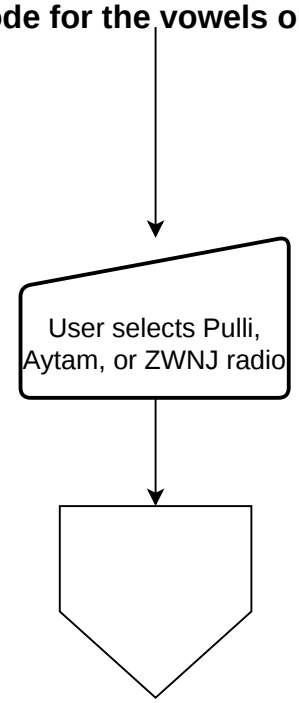

VALIDATING-2: Show ALL fine features
Which mode?
Vowel
Consonant
Show I_1 checkbox
Yes
VALIDATING-3: Stored result true AND i_0 clicked?
No
Hide I_1
User ticks fine feature
ACCUMULATING-2: Fine feature state updated
Which mode?
Vowel
Diacritic or standalone
Page 3, Alpha=1
Page 3, T = 1
Consonant
VALIDATING-4: evalD() / evalV() → output position
VALIDATING-5: renderConsonant()/ renderVowel() → output character
Is the output character "INVALID"?
Yes
Show error highlight
No
COMMIT: Emit character to text buffer
RESET: Wipe all state variables

Alpha = 1 (Extended mode for the consonants only)



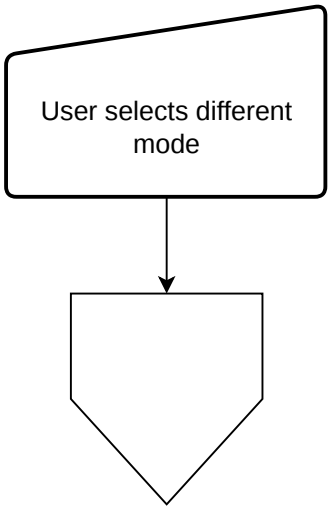
Page-2, VALIDATING-4

Special Modifiers, T = 1 (Extended mode for the vowels only)



Page-2, VALIDATING-4

Mode Switching



Page 1, IDLE