
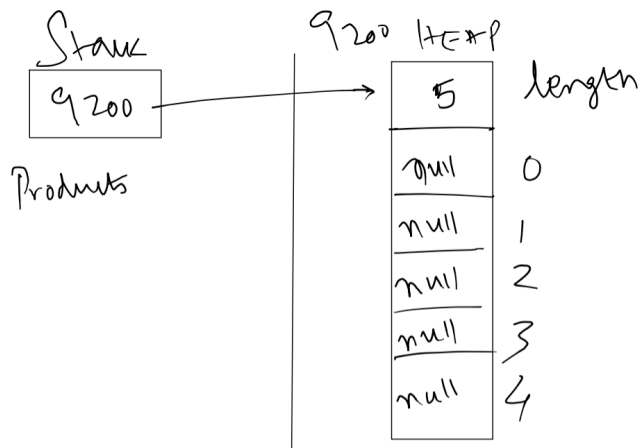


new Mobile();

17EAP

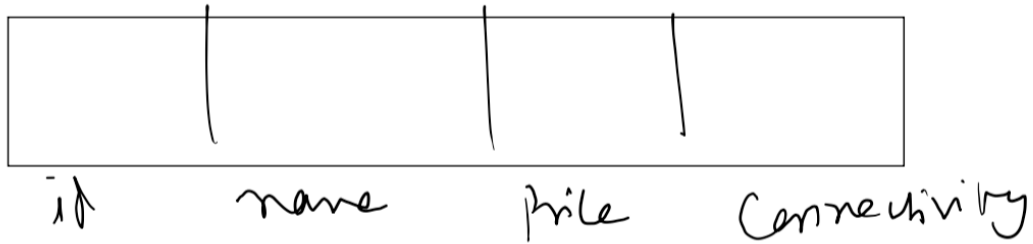


Product[] products = new Product[5];

for(Method m : methods) {

getPrice()	double
getConnectivity()	String
isExpensive()	boolean
getName()	String
setConnectivity(String connectivity)	void
getId()	int
setId(int id)	void
setName(String name)	void
setPrice(double price)	void
equals(Object obj)	boolean
hashCode()	int
toString()	String
getClass()	Class<? extends Mobile>
notify()	void
notifyAll()	void
wait()	void
wait(Long timeoutMillis)	void
wait(Long timeoutMillis, int nanos)	void

p.getClass().getMethods();

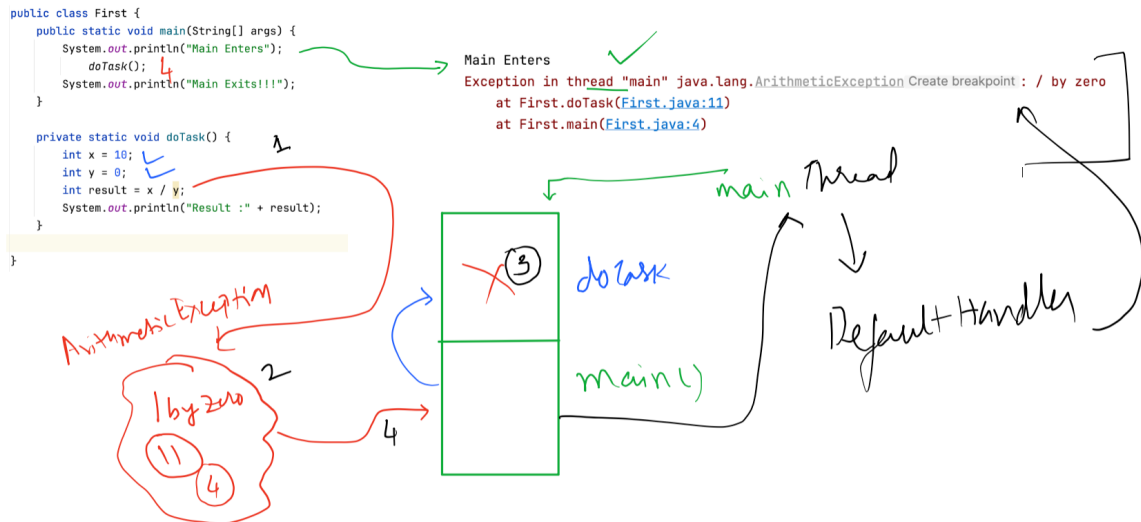

Approach 1:

Client	Interface	Implementation
<pre> User user = new User(...); UserDao userDao = new UserDaoSqlImplementation(); userDao.register(user); </pre>	<pre> public interface UserDao { void register(User user); } </pre>	<pre> public class UserDaoSqlImplementation implements UserDao { public void register(User user) { try { // logic } catch (SQLException ex) { log exceptions } } } </pre>

Approach 2:

<pre> try { User user = new User(...); UserDao userDao = new UserDaoSqlImplementation(); userDao.register(user); } catch (SQLException ex) { message } </pre>	<pre> public interface UserDao { void register(User user) throws SQLException; } </pre>	<pre> public class UserDaoSqlImplementation implements UserDao { public void register(User user) throws SQLException { // logic } } </pre>
---	---	--

Approach 3:

Abstraction: YES, loosely coupled : YES, switching between strategies: YES

<pre> try { User user = new User(...); UserDao userDao = new UserDaoSqlImplementation(); userDao.register(user); } catch (PersistenceException ex) { message } </pre>	<pre> public interface UserDao { void register(User user) throws PersistenceException; } </pre>	<pre> public class UserDaoMongoDbImplementation implements UserDao { public void register(User user) throws PersistenceException { try { // logic } catch (MongoException ex) { if (ex.getErrorCode() == 9234) { throw new PersistenceException("User already exists : " + user.getEmail()); } else if (ex.getErrorCode() == 155) { // .. } } } } public class UserDaoSqlImplementation implements UserDao { public void register(User user) throws PersistenceException { try { // logic } catch (SQLException ex) { if (ex.getErrorCode() == 9234) { throw new PersistenceException("User already exists : " + user.getEmail()); } else if (ex.getErrorCode() == 9001) { // .. } } } } </pre>
---	---	--

