Local Machine — Link — [PRJ]1, [PRJ]2 → Pom.xml

```
<dependency>
    <groupId>com.fasterxml.jackson.core</groupId>
    <artifactId>jackson-databind</artifactId>
    <version>2.18.3</version>
</dependency>
```

.m2 — repository

Remote Repo — jar

CISCO Proxy Server

Central Repo

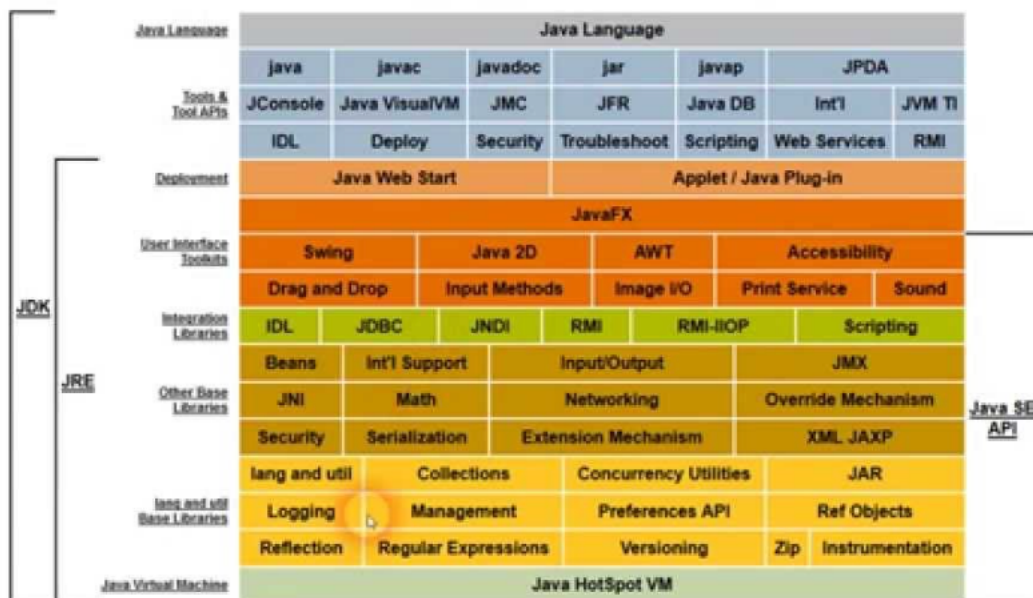Integration libraries of JDK is used to connect to other technologies:

JDBC – used for Java to connect to RDBMS

Scripting – used for java to Ruby / JavaScript connecting

IDL – low level apis written in C /C++

RMI – Inter process communication [java – java]

IIOP – Inter Interoperable Protocol , inter process [java – any technology {C++/ VB / C#}]

Java Language	Java Language						
Tools & Tool APIs	java	javac	javadoc	jar	javap	JPDA	
	JConsole	Java VisualVM	JMC	JFR	Java DB	Int'l	JVM TI
	IDL	Deploy	Security	Troubleshoot	Scripting	Web Services	RMI
Deployment	Java Web Start			Applet / Java Plug-in			
	JavaFX						
User Interface Toolkits	Swing		Java 2D		AWT	Accessibility	
	Drag and Drop		Input Methods		Image I/O	Print Service	Sound
Integration Libraries	IDL	JDBC	JNDI	RMI	RMI-IIOP	Scripting	
Other Base Libraries	Beans	Int'l Support		Input/Output		JMX	
	JNI	Math		Networking		Override Mechanism	
	Security	Serialization		Extension Mechanism		XML JAXP	
lang and util Base Libraries	lang and util	Collections		Concurrency Utilities		JAR	
	Logging	Management		Preferences API		Ref Objects	
	Reflection	Regular Expressions		Versioning		Zip	Instrumentation
Java Virtual Machine	Java HotSpot VM						

getXXX ("column name")

String id = rset.getString("**ID**");
String lastName = rset.getString(**2**);

rset.getString("LAST-NA")

cursor 위치

rest.next()

	①①① ID	**LAST_NAME**
true	10001	JASON
true	10002	JACKSON
true	10003	JAMES
true	...	...
false		

ResultSet

707 × 356