


```

<beans>
  <bean id="mongo" class="pkg.EmployeeDaoMongoImpl" />
  <bean id="jdbc" class="pkg.EmployeeDaoJdbcImpl" />

  <bean id="service" class="pkg.AppService">
    <property name="dao" ref="jdbc" />
  </bean>
</beans>

```

Service.setDao()

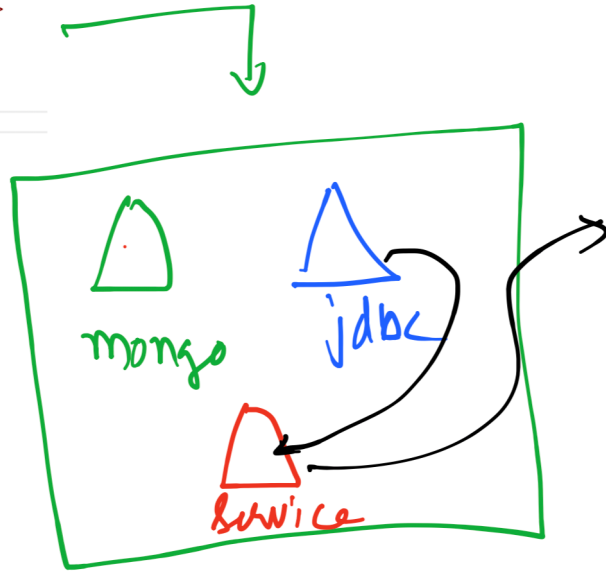

```

public interface EmployeeDao {
    addEmployee();
}

@Repository
public class EmployeeDaoJdbcImpl implements EmployeeDao {
    addEmployee() {...}
}


```

```

@Service
public class AppService {
    @Autowired
    EmployeeDao empDao ;

    public void insert(){
        this.empDao.addEmployee(){..}
    }
}

```

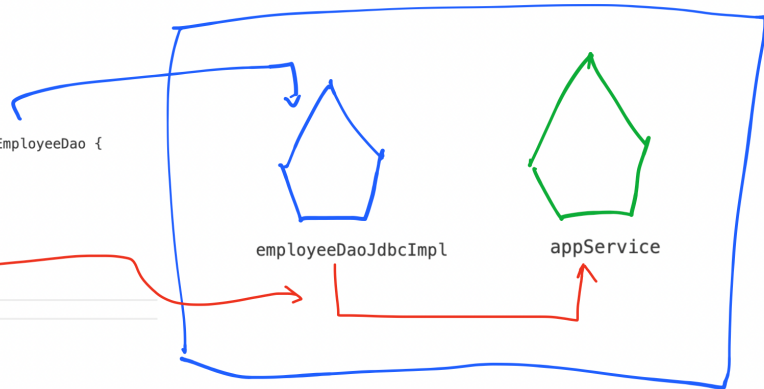

```

public interface EmployeeDao {
    addEmployee();
}

@Repository
public class EmployeeDaoJdbcImpl implements EmployeeDao {
    addEmployee() {...}
}

```


```

@Service
public class AppService {
    @Autowired
    EmployeeDao empDao ;

    public void insert(){
        this.empDao.addEmployee(){..}
    }
}

```

|| 193E

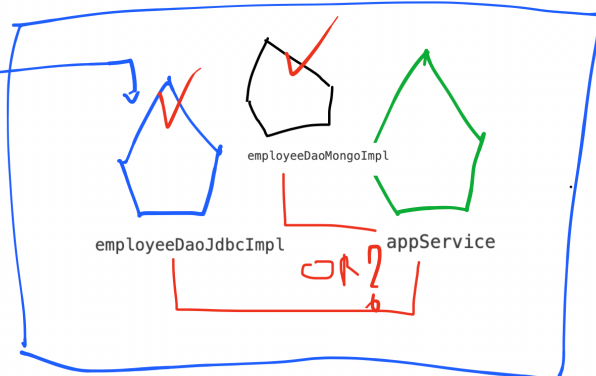

```

@Repository
public class EmployeeDaoMongoImpl implements EmployeeDao {
    addEmployee() {...}
}

```