

```
var g = 100;
```

```
function doTask() {  
  var a = 10;  
  var b;  
  c = 30;  
  if (g > a) {  
    b = 20;  
  }  
  console.log(g, a, b, c);  
}  
doTask();  
console.log(g, a, b, c);
```

Global Creation Context

window / global / Global
this
g = undefined
doTask = undefined

Global Execution Context

window / global / Global
this
g = 100
doTask = function() {...}
c = 30;

Function creation Context

this
a = undefined
b = undefined

Function Execution Context
this
a = 10
b = undefined
OR
b = 20

scope

c = 30;

(g > a)




stack




```
console.log("Hello!!!");  
function execute() {  
  setInterval(function doTask() {  
    console.log("Timed!!!");  
  }, 1);  
  Promise.resolve(function done() {  
    console.log("P1");  
  })  
  Promise.resolve(function done() {  
    console.log("P2");  
  })  
  execute();  
}  
console.log("Bye!!!");
```

'Hello!!!'

log("Hello!!!")

pop

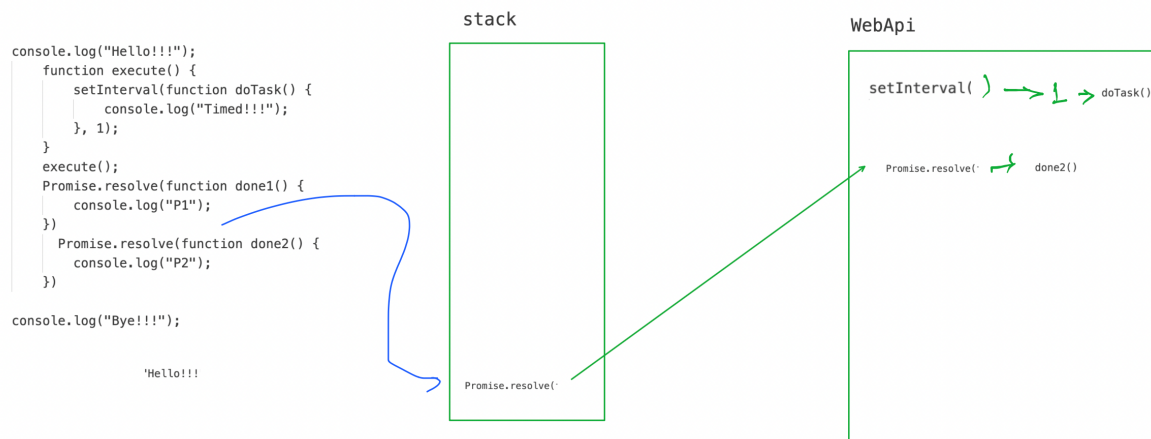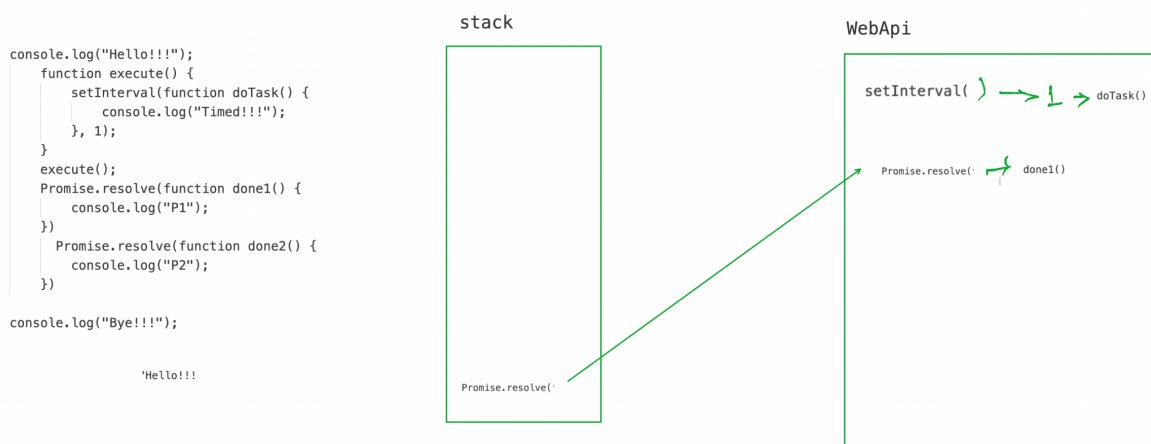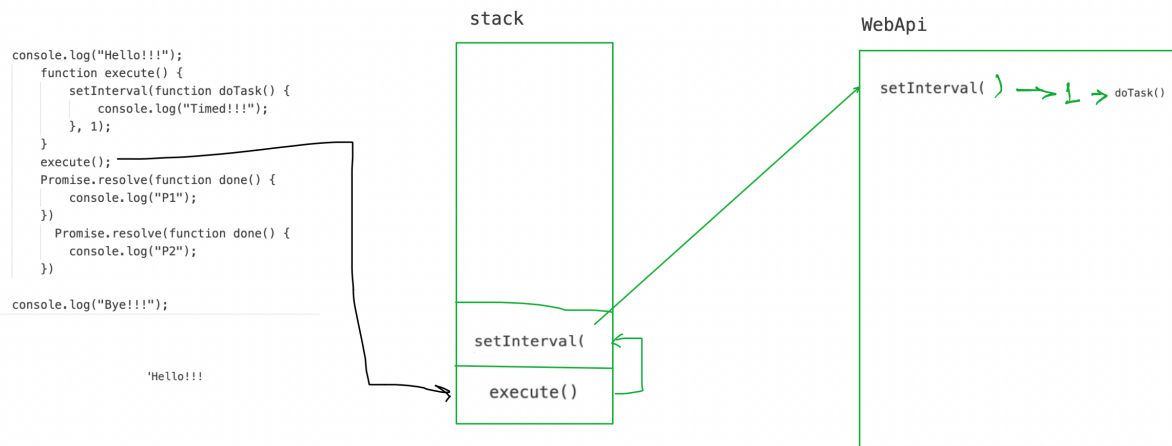

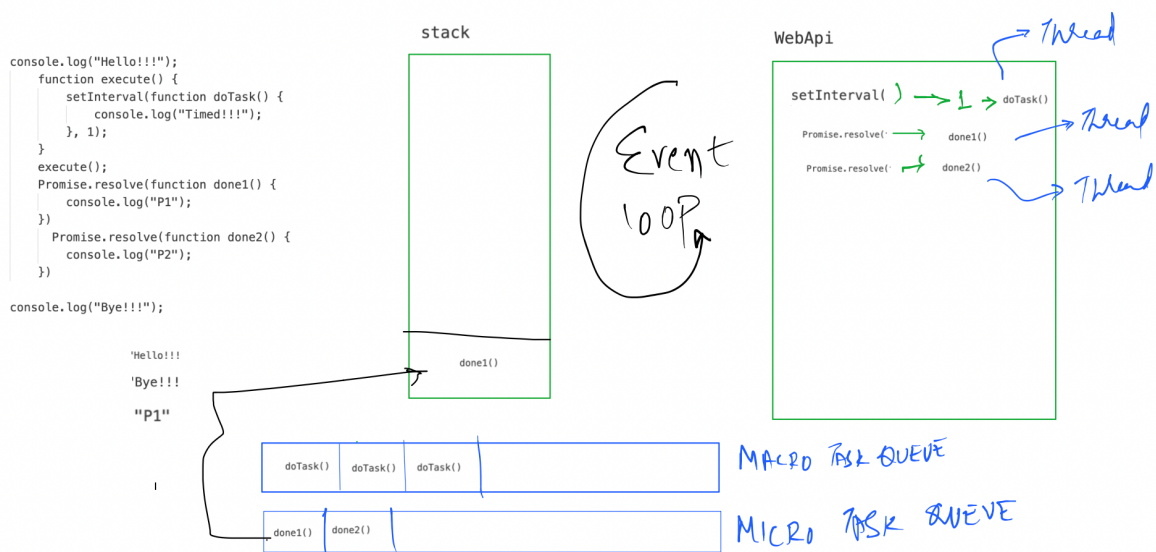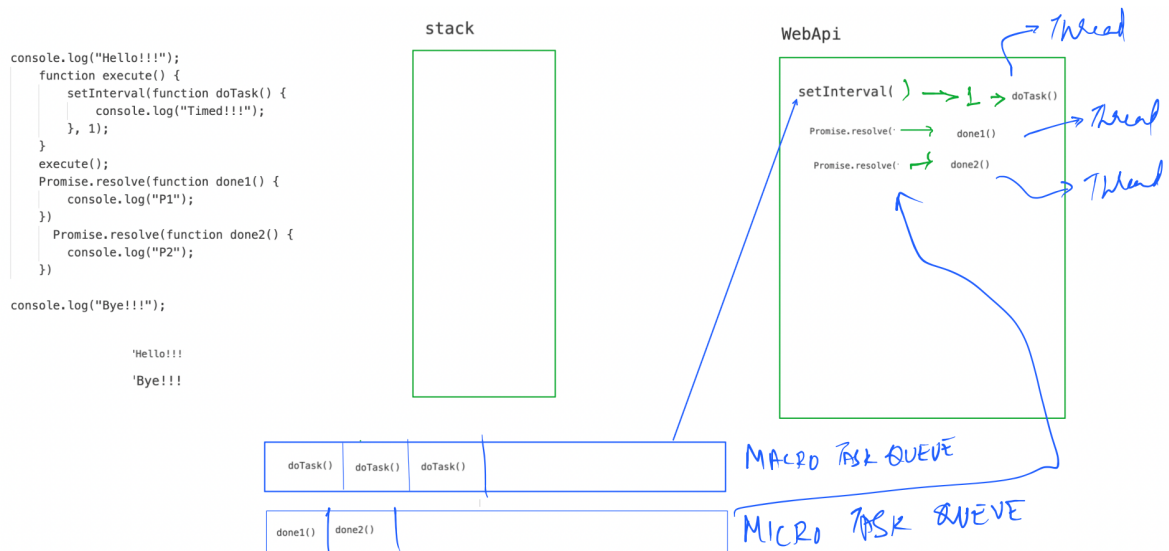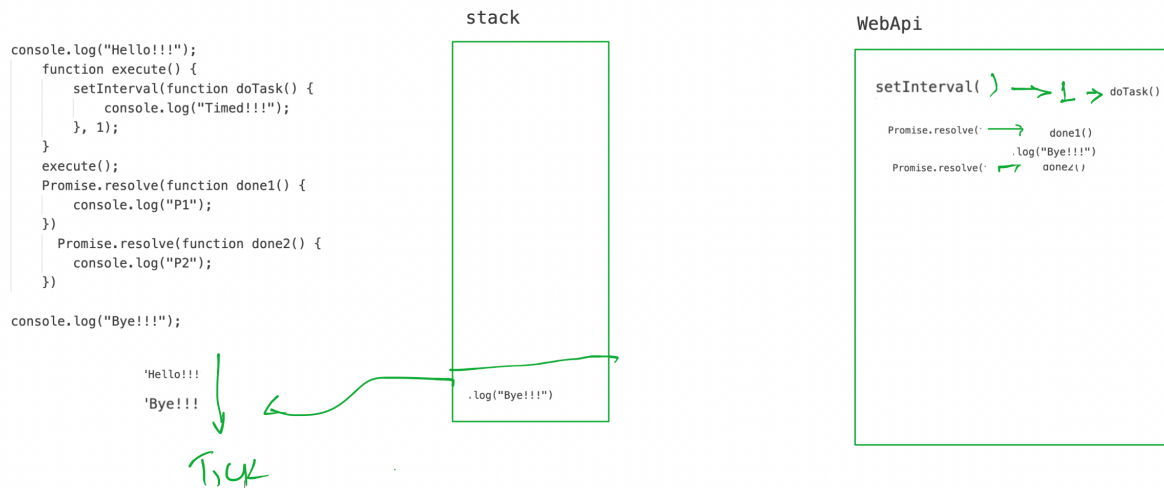


```

console.log("Hello!!!");
function execute() {
  setInterval(function doTask() {
    console.log("Timed!!!");
  }, 1);
}
execute();
Promise.resolve(function done1() {
  console.log("P1");
})
Promise.resolve(function done2() {
  console.log("P2");
})
}
console.log("Bye!!!");

```

stack



Event
loop

WebApi

```

setInterval( ) → 1 → doTask()
Promise.resolve( → done1()
Promise.resolve( → done2()

```

Thread
Thread
Thread

'Hello!!!'
'Bye!!!'
"P1"
"P2"



MACRO TASK QUEUE

MICRO TASK QUEUE