
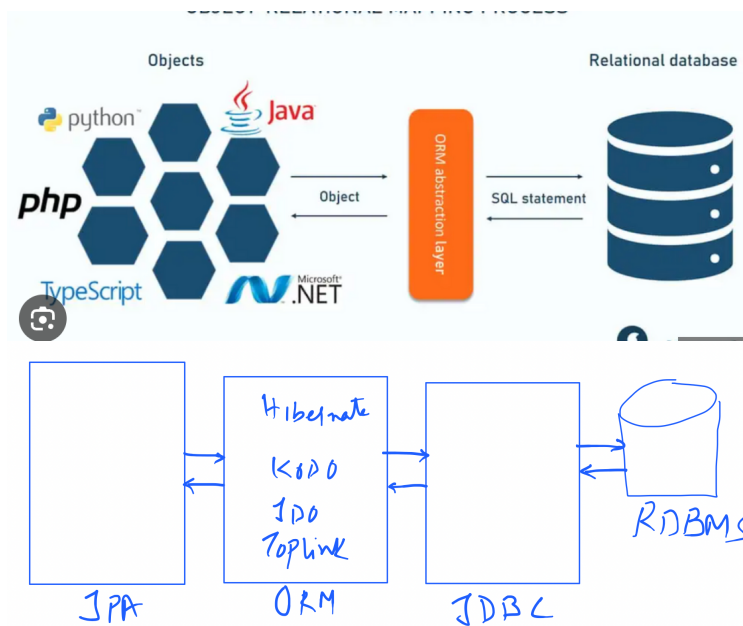


Bean Initialization Steps

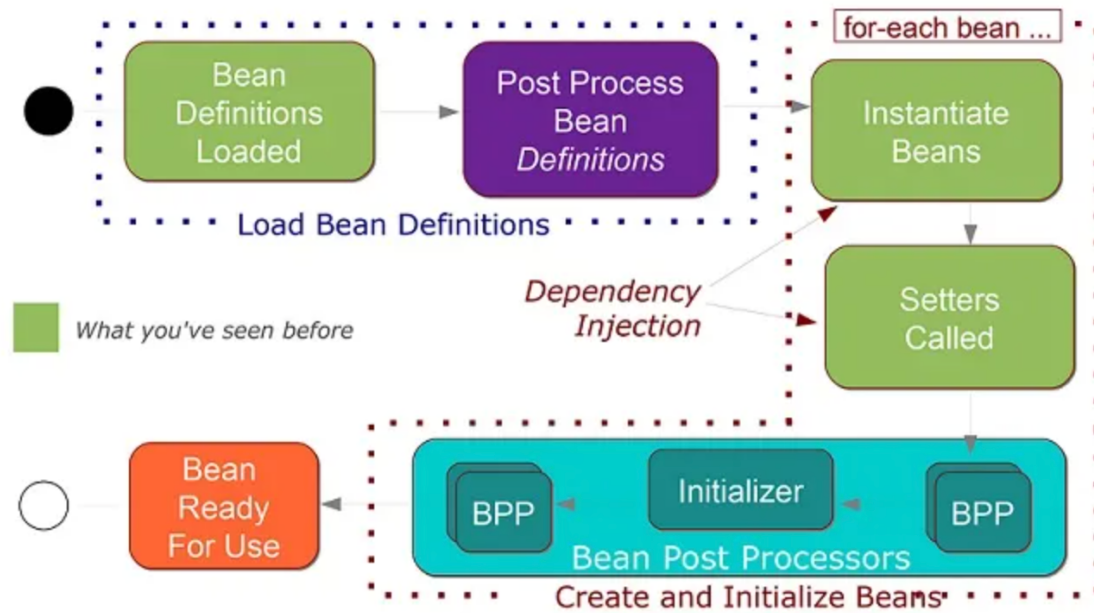



JDBC → Plumbing

```
@Override
public void addProduct(Product p) {
    Connection con = null;
    String SQL = "INSERT INTO products (id, name, price) VALUES (0, ?, ?)";
    try {
        con = DriverManager.getConnection(URL, USER, PWD);
        PreparedStatement ps = con.prepareStatement(SQL);
        ps.setString(1, p.getName());
        ps.setDouble(2, p.getPrice());
        ps.executeUpdate();
    } catch (SQLException ex) {
        ex.printStackTrace();
    } finally {
        if (con != null) {
            try {
                con.close();
            } catch (SQLException e) {
                throw new RuntimeException(e);
            }
        }
    }
}
```

ORM

```
public void addProduct(Product p) {
    em.persist(p);
}
```

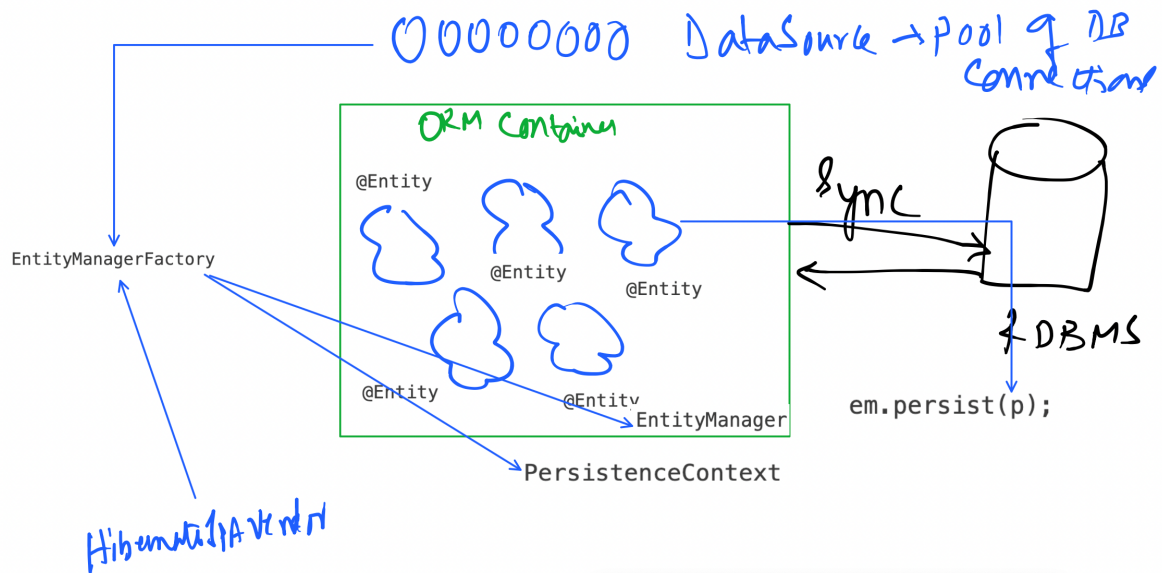

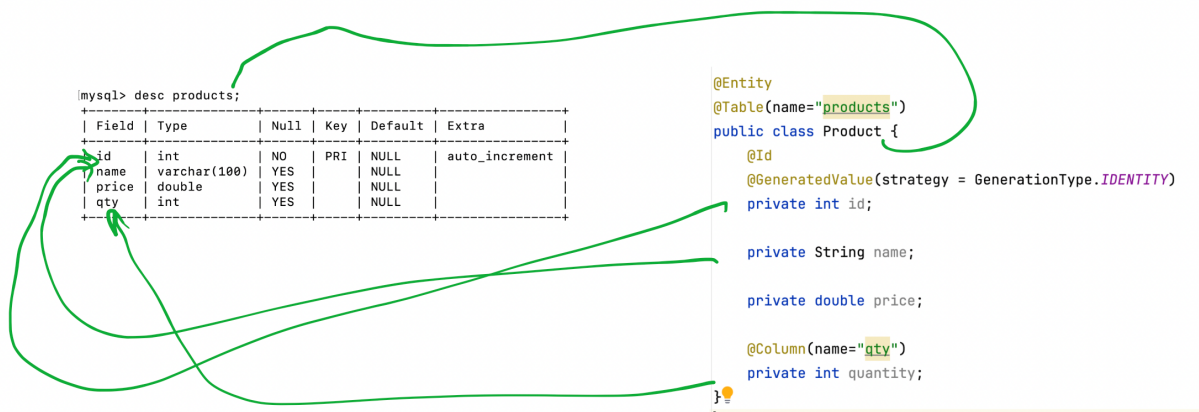

REST API

<https://api.restaurant.com>

See what's available to order



REST API

<https://api.restaurant.com>

See what's available to order



REST API

<https://api.restaurant.com>

Place an order for Margherita Pizza (id #1)



REST API

<https://api.restaurant.com>

Place an order for Margherita Pizza (id #1)



REST API

<https://api.restaurant.com>

Update your order to add a Caesar Salad (id #2)

