

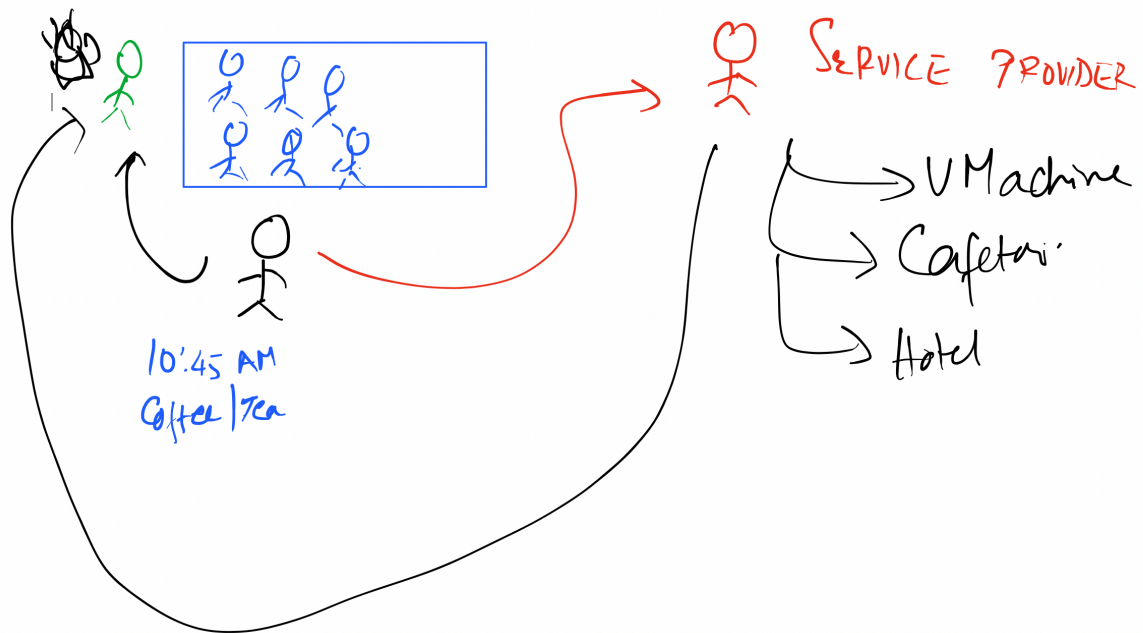


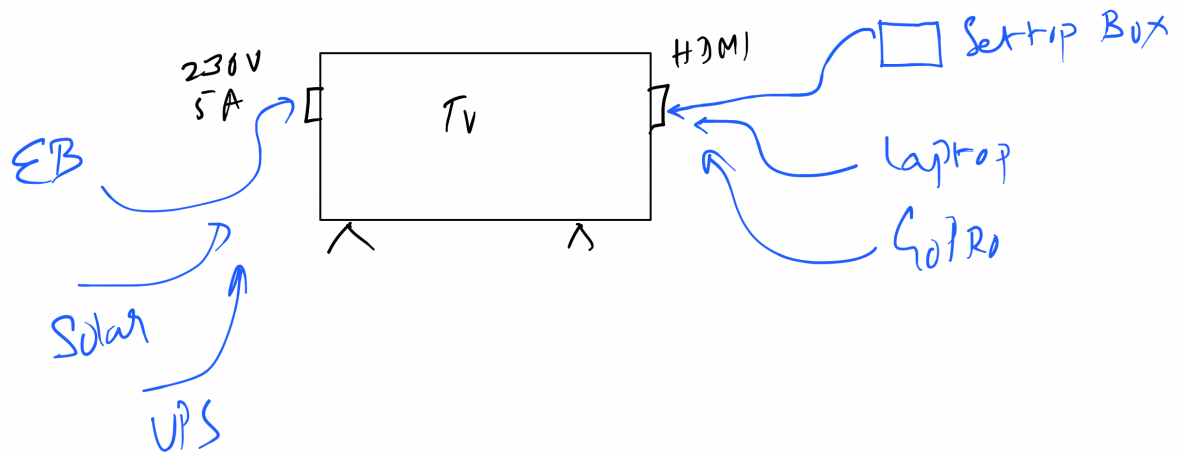

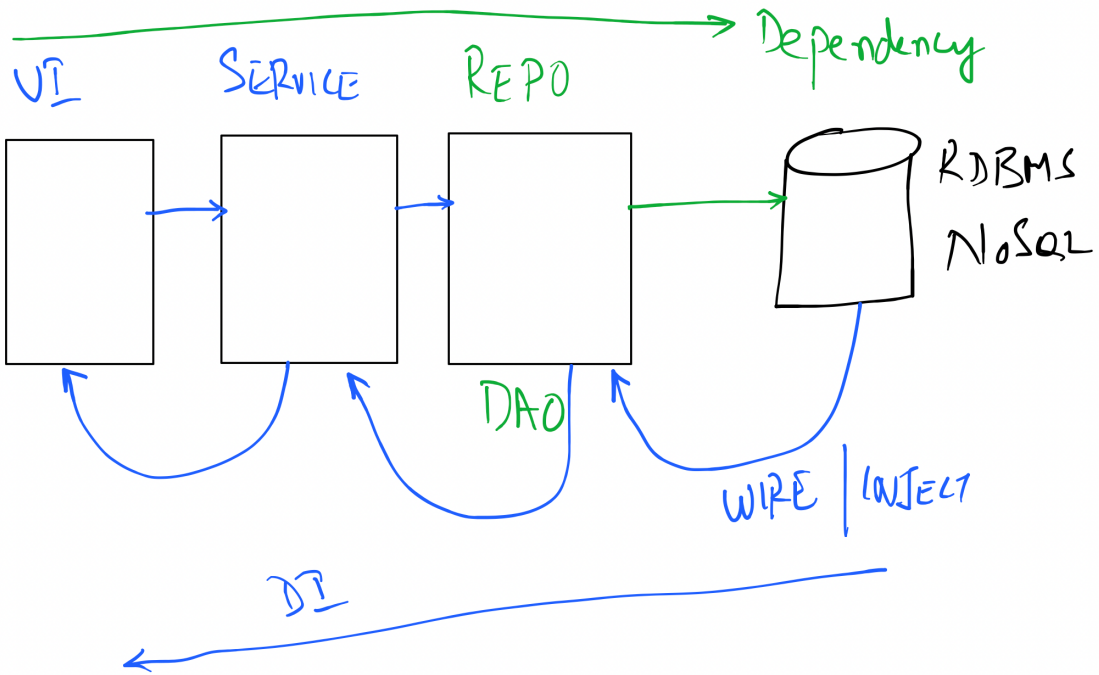

```
interface EmployeeDao {
    void addEmployee(Employee employee);
}
```

```
public class EmployeeDaoDbImpl implements EmployeeDao {
    // ..
    public void addEmployee(Employee employee) {
        ..
    }
}
```

```
public class EmployeeDaoMongoImpl implements EmployeeDao {
    // ...
    public void addEmployee(Employee employee) {
        ..
    }
}
```


```
public class AppService {
    private EmployeeDao employeeDao;
```

```
    private void setEmpDao(EmployeeDao edao) {
        this.employeeDao = edao;
    }
```

```
    public void doTask(Employee e) {
        employeeDao.addEmployee(e);
    }
}
```

```
<beans>
<bean id="rdbms" class="pkg.EmployeeDaoDbImpl" />
<bean id="mongo" class="pkg.EmployeeDaoMongoImpl" />
<bean id="service" class="pkg.AppService">
    <property name="empDao" ref="mongo" />
</bean>
</beans>
```

rdbms

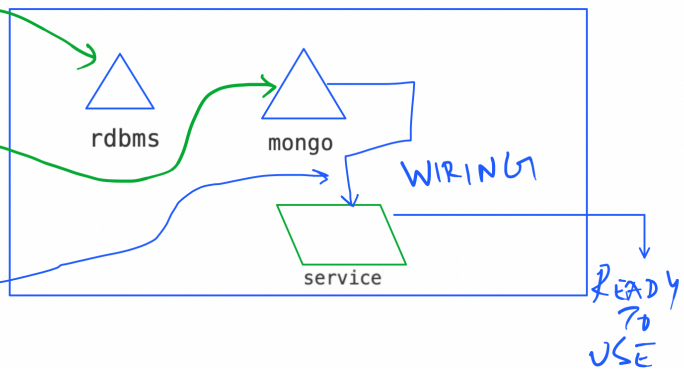


```
interface EmployeeDao {
    void addEmployee(Employee employee);
}
```

```
@Repository
public class EmployeeDaoDbImpl implements EmployeeDao {
    // ..
    public void addEmployee(Employee employee) {
        ..
    }
}
```

```
@Service
public class AppService {
    @Autowired
    private EmployeeDao employeeDao;

    public void doTask(Employee e) {
        employeeDao.addEmployee(e);
    }
}
```

ByType

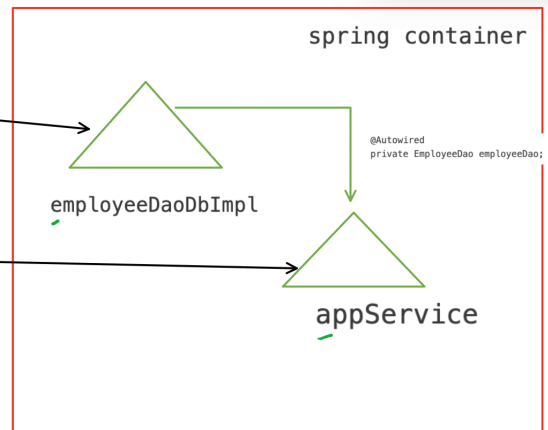

ApplicationContext

