```
interface EmployeeDao {
    void addEmployee(Employee e);
}

public class EmployeeDaoJdbcImpl implements EmployeeDao {
    //
    public void addEmployee(Employee e) {
        SQL --> INSERT INTO employees ....
    }
}

public class EmployeeDaoMongoImpl implements EmployeeDao {
    //
    public void addEmployee(Employee e) {
        db.employees.insertOne(e);
    }
}
```

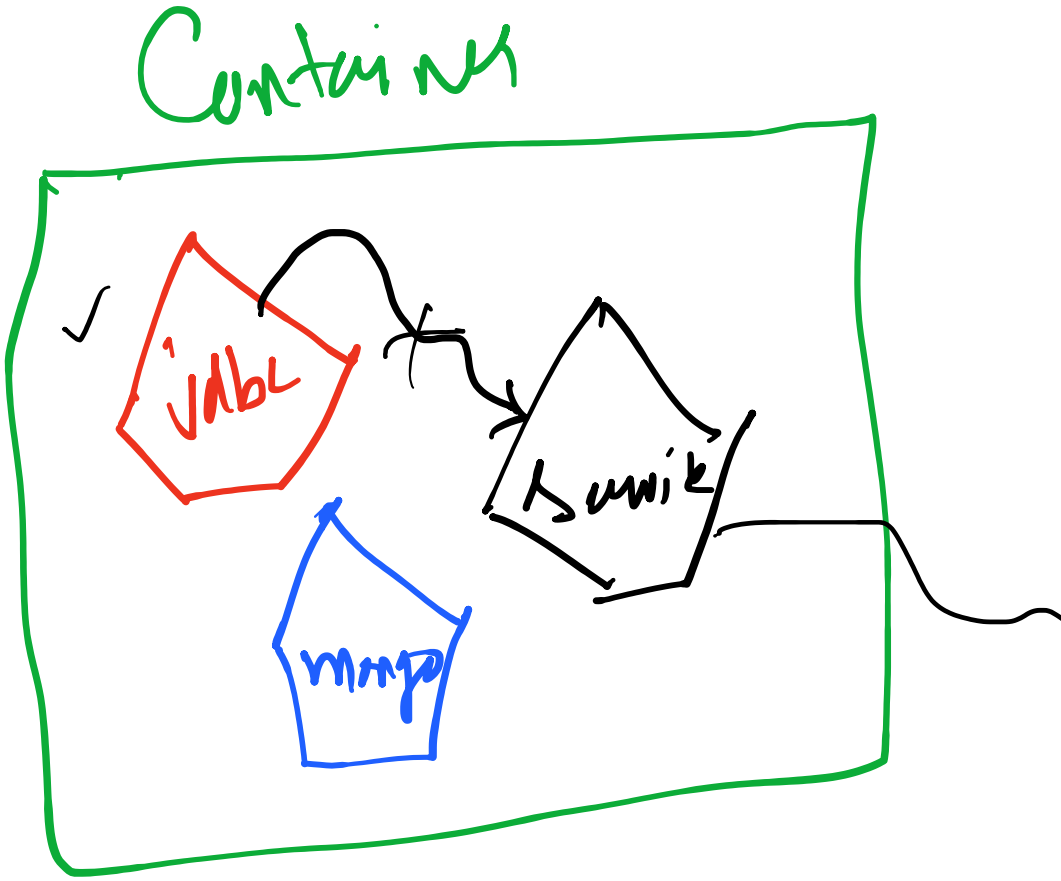

```java
public class AppService {
    private EmployeeDao empDao; // program to interface
    public void setEmployeeDao(EmployeeDao dao) {
        this.empDao = dao;
    }

    public void insert(Employee e) {
        this.empDao.addEmployee(e);
    }
}
```

```xml
<bean id="jdbc" class="pkg.EmployeeDaoJdbcImpl" />
<bean id="mongo" class="pkg.EmployeeDaoMongoImpl" />
```

```xml
<bean id="service" class="pkg.AppService">
    <property name="employeeDao" ref="jdbc">
</bean>
```
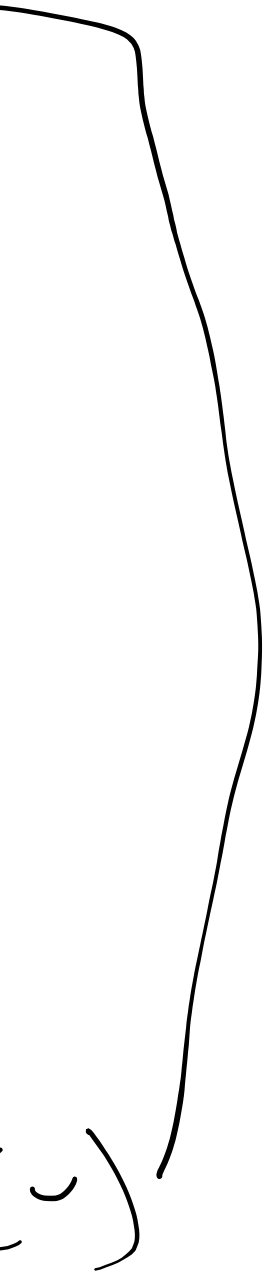
setEmployeeDao(