


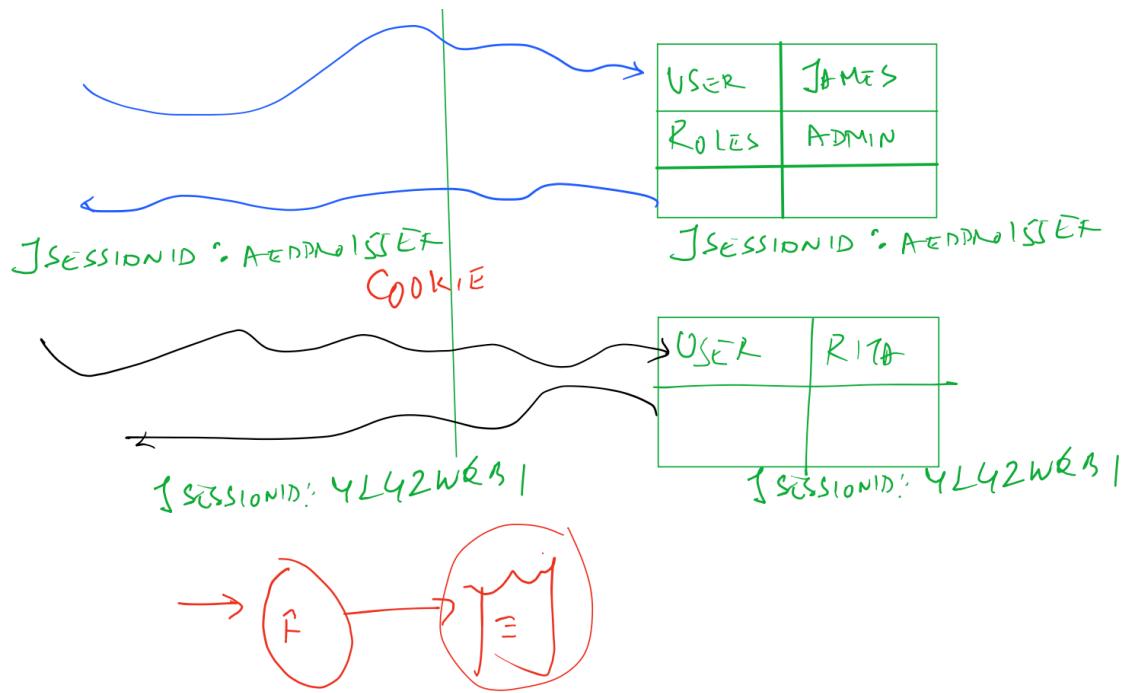

```

interface EmployeeRepo {
    void addEmployee(Employee e);
}

public class EmployeeRepoMongoDb implements EmployeeRepo {
    public void addEmployee(Employee e) {
        db.collections.insert(e);
    }
}

public class EmployeeRepoMySQL implements EmployeeRepo {
    public void addEmployee(Employee e) {
        insert into ...
    }
}

```

```

// Construtor DI
public class AppService {
    private EmployeeRepo empRepo;

    public AppService(EmployeeRepo er) {
        empRepo = er;
    }


    public void insert(Employee e) {
        empRepo.addEmployee(e);
    }
}

```

```

<beans>
<bean id="mongo" class="com.visa.prj.repo.EmployeeRepoMongoDb" />
<bean id="mysql" class="com.visa.prj.repo.EmployeeRepoMySQL" />
<bean id="app" class="com.visa.prj.service.AppService">
    <constructor arg="0" ref="mongo" />
</bean>
</beans>

```

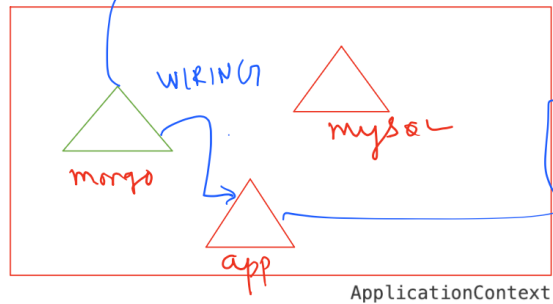

```

@Repository
public class EmployeeRepoMongoDb implements EmployeeRepo {
    public void addEmployee(Employee e) {
        db.collections.insert(e);
    }
}


```

```

@Service
public class AppService {

    public AppService(EmployeeRepo er) {
        empRepo = er;
    }
    public void setRepo(EmployeeRepo er) {
        empRepo = er;
    }
    public void insert(Employee e) {
        empRepo.addEmployee(e);
    }
}

```

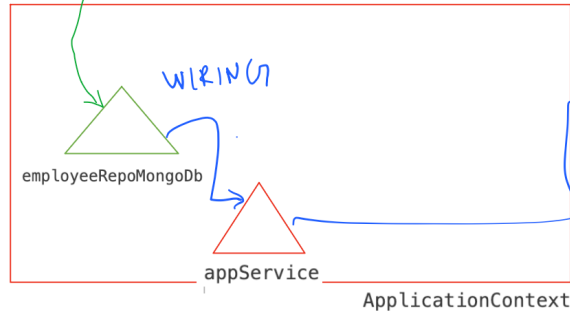

Ready
to
use