Evaluation of the Virtual Crystal Approximation for Predicting Alloy Vibrational Mode Properties and Thermal Conductivity

Jason Larkin and Alan J. H. McGaughey

Department of Mechanical Engineering
Carnegie Mellon University

http://ntpl.me.cmu.edu/

04/04/13

Virtual Crystal Approximation

Gamma

VC

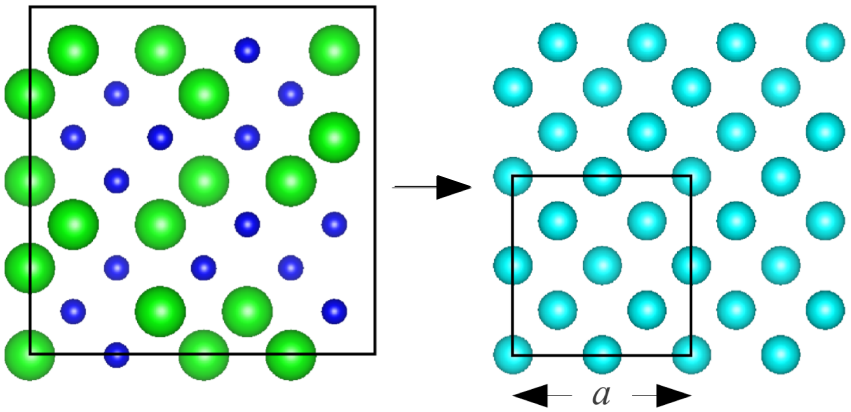

$$\bar{m}^{\mu} = (1-c)m^{i} + cm^{j}$$

$$k_{ph,\mathbf{n}} = \sum_{\boldsymbol{\kappa}} \sum_{\nu} \frac{k_B}{V} D_{ph,\mathbf{n}}\left(\begin{smallmatrix}\boldsymbol{\kappa}\\ \nu\end{smallmatrix}\right)$$

$$D_{ph,\mathbf{n}}\left(\begin{smallmatrix}\boldsymbol{\kappa}\\ \nu\end{smallmatrix}\right) = v^2_{g,\mathbf{n}}\left(\begin{smallmatrix}\boldsymbol{\kappa}\\ \nu\end{smallmatrix}\right) \tau\left(\begin{smallmatrix}\boldsymbol{\kappa}\\ \nu\end{smallmatrix}\right)$$

B. Abeles, Phys. Rev. 131, 19061911 (1963)

VC-ALD Diffusivities: Lifetimes

Gamma

VC

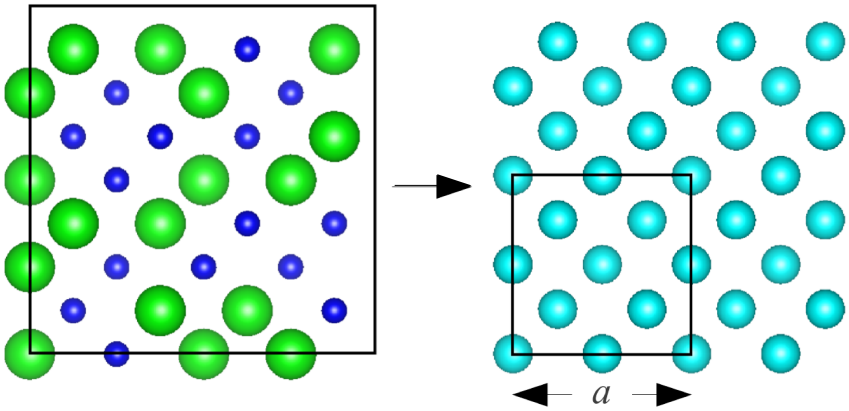

$$D_{ph,\mathbf{n}}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right) = v^2_{g,\mathbf{n}}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)\tau\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)$$

Perturbation theory:

Anharmonic Lattice Dynamics (**ALD**)

Tamura Phonon-Defect[1]

Matthiessen's Rule:

$$\frac{1}{\tau\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)} = \frac{1}{\tau_{p-p}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)} + \frac{1}{\tau_{p-d}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)}$$

[1]Phys. Rev. B 27, 858866 (1983)

VC-ALD Diffusivities: Group Velocity

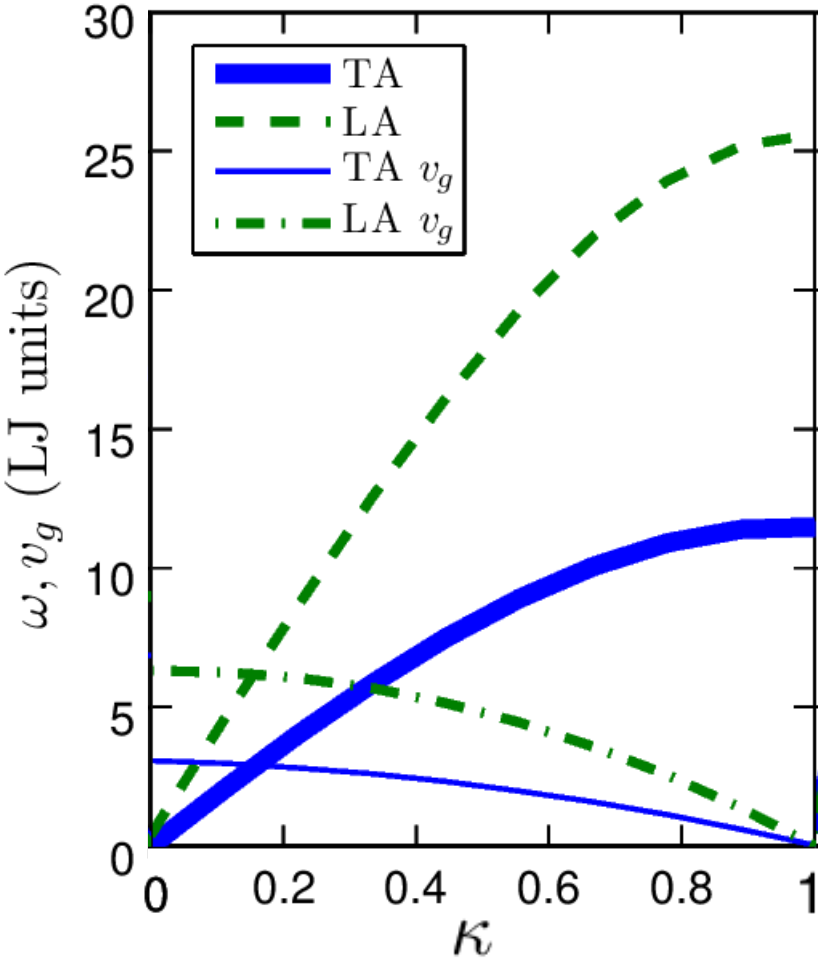

$$D_{ph,\mathbf{n}}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right) = v^2_{g,\mathbf{n}}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)\tau\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)$$

$$\mathbf{v}_{g,\mathbf{n}}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right) = \frac{\partial\omega\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)}{\partial\boldsymbol{\kappa}}$$

VC-ALD: experimental accuracy

Density Functional Theory (DFT) + **(VC-ALD)**

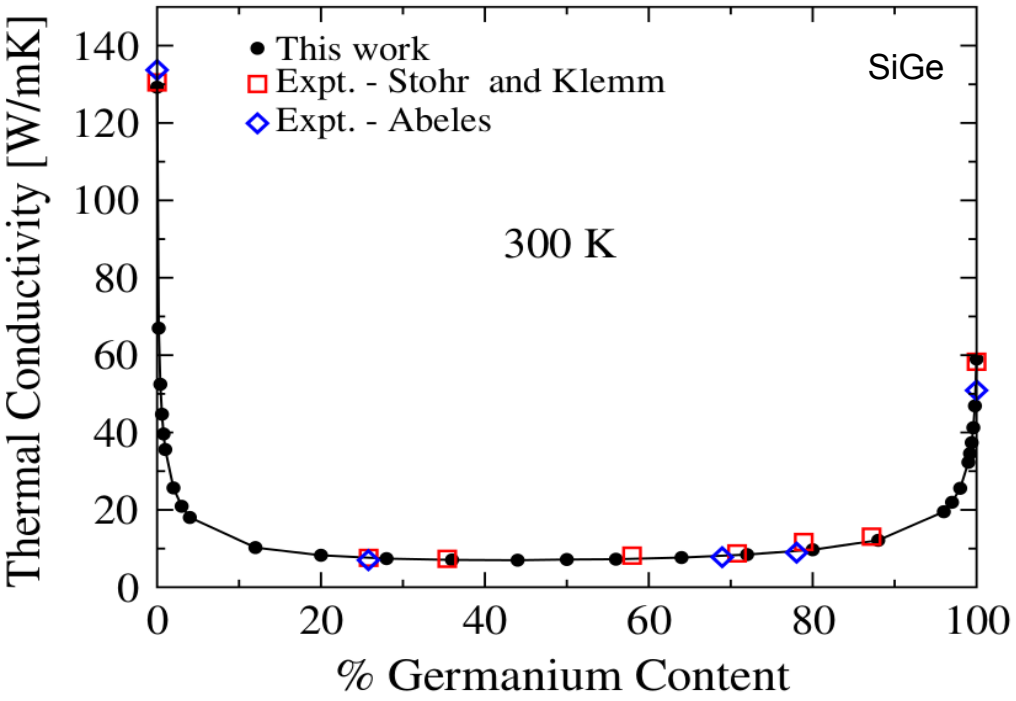

PRL 106, 045901 (2011)

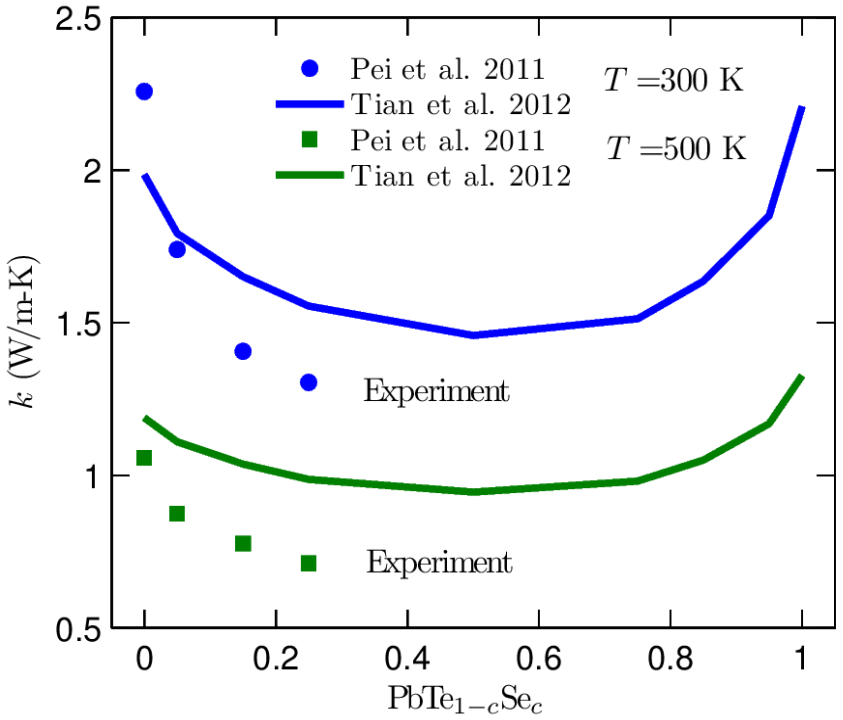

PRB 85, 184303 (2012)

Explicit disorder: VC vs Gamma

Gamma

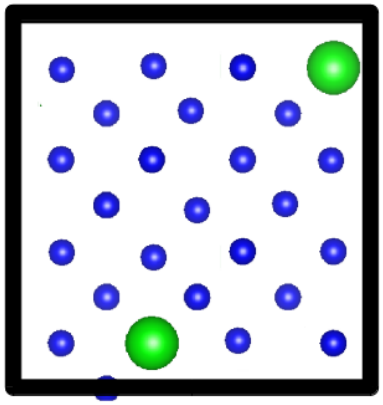

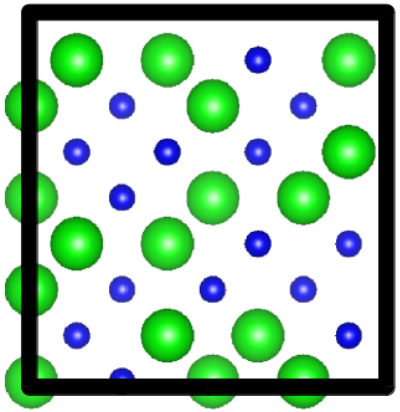

VC

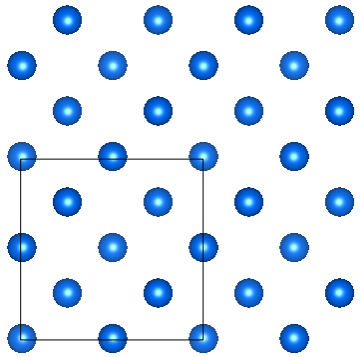

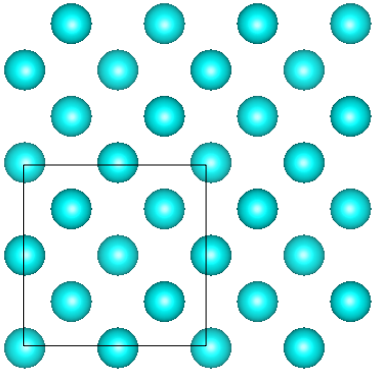

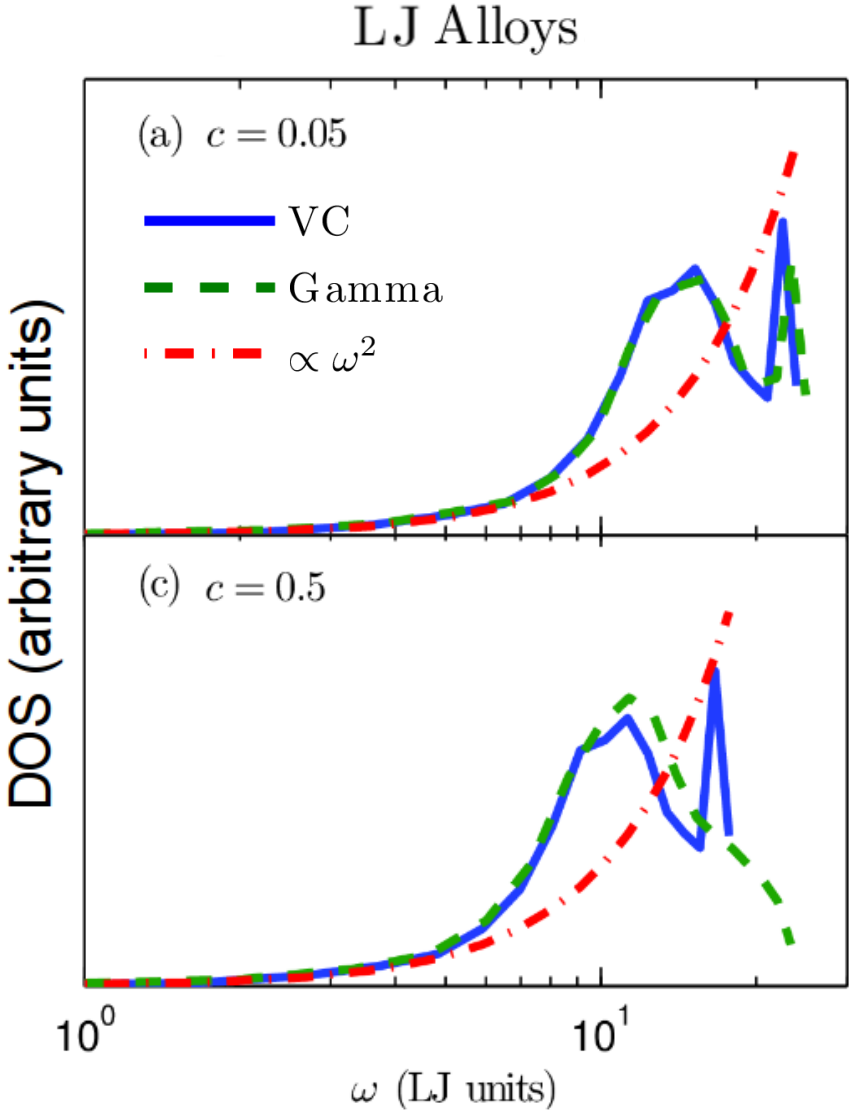

Explicit disorder: NMD

Normal Mode Decomposition (**NMD**): Molecular Dynamics (MD)-based

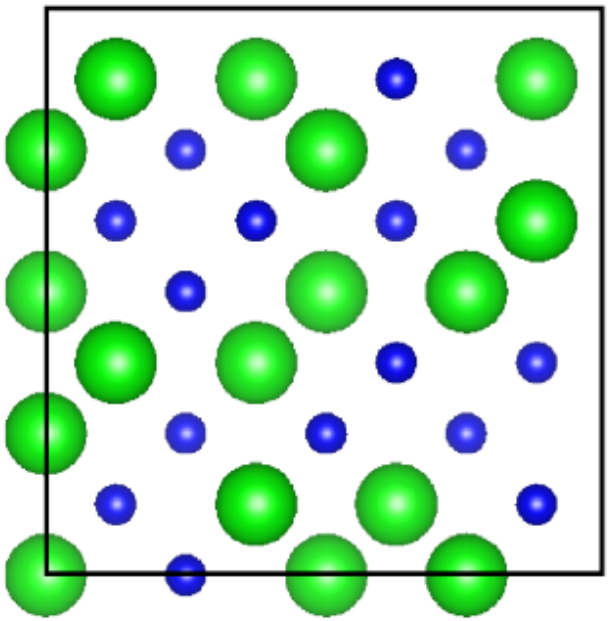

$$\tau(\kappa_\nu) = \int_0^{t^*} \frac{< E(\kappa_\nu; t)\, E(\kappa_\nu; 0) >}{< E(\kappa_\nu; 0)\, E(\kappa_\nu; 0) >} d$$

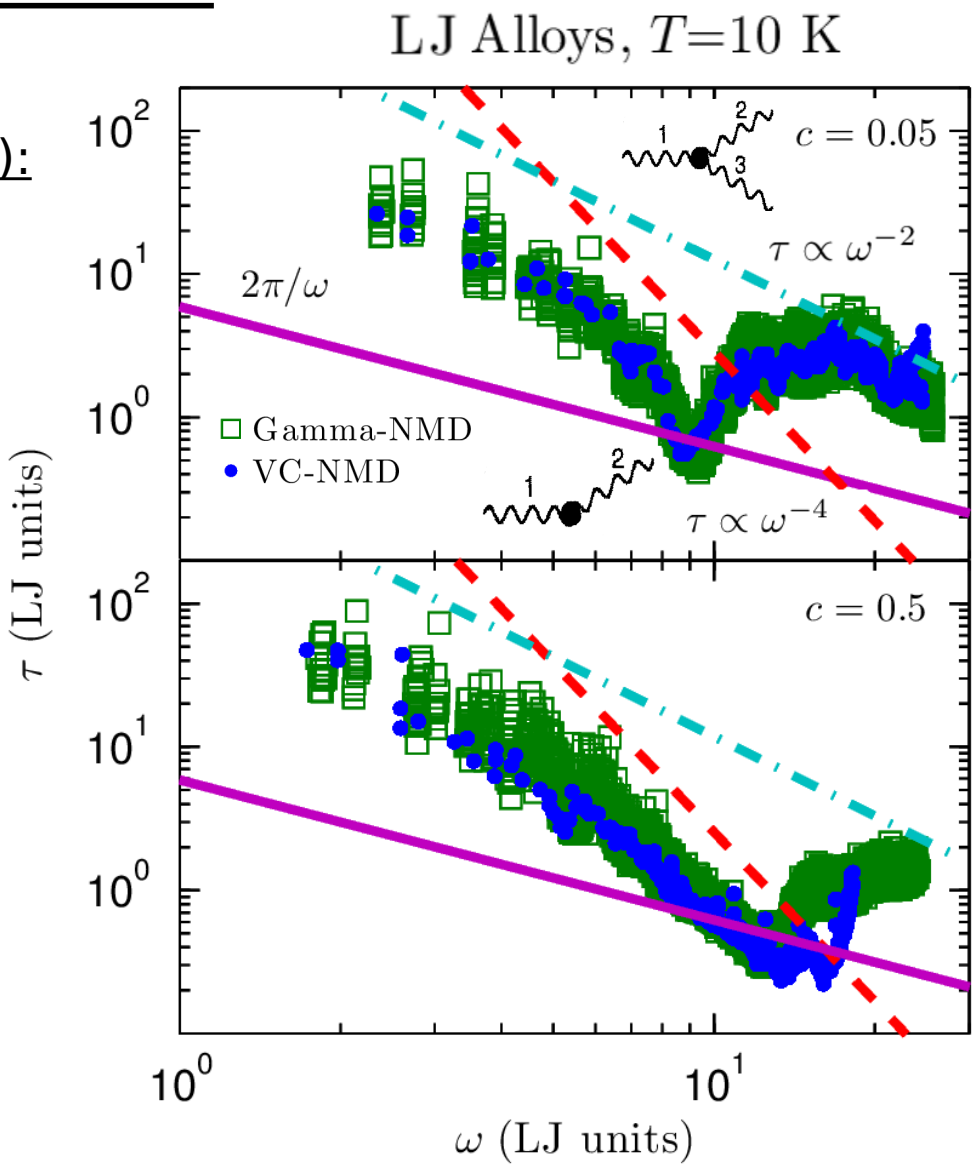

VC Diffusivities

$$D_{ph,\mathbf{n}}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right) = v^2_{g,\mathbf{n}}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)\tau\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right)$$

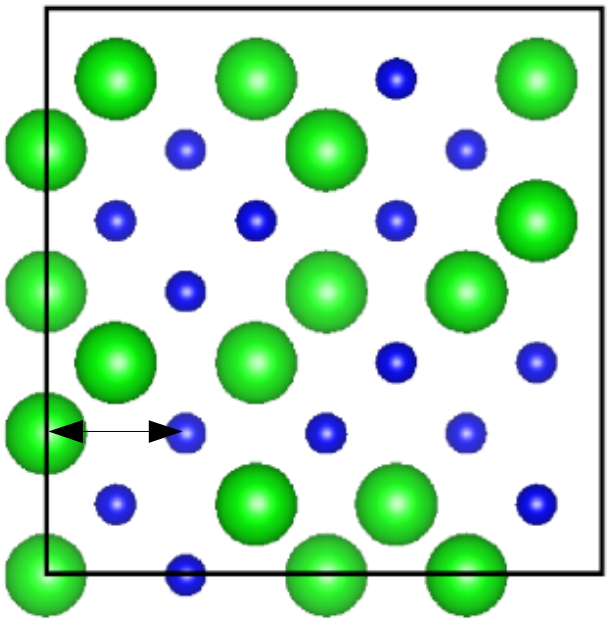

$$D_{HS} = \frac{1}{3} v_s a$$

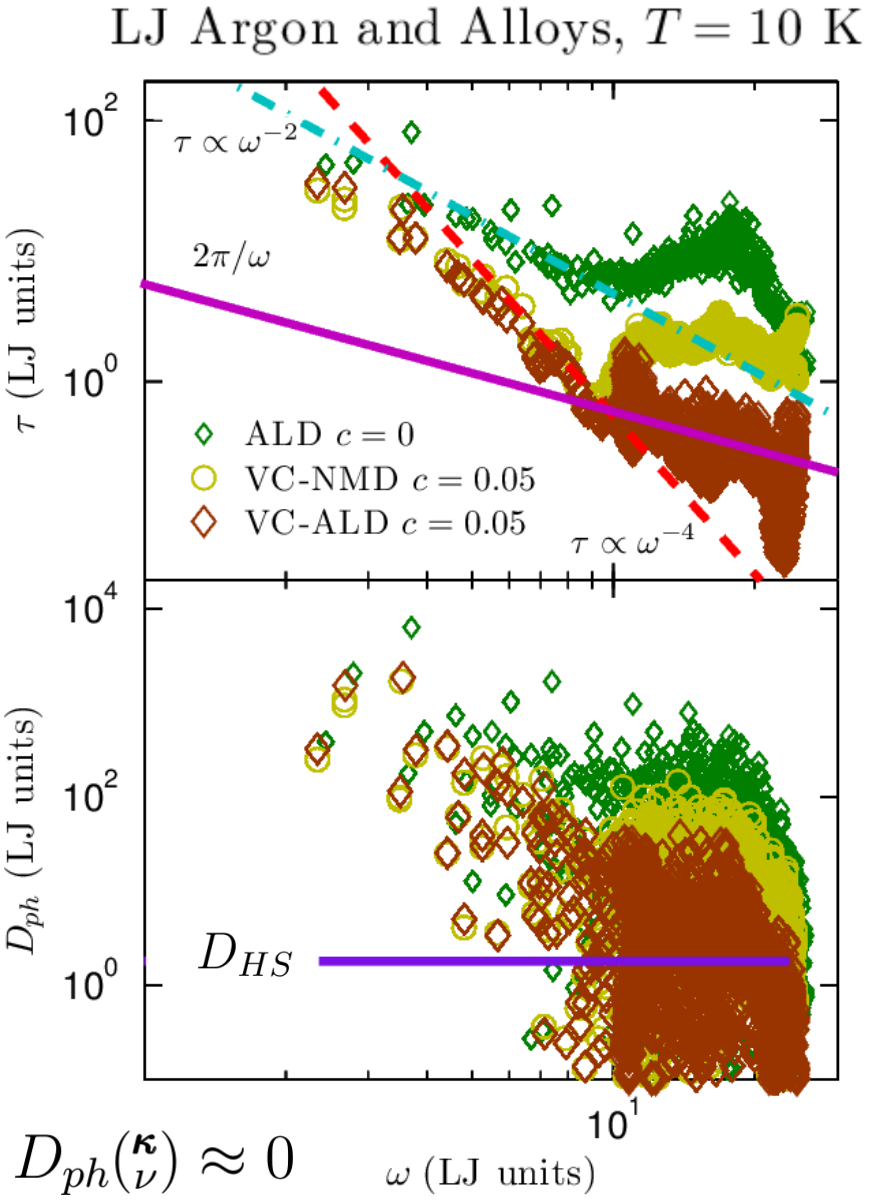

$$D_{ph}\left(\begin{matrix}\boldsymbol{\kappa}\\ \nu\end{matrix}\right) \approx 0$$

AF Diffusivities

Allen-Feldman (AF) Theory:

$$k_{AF} = \sum_{diffusons} \frac{k_B}{V} D_{AF,i}(\omega_i)$$

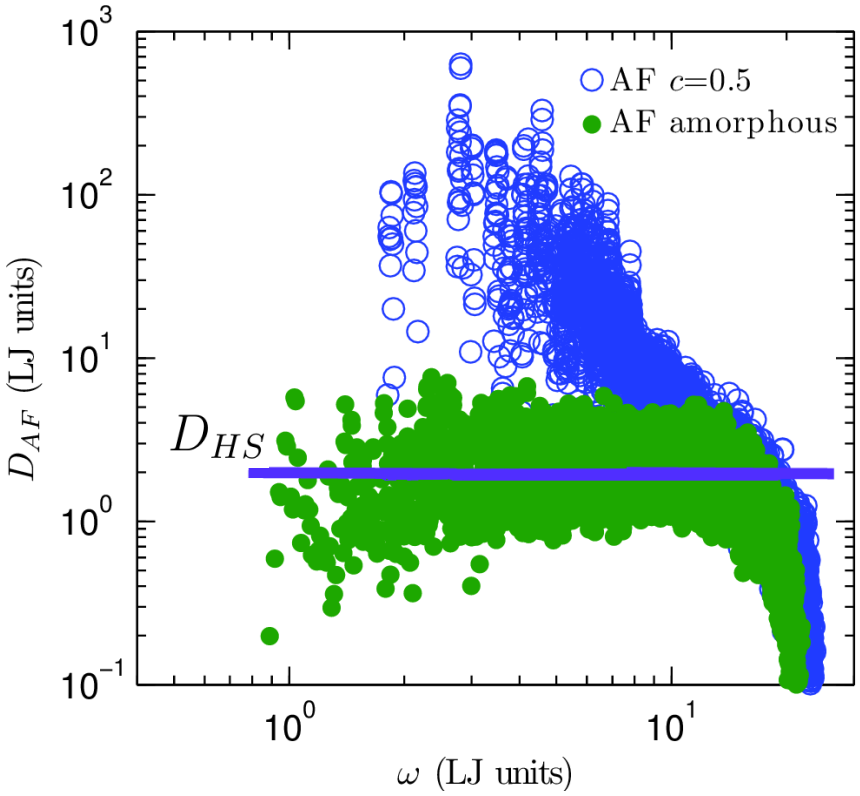

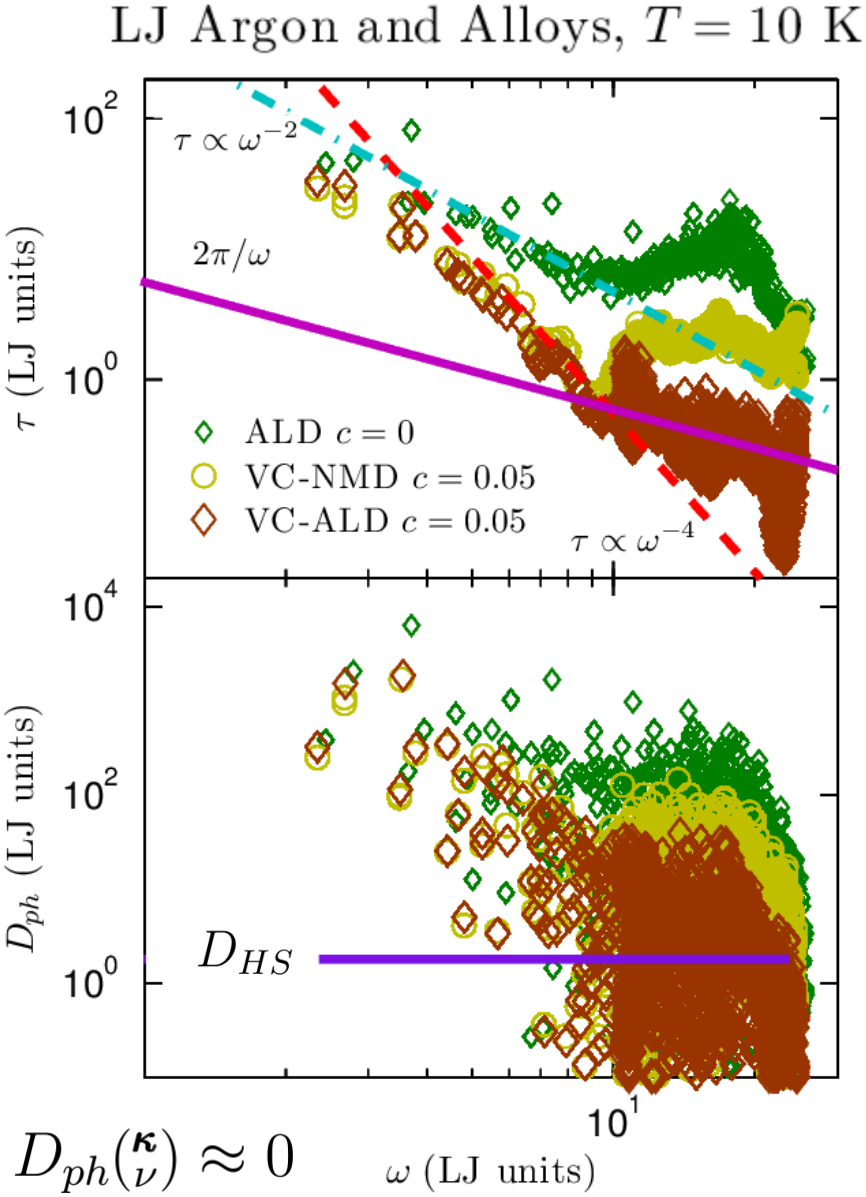

$D_{ph}(\kappa, \nu) \approx 0$

Thermal conductivity

MD-based Green-Kubo (GK)

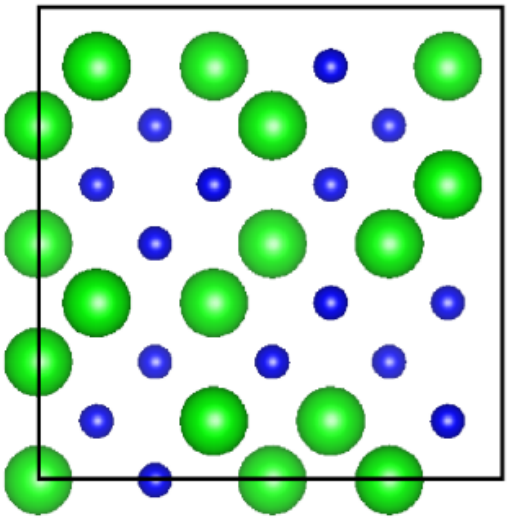

High-scatter adjustment*:

$$D_{ph}\left(\begin{matrix}\kappa\\ \nu\end{matrix}\right) < D_{HS}$$

$$D_{ph}\left(\begin{matrix}\kappa\\ \nu\end{matrix}\right) = D_{HS}$$

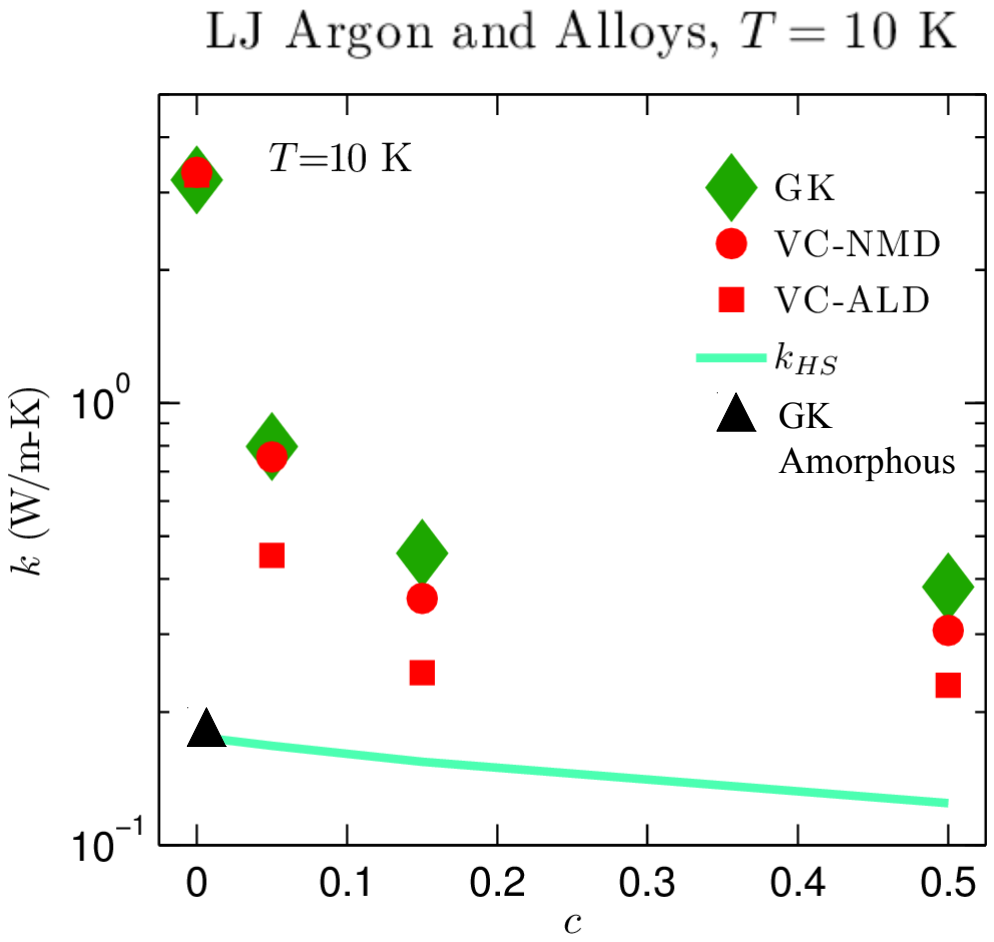

Thermal conductivity

MD-based Green-Kubo (GK)

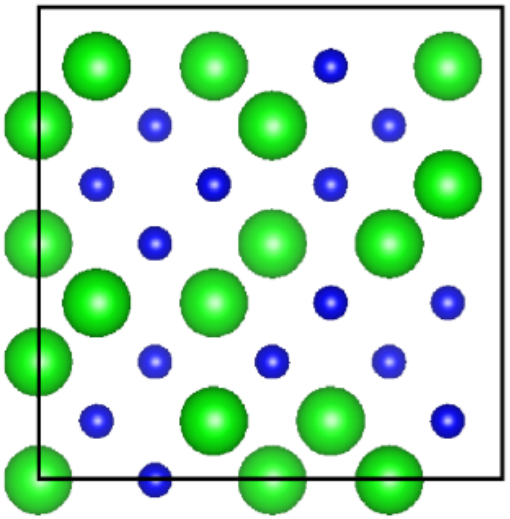

High-scatter adjustment*:

$$D_{ph}\left(\begin{matrix}\kappa\\ \nu\end{matrix}\right) < D_{HS}$$

$$D_{ph}\left(\begin{matrix}\kappa\\ \nu\end{matrix}\right) = D_{HS}$$

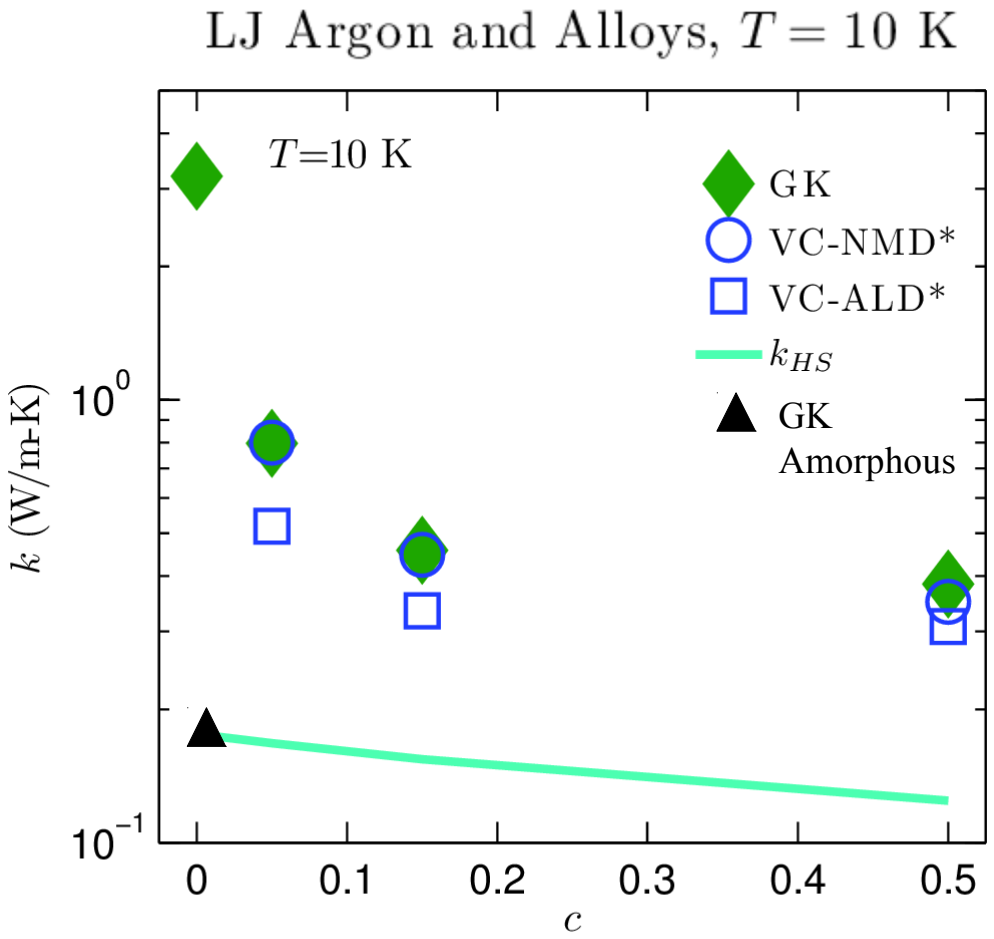

Thermal conductivity spectrum

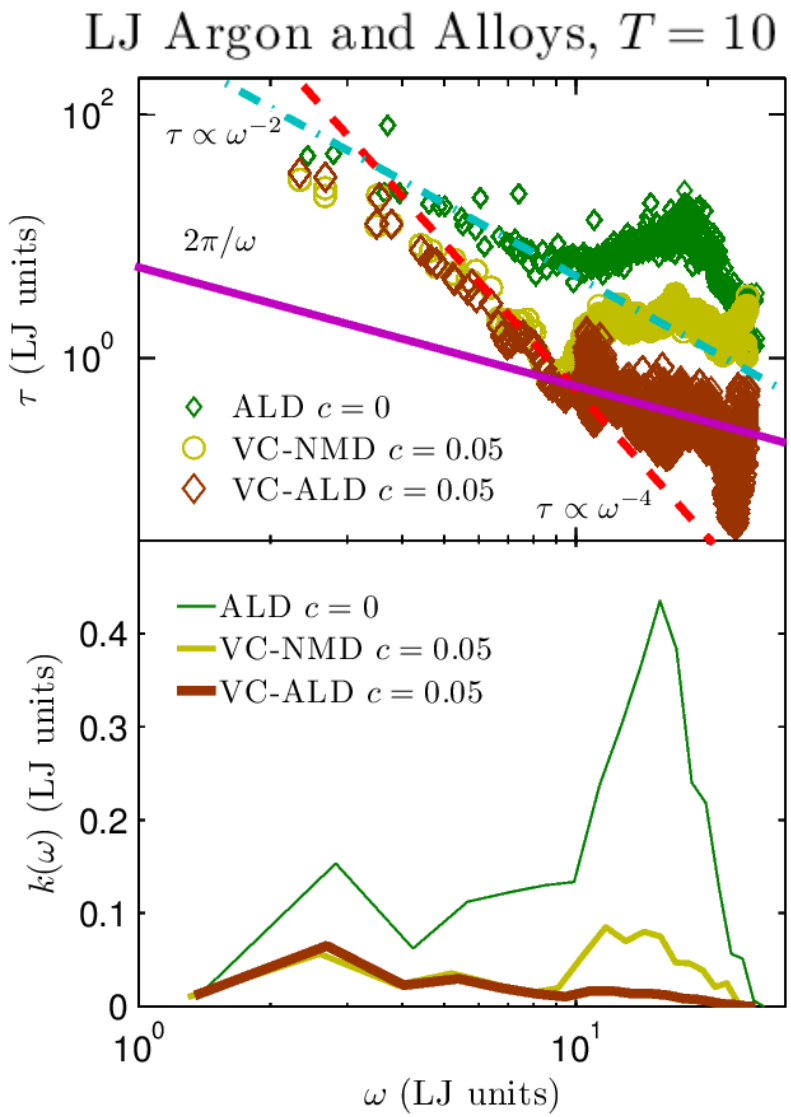

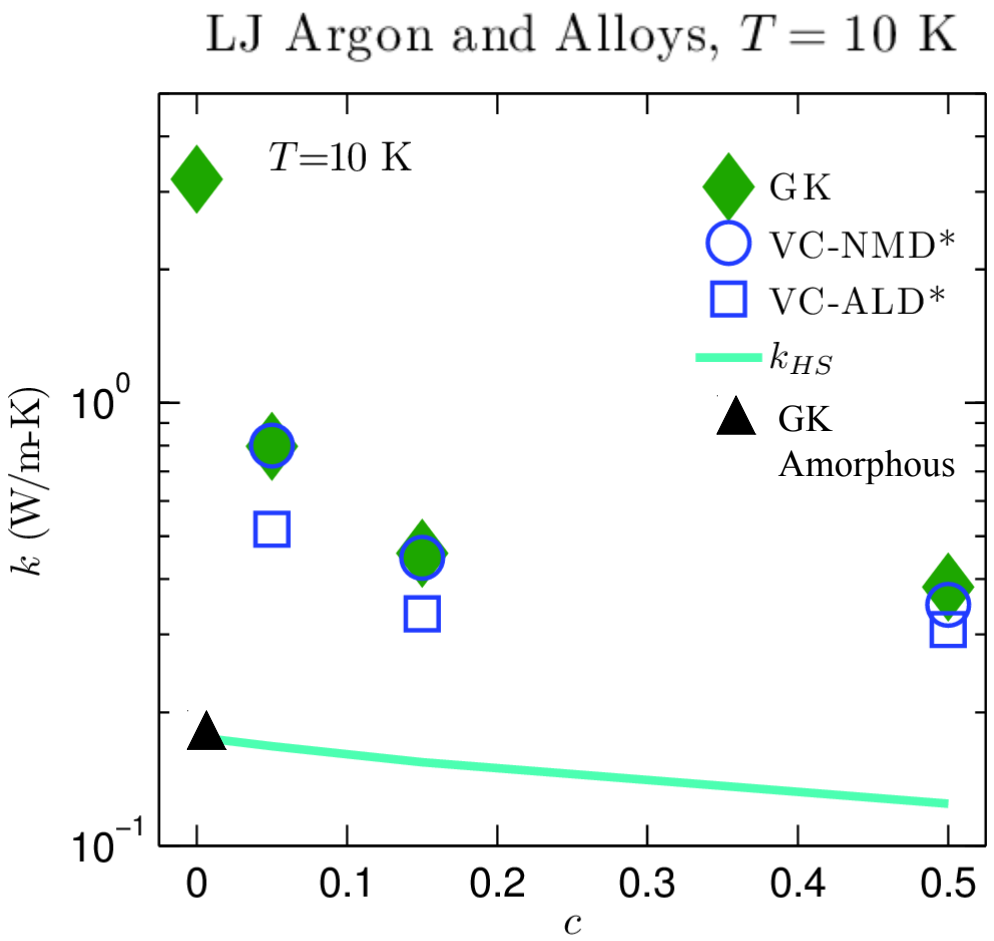

Summary

VC approximation underpredicts mode group velocities at high frequency.

VC-ALD underpredicts lifetimes at high-frequency.

Breakdown of VC-ALD method is likely for materials near HS limit.

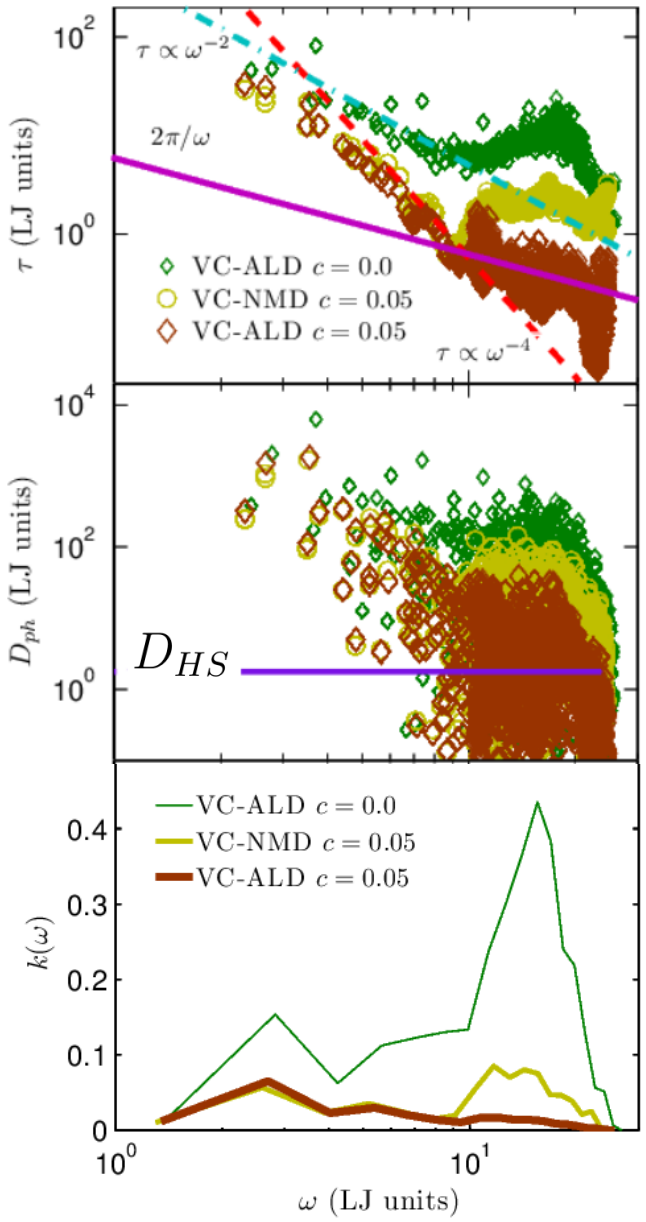

This work was supported by AFOSR award FA95501010098 and by a grant of computer time from the DOD High Performance Computing Modernization Program at the US Army Engineer Research and Development Center. We thank Davide Donadio, Jivtesh Garg, Asad Hasan, Craig Maloney, and Zhiting Tian for helpful discussions.

Explicit disorder: Structure Factor

Gamma VC

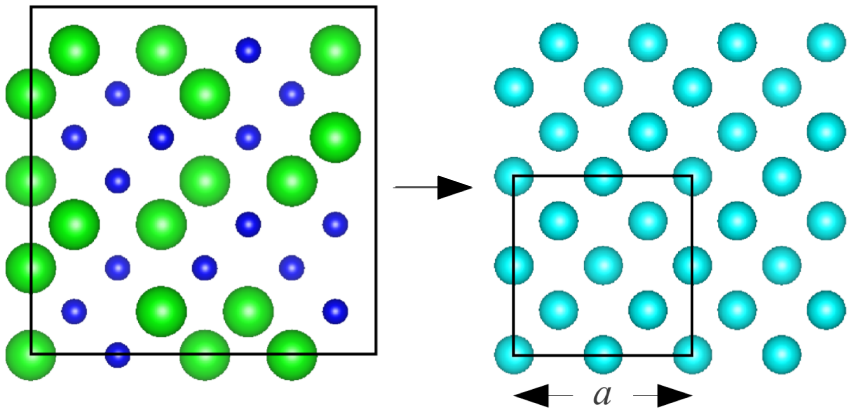

$$D_{ph,\mathbf{n}}(\kappa,\nu) = v^2_{g,\mathbf{n}}(\kappa,\nu)\,\tau(\kappa,\nu)$$

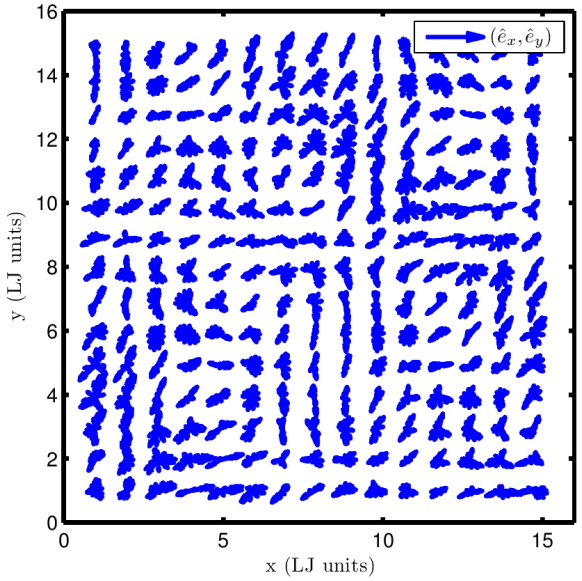

Gamma VC Gamma

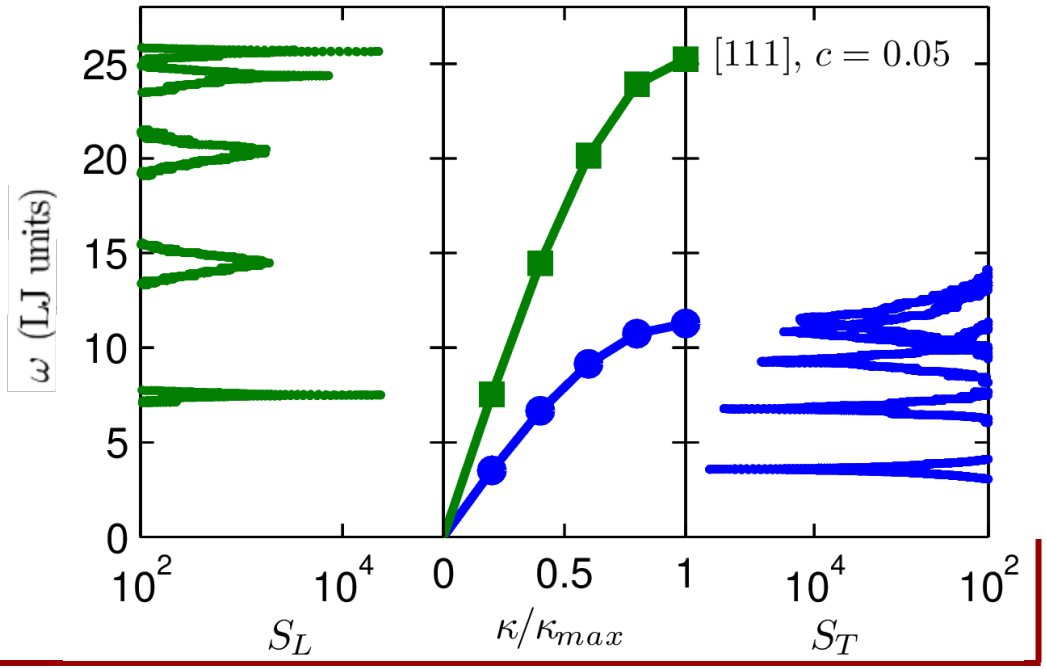

Phys. Rev. B 59, 35513559 (1999)

HS/IR Limit

$$D_{IR} = \frac{2\pi}{3}\frac{v_s^2}{\omega}$$

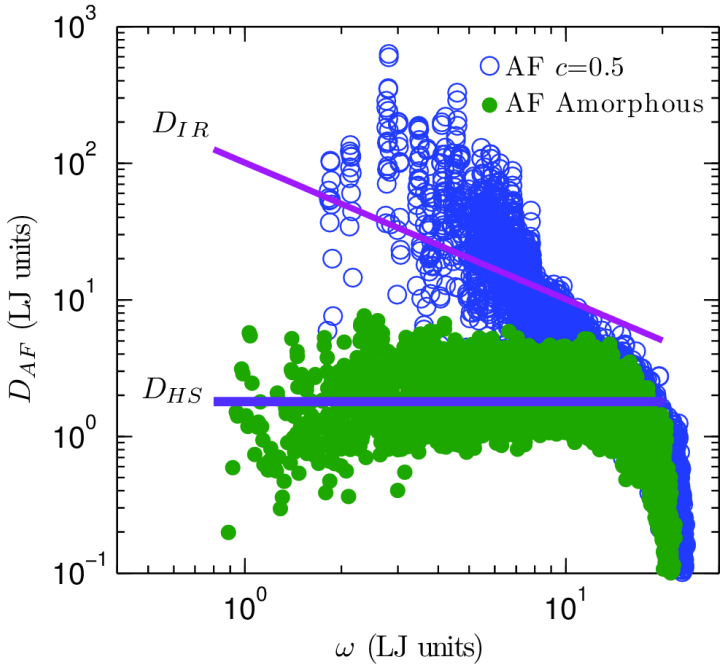

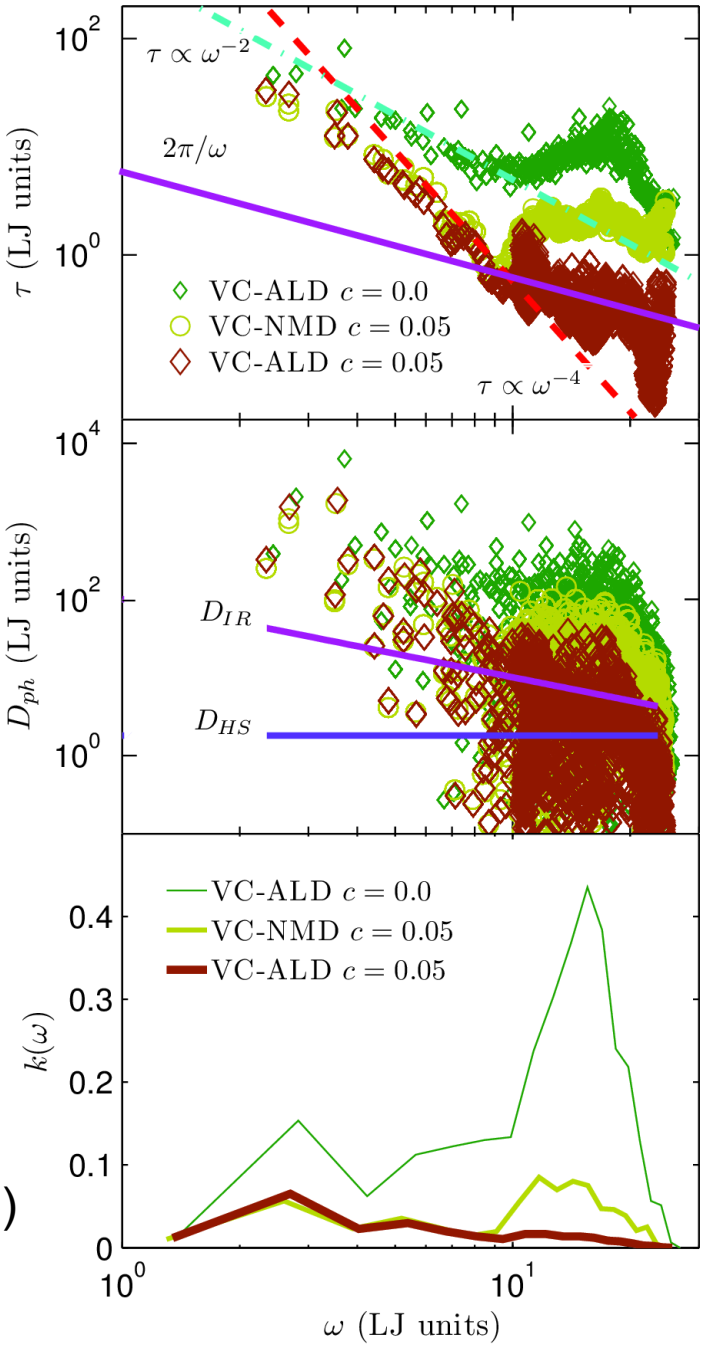

P. Sheng and M. Zhou, Science 253, 539542 (1991)

Thermal conductivity: SW silicon alloy

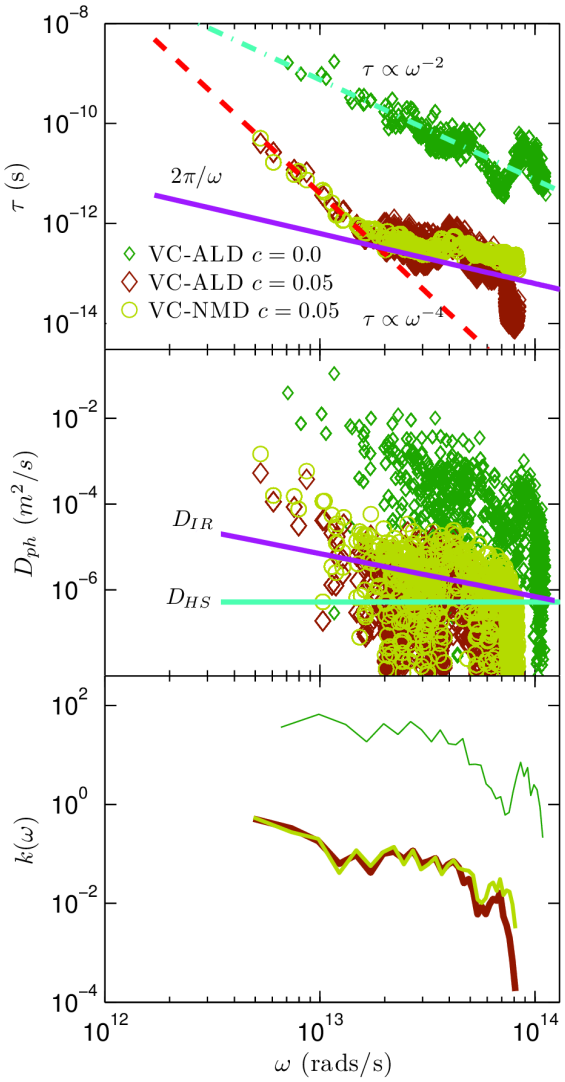

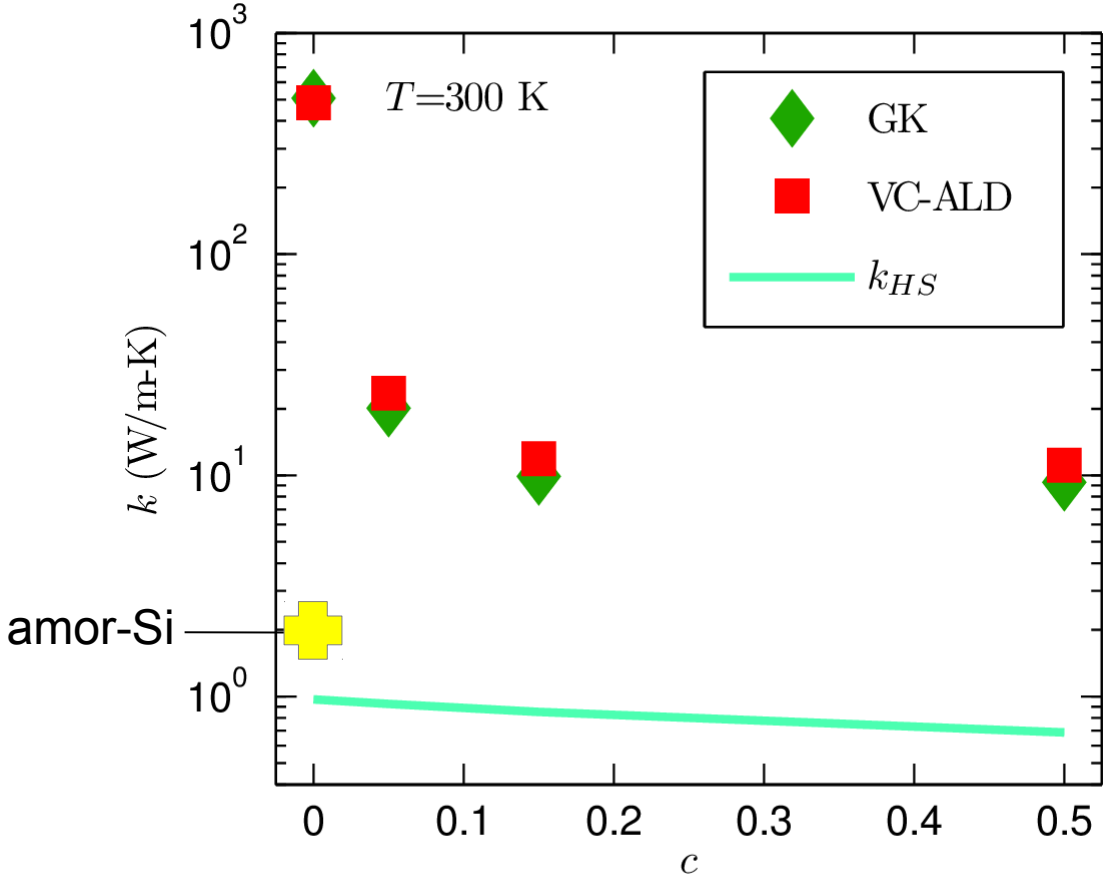

Gamma modes

$e\left(\begin{smallmatrix}\kappa=0 & b\\ \nu & \alpha\end{smallmatrix}\right)$

(a) disordered supercell

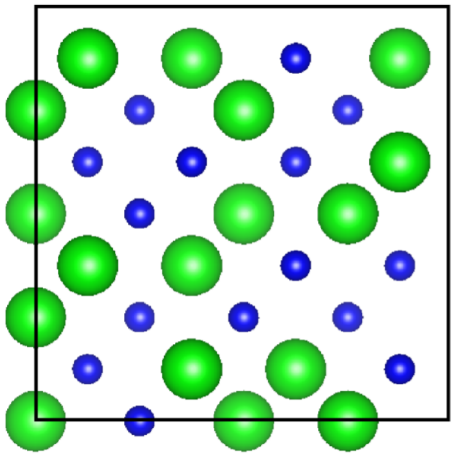

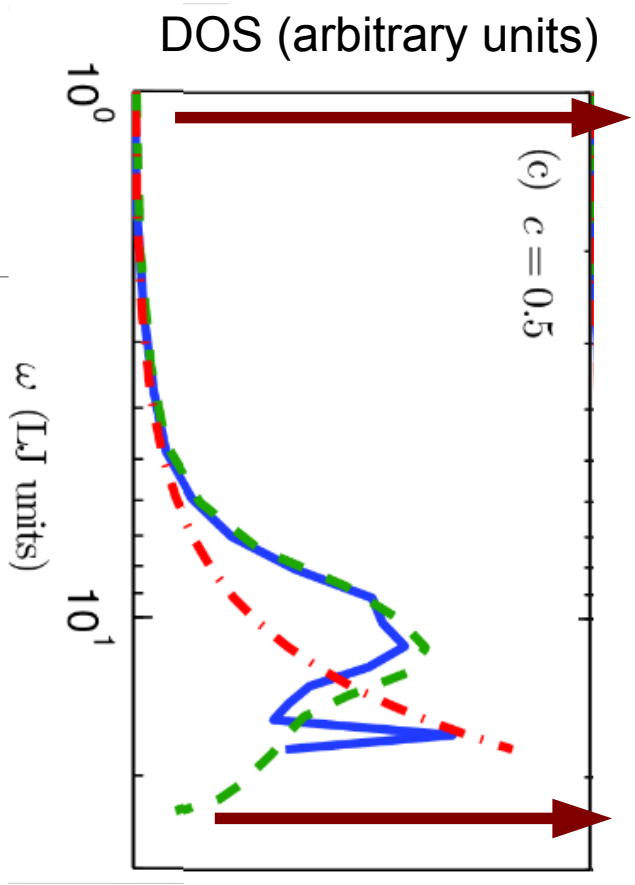

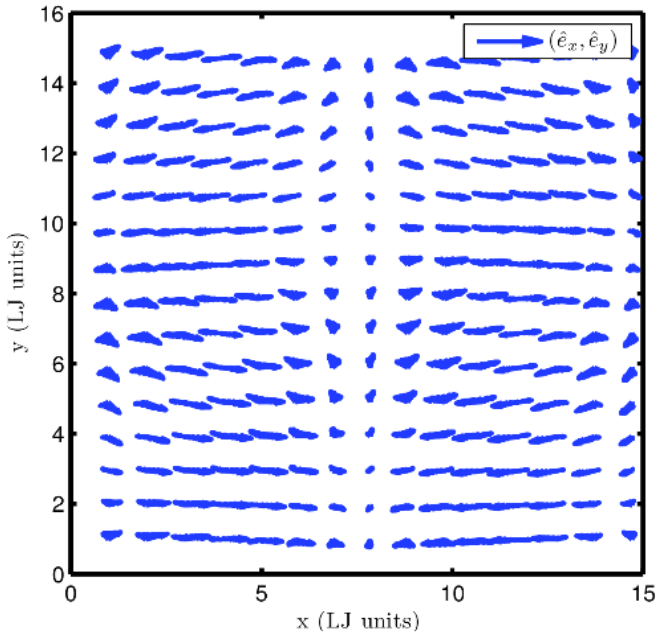

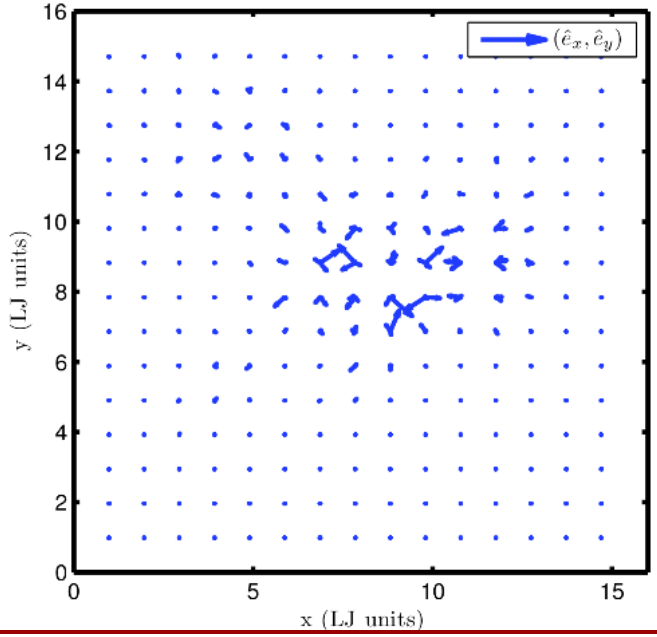

NMD using VC modes

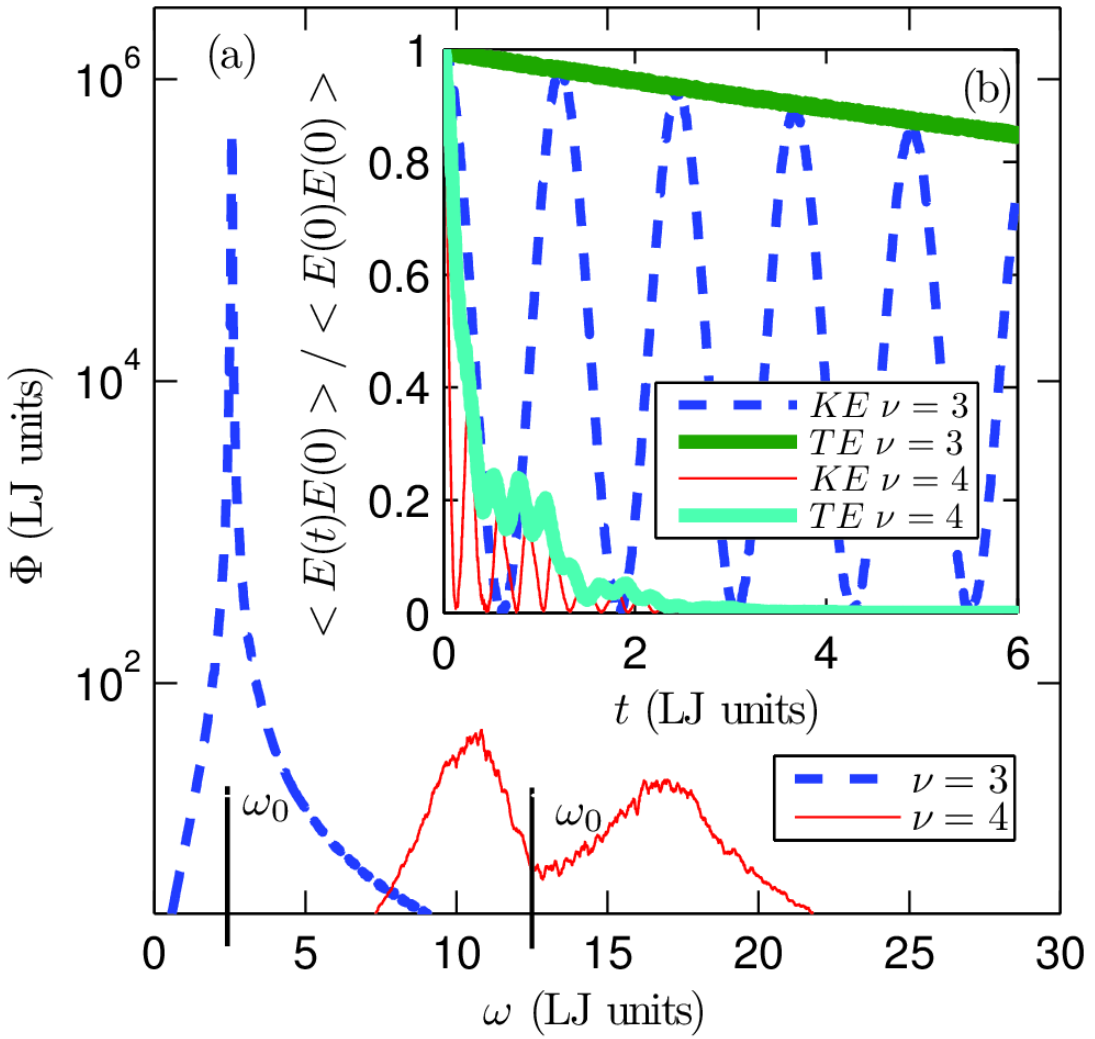

Phonon Spectrum: LJ Ar vs SW Si