

VITON: An Image-based Virtual Try-on Network

Radek Bartyzal

GLAMI AI

20. 7. 2020

Virtual Try On

Companies:

- TriMirror, Fits Me

The key enabling factor behind them is the use of 3D measurements of body shape:

- captured directly by depth cameras
- inferred from a 2D image

Relevant work:

- infer 3D clothing model from 1 image [3]
- a lot of other methods that fail to produce realistic images

Example of TriMirror



Motivation

Idea:

- do not model the 3D objects, keep it all 2D
- keep the person's face + body parts = make it personal
- produce photo-realistic images = no simple avatars

Input:

- 1 (good quality) photo of a person in any clothing
- 1 product image of a piece of clothing (white background)

Output:

- 1 image = original photo with product image put on

Example (cherry picked)



Training

Inputs:

- reference image I with a person wearing c
- product image c

Steps:

- 1 create clothing-agnostic representation (P) of person in I
- 2 synthesize the reference image I with an encoder-decoder = input is P and c , output is attempted reconstruction of I (I') + cloth mask (M)
- 3 use cloth mask M and product image c to generate warped product image c'
- 4 refinement net: input = c' , I' , output = 1-channel mask α
- 5 result = $\alpha \cdot c' + \alpha \cdot I'$

Clothing-agnostic person representation

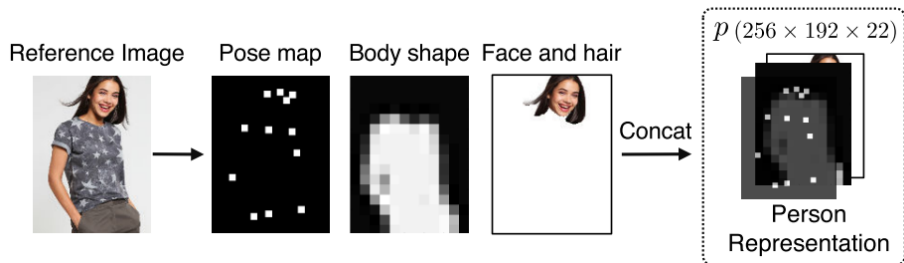


Figure: Given a reference image I , we extract the pose, body shape and face and hair regions of the person, and use this information as part of input to our generator.

- Pose: SOTA pose estimator
- Body: downsampled mask (1=human, 0=not) SOTA human parser
- Face: extract face+hair from human parser

Generate coarse image + clothing mask

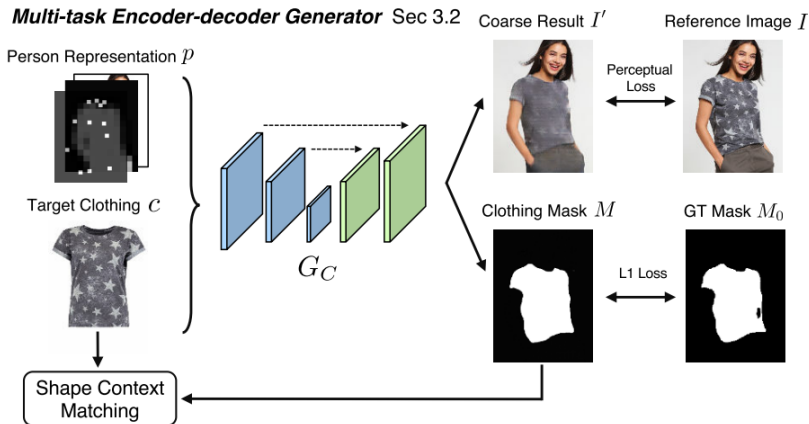


Figure: G_C = CNN U-Net with skip connections.

Generate warped product image

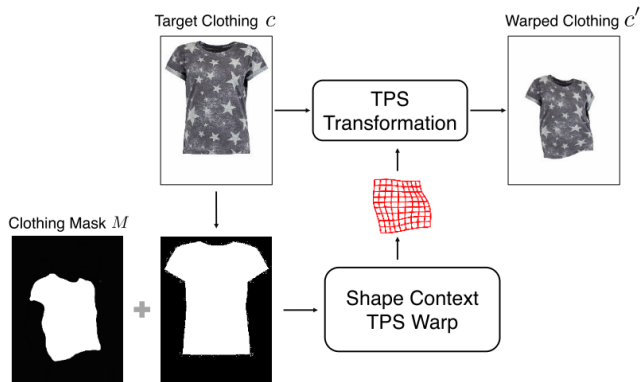


Figure: Warp the clothing item by estimating a thin plate spline (TPS) transformation with shape context matching.

Refinement network

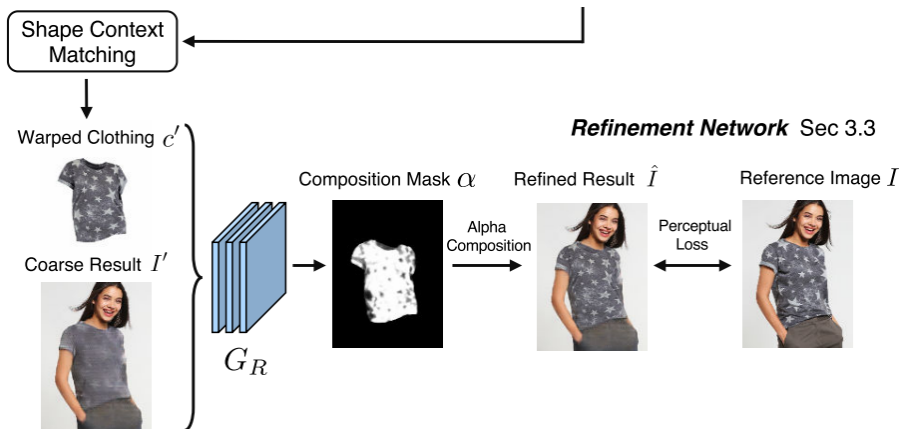


Figure: Simple CNN.

Conclusion

What is required:

- trained pose estimator
- trained human parser = image segmentation of body parts

Sources

1. Han, Xintong, et al. "Viton: An image-based virtual try-on network." Proceedings of the IEEE conference on computer vision and pattern recognition. 2018. <https://arxiv.org/abs/1711.08447>
2. TriMirror video <https://www.youtube.com/watch?v=vYJ19Z9i-zY>
3. S. Yang, T. Ambert, Z. Pan, K. Wang, L. Yu, T. Berg, and M. C. Lin. Detailed garment recovery from a single-view image. In ICCV, 2017