

Power BI Data Model

Human Resources Sample PBIX.pbix

Business tables: 9 | Relationships: 8 | Internal auto-date: 6

How to read


1. Next page(s): visual ER diagram (tables + join lines). Zoom in your PDF reader.
2. * = many / FK side (Power BI From). 1 = one / PK side (To).
3. After the ER diagram: every relationship printed in full (nothing clipped).
4. Later pages list every business column (PK/FK marked) and internal date tables.

ER diagram - Human Resources Sample PBIX.pbix

ER diagram
Human Resources Sample PBIX.pbix

ER diagram (business tables)

Exact joins from the PBIX model. * = many (FK side) 1 = one (lookup / PK side) Dashed red = inactive relationship
Layout: dependency layers (lookup left -> FK / transactional right)

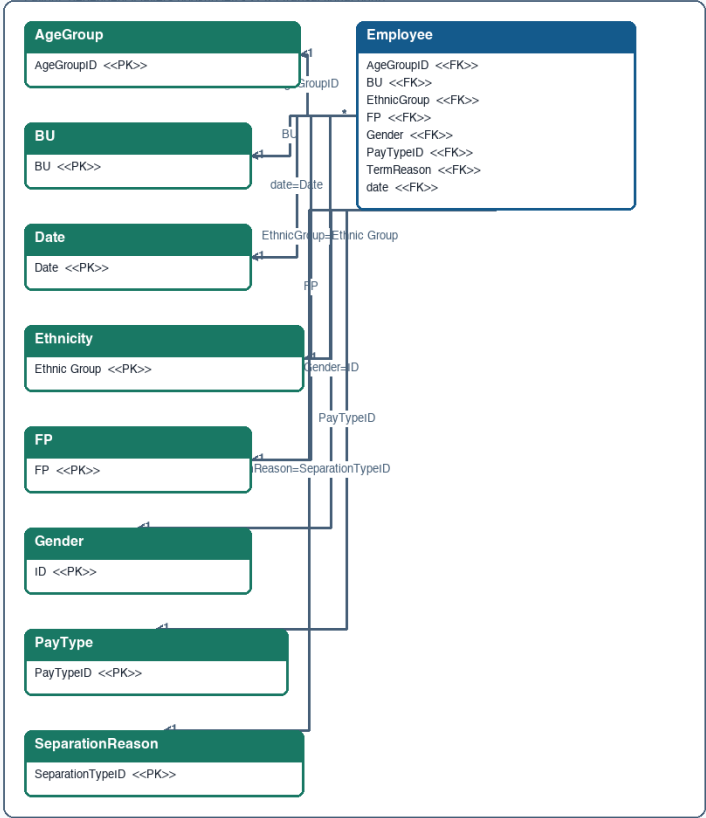

ER accuracy: 8/8 model relationships drawn | 9 business entities | From=Many (*), To=One (1)

Entity colors: Fact / FK-heavy Bridge Dimension / lookup Other

ER relationships checklist (8)

Many side (FK) -> One side (PK) | Card / Filter / Active

1. Employee.AgeGroupID -> AgeGroup.AgeGroupID [*] many = Employee [1] one = AgeGroup M:1 filter: Single ACTIVE
2. Employee.BU -> BU.BU [*] many = Employee [1] one = BU M:1 filter: Single ACTIVE
3. Employee.date -> Date.Date [*] many = Employee [1] one = Date M:1 filter: Single ACTIVE
4. Employee.EthnicGroup -> Ethnicity.Ethnic Group [*] many = Employee [1] one = Ethnicity M:1 filter: Single ACTIVE
5. Employee.FP -> FP.FP [*] many = Employee [1] one = FP M:1 filter: Single ACTIVE
6. Employee.Gender -> Gender.ID [*] many = Employee [1] one = Gender M:1 filter: Single ACTIVE
7. Employee.PayTypeID -> PayType.PayTypeID [*] many = Employee [1] one = PayType M:1 filter: Single ACTIVE
8. Employee.TermReason -> SeparationReason.SeparationTypeID [*] many = Employee [1] one = SeparationReason M:1 filter: Single ACTIVE

Schema layers (left = lookup, right = FK side)

Layer 0: AgeGroup (dim), BU (dim), Date (dim), Ethnicity (dim), FP (dim), Gender (dim), PayType (dim), SeparationReason (dim)

Layer 1: Employee (fact)

Business tables (all columns)

PK / FK marks come from model relationships and key flags.

AgeGroup (dim, 2 cols)

- AgeGroupID [PK] (Int64)
- AgeGroup (string)

BU (dim, 4 cols)

- BU [PK] (string)
- RegionSeq (string)
- VP (string)
- Region [CALC] (string)

Date (dim, 12 cols)

- Date [PK] (datetime64[ns])
- Month (string)
- MonthNumber (Int64)
- Period (string)
- PeriodNumber (Int64)
- Qtr (Int64)
- QtrNumber (string)
- Year (Int64)
- Day (Int64)
- MonthStartDate (datetime64[ns])
- MonthEndDate (datetime64[ns])
- MonthIncrementNumber [CALC] (Int64)

Employee (fact, 16 cols)

- date [FK] (datetime64[ns])
- EmplID (Int64)
- Gender [FK] (string)
- Age (Int64)
- EthnicGroup [FK] (string)
- FP [FK] (string)
- TermDate (datetime64[ns])
- isNewHire [CALC] (Int64)
- BU [FK] (string)
- HireDate (datetime64[ns])
- PayTypeID [FK] (string)
- TermReason [FK] (string)
- AgeGroupID [FK,CALC] (Int64)
- TenureDays [CALC] (Float64)
- TenureMonths [CALC] (Int64)
- BadHires [CALC] (Float64)

Ethnicity (dim, 2 cols)

- Ethnic Group [PK] (string)
- Ethnicity (string)

FP (dim, 2 cols)

- FP [PK] (string)
- FPDesc (string)

Gender (dim, 3 cols)

- ID [PK] (string)
- Gender (string)
- Sort (Int64)

PayType (dim, 2 cols)

- PayTypeID [PK] (string)
- PayType (string)

SeparationReason (dim, 2 cols)

- SeparationTypeID [PK] (string)
- SeparationReason (string)

Internal auto-date tables

LocalDateTable_* / DataTableTemplate_* support Power BI date hierarchies. Listed for completeness; business relationships above do not use them.

DataTableTemplate_92fd358c...

Full name: DataTableTemplate_92fd358c-bb4c-4d52-9f5b-e9a59dc2315d

Used for: PBI auto-date TEMPLATE (not tied to a business column)

LocalDateTable_6f19fed3...

Full name: LocalDateTable_6f19fed3-1fc0-4f7a-878d-34aca93d6782

Used for: Date[Date]

LocalDateTable_c04ce649...

Full name: LocalDateTable_c04ce649-6e25-466f-9bbc-faabfec0fe29

Used for: Employee[HireDate]

LocalDateTable_c9dde99e...

Full name: LocalDateTable_c9dde99e-7ac1-4e8e-a5f2-c5ffc41d9cac

Used for: Date[MonthEndDate]

LocalDateTable_cc28ef26...

Full name: LocalDateTable_cc28ef26-f63a-4bc3-b357-93ab34cd6d9b

Used for: Employee[TermDate]

LocalDateTable_d2ea5b26...

Full name: LocalDateTable_d2ea5b26-668d-4c17-b228-695669b066a6

Used for: Date[MonthStartDate]