

Humpback Whales and Ship Noise

Fabian Blasch

04/11/2022



1 Data and Descriptive Statistics

```
# import data (this dataset is unfortunately not public)
openxlsx::read.xlsx("../Data/Humpback_Whales_Data.xlsx") -> dat_whale

# first a quick look at the missing values in the data
sapply(dat_whale, \(x) sum(is.na(x))) |> knitr::kable(col.names = "NAs")
```

	NAs
Individuum	0
Treatment	0
Szenario	0
ruhezeit	0
speed	5
Atem	0

```
# harmonize names
colnames(dat_whale) <- tolower(colnames(dat_whale))

# to numeric
lapply(dat_whale[, c("ruhezeit", "speed", "atem")], as.numeric) -> dat_whale[, c("ruhezeit", "speed", "atem")]

# to factor
lapply(dat_whale[, !(colnames(dat_whale) %in% c("ruhezeit", "speed", "atem"))],
       as.factor) -> dat_whale[, !(colnames(dat_whale) %in% c("ruhezeit", "speed", "atem"))]

# relevel
factor(dat_whale[, "szenario"],
       levels = c("Before", "During", "After")) -> dat_whale[, "szenario"]
factor(dat_whale[, "treatment"], c("Control", "Medium", "High")) -> dat_whale[, "treatment"]

# add log
within(dat_whale, {
  logspeed <- log(speed)
  logatem <- log(atem)
}) -> dat_whale

# first split into different intensities
dat_whale_intens <- split(dat_whale, dat_whale[, "treatment"])

# build formulas
formulae <- paste(c("ruhezeit", "speed", "atem"), "~", "szenario")

# over szenarios
invisible(lapply(dat_whale_intens, function(x) {
  # safe for presentation
  # pdf(paste0("../Presentation/", nom, ".pdf"))

  # align
  par(mfrow = c(3, 1), mar = c(2, 4, 4, 2) + 0.1)
```

```

# over treatment
invisible(Map(\(x, nom){

  # boxplots
  boxplot(as.formula(y), data = x,
          col = c("cornflowerblue", "deepskyblue4", "darkblue"))




  # add label
  mtext(nom, side = 3, line = 1, cex = 1.2)




}, dat_whale_intens, names(dat_whale_intens))




# close graph. device
# dev.off()

}, formulae, c("resting", "speed", "respatory"))

```

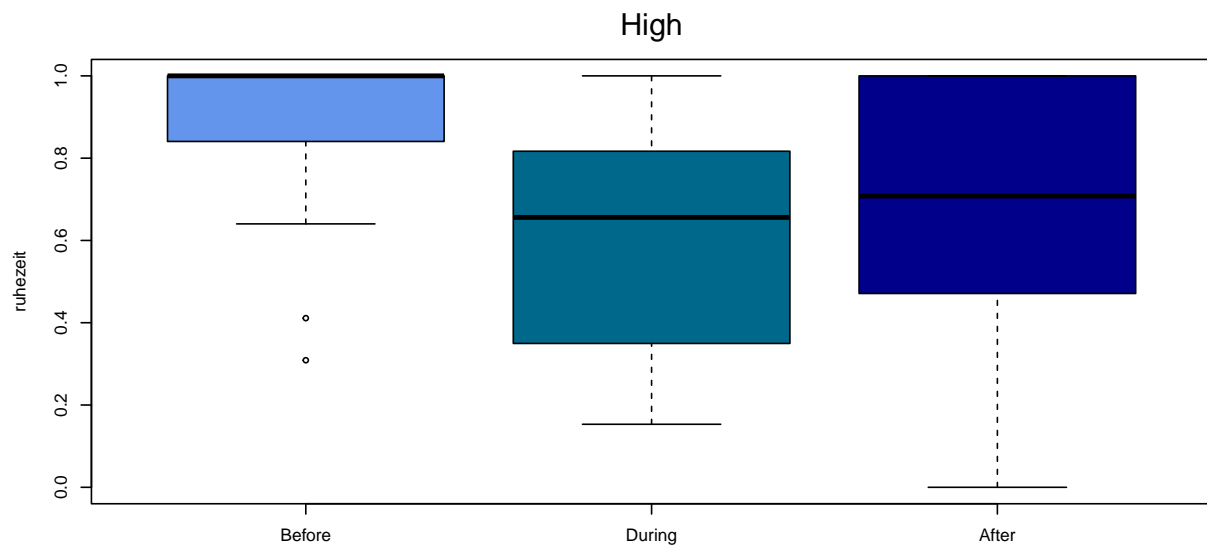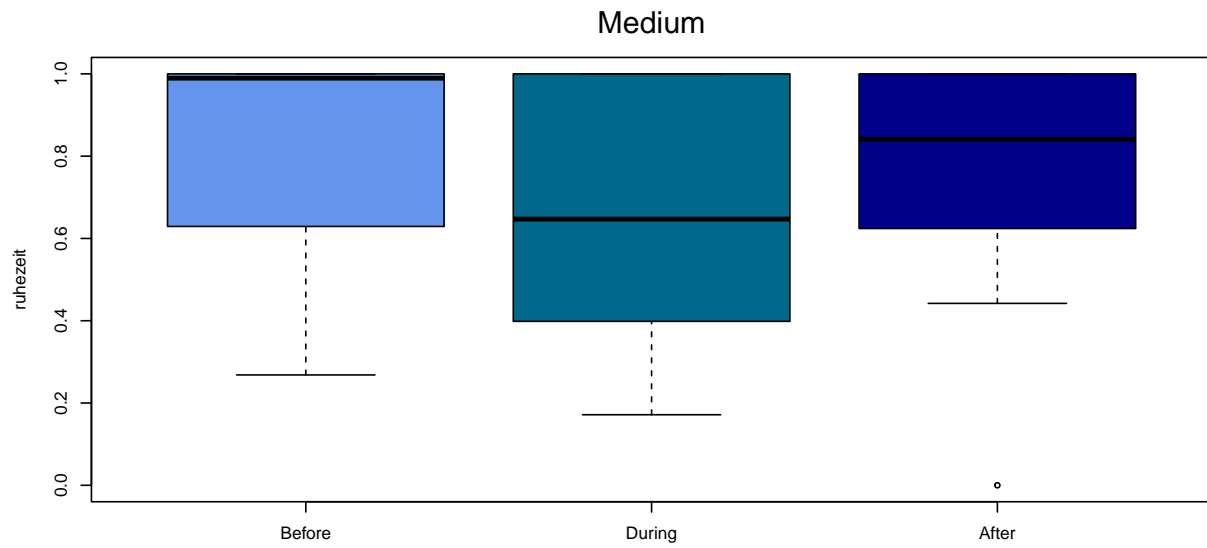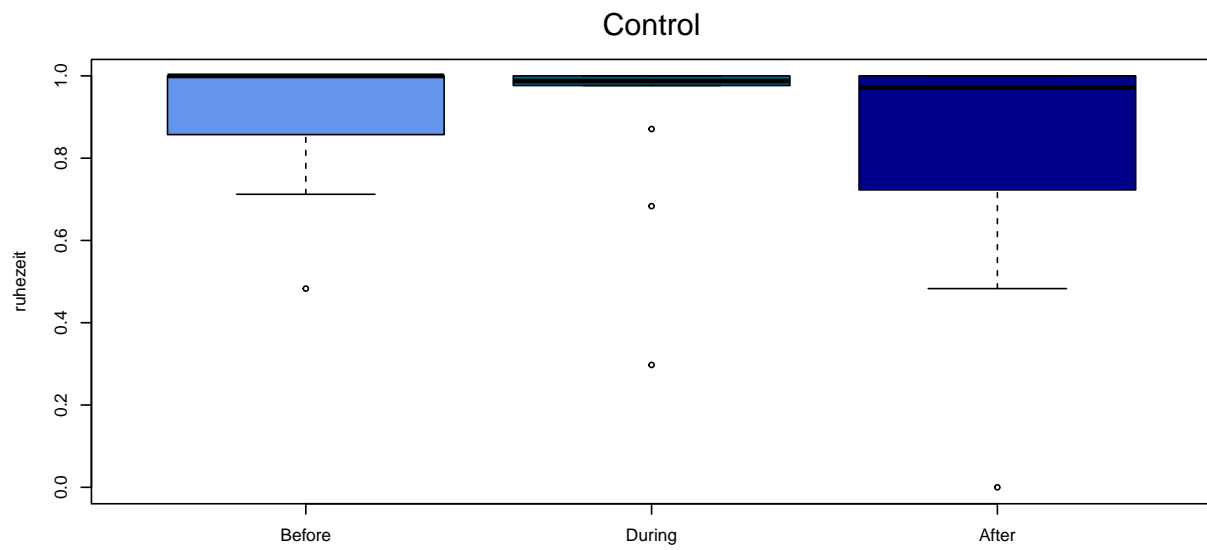

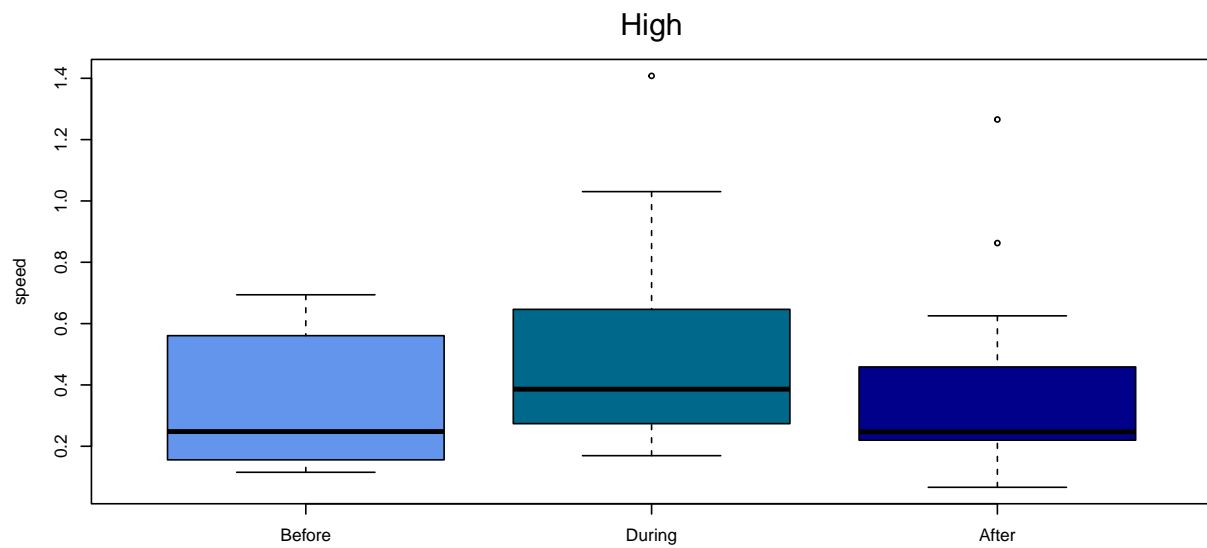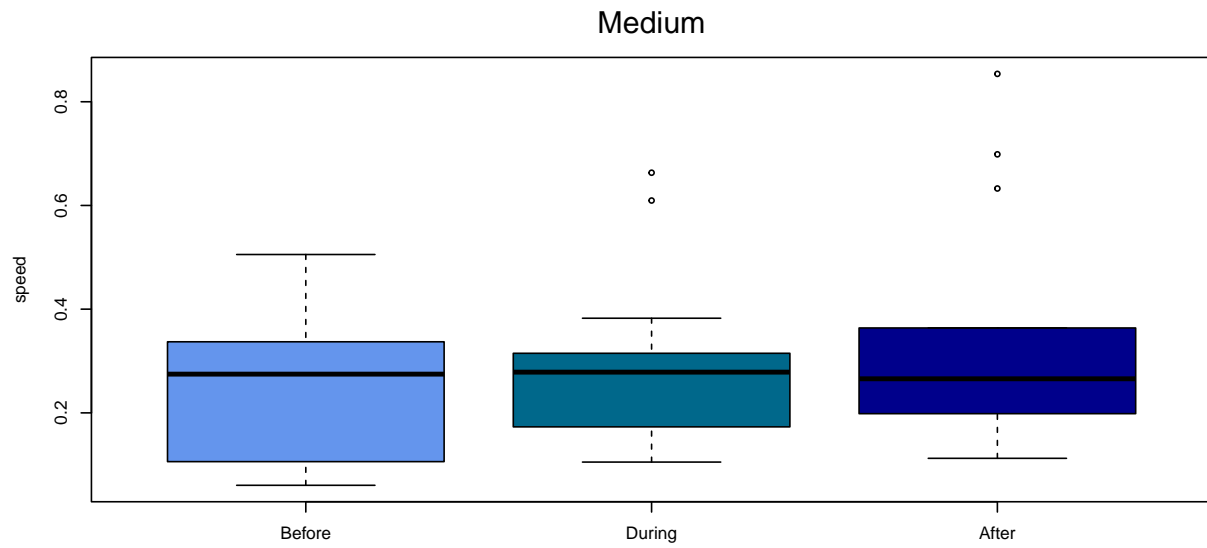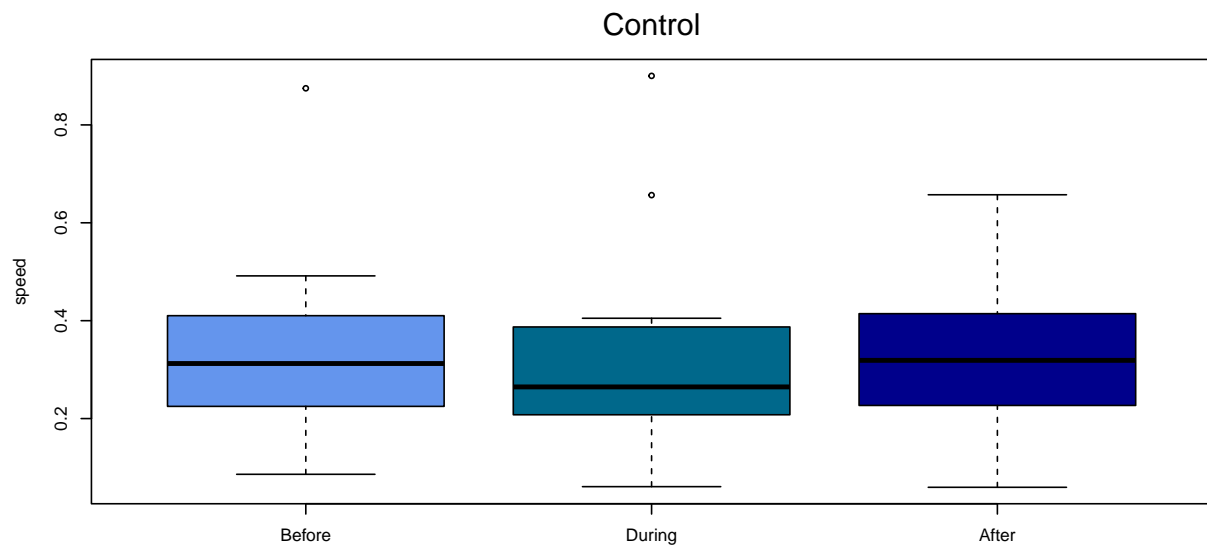

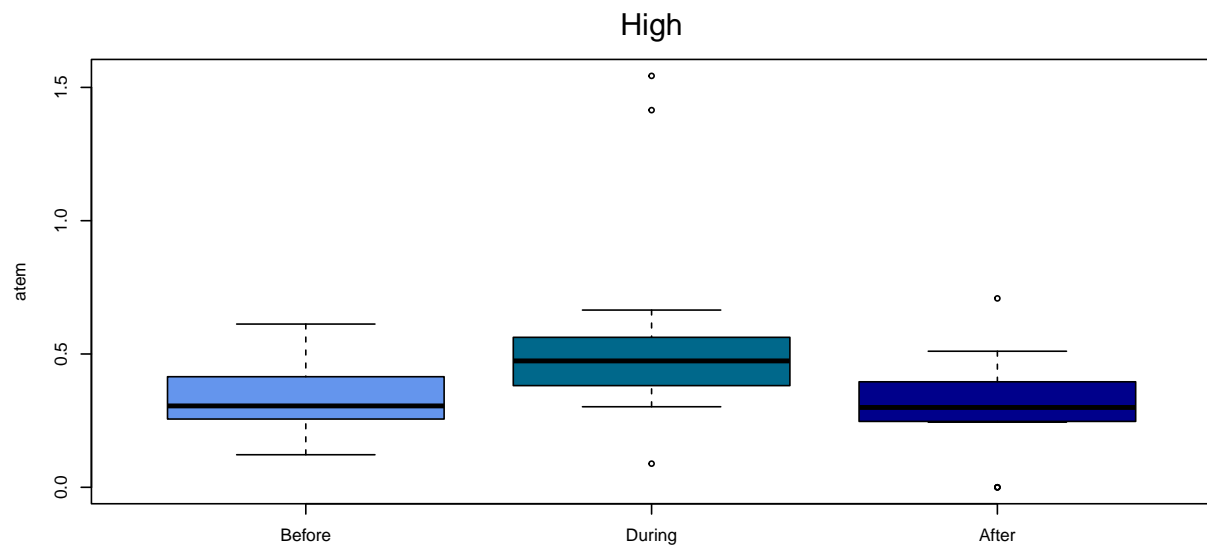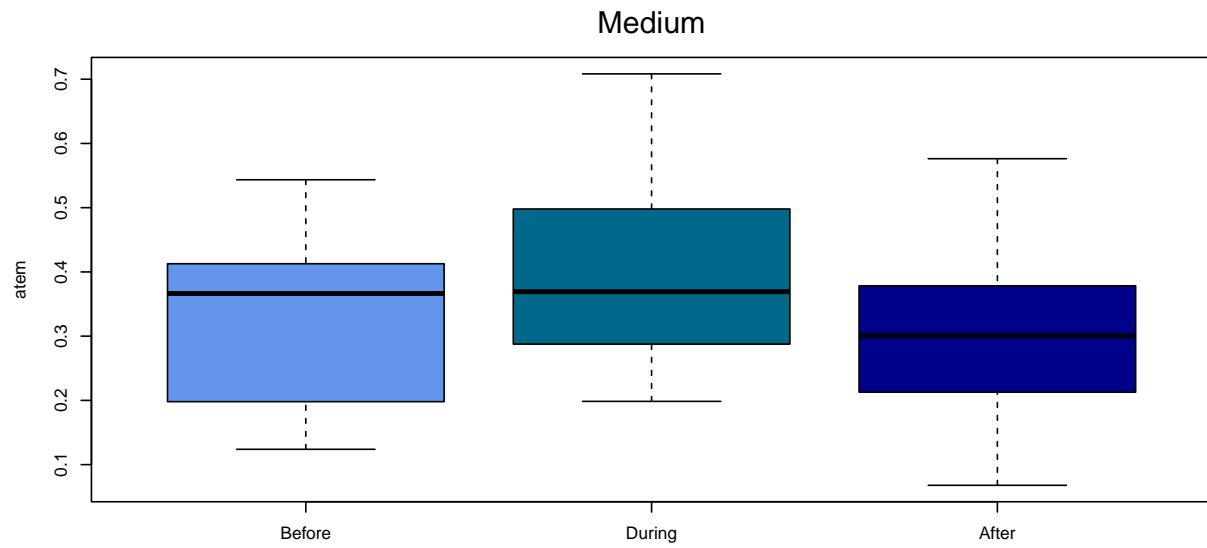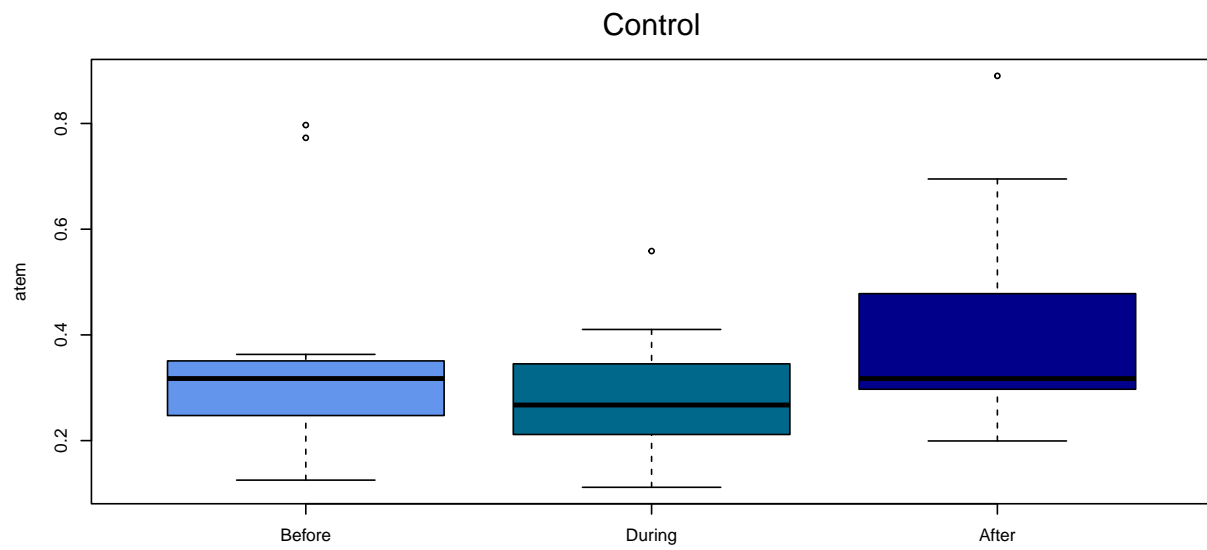

2 Speed and Breath

The basic idea behind looking at a scatterplot of the speed of the animal and the breath frequency for different groups is, that we would expect the breathe frequency to increase with speed, but if the whale is additionally stressed because of external influence, then the breathe should increase above the normally expected level of breathing frequency for a given speed level.

```
# scatter 1
ggplot(dat_whale, aes(x = speed, y = atem, color = treatment,
                      shape = szenario, linetype = szenario)) +
  geom_point(size = 2) +
  geom_smooth(method = "lm", se = FALSE) +
  theme_bw() +
  theme(legend.position = "none") -> plot1

# scatter 2
ggplot(dat_whale, aes(x = logspeed, y = logatem, color = treatment,
                      shape = szenario, linetype = szenario)) +
  geom_point(size = 2) +
  geom_smooth(method = "lm", se = FALSE) +
  theme_bw() -> plot2

# display side by side
plot1 + plot2
```

