Efficient Implementation Strategies for Block Ciphers on ARMv8

Bachelorarbeit

Bastian Engel

May 20, 2023

Abstract

Processor designs licensed by ARM are ubiquitous in many areas due to their low power consumption and heat generation. Being used in nearly all modern smartphones and tablets as well as in many desktop computers and IoT devices, the need for securing communications and confidentiality through encryption arises. Designing cryptographic algorithms for such low-power environments is an active area of research and various designs have been proposed. We examine in detail the two block ciphers GIFT and Camellia. For that, we first give an introduction of the designs as well as the ARMv8 platform we develop for. We then present multiple implementation strategies which leverage ARMv8 SIMD processing facilities and realize these in the C programming language using NEON intrinsics. In the end, we present performance benchmarks and a brief comparison to conclude this work. We find bit- and bytesliced implementations employing vector instructions to be the fastest.

Declaration

I hereby declare that the work presented in this thesis is entirely my own and that I did not use any other sources and references than the listed ones. I have marked all direct or indirect statements from other sources contained therein as quotations. Neither this work nor significant parts of it were part of another examination procedure. I have not published this work in whole or in part before. The electronic copy is consistent with all submitted copies.

Contents

1	Intr	ntroduction													
	1.1	Notati	ion	5											
	1.2	Block	ciphers	5											
		1.2.1	GIFT												
		1.2.2	Camellia												
	1.3	The A													
		1.3.1													
		1.3.2													
		1.3.3	NEON Intrinsics												
2	Imr	olemen	tation strategies	15											
	2.1		gies for GIFT												
			Table-based												
		2.1.2													
		2.1.3	Bitslicing												
	2.2	Strate	gies for Camellia												
		2.2.1	Optimized non-SIMD												
		2.2.2	Byteslicing												
3	Implementation 28														
	3.1			28											
	3.2	-													
			Table-based												
		3.2.2	Using vperm	30											
		3.2.3	Bitslicing	31											
	3.3		lia												
		3.3.1	Optimized non-SIMD implementation												
		3 3 2	Bytesliced implementation	35											

CONTENTS 4

4	Eva	luatior	n	38											
	4.1	Perfor	rmance evaluation	. 38											
	4.2	Conclu	usion	. 39											
	4.3	Notes		. 41											
\mathbf{A}	Detailed benchmarking results														
	A.1	GIFT		. 42											
	A.2	Camel	llia	. 43											
В	C source code														
	B.1	GIFT		. 44											
		B.1.1	Table-based	. 44											
		B.1.2	Using vperm	. 47											
			Bitslicing												
	B.2		llia												
		B.2.1	Optimized non-SIMD	. 58											
			Byteslicing												

Chapter 1

Introduction

1.1 Notation

```
\ll_n; \gg_n left; right shift by n bits \ll_n; \gg_n left; right rotate by n bits \land AND \lor OR \oplus XOR A_{(32)} A is 32 bits long \parallel concatenation
```

1.2 Block ciphers

Securing communication channels between different parties has been a long-term subject of study for cryptographers and engineers which is essential to our modern world to cope with ever-increasing amounts of devices producing and sharing data. The main way to facilitate high-throughput, confidential communications nowadays is through the use of symmetric cryptography in which two parties share a common secret, called a key, which allows them to encrypt, share and subsequently decrypt messages to achieve confidentiality against third parties. Ciphers can be divided into two categories; block ciphers, which always encrypt fixed-sized messages called blocks, and stream ciphers, which continuously provide encryption for an arbitrarily long, constant stream of data.

A block cipher can be defined as a bijection between the input block (the message) and the output block (the ciphertext). For any block cipher with block size n, we denote the key-dependent encryption and decryption functions as E_K, D_K : $\mathbb{F}_2^n \to \mathbb{F}_2^n$. The simplest way to characterize this bijection is through a lookup table which yields the highest possible performance as each block can be encrypted by

one simple lookup depending on the key and the message. This is not practical though due to most ciphers working with block and key sizes $n, |K| \ge 64$. For a block cipher with n = 64, |K| = 128, a space of $2^{64}2^{128}64 = 2^{198}$ is necessary. Considering modern consumer hard disks being able to store data in the order of 2^{40} , it is easy to see that a lookup table is wholly impractical. We therefore describe block ciphers algorithmically which opens up possibilities for different tradeoffs and security concerns.

1.2.1 GIFT

GIFT [1], first presented in the CHES 2017 cryptographic hardware and embedded systems conference, is a lightweight block cipher based on a previous design called PRESENT, developed in 2007. Its goal is to offer maximum security while being extremely light on resources. Modern battery-powered devices like RFID tags or low-latency operations like on-the-fly disc encryption present strong hardware and power constraints. GIFT aims to be a simple, low-energy cipher suited for these kinds of applications.

GIFT comes in two variants; GIFT-64 working with 64-bit blocks and GIFT-128 working with 128-bit blocks. In both cases, the key is 128 bits long. The design is a very simple, round-based substitution-permutation network (SPN). One round consists in a sequential application of the confusion layer by means of 4-bit S-boxes and subsequent diffusion through bit permutation. After the bit permutation, a round key is added to the cipher state and the single round is complete. GIFT-64 uses 28 rounds while GIFT-128 uses 40 rounds.

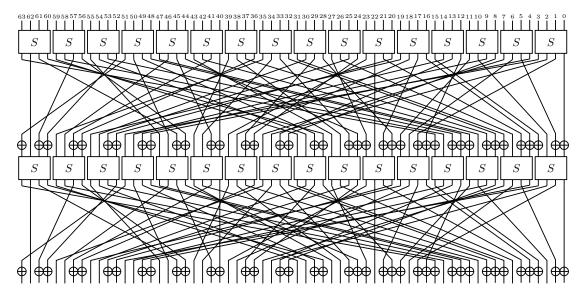


Figure 1.1: Two rounds of GIFT-64

Substitution layer

The input of GIFT is split into 4-bit nibbles which are then fed into 16 S-boxes for GIFT-64 and 32 S-boxes for GIFT-128. The S-box $S: \mathbb{F}_2^4 \to \mathbb{F}_2^4$ is defined as follows:

Permutation layer

The permutation P works on individual bits and maps bit b_i to $b_{P(i)}$. The different permutations for GIFT-64 and GIFT-128 can be expressed by:

$$P_{64}(i) = 4 \left\lfloor \frac{i}{16} \right\rfloor + 16 \left(\left(3 \left\lfloor \frac{i \mod 16}{4} \right\rfloor + (i \mod 4) \mod 4 \right) + (i \mod 4) \right)$$

$$P_{128}(i) = 4 \left\lfloor \frac{i}{16} \right\rfloor + 32 \left(\left(3 \left\lfloor \frac{i \mod 16}{4} \right\rfloor + (i \mod 4) \right) \mod 4 \right) + (i \mod 4)$$

Round key addition

The last step of each round consists in XORing a round key R_i to the cipher state. The new cipher state x_{i+1} after each full round is therefore given by

$$x_{i+1} = P(S(x_i)) \oplus R_i$$

Round key extraction and key schedule

Round key extraction differs for GIFT-64 and GIFT-128. Let $K_{(128)} = k_7 ||k_6|| \dots ||k_0||$ denote the 128-bit key state.

GIFT-64 . We extract two words $U_{(16)}||V_{(16)} = k_1||k_0$ from the key state. These are then added to round key $R_{(64)}$: $R_{4i+1} \leftarrow U_i, R_{4i} \leftarrow V_i$.

GIFT-128 . We extract two words $U_{(32)}||V_{(32)} = k_5||k_4||k_1||k_0$ from the key state. These are then added to round key $R_{(128)}$: $R_{4i+2} \leftarrow U_i$, $R_{4i+1} \leftarrow V_i$.

In both cases, we additionally XOR a round constant $C_{(6)}$ to bit positions n-1,23,19,15,11,7,3. The round constants are generated using a 6-bit affine linear-feedback shift register and have the following values:

	Constants
1 - 16	01,03,07,0F,1F,3E,3D,3B,37,2F,1E,3C,39,33,27,0E
17 - 32	1D,3A,35,2B,16,2C,18,30,21,02,05,0B,17,2E,1C,38
33 - 48	31,23,06,0D,1B,36,2D,1A,34,29,12,24,08,11,22,04

The key state is then updated by individually rotating k_1 and k_0 and rotating the new state 32 bits to the right:

$$|k_7||k_6||\dots||k_1||k_0 \leftarrow k_1 \gg 2||k_0 \gg 12||k_7||k_6||\dots||k_3||k_2$$

1.2.2 Camellia

Camellia [2] is a block cipher jointly developed by NTT and Mitsubishi Electric Corporation and first published in 2001. Following AES specifications, it is able to encrypt 128-bit blocks using either 128-, 196- or 256-bit keys and claims to possess similar performance and security levels as the AES finalists.

Encryption

The encryption process has an 18-round Feistel structure for 128-bit keys and a 24-round Feistel structure for 192/256-bit key and employs key whitening to increase security. First, subkeys $kw_{t(64)}(t=0,1,2,3)$, $k_{u(64)}(u=0,1,\ldots,(17|23)$ and $kl_{v(64)}(v=0,1,2,3)$ are generated from the master key. Then, pre-whitening keys are applied to the plaintext $m_{(128)} = L_{(64)}||R_{(64)}|$:

$$(L||R) \leftarrow (L||R) \oplus (kw_0||kw_1)$$

The next steps differ for 128-bit and 192/256-bit keys in the number of rounds: Finally, R and L are concatenated and XORed with the post-whitening keys to obtain the cipher text $c_{(128)}$:

$$c = (R||L) \oplus (kw_2)||kw_3)$$

Key schedule

The master key K is split into two parts $K = K_{L(128)}||K_{R(128)}$ with $K_R = 0$ for 128-bit keys. Then, two variables $K_{A(128)}, K_{B(128)}$ are generated by repeated application of the round function with key constants $\Sigma_i, i = (0, 1, ..., 5)$:

Round r	128-bit keys	192/256-bit keys
0-4	$(L R) \leftarrow FE(L,R,k_r)$	$(L R) \leftarrow FE(L,R,k_r)$
5	$(L R) \leftarrow FE(L,R)$	$(L R) \leftarrow FE(L,R)$
	$(L R) \leftarrow FLL(L, R, kl_0, kl_1)$	$(L R) \leftarrow FLL(L, R, kl_0, kl_1)$
6-10	$(L R) \leftarrow FE(L,R,k_r)$	$(L R) \leftarrow FE(L,R,k_r)$
11	$(L R) \leftarrow FE(L,R)$	$(L R) \leftarrow FE(L,R)$
11	$(L R) \leftarrow FLL(L, R, kl_2, kl_3)$	$(L R) \leftarrow FLL(L, R, kl_2, kl_3)$
12-16	$(L R) \leftarrow FE(L,R,k_r)$	$(L R) \leftarrow FE(L,R,k_r)$
17		$(L R) \leftarrow FE(L,R)$
17		$(L R) \leftarrow FLL(L, R, kl_4, kl_5)$
18-23		$(L R) \leftarrow FE(L,R,k_r)$

Table 1.1: Camellia encryption

$$\begin{split} K_{A} &\leftarrow K_{L} \oplus K_{R} \\ K_{A} &\leftarrow FE(FE(K_{A}, \Sigma_{0}0\text{xa}09\text{e}667\text{f}3\text{bcc}908\text{b}), \Sigma_{1}0\text{xb}67\text{ae}8584\text{caa}73\text{b}2) \\ K_{A} &\leftarrow K_{A} \oplus K_{L} \\ K_{A} &\leftarrow FE(FE(K_{A}, \Sigma_{2}0\text{xc}6\text{e}f372\text{fe}94\text{f}82\text{be}), \Sigma_{3}0\text{x}54\text{ff}53\text{a}5\text{f}1\text{d}36\text{f}1\text{c}) \\ K_{B} &\leftarrow FE(FE(K_{A}, \Sigma_{4}0\text{x}10\text{e}527\text{f}\text{a}\text{d}e682\text{d}1\text{d}), \Sigma_{5}0\text{xb}05688\text{c}2\text{b}3\text{e}6\text{c}1\text{f}\text{d}) \end{split}$$

Subkeys are then created by rotating K_L, K_R, K_A, K_B :

Table 1.2: Subkey creation for 128-bit keys

Usage	Subkey	Value	Usage	Subkey	Value
Prewhitening $F(\text{Round 0})$ $F(\text{Round 1})$ $F(\text{Round 2})$ $F(\text{Round 3})$ $F(\text{Round 4})$ $F(\text{Round 5})$ FL	$kw_{0}(64)$ $kw_{1}(64)$ $k_{0}(64)$ $k_{1}(64)$ $k_{2}(64)$ $k_{3}(64)$ $k_{4}(64)$ $k_{5}(64)$	$(K_L \ll_0)_{L(64)}$ $(K_L \ll_0)_{R(64)}$ $(K_A \ll_0)_{L(64)}$ $(K_A \ll_0)_{R(64)}$ $(K_L \ll_{15})_{L(64)}$ $(K_L \ll_{15})_{R(64)}$ $(K_A \ll_{15})_{L(64)}$ $(K_A \ll_{15})_{R(64)}$ $(K_A \ll_{30})_{L(64)}$	$F(\text{Round 9})$ F(Round 10) F(Round 11) FL FL^{-1} F(Round 12) F(Round 13) F(Round 14) F(Round 15)	k9(64) k10(64) k11(64) k12(64) k12(64) k13(64) k13(64) k14(64) k15(64)	$(K_L \ll_{60})_{R(64)}$ $(K_A \ll_{60})_{L(64)}$ $(K_A \ll_{60})_{R(64)}$ $(K_L \ll_{77})_{L(64)}$ $(K_L \ll_{77})_{R(64)}$ $(K_L \ll_{94})_{L(64)}$ $(K_L \ll_{94})_{R(64)}$ $(K_A \ll_{94})_{L(64)}$ $(K_L \ll_{94})_{R(64)}$
FL^{-1} F(Round 6) F(Round 7) F(Round 8)	$kl_{1(64)} \ k_{6(64)} \ k_{7(64)} \ k_{8(64)}$	$(K_A \ll 30)_{R(64)}$ $(K_L \ll 45)_{L(64)}$ $(K_L \ll 45)_{R(64)}$ $(K_A \ll 45)_{L(64)}$	F(Round 16) $F(Round 17)$ $Postwhitening$	$k_{16(64)} \ k_{17(64)} \ kw_{2(64)} \ kw_{3(64)}$	$(K_A \ll_{111})_{L(64)}$ $(K_A \ll_{111})_{R(64)}$ $(K_A \ll_{111})_{L(64)}$ $(K_A \ll_{111})_{R(64)}$

Subkeys for 192/256-bit keys are generated in a similar way.

Components

We will give an overview of the main functional components of Camellia.

Feistel round function FE:

$$FE: (\mathbb{F}_2^{64})^3 \to (\mathbb{F}_2^{64})^2$$

 $(L_{(64)}, R_{(64)}, k_{(64)}) \mapsto (R \oplus F(L, k), L)$

SP-function F:

$$F: (\mathbb{F}_2^{64})^2 \to \mathbb{F}_2^{64}$$

 $(X_{(64)}, k_{(64)}) \mapsto P(S(X \oplus k))$

Substitution function S:

$$\begin{split} S: \mathbb{F}_2^{64} &\to \mathbb{F}_2^{64} \\ \frac{l_{0(8)}||l_{1(8)}||l_{2(8)}||l_{3(8)}||}{l_{4(8)}||l_{5(8)}||l_{6(8)}||l_{7(8)}} &\mapsto \frac{s_0(l_0)||s_1(l_1)||s_2(l_2)||s_3(l_3)||}{s_1(l_4)||s_2(l_5)||s_3(l_6)||s_0(l_7)}, \end{split}$$

with 8-bit S-boxes $s_0, s_1, s_2, s_3 : \mathbb{F}_2^8 \to \mathbb{F}_2^8$.

Permutation function P:

$$P: \mathbb{F}_{2}^{64} \to \mathbb{F}_{2}^{64}$$

$$\begin{pmatrix} z_{7} \\ z_{6} \\ z_{5} \\ z_{4} \\ z_{3} \\ z_{2} \\ z_{1} \\ z_{0} \end{pmatrix} \mapsto \begin{pmatrix} 0 & 1 & 1 & 1 & 1 & 0 & 0 & 1 \\ 1 & 0 & 1 & 1 & 1 & 1 & 0 & 0 \\ 1 & 1 & 0 & 1 & 0 & 1 & 1 & 0 \\ 1 & 1 & 1 & 0 & 0 & 0 & 1 & 1 \\ 0 & 1 & 1 & 1 & 1 & 1 & 1 & 0 \\ 1 & 0 & 1 & 1 & 0 & 1 & 1 & 1 \\ 1 & 1 & 0 & 1 & 1 & 0 & 1 & 1 \\ 1 & 1 & 1 & 0 & 1 & 1 & 0 & 1 \end{pmatrix} \begin{pmatrix} z_{7} \\ z_{6} \\ z_{5} \\ z_{4} \\ z_{3} \\ z_{2} \\ z_{1} \\ z_{0} \end{pmatrix}$$

FL layer function FLL:

$$\begin{split} FLL: (\mathbb{F}_2^{64})^4 &\to (\mathbb{F}_2^{64})^2 \\ (X_{L(64)}, X_{R(64)}, k_{0(64)}, k_{1(64)}) &\mapsto (FL(X_L, k_0), FL^{-1}(X_R, k_1)) \end{split}$$

FL:

$$FL: (\mathbb{F}_2^{64})^2 \to \mathbb{F}_2^{64}$$
$$(X_{L(32)}||X_{R(32)}, k_{L(32)}||k_{R(32)}) \mapsto (Y_{L(32)}||Y_{R(32)}),$$

where

$$Y_{R(32)} = ((X_L \cap k_L) \ll 1) \oplus X_R$$

 $Y_{L(32)} = (Y_R \cup k_R) \oplus X_L$

 FL^{-1} :

$$FL^{-1}: (\mathbb{F}_2^{64})^2 \to \mathbb{F}_2^{64}$$

 $(Y_{L(32)}||Y_{R(32)}, k_{L(32)}||k_{R(32)}) \mapsto (X_{L(32)}||X_{R(32)}),$

where

$$X_{L(32)} = (Y_R \cup k_R) \oplus Y_L$$

$$X_{R(32)} = ((X_L \cap k_L) \lll_1) \oplus Y_R$$

1.3 The ARMv8 platform

With small devices and embedded processors becoming ever more ubiquitous and essential in areas like consumer electronics or industrial and IoT applications, the need for low-power, high-performance microprocessors has increased steadily. With more than 250 billion chips shipped, semiconductors designed by ARM power 95% of mobile devices and have found a great many applications due to their high performance and low power consumption [3]. The ODROID-N2+ [4] development board we are using for testing is powered by an Amlogic S922X processor with four ARM Cortex-A73 and two weaker ARM Cortex-A53 cores based on the big.LITTLE architecture combining slower, more power efficient cores with faster, more power hungry ones. Both these cores are part of the eight generation of ARM designs known as ARMv8 [5] released in 2011 and succeeding the older 32-bit ARMv7.

ARMv8 defines three architecture profiles for different use cases as well as dynamic execution states with corresponding instruction sets. This work will focus on the A profile running in the AArch64 state utilizing the A64 instruction set with NEON and crypto extensions.

Microcontroller (M)

Profile Description

Application (A) Traditional use with virtual memory and privilege level support

Real-time (R) Real-time, low-latency, deterministic embedded systems

Very low-power, fast-interrupt embedded systems

Table 1.3: ARMv8 profiles

Table 1.4: ARMv8 execution states

Execution state	Usage	Instruction sets
AArch32 AArch64	32-bit compatibility 64-bit	A32/T32 A64

1.3.1 General architecture

ARMv8 is a RISC architecture employing simple data processing instructions operating only on registers as well as dedicated load/store instructions to transfer data from register to memory and back. This enables faster execution of individual instructions, a simplier pipeline design, predictable instruction timings and fewer addressing modes.

The A64 instruction set defines 31 64-bit general-purpose registers X0-X30 which can also be accessed as 32-bit registers W0-W30. Values are loaded from and stored to memory using LDR/STR. Data processing instructions generally use explicit output registers instead of overwriting the first input register.

Table 1.5: A64 addressing modes

Addressing mode	Example	Description
Base register Offset Pre-indexing Post-indexing		W0 = *(X1); W0 = *(X1 + 12); X1 += 12; W0 = *(X1); W0 = *(X1); X1 += 12;

1.3.2 NEON

ARMv8 supports single-instruction, multiple-data (SIMD) processing. These systems allow the programmer to store multiple pieces of data in a vector and work

on them in parallel to speed up calculations. The A64 instruction set defines two possible SIMD implementations:

- 1. Advanced SIMD, known as NEON
- 2. Scalable Vector Extension (SVE)

We will take a look at NEON as this is the type of vector processing supported by the Cortex-A73 processor.

The register file of the NEON unit is made up of 32 quad-word (128-bit) registers V0-V31, each extending the standard 64-bit floating-point registers D0-31. These registers are divided into equally sized lanes on which vector instructions operate. Figure 1.2 shows valid ways to interpret the register V0.

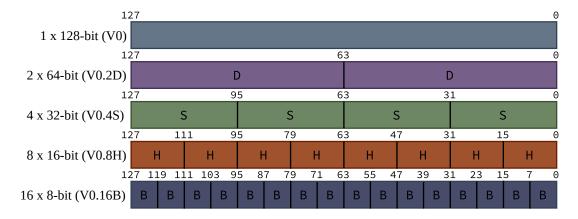


Figure 1.2: Divisions of the V0 register

NEON instructions interpret their operands' layouts (i.e. lane count and width) through the use of suffixes such as .4S or .8H. Adding eight 16-bit halfwords stored in V1 and V2 can be done as follows:

ADD V0.8H, V1.8H, V2.8H

1.3.3 NEON Intrinsics

The header file <arm_neon.h> provides ARM-specific data and function definitions including vector data types and C functions for working with these vectors. These functions are known as NEON intrinsics [6] and give the programmer a high-level interface to most NEON instructions. Major advantages of this approach include the ease of development as the compiler takes over register allocation and load/store operations as well as performance benefits through compiler optimizations.




Figure 1.3: Addition of two vector registers

Standard vector data types have the format $uintnxm_t$ with lane width n in bits and and lane count m. Array types of the format $uintnxmxc_t$, $c \in \{2,3,4\}$ are also defined which are used in operations requiring multiple parameters like TBL or pairwise load/stores. Intrinsics include the operation name and lane data format as well as an optional q suffix to indicate operation on a 128-bit register. Multiplying eight pairs of 16-bit numbers a, b for example can be done via the following:

In this case, the compiler allocates vector registers for a, b and result and assembles the intrinsic to MUL Vr.8H, Va.8H, Vb.8H. Necessary loads and stores for the result and parameters are also handled automatically. Of special interest to us are the following intrinsics, each existing in different variants with different lane widths and also array types:

Intrinsic		Summary
uint64x2_t	vdupq_n_u64(uint64_t)	Initialize all lanes to same value
void	vst1q_u64(uint64_t*, uint64x2_t)	Store from register to memory
uint64x2_t	vld1q_u64(uint64_t*, uint64x2_t)	Load from memory to register
uint8x16_t	<pre>veorq_u8(uint8x16_t, uint8x16_t)</pre>	bitwise XOR
uint8x16_t	<pre>vandq_u8(uint8x16_t, uint8x16_t)</pre>	bitwise AND
uint8x16_t	vorrq_u8(uint8x16_t, uint8x16_t)	bitwise OR
uint8x16_t	vmvnq_u8(uint8x16_t)	bitwise NOT
uint8x16_t	vqtbl2q_u8(uint8x16_t, uint8x16_t)	permutation (TBL)
uint64x2_t	vextq_u64(uint64x2_t, uint64x2_t, int)	extract from pair of vectors

Table 1.6: Common NEON intrinsics

Chapter 2

Implementation strategies

Due to the structural differences of SPN- and Feistel network-based ciphers, we shall analyze these two separately.

2.1 Strategies for **GIFT**

Three implementation strategies for substitution-permutation networks are introduced by [7]:

- Table-based implementations
- vperm implementations
- Bitslice implementations

2.1.1 Table-based

Table-driven programming is a simple way to increase performance of operations by tabulating the results, therefore requiring only a single memory access to acquire the result. This approach is obviously limited to manageable table sizes, so while tabulating a function like the AES S-box $S_{AES}: \mathbb{F}_2^8 \to \mathbb{F}_2^8$ requires only 2^{11} space, tabulating the GIFT permutation layer $P_{GIFT}: \mathbb{F}_2^{64} \to \mathbb{F}_2^{64}$ would require 2^{70} space, which is totally unfeasible.

A common approach is to tabulate the output of each S-box, including the diffusion layer, and then XORing the results together. Let n denote the internal cipher state size and s the size of a single S-box in bits. For each S-box S_i , $i \in \{0, \ldots, \frac{n}{s}\}$, we can construct a mapping $T_i : \mathbb{F}_2^s \to \mathbb{F}_2^n$ representing substitution with subsequent permutation of that single S-box. The cipher state before round key addition is then given by $\bigoplus_{i=0}^{\frac{n}{s}-1} T_i(m_i)$ for each s-bit message chunk m_i . This

approach requires space of $\frac{n}{s}|\mathbb{F}_2^s|n=\frac{n^22^s}{s}$ bits, which, for GIFT-64, results in a manageable size of $\frac{64^22^4}{4}=2^{14}$ bits which equals 16 KiB.

Constructing the tables

For GIFT-64, table construction is relatively straightforward and can be done as follows:

Listing 2.1: Table construction algorithm

```
tables <- [][]
for sbox_index from 0 to 15 do
for sbox_input from 0 to 15 do
output <- sbox(sbox_input)
output <- permute(output << (4 * sbox_index))
tables[sbox_index][sbox_input] <- output
```

Implementing this algorithm gives us the following table representing the first and second S-box.

\boldsymbol{x}	$T_0(x)$	$T_1(x)$	
0x0	0x1	0x10000000000000	
0x1	0x8000000020000	0x800000002	
0x2	0x400000000	0x40000	
0x3	0x8000400000000	0x800040000	
0x4	0x400020000	0x40002	
0x5	0x8000400020001	0x1000800040002	
0x6	0x20001	0x100000000000002	
0x7	0x80000000000001	0x1000800000000	
0x8	0x20000	0x2	
0x9	0x8000400000001	0x1000800040000	
0xa	0x8000000020001	0x1000800000002	
0xb	0x400020001	0x1000000040002	
0xc	0x400000001	0x1000000040000	
0xd	0x0	0x0	
0xe	0x80000000000000	0x800000000	
0xf	0x8000400020000	0x800040002	

The tables for GIFT-128 can be generated in a similar way by looping through all 32 S-boxes instead of 16 on line 3.

2.1.2 Using vperm


The plenitude of different processing instructions introduced by NEON1.3.2 allow flexible ways to further speed up algorithms having reached their optimizational limit on non-SIMD platforms. vperm, a general term standing for vector permute, is a common instruction on SIMD machines. Called TBL on NEON, it is used for parallel table lookups and arbitrary permutations. It takes two inputs to perform a lanewise lookup:

- 1. A register with lookup values
- 2. One or more registers containing data

S-box lookup

This instruction can be used to implement S-box lookup of all 16 S-boxes in a single instruction. We do this by packing our 64-bit cipher state $s = s_{15}||s_{14}|| \dots ||s_0|$ into a vector register V_0 . Because we can only operate on whole bytes, we put each 4-bit S-box into an 8-bit lane which neatly fits into the 128-bit registers. We then put the S-box itself into register V_1 which will be used as the data register for the table lookup.

The confusion layer can now be performed through one TBL instruction:



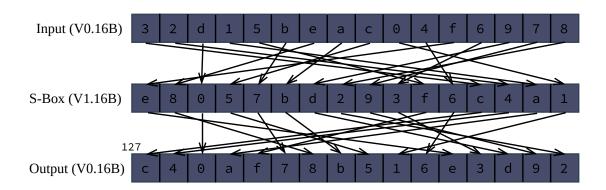


Figure 2.1: Performing the S-Box lookup in parallel

2.1.3 Bitslicing

Bitsliced implementation techniques were first introduced to improve the performance of DES in 1997 and work by viewing a processor with n-bit registers as a machine capable of executing n bitwise operations at once [8]. Bitslicing offers a performance advantage by splitting up n bits into m slices to achieve a more efficient representation which can exploit this bitwise parallelism. The structure

of GIFT naturally offers possibilities for bitslicing. We split the cipher state bits $b_{63}b_{62}...b_0$ into four slices $S_i, i \in \{0, 1, 2, 3\}$ such that the *i*-th slice contains all *i*-th bits of the individual S-boxes. This is equivalent to transposing the bit matrix.

$$S = \begin{bmatrix} S_0 \\ S_1 \\ S_2 \\ S_3 \end{bmatrix} = \begin{bmatrix} b_{60}b_{56}b_{52}\dots b_0 \\ b_{61}b_{57}b_{53}\dots b_1 \\ b_{62}b_{58}b_{54}\dots b_2 \\ b_{63}b_{59}b_{55}\dots b_3 \end{bmatrix}$$

Parallel S-Boxes

This representation offers multiple advantages. We first note that computation of the S-box can be executed in parallel, similar to the **vperm** technique above. This can be done by finding a bitwise instruction sequence to apply the S-box which has already been proposed by the original GIFT authors:

$$S_{1} \leftarrow S_{1} \oplus (S_{0} \wedge S_{2})$$

$$t \leftarrow S_{0} \oplus (S_{1} \wedge S_{3})$$

$$S_{2} \leftarrow S_{2} \oplus (t \vee S_{1})$$

$$S_{0} \leftarrow S_{3} \oplus S_{2}$$

$$S_{1} \leftarrow S_{1} \oplus S_{0}$$

$$S_{0} \leftarrow \neg S_{0}$$

$$S_{2} \leftarrow S_{2} \oplus (t \wedge S_{1})$$

$$S_{3} \leftarrow t$$

This is very efficient as it only requires six XOR-, three AND and one OR operation.

An important property of the permutation is the fact that bits always stay in their slice. This means we can decompose the permutation P into four permutations P_i , $i \in \{0, 1, 2, 3\}$ and apply these permutations separately to each slice. One possible way to implement a permutation P_i in software is to mask off all bits individually, shift them to their correct position and OR them together:

$$P_i(S_i) = \bigvee_{k=0}^{15} (S_i \wedge m_i) \ll s_i$$

This approach requires 47 operations, meaning all four permutations require over 150 operations which would present a major bottleneck to the round function. We can improve on this by working on multiple message blocks at once and using the aforementioned <code>vperm</code> instruction to implement the bit shuffling. We then need only four instructions for the complete diffusion layer.

Using vperm for slice permutation

We cannot use the TBL instruction directly as we need to shuffle individual bits, but the smallest data we can operate on are bytes. We therefore encrypt 8n messages at once which allows us to create bytewise groupings. These messages are put into 4m registers with register R_{4i} containing S_0 , register R_{4i+1} containing S_1 and so forth. With block size BS and register size RS, the following must hold:

$$8n \cdot BS = 4m \cdot RS$$

In the case of GIFT-64 with BS = 64 and ARM NEON with RS = 128, we get

$$8n \cdot 64 = 4m \cdot 128 \Leftrightarrow n = m$$

n=m=1 would be a valid choice which yields eight messages divided into four registers. We choose n=m=2 so we can directly utilize the algorithm for bit packing presented by the original GIFT authors, although it is simple to adapt this algorithm to only four registers and eight messages by adjusting the SWAPMOVE shift and mask values. Encrypting multiple blocks in parallel is a realistic use case since usually a lot of blocks are encrypted under the same key.

Packing the data into bitslice format

Let a, b, \ldots, p be sixteen messages of length 64 with subscripts denoting individual bits. We first put these messages into eight SIMD registers V_0, V_1, \ldots, V_7 :

$$V_0 = b||a$$
 $V_4 = j||i$
 $V_1 = d||c$ $V_5 = l||k$
 $V_2 = f||e$ $V_6 = n||m$
 $V_3 = h||g$ $V_7 = p||o$

We then use the SWAPMOVE technique to bring the data into bitslice format. This operation operates on two registers A, B using mask M and shift value N. It swaps bits in A masked by $(M \ll N)$ with bits in B masked by M in using only three XOR-, one AND- and two shift operations.

SWAPMOVE
$$(A, B, M, N)$$
:
$$T = ((A \gg N) \oplus B) \land M$$

$$B = B \oplus T$$

$$A = A \oplus (T \ll N)$$

One caveat of this approach is the fact that NEON registers cannot be shifted in their entirety due to the fact bits are not able to cross lanes. This leads to the problem of being able to shift at most two lanes of 64 bits at once. We thus need to implement the shr(V,n) and shl(V,n) operations on our own. This can be done by extracting and shifting the overflow ov out of V = V[1]||V[0], shifting the lanes individually and finally ORing the overflow bits to the corresponding vector element.

$$\operatorname{shl}(V, n)$$
:
 $ov = V[0] \gg_{64-n}$
 $V[0] = V[0] \ll$
 $V[1] = (V[1] \ll) \vee ov$

The following operations group all *i*-th bits of the messages a, c, \ldots, o into bytes and put these into the lower half of the registers $V_{i \mod 8}$. The same is done for messages b, d, \ldots, p , only differing in that the bytes are put into the upper half of the registers.

With $Ax = o_x m_x k_x j_x g_x e_x c_x a_x$ and $Bx = p_x n_x l_x i_x h_x f_x d_x b_x$ denoting byte groups, our data now has the following permutation-friendly format:

n	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
$\overline{V_0}$	B56	B48	B40	B32	B24	B16	B8	B0	A56	A48	A40	A32	A24	A16	A8	$\overline{A0}$
V_1	B57	B49	B41	B33	B25	B17	B9	B1	A57	A49	A41	A33	A25	A17	A9	A1
V_2	B58	B50	B42	B34	B26	B18	B10	B2	A58	A50	A42	A34	A26	A18	A10	A2
V_3	B59	B51	B43	B35	B27	B19	B11	B3	A59	A51	A43	A35	A27	A19	A11	A3
V_4	B60	B52	B44	B36	B28	B20	B12	B4	A60	A52	A44	A36	A28	A20	A12	A4
V_5	B61	B53	B45	B37	B29	B21	B13	B5	A61	A53	A45	A37	A29	A21	A13	A5
V_6	B62	B54	B46	B38	B30	B22	B14	B6	A62	A54	A46	A38	A30	A22	A14	A6
V_7	B63	B55	B47	B39	B31	B23	B15	B7	A63	A55	A47	A39	A31	A23	A15	A7

Although this would already work, we prefer to have only bits of the same messages in each register - otherwise the permutation would need to operate on two source registers with the added requirement of storing the pre-permutation values for the first four registers, slowing down the round function through superfluous load/stores. This transformation is trivial by use of TBL with two data source operands. The final data format we operate on is as follows:

n	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
$\overline{V_0}$	A60	A56	A52	A48	A44	A40	A36	A32	A28	A24	A20	A16	A12	A8	A4	$\overline{A0}$
V_1	A61	A57	A53	A49	A45	A41	A37	A33	A29	A25	A21	A17	A13	A9	A5	A1
V_2	A62	A58	A54	A50	A46	A42	A38	A34	A30	A26	A22	A18	A14	A10	A6	A2
V_3	A63	A59	A55	A51	A47	A43	A39	A35	A31	A27	A23	A19	A15	A11	A7	A3
V_4	B60	B56	B52	B48	B44	B40	B36	B32	B28	B24	B20	B16	B12	B8	B4	B0
V_5	B61	B57	B53	B49	B45	B41	B37	B33	B29	B25	B21	B17	B13	B9	B5	B1
V_6	B62	B58	B54	B50	B46	B42	B38	B34	B30	B26	B22	B18	B14	B10	B6	B2
V_7	B63	B59	B55	B51	B47	B43	B39	B35	B31	B27	B23	B19	B15	B11	B7	B3

We can now create permutation tables using the specification of the individual slice permutations P_i which are then applied to V_i and V_{i+4} respectively:

j																
$P_0(j) \\ P_1(j)$	0	12	8	4	1	13	9	5	2	14	10	6	3	15	11	7
$P_1(j)$	4	0	12	8	5	1	13	9	6	2	14	10	7	3	15	11
$P_2(j)$	8	4	0	12	9	5	1	13	10	6	2	14	11	7	3	15
$P_3(j)$	12	8	4	0	13	9	5	1	14	10	6	2	15	11	7	3

One thing to take note of is the original permutation values only show where a given byte should land, not which byte belongs to a certain position - i.e. for P_0 , byte 1 should land in position 12, but the byte belonging to position 1 is byte 4. Because TBL works in the latter way, we have to do some trivial rearrangements.

Assuming the correct permutation values are put into registers V_8 , V_9 , V_{10} , V_{11} , this now allows us to compute the permutation layer for all 16 blocks in only eight permutation instructions.

```
TBL V0, V0, V8
TBL V1, V1, V9
TBL V4, V4, V8
TBL V5, V5, V9
TBL V2, V2, V10
TBL V3, V3, V11
TBL V6, V6, V10
TBL V7, V7, V11
```

Round key function

In contrast to packing and unpacking of data which is only done once in the beginning and end, a round key is derived for every round, so the round key derivation function needs to be as fast as possible. A simple but naive approach for one round would be to generate a single round key, copy it 15 times and pack the resulting registers similar to how we proceed with the messages. Due to the cost of packing the messages, this is prohibitively expensive. Because we know where each byte group ends up after packing, we can directly XOR the round key bits to the correct position. Extending these bits to bytes can then be done simply by repeatedly shifting and ORing the registers together.

2.2 Strategies for Camellia

2.2.1 Optimized non-SIMD

The original paper proposes various platform-independent ways to implement Camellia efficiently. Only some of these apply to the ARMv8 architecture since features like the inline barrel shifter and bitfield manipulation instructions generally offer better performance.

XOR cancellation property in key schedule: While deriving K_A in the key schedule, the instruction sequence

$$K_A \leftarrow K_L \oplus K_R$$

 $K_A \leftarrow FE(FE(K_A, \Sigma_0), \Sigma_1)$
 $K_A \leftarrow K_A \oplus K_L$

causes cancellations, allowing us to eliminate some operations by replacing it with the following:

$$K_{A_L} \leftarrow F(K_{L_R} \oplus F(K_{L_L}, \Sigma_0))$$

 $K_{A_R} \leftarrow F(K_{L_L} \oplus \Sigma_1)$

Absorption of whitening keys: Whitening keys kw_1, kw_3 can be absorbed into other subkeys to save two XOR operations

Efficiently computing $(P \circ S)$: This technique applies to 64-bit processors. By preparing tables

$$SP_{0}(y_{0(8)}) = (s_{0}(y_{0}), s_{0}(y_{0}), s_{0}(y_{0}), 0, s_{0}(y_{0}), 0, s_{0}(y_{0}), 0, s_{0}(y_{0}))$$

$$SP_{1}(y_{1(8)}) = (0, s_{1}(y_{1}), s_{1}(y_{1}), s_{1}(y_{1}), s_{1}(y_{1}), s_{1}(y_{1}), s_{1}(y_{1}), 0, 0)$$

$$SP_{2}(y_{2(8)}) = (s_{2}(y_{2}), 0, s_{2}(y_{2}), s_{2}(y_{2}), 0, s_{2}(y_{2}), s_{2}(y_{2}), 0)$$

$$SP_{3}(y_{3(8)}) = (s_{3}(y_{3}), s_{3}(y_{3}), 0, s_{3}(y_{3}), 0, s_{3}(y_{3}), s_{3}(y_{3}))$$

$$SP_{4}(y_{4(8)}) = (0, s_{2}(y_{4}), s_{2}(y_{4}), s_{2}(y_{4}), 0, s_{2}(y_{4}), s_{2}(y_{4}), s_{2}(y_{4}))$$

$$SP_{5}(y_{5(8)}) = (s_{3}(y_{5}), 0, s_{3}(y_{5}), s_{3}(y_{5}), s_{3}(y_{5}), s_{3}(y_{5}), s_{3}(y_{5}), s_{3}(y_{5}))$$

$$SP_{6}(y_{6(8)}) = (s_{4}(y_{6}), s_{4}(y_{6}), 0, s_{4}(y_{6}), s_{4}(y_{6}), s_{4}(y_{6}), s_{4}(y_{6}), s_{4}(y_{6}), s_{4}(y_{6}), s_{4}(y_{6}), s_{4}(y_{6}), s_{4}(y_{6}), s_{4}(y_{7}), s_{1}(y_{7}), s_{1}(y_{7}),$$

, we can compute $(P \circ S)(X_{(64)})$ using only 8 table lookups and 7 XORs in the following way:

$$(z'_1, z'_2, z'_3, z'_4, z'_5, z'_6, z'_7, z'_8) \leftarrow \bigoplus_{i=0}^7 SP_i(y_i)$$

2.2.2 Byteslicing

Because Camellia is a byte-oriented block cipher, we can pursue a similar strategy as for GIFT: find a convenient data packing format and a way to apply necessary operations in parallel.

We choose a bytesliced representation by encrypting 16 plaintext blocks at once so we can fill 16 vector registers with register V_i containing all i-th bytes. This lends itself well to a NEON implementation since S-boxes as well as the FL layer, Feistel round and packing/unpacking functions can be implemented efficiently.

Packing and unpacking

Packing and unpacking of data can be done efficiently by use of 32 TBL instructions and is summarized in Figure 2.2. After packing, every i-th register will contain all i-th bytes of the 16 input blocks. Unpacking is done in a similar way with different permutation tables.




Figure 2.2: Camellia bytesliced packing function with 32 TBL operations. Curly brackets represent a 4-element vector array being used as source registers.

Hardware-accelerated Camellia S-box

A bytesliced implementation strategy for the S-box on ARMv8 can be derived from already existing x86-optimized implementations utilizing the AES-NI advanced encryption standard instruction set [9]. NEON itself possesses cryptographic extensions for finite field arithmetic and AES as well as SHA calculations. These can be used to produce an accelerated Camellia implementation due to the algebraic similarity of the AES- and Camellia S-boxes.

The AES S-box works by multiplicatively inverting $x \in \mathbb{F}_2^8$ over $GF(2^8)$ and then applying an affine transformation A:

$$s(x): \mathbb{F}_2^8 \to \mathbb{F}_2^8, x \mapsto A(x_{\mathrm{GF}(2^8)}^{-1})$$

The Camellia S-box s_0 is defined as follows:

$$s_0(x): \mathbb{F}_2^8 \to \mathbb{F}_2^8, x \mapsto h(g(f(x \oplus 0xc5))) \oplus 0x6e$$

with affine transformations h, f and the multiplicative inversion function g in the composite field $GF((2^4)^2)$. Because Galois fields of equal size are isomorphic, there exist affine isomorphisms δ, δ^{-1} between $GF(2^8)$ and $GF((2^4)^2)$ respectively [10]:

$$\delta: \mathrm{GF}(2^8) \to \mathrm{GF}((2^4)^2)$$
$$\delta^{-1}: \mathrm{GF}((2^4)^2) \to \mathrm{GF}(2^8)$$

NEON provides the AESE instruction for one round of AES encryption which works on a 128-bit vector register. By applying the inverse of ShiftRow to x, we can apply the AES S-box to 16 bytes at once.

$$AESE(x) = SubBytes(ShiftRow(x)) \Leftrightarrow AESE(ShiftRow^{-1}(x)) = SubBytes(x)$$

We can then reverse the affine transformation A due to bijectivity and extract the multiplicative inverse of all 16 vector bytes in $GF(2^8)$.

$$x_{\mathrm{GF}(2^8)}^{-1} = A^{-1}(A(x_{\mathrm{GF}(2^8)}^{-1})) = A^{-1}(\mathrm{SubBytes}(x)) = A^{-1}(\mathsf{AESE}(\mathrm{ShiftRow}^{-1}(x)))$$

Using the affine isomorphism, we transform this inverse into the inverse in $GF((2^4)^2)$ which is equal to g(x):

$$g(x) = x_{\mathrm{GF}((2^4)^2)}^{-1} = \delta(x_{\mathrm{GF}(2^8)}^{-1}) = \delta(A^{-1}(\mathsf{AESE}(\mathrm{ShiftRow}^{-1}(x))))$$

We now redefine h, f as H, F such that they include addition of constants 0xc5 and 0x6e. We can now use the inverse in conjunction with H and F and an additional input transformation to calculate the Camellia S-box:

$$s_0(x) = h(g(f(x \oplus 0xc5))) \oplus 0x6e$$

$$= H(g(F(x)))$$

$$= H(\delta(A^{-1}(AESE(ShiftRow^{-1}(\delta^{-1}(F(x)))))))$$

Because of different bit endianness of the matrices representing δ , δ^{-1} , we define an additional bit-swapping function:

$$S = S^{-1} : \begin{pmatrix} x_0 \\ x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \\ x_7 \end{pmatrix} \mapsto \begin{pmatrix} 0 & 0 & 0 & 0 & 0 & 0 & 0 & 1 \\ 0 & 0 & 0 & 0 & 0 & 0 & 1 & 0 \\ 0 & 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 \\ 0 & 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{pmatrix} \begin{pmatrix} x_0 \\ x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \\ x_7 \end{pmatrix}$$

The final equation serving as the basis for our implementation then becomes

$$s_0(x) = S^{-1}(H(\delta(S(A^{-1}(AESE(ShiftRow^{-1}(S^{-1}(\delta^{-1}(F(S(x)))))))))))$$

While appearing to be computationally too intensive for any performance gains, we shall notice that all of the transformations are affine and can therefore be combined into a single operation by simple matrix multiplication. We combine them into a pre-filter function θ_0 and a post-filter function ψ_0 :

$$\theta_0(x) = S^{-1}(\delta^{-1}(F(S(x))))$$

$$\psi_0(x) = S^{-1}(H(\delta(S(A^{-1}(x)))))$$

This simplifies our final equation:

$$s_0(x) = \psi_0(AESE(ShiftRow^{-1}(\theta_0(x))))$$

The other S-boxes s_1, s_2, s_3 are defined in terms of s_0 and rotations. We can include these rotations by constructing additional S-box-specific filters θ_3, ψ_1, ψ_2 :

$$s_1(x) = s_0(x) \ll_1 = \psi_1(AESE(ShiftRow^{-1}(\theta_0(x))))$$

 $s_2(x) = s_0(x) \gg_1 = \psi_2(AESE(ShiftRow^{-1}(\theta_0(x))))$
 $s_3(x) = s_0(x \ll_1) = \psi_0(AESE(ShiftRow^{-1}(\theta_3(x))))$

Fast matrix multiplication

Efficient application of the filter functions is essential to performance and can be implemented in parallel by use of the TBL instruction. First note that matrix-vector multiplication $\mathbb{F}_2^{8\times 8}\cdot\mathbb{F}_2^8\to\mathbb{F}_2^8$ can be decomposed into two multiplications $\mathbb{F}_2^{8\times 4}\cdot\mathbb{F}_2^4\to\mathbb{F}_2^8$ with subsequent addition of the results:

$$\begin{pmatrix} 1 & 1 & 1 & 0 & 1 & 1 & 0 & 1 \\ 0 & 0 & 1 & 1 & 0 & 0 & 1 & 0 \\ 1 & 1 & 0 & 1 & 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 1 & 0 & 0 & 1 & 1 \\ 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 \\ 1 & 0 & 1 & 0 & 0 & 1 & 0 & 0 \\ 1 & 0 & 1 & 0 & 0 & 1 & 1 & 0 & 0 \\ 0 & 0 & 1 & 0 & 1 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 1 & 1 & 0 & 0 \\ 1 & 0 & 0 & 0 & 0 & 1 & 1 & 0 \end{pmatrix} \cdot \begin{pmatrix} x_0 \\ x_1 \\ x_2 \\ x_3 \\ x_4 \\ x_5 \\ x_6 \\ x_7 \end{pmatrix} = \begin{pmatrix} 1 & 1 & 0 & 1 \\ 0 & 0 & 1 & 0 \\ 0 & 0 & 1 & 1 \\ 1 & 1 & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 1 & 1 & 0 \end{pmatrix} \cdot \begin{pmatrix} x_0 \\ x_1 \\ x_2 \\ x_3 \end{pmatrix} \oplus \begin{pmatrix} 1 & 1 & 1 & 0 \\ 0 & 0 & 1 & 1 \\ 1 & 0 & 1 & 1 \\ 0 & 0 & 0 & 0 \\ 1 & 0 & 1 & 0 \\ 0 & 0 & 1 & 0 \\ 1 & 0 & 0 & 0 \end{pmatrix} \cdot \begin{pmatrix} x_4 \\ x_5 \\ x_6 \\ x_7 \end{pmatrix}$$

We can then tabulate the decomposed multiplications since each input now consists of only four bits which allows us to fit the 16 possible 8-bit results into a single vector register. A single matrix multiplication is then executed for 16 bytes in parallel by use of two TBL and one XOR instruction with an additional AND and SHR operation for masking off the lower/upper 4 bits.

Permutation

Since all bytes of the same position are collected in the same register, applying the permutation can be realized in 16 XOR operations as described in the Camellia specification with the difference that we choose to not swap the lower and higher 4 bytes, but rather compensate for this by choosing the correct bytes when XORing with the other half later in the Feistel round.

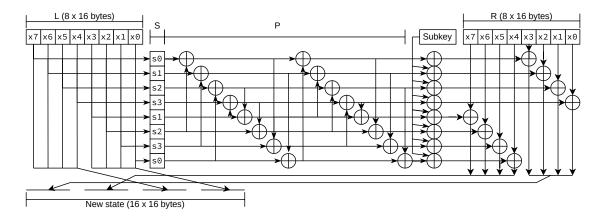


Figure 2.3: Camellia bytesliced Feistel round function

FL layer

The two functions FL, FL^{-1} can be implemented in a straightforward manner once 1-bit left rotation has been defined for the bytesliced representation. This can be facilitated by extracting the highest bit of each byte, shifting it all the way to the right and storing it as overflow ov_i . ov_i is then added to the left-shifted value of byte $(i+4) \pmod{4}$ for the final result.

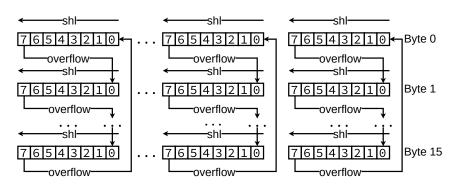


Figure 2.4: Camellia bytesliced 1-bit left rotate

Chapter 3

Implementation

Implementations in the C programming language for the presented strategies can be found in Appendix B. Although directly writing Assembler code could result in a small performance benefit, this generally increases the work necessary by an order of magnitude for only limited results. Instruction-level optimization and in particular register allocation is left to the compiler. Relying on the compiler mandates a closer study of the generated, optimized assembler. All source files were compiled using clang version 15.0.7 and optimization level O3.

3.1 Pipelining

Understanding certain choices requires an understanding of the Cortex-A73 instruction pipeline [11]. Being a superscalar processor, it is able to execute more than one instruction per clock cycle by dispatching instructions to different execution units working in parallel.

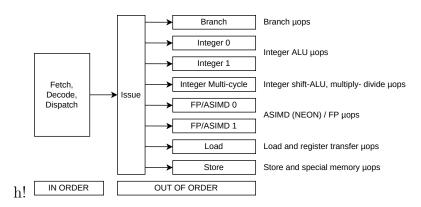


Figure 3.1: High-level overview of the Cortex-A72 instruction pipeline

The processor might for example store a calculation result, load a necessary value from memory and execute two SIMD operations at once, all in the same clock cycle. Modern compilers take advantage of this fact by reordering instructions such that all pipeline execution units stay as busy as possible and do not stall while having to wait for new instructions to be dispatched. A more thorough analysis will be presented for the bitsliced strategy of GIFT, but all implementations are heavily reliant on function inlining, instruction reordering and loop unrolling.

3.2 GIFT

3.2.1 Table-based

This is the simplest strategy to implement. Indeed, its biggest advantage lies in its portability to other platforms without relying on specific features or extensions. The cipher state is stored as a 64-bit word and one round consists in extracting the 4-bit S-boxes, looking up table values, collecting these in an accumulator and finally adding the round key.

Listing 3.1: GIFT-64 table subperm

```
uint64_t gift_64_table_subperm(const uint64_t cipher_state)
 1
2
3
            uint64_t new_cipher_state = 0;
 4
5
            for (size_t i = 0; i < 16; i++) {</pre>
                     int nibble = (cipher_state >> (i * 4)) & 0xf;
6
7
                     new_cipher_state ^= tables[i][nibble];
8
9
10
            return new_cipher_state;
    }
11
```

Listing 3.2: GIFT-64 table encrypt

```
uint64 t gift 64 table encrypt(const uint64 t m,
1
                                      const uint64_t rks[restrict ROUNDS_GIFT_64])
2
3
    {
            uint64_t c = m;
4
5
6
            // round loop
            for (int round = 0; round < ROUNDS_GIFT_64; round++) {</pre>
7
8
                     c = gift_64_table_subperm(c);
9
                     c ^= rks[round];
10
11
12
            return c;
13
    }
```

Lots of operations require extraction of a certain number of consecutive bits, usually referred to as a bitfield. Indices for table lookups are generally attained by right-shifting a larger value stored in a register, then applying an AND operation

to get the lowest n bits and finally writing the result into the beginning of another register. Due to its usefulness, this operation is implemented as UBFX for an unsigned bitfield extract and can be used to implement S-box extraction for subperm lookups which would otherwise take two or three instructions. Interestingly, the AArch64 instruction set makes heavy use of instruction aliasing. The logical shift left instruction lsl for example is an alias of UBFX which itself is an alias for UBFM.

Another keyword aiding in optimization is restrict which can be used for pointer and array function parameters; the programmer can add this keyword to parameters to tell the compiler they are never aliased by any other pointers which allows the compiler to rearrange instructions and eliminate loads.

3.2.2 Using vperm

Implementation of the substitution layer requires the use of a single vector intrinsic. This mandates the packing of data into a vector register which in turn is disadvantageous to the permutation layer as we need to extract single bits. Packing and unpacking is nothing more than filling 8-bit vector lanes with 4-bit S-boxes and vice versa.

Listing 3.3: vperm S-box

Listing 3.4: vperm permutation

```
uint8x16_t gift_64_vec_sbox_permute(const uint8x16_t cipher_state)
1
2
3
            // collect individual bits into 64-bit register
4
            uint64_t new_cipher_state = 0UL;
            uint64_t boxes[2];
6
            vst1q_u64(boxes, cipher_state);
7
            for (size_t box = 0; box < 16; box++) {</pre>
8
                     for (size_t i = 0; i < 4; i++) {</pre>
9
                              const int bit = (boxes[box / 8] >> ((box % 8) * 8 + i)) & 0x1;
10
                              new_cipher_state |= (uint64_t)bit << perm_64[box * 4 + i];</pre>
11
                     }
12
13
14
15
            return gift_64_vec_sbox_bits_pack(new_cipher_state);
16
```

Listing 3.5: vperm encrypt function

```
uint64_t gift_64_vec_sbox_encrypt(const uint64_t m,
const uint8x16_t rks[restrict ROUNDS_GIFT_64])
{
```

```
// pack into vector register
4
5
            uint8x16_t c = gift_64_vec_sbox_bits_pack(m);
6
             // round loop
7
8
            for (int round = 0; round < ROUNDS_GIFT_64; round++) {</pre>
9
                     c = gift_64_vec_sbox_subcells(c);
10
                     c = gift_64_vec_sbox_permute(c);
                     c = veorq_u8(c, rks[round]);
11
12
            }
13
14
            // unpack
15
            return gift_64_vec_sbox_bits_unpack(c);
16
```

3.2.3 Bitslicing

A note on data storage

NEON only provides 32 vector registers. While this is more than the 16 YMM registers offered by Intel's AVX-256 vector extension, it is not enough to accompany all 28 round keys for GIFT-64 plus the 16 registers representing cipher state at once. Because loading and storing single registers is inefficient, data is represented using the vector array type uint8x16x4_t. Loads and stores are then assembled such that the whole array is loaded or stored in a single instruction. Loading a single vector from memory for example has a latency of 5 cycles while loading four vectors into a vector array can be done in 8 cycles which results in an amortized cost of 2 cycles per vector. Vectors are grouped into vector arrays as often as possible to reduce the number of necessary loads and stores.

Shifts for swapmove

Implementing shift functions for 128-bit NEON registers by extracting the overflow and adding it back in later can be realized using 5 instructions. It would be most useful for the function to take a shift amount parameter, but most NEON intrinsics encode their parameters into the final machine code such that parameters need to be compile-time constants. We will therefore implement shl, shr and swapmove as C macros utilizing the vextq_u64 intrinsic to swap the two 64-bit vector elements:

Listing 3.6: Bitsliced GIFT swapmove and shift macros

```
9
10
11
    uint8x16_t shr(const uint8x16_t v, const int n) */
    #define shr(_a, v, n)
12
13
            uint64x2_t _overflow = vshlq_n_u64(v, 64 - n);
14
15
            _overflow = vextq_u64(_overflow, vdupq_n_u64(0x0), 1);
            _a = vorrq_u8(vshrq_n_u64(v, n), _overflow);
16
17
    }
18
19
    /* implemented as a macro so we can use vshlq_n_u8 with variable n
    void gift_64_vec_sliced_swapmove(uint8x16_t *restrict a, uint8x16_t *restrict b,
20
21
                                      const uint8x16_t m, const int n) */
    #define gift_64_vec_sliced_swapmove(a, b, m, n)
22
23
24
            uint8x16_t _a;
25
            shr(_a, a, n);
26
            const uint8x16_t _t = vandq_u8(veorq_u8(_a, b), m);
            b = veorq_u8(b, _t);
27
28
            shl(_a, _t, n);
29
            a = veorq_u8(a, _a);
30
```

Round function

We will examine the round function in closer detail and compare the source code with the generated assembly.

Listing 3.7: Bitsliced GIFT S-box

```
1
    void gift_64_vec_sliced_subcells(uint8x16x4_t cs[restrict 2])
2
3
            cs[0].val[1] = veorq_u8(cs[0].val[1],
4
                                     vandq_u8(cs[0].val[0], cs[0].val[2]));
            uint8x16_t t = veorq_u8(cs[0].val[0]
5
6
                                     vandq_u8(cs[0].val[1], cs[0].val[3]));
            cs[0].val[2] = veorq_u8(cs[0].val[2], vorrq_u8(t, cs[0].val[1]));
 7
8
            cs[0].val[0] = veorq_u8(cs[0].val[3], cs[0].val[2]);
9
            cs[0].val[1] = veorq_u8(cs[0].val[1], cs[0].val[0]);
10
            cs[0].val[0] = vmvnq_u8(cs[0].val[0]);
            cs[0].val[2] = veorq_u8(cs[0].val[2], vandq_u8(t, cs[0].val[1]));
11
12
            cs[0].val[3] = t;
13
14
            cs[1].val[1] = veorq_u8(cs[1].val[1],
                                     vandq_u8(cs[1].val[0], cs[1].val[2]));
15
16
                         = veorq_u8(cs[1].val[0]
17
                                     vandq_u8(cs[1].val[1], cs[1].val[3]));
18
            cs[1].val[2] = veorq_u8(cs[1].val[2], vorrq_u8(t, cs[1].val[1]));
19
            cs[1].val[0] = veorq_u8(cs[1].val[3], cs[1].val[2]);
            cs[1].val[1] = veorq_u8(cs[1].val[1], cs[1].val[0]);
20
            cs[1].val[0] = vmvnq_u8(cs[1].val[0]);
21
            cs[1].val[2] = veorq_u8(cs[1].val[2], vandq_u8(t, cs[1].val[1]));
22
23
            cs[1].val[3] = t;
24
```

Listing 3.8: Bitsliced GIFT permutation

```
1 | void gift_64_vec_sliced_permute(uint8x16x4_t cs[restrict 2])
```

```
{
3
           cs[0].val[0] = vqtbl1q_u8(cs[0].val[0], perm.val[0]);
4
           cs[0].val[1] = vqtbl1q_u8(cs[0].val[1], perm.val[1]);
           cs[0].val[2] = vqtbl1q_u8(cs[0].val[2], perm.val[2]);
5
6
           cs[0].val[3] = vqtbl1q_u8(cs[0].val[3], perm.val[3]);
7
8
            cs[1].val[0] = vqtbl1q_u8(cs[1].val[0], perm.val[0]);
           cs[1].val[1] = vqtbl1q_u8(cs[1].val[1], perm.val[1]);
10
           cs[1].val[2] = vqtbl1q_u8(cs[1].val[2], perm.val[2]);
11
            cs[1].val[3] = vqtbl1q_u8(cs[1].val[3], perm.val[3]);
```

Listing 3.9: Round function

```
for (int round = 0; round < ROUNDS_GIFT_64; round++) {</pre>
         gift_64_vec_sliced_subcells(s);
2
3
        gift_64_vec_sliced_permute(s);
 4
5
         // round key addition
        s[0].val[0] = veorq_u8(s[0].val[0], rks[round][0].val[0]);
        s[0].val[1] = veorq_u8(s[0].val[1], rks[round][0].val[1]);
s[0].val[2] = veorq_u8(s[0].val[2], rks[round][0].val[2]);
 7
8
        s[0].val[3] = veorq_u8(s[0].val[3], rks[round][0].val[3]);
10
        s[1].val[0] = veorq_u8(s[1].val[0], \ rks[round][1].val[0]);
11
         s[1].val[1] = veorq_u8(s[1].val[1], rks[round][1].val[1]);
12
        s[1].val[2] = veorq_u8(s[1].val[2], rks[round][1].val[2]);
13
         s[1].val[3] = veorq_u8(s[1].val[3], rks[round][1].val[3]);
14
```

Listing 3.10: Round function asm

```
v20.16b, v17.16b, v6.16b
                                                    tbl
                                                             v18.16b, {v6.16b}, v2.16b
 1
    and
                                                25
                                                    tbl
                                                             v19.16b, {v21.16b}, v3.16b
 2
    add
             x9, x20, x8
                                                26
                                                    tbl
                                                             v21.16b, {v4.16b}, v2.16b
 3
             v20.16b, v20.16b, v16.16b
    eor
                                                27
                                                             q6, q4, [x9, #-112]
 4
    add
             x8, x8, #0x80
                                                    ldp
    and
             v21.16b, v20.16b, v19.16b
                                                28
                                                    mvn
                                                             v16.16b, v16.16b
                                                29
                                                    tbl
                                                             v16.16b, {v16.16b}, v0.16b
 6
    cmp
             x8, #0xe70
                                                             v17.16b, {v17.16b}, v1.16b
    eor
             v21.16b, v21.16b, v6.16b
                                                30
                                                    tbl
                                                31
                                                             v5.16b, v5.16b
                                                    mvn
 8
             v6.16b, v6.16b, v16.16b
    orr
                                                32
                                                             v5.16b, {v5.16b}, v0.16b
                                                    tbl
 9
    eor
             v6.16b, v6.16b, v17.16b
                                                33
                                                    ldp
                                                             q22, q23, [x9, #-80]
10
    eor
             v16.16b, v19.16b, v6.16b
                                                             v6.16b, v6.16b, v16.16b
                                                34
                                                    eor
             v17.16b, v16.16b, v20.16b
11
    eor
                                                             v16.16b, v4.16b, v17.16b
                                                35
             v19.16b, v21.16b, v17.16b
                                                    eor
12
    and
13
             v6.16b, v19.16b, v6.16b
                                                36
                                                    tbl
                                                             v7.16b, {v7.16b}, v1.16b
    eor
                                                37
                                                             v17.16b, v22.16b, v18.16b
                                                    eor
             v19.16b, v7.16b, v4.16b
14
    and
             v19.16b, v19.16b, v5.16b
                                                38
                                                    th1
                                                             v20.16b, {v20.16b}, v3.16b
15
    eor
             v20.16b, v19.16b, v18.16b
v20.16b, v20.16b, v4.16b
                                                39
                                                             q4, q18, [x9, #-48]
                                                    ldp
    and
16
                                                             v19.16b, v23.16b, v19.16b
                                                40
                                                    eor
17
    eor
                                                41
                                                    eor
                                                             v4.16b, v4.16b, v5.16b
    orr
             v4.16b, v4.16b, v5.16b
18
                                                42
                                                    ldp
                                                             q22, q23, [x9, #-16]
19
             v4.16b, v4.16b, v7.16b
    eor
20
             v5.16b, v18.16b, v4.16b
                                                43
                                                    eor
                                                             v5.16b, v18.16b, v7.16b
    eor
                                                44
                                                    eor
                                                             v7.16b, v22.16b, v21.16b
21
             v7.16b, v5.16b, v19.16b
    eor
                                                45
                                                             v18.16b, v23.16b, v20.16b
22
    and
             v18.16b, v20.16b, v7.16b
                                                    eor
             v4.16b, v18.16b, v4.16b
                                                46
                                                    b.ne
                                                             19760
```

It is obvious to see the compiler has inlined the two function calls to subcells and permute with lines 1 to 23 originating from the subcells and lines 24-46 from the permute and round key addition functions. It has chosen not to unroll the loop, but has moved the loop counter increment as well as the condition check

3.3. CAMELLIA 34

in between the **subcells** instructions to line 4 and 6. In addition, the loop counter serves a second purpose as an offset register and is therefore incremented by 0x80=128 instead of just 1.

Permutation (tbl) and round key addition (eor) instructions are interleaved. The compiler recognizes data dependencies and can therefore proceed with round key addition immediately after a slice has been permuted without needing to wait for all permutations to finish. This is only logical considering the inner workings of the instruction pipeline: by interleaving NEON with regular logic and load instructions, the execution units are filled more evenly and pipeline stalls are prevented which speeds up computation.

Round keys are loaded from memory a few instructions before they are needed; assuming all round keys are stored in the L1 cache, loading a floating-point/vector register takes 5 cycles. After the load has been dispatched to the load execution unit in line 27, the processor continues processing the instruction stream by issuing tbl and mvn μ ops to other execution units.

These kinds of optimizations are pervasive when programming using higher level languages like C and modern-day compilers more often than not outperform handcrafted assembly.

3.3 Camellia

3.3.1 Optimized non-SIMD implementation

An optimized non-SIMD implementation based on the platform-independent techniques presented in the original paper is relatively easy to achieve since all functional components are already well defined. One thing to take note of however is the fact that the specification is based on a big endian representation while ARMv8 is a little endian machine. The problem of endianness manifests itself whenever a memory-register interaction takes place, i.e. for loads and stores. Arithmetic on a register is unaffected since a register is always treated as one large number with no conception of addresses.

We will store input data and arrays in Camellia byte-order such that a lower array element actually represents a higher numerical value, i.e. the numerical value of

```
{ 0 \times 0123456789 abcdefUL, 0 \times fedcba 9876543210 UL} is equal to
```

0x0123456789abcdeffedcba9876543210

3.3. CAMELLIA 35

which is equal to the byte string

01 23 45 67 89 ab cd ef fe dc ba 98 76 54 32 10

This allows us to change the endianness of the implementation while keeping input in the original Camellia byte order. A change in implementation endianness manifest itself for example in table lookups where, according to Camellia specification, the first byte is expected to be the most significant byte:

Listing 3.11: Camellia optimized SP function with reverse byte order

```
uint64_t camellia_spec_opt_F(uint64_t X, const uint64_t k)
1
2
3
            X ^= k;
4
            // compute P(S(X)) through large 64-bit lookup table
5
6
            uint64_t result = 0UL;
7
            result ^= SP0[(X >> 56) & 0xff];
            result ^= SP1[(X >> 48) & 0xff];
8
            result ^= SP2[(X >> 40) & 0xff];
9
            result ^= SP3[(X >> 32) & 0xff];
10
            result ^= SP4[(X >> 24) & 0xff];
11
            result ^= SP5[(X >> 16) & 0xff];
12
13
            result ^= SP6[(X >> 8 ) & 0xff];
            result ^= SP7[(X >> 0 ) & 0xff];
14
15
            return result;
16
17
```

3.3.2 Bytesliced implementation

Key generation

A possible approach to storing keys is storing them in bytesliced format so they can later be loaded from memory and used directly since we only have 32 vector registers in total and half of them are already occupied by the current cipher state. This can be implemented by first generating 64 bit round keys and then filling register V_i with the i-th byte by means of $vdupq_nu8$ for each key.

Listing 3.12: Bytesliced Camellia round key generation

```
1
    void camellia_sliced_generate_round_keys_128(struct camellia_rks_sliced_128 *restrict
2
                                                  const uint64_t key[restrict 2])
3
   {
4
            // use standard key derivation
5
            struct camellia_rks_128 rks_128;
6
            camellia_spec_opt_generate_round_keys_128(&rks_128, key);
7
            // now pack round keys by use of vdupq_n_u8 since all bytes are the same
8
9
            // in a bytesliced representation
10
            // whitening and FL layer keys
```

3.3. CAMELLIA 36

```
12
             for (size_t i = 0; i < 4; i++) {</pre>
13
                     for (size_t byte = 0; byte < 8; byte++) {</pre>
14
                              uint8x16_t *reg_kw = &rks->kw[i][byte / 4].val[byte % 4];
                              uint8x16_t *reg_kl = &rks->kl[i][byte / 4].val[byte % 4];
15
16
                              *reg_kw = vdupq_n_u8((rks_128.kw[i] >> (8 * byte)) & 0xff);
17
18
                              *reg_kl = vdupq_n_u8((rks_128.kl[i] >> (8 * byte)) & 0xff);
                     }
19
20
             }
21
22
             // F function keys
             for (size_t i = 0; i < 18; i++) {</pre>
23
24
                     for (size_t byte = 0; byte < 8; byte++) {</pre>
25
                              uint8x16_t *reg_ku = &rks->ku[i][byte / 4].val[byte % 4];
26
27
                              *reg_ku = vdupq_n_u8((rks_128.ku[i] >> (8 * byte)) & 0xff);
28
                     }
29
             }
30
    }
```

Another way to implement key generation is not to store the keys bytesliced, but rather to store the 64 bit values and create necessary vector registers on the fly. This saves 3120 bytes of memory and could show some usefulness for memory-constrained environments, but benchmarking shows a performance drop of about 3.6%. This is due to the fact that vdupq_n_u8 has a latency of 8 cycles and a throughput of only 1, making it a great deal slower than simple vector array loads.

F-function

The s-function implements matrix multiplication with a given pre- and postfilter using the aforementioned strategy.

Listing 3.13: Bytesliced Camellia S-box

```
1
    static uint8x16_t s(const uint8x16_t X,
2
                         const uint8x16x2_t prefilter,
3
                         const uint8x16x2_t postfilter)
4
    {
            // prefilter
5
6
            uint8x16_t pre_low = vqtbl1q_u8(prefilter.val[0],
7
                                               vandq_u8(X, lower_4_bits_mask));
            uint8x16_t pre_high = vqtbl1q_u8(prefilter.val[1],
8
9
                                               vshrq_n_u8(X, 4));
10
            uint8x16_t pre = veorq_u8(pre_low, pre_high);
11
12
            // inverse ShiftRows
            pre = vqtbl1q_u8(pre, shiftrows_inv);
13
14
15
            // AES single round encryption (x \leftarrow AESSubBytes(AESShiftRows(x)))
            uint8x16_t aesd = vaeseq_u8(pre, vdupq_n_u8(0x0));
16
17
18
            // postfilter
19
            uint8x16_t post_low = vqtbl1q_u8(postfilter.val[0],
20
                                                vandq_u8(aesd, lower_4_bits_mask));
            uint8x16_t post_high = vqtbl1q_u8(postfilter.val[1],
21
22
                                                vshrq_n_u8(aesd, 4));
23
            uint8x16_t post = veorq_u8(post_low, post_high);
```

3.3. CAMELLIA 37

```
24 | return post; 26 |}
```

Just as before we need to invert the byte order since the first vector X[0].val[0] contains all least significant bytes, but the Camellia specification places the most significant bytes at the beginning.

Listing 3.14: Bytesliced Camellia F-function

```
void camellia_sliced_F(uint8x16x4_t X[restrict 2],
                           const uint8x16x4_t k[restrict 2])
3
4
            // key additions
            for (size_t byte = 0; byte < 8; byte++) {</pre>
5
6
                    uint8x16_t *reg = &X[byte / 4].val[byte % 4];
7
                    *reg = veorq_u8(*reg, k[byte / 4].val[byte % 4]);
8
9
10
11
            // S-boxes (beware of endianness)
12
            X[1].val[3] = s(X[1].val[3], prefilter_0, postfilter_0); // s0
13
            X[1].val[2] = s(X[1].val[2], prefilter_0, postfilter_1); // s1
14
            X[1].val[1] = s(X[1].val[1], prefilter_0, postfilter_2); // s2
15
            X[1].val[0] = s(X[1].val[0], prefilter_3, postfilter_0); // s3
16
            X[0].val[3] = s(X[0].val[3], prefilter_0, postfilter_1); // s1
17
            X[0].val[2] = s(X[0].val[2], prefilter_0, postfilter_2); // s2
            X[0].val[1] = s(X[0].val[1], prefilter_3, postfilter_0); // s3
18
19
            X[0].val[0] = s(X[0].val[0], prefilter_0, postfilter_0); // s0
20
21
            // permutation
22
            X[1].val[3] = veorq_u8(X[1].val[3], X[0].val[2]);
23
            X[1].val[2] = veorq_u8(X[1].val[2], X[0].val[1]);
24
            X[1].val[1] = veorq_u8(X[1].val[1], X[0].val[0]);
            X[1].val[0] = veorq_u8(X[1].val[0], X[0].val[3]);
25
26
            X[0].val[3] = veorq_u8(X[0].val[3], X[1].val[1]);
27
            X[0].val[2] = veorq_u8(X[0].val[2], X[1].val[0]);
28
            X[0].val[1] = veorq_u8(X[0].val[1], X[1].val[3]);
29
            X[0].val[0] = veorq_u8(X[0].val[0], X[1].val[2]);
30
31
            X[1].val[3] = veorq_u8(X[1].val[3], X[0].val[0]);
32
            X[1].val[2] = veorq_u8(X[1].val[2], X[0].val[3]);
            X[1].val[1] = veorq_u8(X[1].val[1], X[0].val[2]);
33
            X[1].val[0] = veorq_u8(X[1].val[0], X[0].val[1]);
34
35
            X[0].val[3] = veorq_u8(X[0].val[3], X[1].val[0]);
36
            X[0].val[2] = veorq_u8(X[0].val[2], X[1].val[3]);
37
            X[0].val[1] = veorq_u8(X[0].val[1], X[1].val[2]);
38
            X[0].val[0] = veorq_u8(X[0].val[0], X[1].val[1]);
39
40
            // X[0] and X[1] are swapped now; this is
41
42
            // taken into account in the feistel round
43
```

Chapter 4

Evaluation

In this chapter, we will evaluate the strategies through performance measurements and compare them with one another.

4.1 Performance evaluation

Performance measurements were taken for each strategy as well as for naive reference implementations and are presented through latency lat in cycles per byte (c/B) as well as constant throughput thr in MiB/s of the entire encryption strategy. Round key derivation is measured separately. Measurements of all individual components like packing or permuting have to be viewed as upper bounds due to the aforementioned inlining, instruction reordering and pipelining (TODO REF HERE) taking place in the actual encryption function.

The AArch64 defines system registers in addition to general-purpose registers which are used for system configuration and monitoring. One of these registers is the performance monitor cycle count register PMCCNTR which counts processor clock cycles. Access from userspace is disabled by default and can be activated through a custom Linux kernel module by setting PMUSERENR. EN to 1. To minimize interference and because the cycle count register is core-local, we isolate and utilize one Cortex-A53 and Cortex-A73 core from the rest of the system for exclusive benchmarking purposes respectively by use of the <code>isolcpus</code> kernel command line parameter and <code>taskset</code> command utility. Results can be found in full in Appendix A and are summarized in Figure 4.1.

Bit- and bytesliced implementations leveraging SIMD instructions show the highest throughput values. Camellia implementations tend to be faster than GIFT due to the higher number of rounds as well as the bit permutation slowing down GIFT software implementations, differing from Camellia which is byte-oriented. Bitsliced GIFT manages to be the fastest due to the bit permutation being imple-

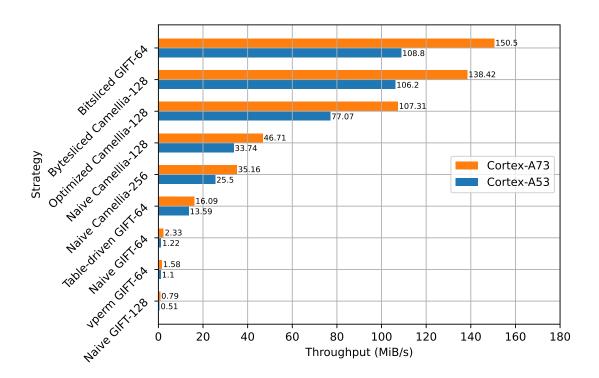


Figure 4.1: Throughput in MiB/s for each strategy and processor type

mented efficiently through bytewise table lookups. Bytesliced Camellia achieves an only slightly lower performance than bitsliced GIFT in spite of increased complexity due to the higher number of bytes being encrypted in parallel.

Table-driven implementations show a 691% and 230% improvement for GIFT and Camellia respectively compared to their naive implementations. GIFT especially benefits from this approach due to the elimination of the expensive bit permutation layer. While S-box lookup is accelerated for vperm GIFT-64, the whole implementation only achieves a throughput of 1.58MiB/s due to extremely inefficient packing and unpacking operations every round.

4.2 Conclusion

We have examined various strategies for efficient implementation of GIFT and Camellia and have realized these in the C programming language using NEON intrinsics for the ARMv8 platform. Bit- and bytesliced implementations have proven themselves especially suited for high-throughput applications on SIMD platforms with the added security benefit of being constant-time, thus eliminating possible side-channels through e.g. cache timings. Table implementations also

show good performance characteristics compared to non-table approaches and are extremely easy to port to other platforms since they don't rely on any specific machine instructions, but are vulnerable to cache timing attacks since they access data-dependent memory locations.

GIFT as well as Camellia are suited for low-power hardware as well as bitsliced software implementation with GIFT appearing to be more suited towards hardware implementation due to the low area requirement of the S-box and bit wiring permutation layer.

Vector length determines the number of blocks that can be processed in parallel and therefore is the major contributor to performance since a doubling of register size with the same instruction throughput generally implies a doubling in performance. NEON provides 128 bit registers which is smaller than the 512 bit registers offered by Intel's AVX-512, but new extensions for ARM like SVE2 offer flexible vector lengths up to 2048 bits which will result not only in further acceleration of traditional compute domains like machine learning or multimedia, but also of massively parallelized cryptographic algorithms for low-power and embedded systems.

4.3. NOTES 41

4.3 Notes

Working on this project has allowed me to learn a lot about ARMv8 and its A64 instruction set as well as SIMD extensions and the use of intrinsics. I have written a lot of code for x86-64, but working with a RISC machine with comparatively simple instructions and addressing modes felt somewhat simpler and more straightforward. The toolchain was surprisingly simple to set up: after flashing a custom odroid Linux image to the SD card, setting up SSH, copying the sysroot (i.e. /lib and /usr) to my local development machine and feeding clang with the correct parameters for compilation, I could just copy the binary to the target system and run it there. Building, deploying and executing was simple to automate using a Makefile.

Aside from tooling, I also learned a lot about efficient cryptography implementations and how bitslicing can make a seemingly inefficient cipher like GIFT very fast. Most of the time debugging was spent on fixing values for permutation tables since it was easy to make a mistake there, but once they were corrected the rest was usually pretty simple.

Trying to optimize performance without writing assembler was also very educational since constantly making small adjustments to the C program and then analyzing the disassembled binaries taught me a lot about what the compiler actually does and how it optimizes programs through e.g. loop unrolling and inlining as well as combining logical instructions.

Appendix A

Detailed benchmarking results

A.1 GIFT

Table A.1: Benchmarks for GIFT

		Cor	tex-A53	Cortex-A73		
Strategy	Component	lat (c/B)	$thr~(\mathrm{MiB/s})$	lat (c/B)	thr (MiB/s)	
Naive GIFT-64	round_keys encrypt	223.54 1367.66	1.22	190.34 830.49	2.33	
	subcells permute	$4.64 \\ 36.68$		3.13 21.09		
Naive GIFT-128	round_keys encrypt	$182.91 \\ 3532.52$	0.51	$167.16 \\ 2615.89$	0.79	
	subcells permute	6.91 82.68		$2.73 \\ 61.27$		
Table-driven	round_keys encrypt	$223.81 \\ 122.11$	13.59	190.11 119.62	16.09	
	subperm	5.15		4.47		
vperm S-box	round_keys encrypt	308.12 1514.28	1.10	$270.69 \\ 1218.18$	1.58	
	subcells permute pack unpack	1.63 53.18 7.51 7.39		1.13 42.40 1.24 4.67		
Bitsliced	round_keys encrypt	19.93 16.69	108.80	16.12 13.98	150.50	
	subcells permute pack unpack	0.41 0.39 1.81 1.68		0.06 0.18 1.34 1.31		

A.2 Camellia

Table A.2: Benchmarks for Camellia

		Cortex-A53		Cortex-A73	
Strategy	Component	lat (c/B)	thr (MiB/s)	lat (c/B)	thr (MiB/s)
Naive Camellia-128	round_keys encrypt	15.26 53.44	33.74	11.08 43.51	46.71
	feistel_round S F P FL	4.02 2.01 3.13 2.03 1.06		2.66 0.94 2.25 1.63 0.72	
Naive Camellia-256	round_keys encrypt	$22.01 \\ 70.55$	25.50	16.99 58.27	35.16
Optimized Camellia-128	round_keys encrypt	8.18 23.63	77.07	5.93 19.83	107.31
	feistel_round F FL	2.32 2.21 1.06		1.56 1.43 0.69	
Bytesliced Camellia-128	round_keys encrypt	2.59 17.14	106.20	2.19 15.19	138.42
	feistel_round F FL pack unpack	1.00 0.79 0.36 1.04 0.91		0.69 0.58 0.12 0.96 0.83	

Appendix B

C source code

B.1 GIFT

B.1.1 Table-based

Listing B.1: gift/table.h

```
#pragma once
   #include <stdint.h>
4
   #define ROUNDS_GIFT_64 28
5
6
   void gift_64_table_generate_round_keys(uint64_t rks[restrict ROUNDS_GIFT_64],
8
                                     const uint64_t key[restrict 2]);
10
   uint64_t gift_64_table_subperm(const uint64_t cipher_state);
11
   // can only encrypt using table technique!
12
13
   uint64_t gift_64_table_encrypt(const uint64_t m,
                                   const uint64_t rks[restrict ROUNDS_GIFT_64]);
```

Listing B.2: gift/table.c

```
#include <stdint.h>
     #include <stddef.h>
     #include "table.h"
 4
 5
     static const int round_const[] = {
 6
 7
               // rounds 0-15
               0x01, 0x03, 0x07, 0x0F, 0x1F, 0x3E, 0x3D, 0x3B, 0x37, 0x2F, 0x1E, 0x3C, 0x39, 0x33, 0x27, 0x0E,
 8
 q
10
               // rounds 16-31
11
               0x1D, 0x3A, 0x35, 0x2B, 0x16, 0x2C, 0x18, 0x30,
               0x21, 0x02, 0x05, 0x0B, 0x17, 0x2E, 0x1C, 0x38,
12
13
               // rounds 32-47
               0x31, 0x23, 0x06, 0x0D, 0x1B, 0x36, 0x2D, 0x1A, 0x34, 0x29, 0x12, 0x24, 0x08, 0x11, 0x22, 0x04
14
15
16 };
```

```
17
18
   static const uint64_t tables[16][16] = {
          19
              x000800040000000UL, 0x0000000400020000UL, 0x0008000400020001UL, 0
              x000000000020001UL, 0x000800000000001UL, 0x0000000000020000UL, 0
              x000800040000001UL, 0x000800000020001UL, 0x0000000400020001UL, 0
              x000000040000001UL, 0x00000000000000UL, 0x00080000000000UL, 0
              x0008000400020000UL },
          20
              x0000000800040000UL, 0x000000000040002UL, 0x0001000800040002UL, 0
              x0001000000000002UL, 0x000100080000000UL, 0x000000000000002UL, 0
              x0001000800040000UL, 0x000100080000002UL, 0x0001000000040002UL, 0x000100000004000UL, 0x000000000000UL, 0x00000008000000UL, 0
              x0000000800040002UL },
          21
              x00000000000000000UL, 0x0002000000000UL, 0x0002000100080004UL, 0x0002000100000000UL, 0
              x0000000100080004UL, 0x000200010008000UL, 0x000200010000004UL, 0x0000000100000004UL, 0x00000000000UL, 0x00000000000UL, 0
              x0002000000080004UL },
22
          x000400000000008UL, 0x00040002000000UL, 0x0004000200010008UL, 0
              x0000000200010000UL, 0x000000000010008UL, 0x000000020000000UL, 0
              x000400000010000UL, 0x0000000000000UL, 0x000000000000000000UL, 0
              x0004000200000008UL },
23
          { 0x0000000000000010UL, 0x00800000020000UL, 0x000000400000000UL, 0
              x008000400000000UL, 0x000000400020000UL, 0x0080004000200010UL, 0
              x000000000200010UL, 0x00800000000010UL, 0x0000000000200000UL, 0
              x008000400000010UL, 0x008000000200010UL, 0x0000004000200010UL, 0
              x000000400000010UL, 0x0000000000000UL, 0x0080000000000UL, 0
              x0080004000200000UL },
          { 0x001000000000000UL, 0x000000800000020UL, 0x000000000400000UL, 0
24
              x0010008000400000UL, 0x001000800000020UL, 0x0010000000400020UL, 0
              x00100000040000UL, 0x0000000000000UL, 0x00000080000000UL, 0
              x0000008000400020UL },
          { 0x000000100000000UL, 0x00200000080000UL, 0x0000000000000040UL, 0
25
              x002000100000000UL, 0x000000100080000UL, 0x002000000000000UL, 0
              x0000001000800040UL, 0x0020001000800000UL, 0x0020001000000040UL, 0
              x000000100000040UL, 0x00000000000000UL, 0x0000000000800000UL, 0
              x0020000000800040UL },
26
          { 0x000000000100000UL, 0x000000200000080UL, 0x004000000000000UL, 0
              x0040000000000080UL, 0x004000200000000UL, 0x0040002000100080UL, 0
              x0000002000100000UL, 0x000000000100080UL, 0x000000200000000UL, 0x0040000000100080UL, 0x0000002000100080UL, 0x0040002000100000UL, 0
              x0040002000000080UL },
          { 0x00000000000100UL, 0x080000000200000UL, 0x000004000000000UL, 0
27
              x080004000000000UL, 0x000004000200000UL, 0x0800040002000100UL, 0
              x0000000002000100UL, 0x080000000000100UL, 0x000000000200000UL, 0
              x080004000000100UL, 0x0800000002000100UL, 0x0000040002000100UL, 0x000004000000100UL, 0x000000000000UL, 0x0800000000000UL, 0
              x0800040002000000UL },
28
          { 0x010000000000000UL, 0x000008000000200UL, 0x0000000004000000UL, 0
              x010000000000200UL, 0x01000800000000UL, 0x0000000000000200UL, 0
              x010008000400000UL, 0x010008000000200UL, 0x0100000004000200UL, 0x010000000400000UL, 0x000000000000UL, 0x0000080000000UL, 0
              x0000080004000200UL },
```

```
{ 0x000001000000000UL, 0x02000000800000UL, 0x000000000000400UL, 0
29
                x0000000008000400UĹ, 0x0200000000000000UĹ, 0x0200010008000400UĹ, 0
x020001000000000UL, 0x000001000800000UL, 0x020001000800000UL, 0
x0000010008000400UL, 0x020001000800000UL, 0x0200010000000400UL, 0
                \verb|x000001000000400UL|, 0x00000000000000UL|, 0x0000000008000000UL|, 0
                x0200000008000400UL },
30
            { 0x000000001000000UL, 0x000002000000800UL, 0x040000000000000UL, 0
                \verb|x0400000000000800UL|, 0x04000200000000UL|, 0x0400020001000800UL|, 0
                x0000020001000000UL, 0x000000001000800UL, 0x000002000000000UL, 0x0400000001000800UL, 0x0000020001000800UL, 0x0400020001000000UL, 0
                x040000001000000UL, 0x00000000000000UL, 0x000000000000800UL, 0
                x0400020000000800UL },
31
            x800040000000000UL, 0x000040002000000UL, 0x8000400020001000UL, 0
                x8000400020000000UL },
            { 0x100000000000000UL, 0x00008000000200UL, 0x000000004000000UL, 0
32
                x000080004000000UL, 0x000000040002000UL, 0x1000800040002000UL, 0
                x1000000000002000UL, 0x10008000000000UL, 0x000000000002000UL, 0
                x100080004000000UL, 0x100080000002000UL, 0x1000000040002000UL, 0x100000004000000UL, 0x000000000000UL, 0x0000800000000UL, 0
                x0000800040002000UL },
33
            x0000000080004000UL, 0x2000000000004000UL, 0x2000100080004000UL, 0
                x200010000000000UL, 0x000010008000000UL, 0x20000000000000UL, 0
                x0000100080004000UL, 0x200010008000000UL, 0x200010000004000UL, 0x000010000004000UL, 0x000000000000UL, 0x0000000000UL, 0
                x2000000080004000UL },
            34
                x4000000000008000UL, 0x400020000000000UL, 0x4000200010008000UL, 0
                x0000200010000000UL, 0x000000010008000UL, 0x000020000000000UL, 0
                x4000200000008000UL }
35
   };
36
   void gift_64_table_generate_round_keys(uint64_t rks[restrict ROUNDS_GIFT_64],
37
38
                                           const uint64_t key[restrict 2])
39
40
            uint64_t key_state[] = {key[0], key[1]};
            for (int round = 0; round < ROUNDS_GIFT_64; round++) {</pre>
41
                    int v = (key_state[0] >> 0 ) & 0xfffff;
42
43
                    int u = (key_state[0] >> 16) & 0xffff;
44
45
                    // add round key (RK=U||V)
                    rks[round] = 0UL;
46
                    for (size_t i = 0; i < 16; i++) {
47
                            int key_bit_v = (v >> i) & 0x1;
int key_bit_u = (u >> i) & 0x1;
48
49
                            rks[round] ^= (uint64_t)key_bit_v << (i * 4 + 0);
50
51
                            rks[round] ^= (uint64_t)key_bit_u << (i * 4 + 1);
52
53
                    // add single bit
54
55
                    rks[round] ^= 1UL << 63;
56
57
                    // add round constants
                    rks[round] ^= ((round_const[round] >> 0) & 0x1) << 3;
58
                    rks[round] ^= ((round_const[round] >> 1) & 0x1) << 7;
59
                    rks[round] ^= ((round_const[round] >> 2) & 0x1) << 11;</pre>
60
```

```
rks[round] ^= ((round_const[round] >> 3) & 0x1) << 15;</pre>
61
                      rks[round] ^= ((round_const[round] >> 4) & 0x1) << 19;
62
                      rks[round] ^= ((round_const[round] >> 5) & 0x1) << 23;</pre>
63
64
65
                      // update key state
66
                      int k0 = (key_state[0] >> 0 ) & 0xffffUL;
                      int k1 = (key_state[0] >> 16) & 0xffffUL;
67
                      k0 = (k0 >> 12) | ((k0 \& 0xfff) << 4);
68
                      k1 = (k1 >> 2) | ((k1 \& 0x3) << 14);
69
70
                      key_state[0] >>= 32;
                      key_state[0] |= (key_state[1] & 0xffffffffUL) << 32;</pre>
71
72
                      key_state[1] >>= 32;
                      key_state[1] |= ((uint64_t)k0 << 32) | ((uint64_t)k1 << 48);</pre>
73
74
             }
75
77
    uint64_t gift_64_table_subperm(const uint64_t cipher_state)
78
79
             uint64_t new_cipher_state = 0;
80
81
             for (size_t i = 0; i < 16; i++) {</pre>
82
                      int nibble = (cipher_state >> (i * 4)) & 0xf;
                      new_cipher_state ^= tables[i][nibble];
83
84
85
86
             return new_cipher_state;
87
88
89
    uint64_t gift_64_table_encrypt(const uint64_t m,
90
                                      const uint64_t rks[restrict ROUNDS_GIFT_64])
91
92
             uint64_t c = m;
93
94
             // round loop
95
             for (int round = 0; round < ROUNDS_GIFT_64; round++) {</pre>
96
                      c = gift_64_table_subperm(c);
97
                      c ^= rks[round];
98
99
100
             return c;
101
```

B.1.2 Using vperm

Listing B.3: gift/vec_sbox.h

```
#pragma once

#include <arm_neon.h>
#include <stdint.h>

#define ROUNDS_GIFT_64 28

// expose for benchmarking
uint8x16_t gift_64_vec_sbox_bits_pack(const uint64_t a);
uint64_t gift_64_vec_sbox_bits_unpack(const uint8x16_t a);
uint8x16_t gift_64_vec_sbox_subcells(const uint8x16_t cipher_state);
uint8x16_t gift_64_vec_sbox_subcells_inv(const uint8x16_t cipher_state);
```

```
13
   uint8x16_t gift_64_vec_sbox_permute(const uint8x16_t cipher_state);
14
    uint8x16_t gift_64_vec_sbox_permute_inv(const uint8x16_t cipher_state);
               gift_64_vec_sbox_generate_round_keys(uint8x16_t rks[ROUNDS_GIFT_64]
15
                                                     const uint64_t key[restrict 2]);
16
17
18
    // construct tables
19
    void gift_64_vec_sbox_init(void);
20
21
    uint64_t gift_64_vec_sbox_encrypt(const uint64_t m,
22
                                       const uint8x16_t rks[restrict ROUNDS_GIFT_64]);
23
    uint64_t gift_64_vec_sbox_decrypt(const uint64_t c,
24
                                       const uint8x16_t rks[restrict ROUNDS_GIFT_64]);
```

Listing B.4: gift/vec_sbox.c

```
#include <arm_neon.h>
    #include <stdint.h>
2
    #include <stddef.h>
3
    #include "vec_sbox.h"
5
6
7
    static uint64_t sbox_vec_u64[2] = {
            0x09030f060c040a01UL, 0x0e080005070b0d02UL
8
9
    };
10
11
    static uint64_t sbox_vec_inv_u64[2] = {
12
            0x0b040c020608000dUL, 0x050f09030a01070eUL
13
15
    static uint8x16_t sbox_vec;
    static uint8x16_t sbox_vec_inv;
16
17
    // split S-box bits into vector lanes
18
19
   uint8x16_t gift_64_vec_sbox_bits_pack(const uint64_t a)
20
21
            uint8x16_t v;
22
            v = vsetq_lane_u64(
            (uint64_t)((a >> 4 * 0) & 0xf) << 8 * 0
23
24
            (uint64_t)((a >> 4 * 1) & 0xf) << 8 * 1
25
            (uint64_t)((a >> 4 * 2) & 0xf) << 8 * 2
26
            (uint64_t)((a >> 4 * 3) & 0xf) << 8 * 3
27
            (uint64_t)((a >> 4 * 4) & 0xf) << 8 * 4
28
            (uint64_t)((a >> 4 * 5) & 0xf) << 8 * 5
29
            (uint64_t)((a >> 4 * 6) & 0xf) << 8 * 6 |
30
            (uint64_t)((a >> 4 * 7) & 0xf) << 8 * 7, v, 0);
31
            v = vsetq_lane_u64(
32
33
            (uint64_t)((a >> 4 * 8) & 0xf) << 8 * 0 |
34
            (uint64_t)((a >> 4 * 9) & 0xf) << 8 * 1
35
            (uint64_t)((a >> 4 * 10) & 0xf) << 8 * 2
            (uint64_t)((a >> 4 * 11) & 0xf) << 8 * 3
36
37
            (uint64_t)((a >> 4 * 12) & 0xf) << 8 * 4
38
            (uint64_t)((a >> 4 * 13) & 0xf) << 8 * 5
            (uint64_t)((a >> 4 * 14) & 0xf) << 8 * 6 |
39
            (uint64_t)((a >> 4 * 15) & 0xf) << 8 * 7, v, 1);
40
41
42
            return v;
43
    }
44
    // merge S-box bits into single uint64_t
45
   uint64_t gift_64_vec_sbox_bits_unpack(const uint8x16_t v)
```

```
47
     {
48
             uint64_t a = 0UL;
 49
             uint64_t lane = vgetq_lane_u64(v, 0);
             a = (uint64_t)((lane >> 8 * 0) & 0xf) << 4 * 0
50
                  (uint64_t)((lane >> 8 * 1) & 0xf) << 4 * 1
51
                  (uint64_t)((lane >> 8 * 2) & 0xf) << 4 * 2
52
53
                  (uint64_t)((lane >> 8 * 3) & 0xf) << 4 * 3
                  (uint64_t)((lane >> 8 * 4) & 0xf) << 4 * 4
55
                  (uint64_t)((lane >> 8 * 5) & 0xf) << 4 * 5
56
                  (uint64_t)((lane >> 8 * 6) & 0xf) << 4 * 6
57
                  (uint64_t)((lane >> 8 * 7) & 0xf) << 4 * 7;
58
59
             lane = vgetq_lane_u64(v, 1);
60
             a |= (uint64_t)((lane >> 8 * 0) & 0xf) << 4 * 8
 61
                   (uint64_t)((lane >> 8 * 1) & 0xf) << 4 * 9
                   (uint64_t)((lane >> 8 * 2) & 0xf) << 4 * 10
 62
                   (uint64_t)((lane >> 8 * 3) & 0xf) << 4 * 11
63
 64
                   (uint64_t)((lane >> 8 * 4) & 0xf) << 4 * 12
 65
                   (uint64_t)((lane >> 8 * 5) & 0xf) << 4 * 13
                   (uint64_t)((lane >> 8 * 6) & 0xf) << 4 * 14
66
67
                   (uint64_t)((lane >> 8 * 7) & 0xf) << 4 * 15;
68
69
             return a;
70
71
72
     static const size_t perm_64[] = {
             0, 17, 34, 51, 48, 1, 18, 35, 32, 49, 2, 19, 16, 33, 50, 3,
73
             4, 21, 38, 55, 52, 5, 22, 39, 36, 53, 6, 23, 20, 37, 54, 7, 8, 25, 42, 59, 56, 9, 26, 43, 40, 57, 10, 27, 24, 41, 58, 11,
74
75
76
             12, 29, 46, 63, 60, 13, 30, 47, 44, 61, 14, 31, 28, 45, 62, 15
77
     };
     static const size_t perm_64_inv[] = {
79
80
             0, 5, 10, 15, 16, 21, 26, 31, 32, 37, 42, 47, 48, 53, 58, 63,
             12, 1, 6, 11, 28, 17, 22, 27, 44, 33, 38, 43, 60, 49, 54, 59, 8, 13, 2, 7, 24, 29, 18, 23, 40, 45, 34, 39, 56, 61, 50, 55,
81
82
83
             4, 9, 14, 3, 20, 25, 30, 19, 36, 41, 46, 35, 52, 57, 62, 51
84
     };
85
     static const int round_const[] = {
87
             // rounds 0-15
88
             0x01, 0x03, 0x07, 0x0F, 0x1F, 0x3E, 0x3D, 0x3B, 0x37, 0x2F, 0x1E, 0x3C, 0x39, 0
                  x33, 0x27, 0x0E,
89
              // rounds 16-31
             0x1D, 0x3A, 0x35, 0x2B, 0x16, 0x2C, 0x18, 0x30, 0x21, 0x02, 0x05, 0x0B, 0x17, 0
90
                  x2E, 0x1C, 0x38,
 91
              // rounds 32-47
92
             0x31, 0x23, 0x06, 0x0D, 0x1B, 0x36, 0x2D, 0x1A, 0x34, 0x29, 0x12, 0x24, 0x08, 0
                  x11, 0x22, 0x04
93
95
     uint8x16_t gift_64_vec_sbox_subcells(const uint8x16_t cipher_state)
96
97
             return vqtbl1q_u8(sbox_vec, cipher_state);
98
100
     uint8x16_t gift_64_vec_sbox_subcells_inv(const uint8x16_t cipher_state)
101
     {
102
             return vqtbl1q_u8(sbox_vec_inv, cipher_state);
103
104
    uint8x16_t gift_64_vec_sbox_permute(const uint8x16_t cipher_state)
105
```

```
106
    | {
107
              // collect individual bits into 64-bit register
108
              uint64_t new_cipher_state = 0UL;
              uint64_t boxes[2];
109
110
              vst1q_u64(boxes, cipher_state);
111
112
              for (size_t box = 0; box < 16; box++) {</pre>
113
                       for (size_t i = 0; i < 4; i++) {</pre>
                                const int bit = (boxes[box / 8] >> ((box % 8) * 8 + i)) & 0x1;
114
115
                                new_cipher_state |= (uint64_t)bit << perm_64[box * 4 + i];</pre>
116
                       }
              }
117
118
119
              return gift_64_vec_sbox_bits_pack(new_cipher_state);
120
121
122
     uint8x16_t gift_64_vec_sbox_permute_inv(const uint8x16_t cipher_state)
123
124
              // collect into 64-bit register (faster)
              uint64_t new_cipher_state = 0;
125
126
              uint64_t boxes[2];
127
              vst1q_u64(boxes, cipher_state);
128
129
              // S-box 0-7
130
              for (size_t box = 0; box < 8; box++) {</pre>
                       for (size_t i = 0; i < 4; i++) {</pre>
131
                                const int bit = (boxes[0] >> (box * 8 + i)) & 0x1;
132
133
                                new_cipher_state |= (uint64_t)bit << perm_64_inv[box * 4 + i];</pre>
134
                       }
135
              }
136
137
              // S-box 8-15
              for (size_t box = 0; box < 8; box++) {</pre>
138
139
                       for (size_t i = 0; i < 4; i++) {</pre>
140
                                const int bit = (boxes[1] >> (box * 8 + i)) & 0x1;
                                new\_cipher\_state \mid = (uint64\_t)bit << perm\_64\_inv[(box + 8) * 4]
141
                                     + i];
142
                       }
143
144
145
              return gift_64_vec_sbox_bits_pack(new_cipher_state);
146
147
     \textbf{void} \ \ \texttt{gift\_64\_vec\_sbox\_generate\_round\_keys(uint8x16\_t \ rks[ROUNDS\_GIFT\_64],}
148
149
                                                    const uint64_t key[2])
150
              uint64_t key_state[] = {key[0], key[1]};
151
152
              for (int round = 0; round < ROUNDS_GIFT_64; round++) {</pre>
                       const int v = (key_state[0] >> 0 ) & 0xffff;
153
154
                       const int u = (key_state[0] >> 16) & 0xffff;
155
                       // add round key (RK=U||V)
156
157
                       uint64_t round_key = 0UL;
                       for (size_t i = 0; i < 16; i++) {</pre>
158
                                const int key_bit_v = (v >> i) & 0x1;
const int key_bit_u = (u >> i) & 0x1;
159
160
161
                                round_key ^= (uint64_t)key_bit_v << (i * 4 + 0);
                                round_key ^= (uint64_t)key_bit_u << (i * 4 + 1);
162
163
164
                       // add single bit
165
                       round_key ^= 1UL << 63;
166
```

```
167
168
                      // add round constants
                      round_key ^= ((round_const[round] >> 0) & 0x1) << 3;</pre>
169
                      round_key ^= ((round_const[round] >> 1) & 0x1) << 7;</pre>
170
171
                       round_key ^= ((round_const[round] >> 2) & 0x1) << 11;
                      round_key ^= ((round_const[round] >> 3) \& 0x1) << 15;
172
                      round_key ^= ((round_const[round] >> 4) & 0x1) << 19;</pre>
173
174
                      round_key ^= ((round_const[round] >> 5) & 0x1) << 23;</pre>
175
176
                      // pack into vector register
                      rks[round] = gift_64_vec_sbox_bits_pack(round_key);
177
178
179
                       // update key state
180
                      int k0 = (key_state[0] >> 0 ) & 0xffffUL;
181
                      int k1 = (key_state[0] >> 16) & 0xffffUL;
                      k0 = (k0 >> 12) | ((k0 & 0xfff) << 4);
k1 = (k1 >> 2) | ((k1 & 0x3 ) << 14);
182
183
184
                      key_state[0] >>= 32;
                      key_state[0] |= (key_state[1] & 0xffffffffUL) << 32;
key_state[1] >>= 32;
185
186
187
                      key_state[1] |= ((uint64_t)k0 << 32) | ((uint64_t)k1 << 48);</pre>
188
              }
189
190
191
     void gift_64_vec_sbox_init(void)
192
193
              // construct sbox_vec
194
              sbox_vec = vld1q_u64(sbox_vec_u64);
195
196
              // construct sbox_vec_inv
197
              sbox_vec_inv = vld1q_u64(sbox_vec_inv_u64);
198
199
200
     uint64_t gift_64_vec_sbox_encrypt(const uint64_t m,
                                          const uint8x16_t rks[restrict ROUNDS_GIFT_64])
201
202
203
              // pack into vector register
204
              uint8x16_t c = gift_64_vec_sbox_bits_pack(m);
205
206
              // round loop
207
              for (int round = 0; round < ROUNDS_GIFT_64; round++) {</pre>
208
                      c = gift_64_vec_sbox_subcells(c);
209
                      c = gift_64_vec_sbox_permute(c);
210
                      c = veorq_u8(c, rks[round]);
211
212
213
              // unpack
214
              return gift_64_vec_sbox_bits_unpack(c);
215
216
217
     uint64_t gift_64_vec_sbox_decrypt(const uint64_t c,
218
                                          const uint8x16_t rks[restrict ROUNDS_GIFT_64])
219
220
              // pack into vector register
221
              uint8x16_t m = gift_64_vec_sbox_bits_pack(c);
222
223
              // round loop (in reverse)
              for (int round = ROUNDS_GIFT_64 - 1; round >= 0; round--) {
224
225
                      m = veorq_u8(m, rks[round]);
226
                      m = gift_64_vec_sbox_permute_inv(m);
227
                      m = gift_64_vec_sbox_subcells_inv(m);
228
              }
```

B.1.3 Bitslicing

Listing B.5: gift/vec_sliced.h

```
1
    #pragma once
2
3
    #include <stdint.h>
4
    #include <arm_neon.h>
5
    #define ROUNDS_GIFT_64 28
6
8
    // expose for benchmarking
9
    uint8x16_t shl(const uint8x16_t v, const int n);
10
    uint8x16_t shr(const uint8x16_t v, const int n);
11
    void gift_64_vec_sliced_swapmove(uint8x16_t *restrict a, uint8x16_t *restrict b,
12
                                      const uint8x16_t m, const int n);
    void gift_64_vec_sliced_bits_pack(uint8x16x4_t m[restrict 2]);
13
    void gift_64_vec_sliced_bits_unpack(uint8x16x4_t m[restrict 2]);
14
15
    void gift_64_vec_sliced_subcells(uint8x16x4_t cipher_state[restrict 2]);
16
17
    void gift_64_vec_sliced_subcells_inv(uint8x16x4_t cipher_state[restrict 2]);
    void gift_64_vec_sliced_permute(uint8x16x4_t cipher_state[restrict 2]);
19
    void gift_64_vec_sliced_permute_inv(uint8x16x4_t cipher_state[2]);
20
    void gift_64_vec_sliced_generate_round_keys(uint8x16x4_t rks[restrict ROUNDS_GIFT_64
        1[2],
21
                                                 const uint64_t key[restrict 2]);
22
23
    void gift_64_vec_sliced_init(void);
24
25
    void gift_64_vec_sliced_encrypt(uint64_t c[restrict 16],
26
                                     const uint64_t m[restrict 16],
27
                                     const uint8x16x4_t rks[restrict ROUNDS_GIFT_64][2]);
28
    void gift_64_vec_sliced_decrypt(uint64_t m[restrict 16],
29
                                     const uint64_t c[restrict 16],
30
                                     const uint8x16x4_t rks[restrict ROUNDS_GIFT_64][2]);
```

Listing B.6: gift/vec_sliced.c

```
#include <arm_neon.h>
    #include <stdint.h>
3
    #include <stddef.h>
    #include "vec_sliced.h"
5
6
7
    static uint64_t pack_shf_u64[] = {
             0x1303120211011000UL, 0x1707160615051404UL, // S0/S1/S2/S3
8
9
             0x1b0b1a0a19091808UL, 0x1f0f1e0e1d0d1c0cUL, // S4/S5/S6/S7
10
    };
11
    static uint64_t pack_shf_inv_u64[] = {
12
              \texttt{0x0e0c0a0806040200UL}, \ \texttt{0x1e1c1a1816141210UL}, \ \texttt{//} \ \texttt{S0/S1/S2/S3} 
13
14
             0x0f0d0b0907050301UL, 0x1f1d1b1917151311UL, // S4/S5/S6/S7
   };
15
```

```
16
17
    static uint64_t perm_u64[] = {
             0x0f0b07030c080400UL, 0x0d0905010e0a0602UL, // S0/S4
0x0c0804000d090501UL, 0x0e0a06020f0b0703UL, // S1/S5
18
19
20
              0 x 0 d 0 9 0 5 0 1 0 e 0 a 0 6 0 2 U L, \ 0 x 0 f 0 b 0 7 0 3 0 c 0 8 0 4 0 0 U L, \ // \ S2/S6  
21
             0x0e0a06020f0b0703UL, 0x0c0804000d090501UL // S3/S7
22
    };
23
24
25
    static uint64_t perm_inv_u64[] = {
             0x05090d0104080c00UL, 0x070b0f03060a0e02UL, // S0/S4
26
             0x090d0105080c0004UL, 0x0b0f03070a0e0206UL, // S1/S5
0x0d0105090c000408UL, 0x0f03070b0e02060aUL, // S2/S6
27
28
29
             0x0105090d0004080cUL, 0x03070b0f02060a0eUL // S3/S7
30
    };
31
32
    static uint8x16x2_t pack_shf;
33
    static uint8x16x2_t pack_shf_inv;
34
    static uint8x16x4_t perm;
    static uint8x16x4_t perm_inv;
35
36
37
    static uint8x16_t pack_mask_0;
38
    static uint8x16_t pack_mask_1;
39
    static uint8x16_t pack_mask_2;
40
41
    static const int round_const[] = {
42
             // rounds 0-15
             0x01, 0x03, 0x07, 0x0F, 0x1F, 0x3E, 0x3D, 0x3B, 0x37, 0x2F, 0x1E, 0x3C, 0x39, 0
43
                  x33, 0x27, 0x0E,
             // rounds 16-31
44
             0x1D, 0x3A, 0x35, 0x2B, 0x16, 0x2C, 0x18, 0x30, 0x21, 0x02, 0x05, 0x0B, 0x17, 0
45
                 x2E, 0x1C, 0x38,
             // rounds 32-47
46
47
             0x31, 0x23, 0x06, 0x0D, 0x1B, 0x36, 0x2D, 0x1A, 0x34, 0x29, 0x12, 0x24, 0x08, 0
                  x11, 0x22, 0x04
48
    };
49
50
    uint8x16_t shl(const uint8x16_t v, const int n) */
51
    #define shl(_a, v, n)
53
    {
54
             uint64x2_t _overflow = vshrq_n_u64(v, 64 - n);
             _overflow = vextq_u64(vdupq_n_u64(0x0), _overflow, 1);
55
56
             _a = vorrq_u8(vshlq_n_u64(v, n), _overflow);
57
    }
58
59
60
    uint8x16_t shr(const uint8x16_t v, const int n) */
    #define shr(_a, v, n)
61
62
             uint64x2_t _overflow = vshlq_n_u64(v, 64 - n);
63
             _overflow = vextq_u64(_overflow, vdupq_n_u64(0x0), 1);
64
65
             _a = vorrq_u8(vshrq_n_u64(v, n), _overflow);
66
    }
67
    /* implemented as a macro so we can use vshlq_n_u8 with variable n
69
    void gift_64_vec_sliced_swapmove(uint8x16_t *restrict a, uint8x16_t *restrict b,
70
                                         const uint8x16_t m, const int n) */
    #define gift_64_vec_sliced_swapmove(a, b, m, n)
72
    {
73
             uint8x16_t _a;
74
             shr(_a, a, n);
```

```
75
              const uint8x16_t _t = vandq_u8(veorq_u8(_a, b), m);
 76
              b = veorq_u8(b, _t);
 77
              shl(_a, _t, n);
 78
              a = veorq_u8(a, _a);
 79
     }
 80
 81
     void gift_64_vec_sliced_bits_pack(uint8x16x4_t m[restrict 2])
 82
              // take care not to shift mask bits out of the register
 83
 84
              gift_64_vec_sliced_swapmove(m[0].val[0], m[0].val[1], pack_mask_0, 1);
 85
              \label{eq:gift_64_vec_sliced_swapmove} \\ \texttt{[0].val[2], m[0].val[3], pack_mask_0, 1);} \\
              gift_64_vec_sliced_swapmove(m[1].val[0], m[1].val[1], pack_mask_0, 1);
 86
 87
              gift_64_vec_sliced_swapmove(m[1].val[2], m[1].val[3], pack_mask_0, 1);
 88
 89
              gift_64_vec_sliced_swapmove(m[0].val[0], m[0].val[2], pack_mask_1, 2);
              \label{eq:gift_64_vec_sliced_swapmove} \\ \texttt{[m[0].val[1], m[0].val[3], pack\_mask\_1, 2);} \\
 90
 91
              gift_64_vec_sliced_swapmove(m[1].val[0], m[1].val[2], pack_mask_1, 2);
 92
              gift_64_vec_sliced_swapmove(m[1].val[1], m[1].val[3], pack_mask_1, 2);
 93
              // make bytes (a0 b0 c0 d0 a4 b4 c4 d4 -> a0 b0 c0 d0 e0 f0 g0 h0)
 94
 95
              gift_64_vec_sliced_swapmove(m[0].val[0], m[1].val[0], pack_mask_2, 4);
 96
              \label{linear_gift_64_vec_sliced_swapmove} \\ (\texttt{m[0].val[2]}, \ \texttt{m[1].val[2]}, \ \texttt{pack\_mask\_2}, \ \texttt{4}); \\
 97
              gift_64_vec_sliced_swapmove(m[0].val[1], m[1].val[1], pack_mask_2, 4);
              gift_64_vec_sliced_swapmove(m[0].val[3], m[1].val[3], pack_mask_2, 4);
 98
99
100
              // same plaintext slice bits into same register (so we only have to do
101
              // what we are doing here once instead of every round)
              const uint8x16x2_t pairs[4] = {
102
103
                       { .val = { m[0].val[0], m[1].val[0] }},
104
                       { .val = { m[0].val[1], m[1].val[1] }},
105
                       { .val = { m[0].val[2], m[1].val[2] }},
106
                       { .val = \{ m[0].val[3], m[1].val[3] \} \},
107
              };
108
              m[0].val[0] = vqtbl2q_u8(pairs[0], pack_shf.val[0]);
109
              m[0].val[1] = vqtbl2q_u8(pairs[1], pack_shf.val[0]);
110
111
              m[0].val[2] = vqtbl2q_u8(pairs[2], pack_shf.val[0]);
112
              m[0].val[3] = vqtbl2q_u8(pairs[3], pack_shf.val[0]);
113
              m[1].val[0] = vqtbl2q_u8(pairs[0], pack_shf.val[1]);
114
              m[1].val[1] = vqtbl2q_u8(pairs[1], pack_shf.val[1]);
115
116
              m[1].val[2] = vqtbl2q_u8(pairs[2], pack_shf.val[1]);
              m[1].val[3] = vqtbl2q_u8(pairs[3], pack_shf.val[1]);
117
118
     }
119
120
     void gift_64_vec_sliced_bits_unpack(uint8x16x4_t m[restrict 2])
121
122
              const uint8x16x2_t pairs[4] = {
123
                      { .val = { m[0].val[0], m[1].val[0] }},
124
                       { .val = { m[0].val[1], m[1].val[1] }},
                      { .val = { m[0].val[2], m[1].val[2] }},
{ .val = { m[0].val[3], m[1].val[3] }},
125
126
127
              };
128
              m[0].val[0] = vqtbl2q_u8(pairs[0], pack_shf_inv.val[0]);
129
130
              m[0].val[1] = vqtbl2q_u8(pairs[1], pack_shf_inv.val[0]);
131
              m[0].val[2] = vqtbl2q_u8(pairs[2], pack_shf_inv.val[0]);
132
              m[0].val[3] = vqtbl2q_u8(pairs[3], pack_shf_inv.val[0]);
133
              m[1].val[0] = vqtbl2q_u8(pairs[0], pack_shf_inv.val[1]);
134
135
              m[1].val[1] = vqtbl2q_u8(pairs[1], pack_shf_inv.val[1]);
136
              m[1].val[2] = vqtbl2q_u8(pairs[2], pack_shf_inv.val[1]);
```

```
137
             m[1].val[3] = vqtbl2q_u8(pairs[3], pack_shf_inv.val[1]);
138
139
             // take care not to shift mask bits out of the register
             gift_64_vec_sliced_swapmove(m[0].val[0], m[0].val[1], pack_mask_0, 1);
140
141
             gift_64_vec_sliced_swapmove(m[0].val[2], m[0].val[3], pack_mask_0, 1);
142
             \label{eq:gift_64_vec_sliced_swapmove} \\ \texttt{(m[1].val[0], m[1].val[1], pack\_mask\_0, 1);} \\ \\
143
             gift_64_vec_sliced_swapmove(m[1].val[2], m[1].val[3], pack_mask_0, 1);
144
145
             gift_64_vec_sliced_swapmove(m[0].val[0], m[0].val[2], pack_mask_1, 2);
146
             gift_64_vec_sliced_swapmove(m[0].val[1], m[0].val[3], pack_mask_1, 2);
147
             gift_64_vec_sliced_swapmove(m[1].val[0], m[1].val[2], pack_mask_1, 2);
             gift_64_vec_sliced_swapmove(m[1].val[1], m[1].val[3], pack_mask_1, 2);
148
149
150
             // make bytes (a0 b0 c0 d0 a4 b4 c4 d4 -> a0 b0 c0 d0 e0 f0 q0 h0)
151
             gift_64_vec_sliced_swapmove(m[0].val[0], m[1].val[0], pack_mask_2, 4);
             gift_64_vec_sliced_swapmove(m[0].val[2], m[1].val[2], pack_mask_2, 4);
152
             gift_64_vec_sliced_swapmove(m[0].val[1], m[1].val[1], pack_mask_2, 4);
153
154
             gift_64_vec_sliced_swapmove(m[0].val[3], m[1].val[3], pack_mask_2, 4);
155
156
157
     void gift_64_vec_sliced_subcells(uint8x16x4_t cs[restrict 2])
158
159
             cs[0].val[1] = veorq_u8(cs[0].val[1],
                                      vandq_u8(cs[0].val[0], cs[0].val[2]));
160
             uint8x16_t t = veorq_u8(cs[0].val[0],
161
162
                                      vandq_u8(cs[0].val[1], cs[0].val[3]));
163
             cs[0].val[2] = veorq_u8(cs[0].val[2], vorrq_u8(t, cs[0].val[1]));
             cs[0].val[0] = veorq_u8(cs[0].val[3], cs[0].val[2]);
164
165
             cs[0].val[1] = veorq_u8(cs[0].val[1], cs[0].val[0]);
166
             cs[0].val[0] = vmvnq_u8(cs[0].val[0]);
167
             cs[0].val[2] = veorq_u8(cs[0].val[2], vandq_u8(t, cs[0].val[1]));
168
             cs[0].val[3] = t;
169
170
             cs[1].val[1] = veorq_u8(cs[1].val[1],
                                      vandq_u8(cs[1].val[0], cs[1].val[2]));
171
172
                           = veorq_u8(cs[1].val[0]
173
                                      vandq_u8(cs[1].val[1], cs[1].val[3]));
             cs[1].val[2] = veorq_u8(cs[1].val[2], vorrq_u8(t, cs[1].val[1]));
174
175
             cs[1].val[0] = veorq_u8(cs[1].val[3], cs[1].val[2]);
             cs[1].val[1] = veorq_u8(cs[1].val[1], cs[1].val[0]);
176
             cs[1].val[0] = vmvnq_u8(cs[1].val[0]);
177
178
             cs[1].val[2] = veorq_u8(cs[1].val[2], vandq_u8(t, cs[1].val[1]));
179
             cs[1].val[3] = t;
180
     }
181
182
     void gift_64_vec_sliced_subcells_inv(uint8x16x4_t cs[restrict 2])
183
184
             uint8x16_t t = cs[0].val[3];
             cs[0].val[2] = veorq_u8(cs[0].val[2], vandq_u8(t, cs[0].val[1]));
185
186
             cs[0].val[0] = vmvnq_u8(cs[0].val[0]);
             cs[0].val[1] = veorq_u8(cs[0].val[1], cs[0].val[0]);
187
             cs[0].val[3] = veorq_u8(cs[0].val[0], cs[0].val[2]);
188
189
             cs[0].val[2] = veorq_u8(cs[0].val[2], vorrq_u8(t, cs[0].val[1]));
190
             cs[0].val[0] = veorq_u8(t, vandq_u8(cs[0].val[1], cs[0].val[3]));
             cs[0].val[1] = veorq_u8(cs[0].val[1]
191
192
                                      vandq_u8(cs[0].val[0], cs[0].val[2]));
193
194
                           = cs[1].val[3];
             cs[1].val[2] = veorq_u8(cs[1].val[2], vandq_u8(t, cs[1].val[1]));
195
             cs[1].val[0] = vmvnq_u8(cs[1].val[0]);
196
197
             cs[1].val[1] = veorq_u8(cs[1].val[1], cs[1].val[0]);
             cs[1].val[3] = veorq_u8(cs[1].val[0], cs[1].val[2]);
198
```

```
199
             cs[1].val[2] = veorq_u8(cs[1].val[2], vorrq_u8(t, cs[1].val[1]));
200
             cs[1].val[0] = veorq_u8(t, vandq_u8(cs[1].val[1], cs[1].val[3]));
201
             cs[1].val[1] = veorq_u8(cs[1].val[1],
                                       vandq_u8(cs[1].val[0], cs[1].val[2]));
202
203
204
205
     void gift_64_vec_sliced_permute(uint8x16x4_t cs[restrict 2])
206
             cs[0].val[0] = vqtbl1q_u8(cs[0].val[0], perm.val[0]);
207
208
             cs[0].val[1] = vqtbl1q_u8(cs[0].val[1], perm.val[1]);
             cs[0].val[2] = vqtbl1q_u8(cs[0].val[2], perm.val[2]);
209
210
             cs[0].val[3] = vqtbl1q_u8(cs[0].val[3], perm.val[3]);
211
             cs[1].val[0] = vqtbl1q_u8(cs[1].val[0], perm.val[0]);
212
213
             cs[1].val[1] = vqtbl1q_u8(cs[1].val[1], perm.val[1]);
             cs[1].val[2] = vqtbl1q_u8(cs[1].val[2], perm.val[2]);
214
215
             cs[1].val[3] = vqtbl1q_u8(cs[1].val[3], perm.val[3]);
216
217
     void gift_64_vec_sliced_permute_inv(uint8x16x4_t cs[restrict 2])
218
219
             cs[0].val[0] = vqtbl1q_u8(cs[0].val[0], perm_inv.val[0]);
220
             cs[0].val[1] = vqtbl1q_u8(cs[0].val[1], perm_inv.val[1]);
221
             cs[0].val[2] = vqtbl1q_u8(cs[0].val[2], perm_inv.val[2]);
222
223
             cs[0].val[3] = vqtbl1q_u8(cs[0].val[3], perm_inv.val[3]);
224
225
             cs[1].val[0] = vqtbl1q_u8(cs[1].val[0], perm_inv.val[0]);
             cs[1].val[1] = vqtbl1q_u8(cs[1].val[1], perm_inv.val[1]);
226
227
             cs[1].val[2] = vqtbl1q_u8(cs[1].val[2], perm_inv.val[2]);
             cs[1].val[3] = vqtbl1q_u8(cs[1].val[3], perm_inv.val[3]);
228
229
     }
230
231
     void gift_64_vec_sliced_generate_round_keys(uint8x16x4_t rks[restrict ROUNDS_GIFT_64
         ][2],
232
                                                    const uint64_t key[restrict 2])
233
     {
234
             uint64_t key_state[] = {key[0], key[1]};
235
             for (int round = 0; round < ROUNDS_GIFT_64; round++) {</pre>
                      const int v = (key_state[0] >> 0 ) & 0xfffff;
236
237
                      const int u = (key_state[0] >> 16) & 0xffff;
238
239
                      // add round key (RK=U||V)
                      // (slice 2 stays unused)
240
241
                      uint64_t rk[6] = { 0x0UL };
242
                      for (size_t i = 0; i < 8; i++) {</pre>
                                              = (v >> (i + 0)) \& 0x1;
243
                              int key_bit_v
                                               = (u >> (i + 0)) & 0x1;
                              int key_bit_u
244
245
                              rk[0]
                                               ^= (uint64_t)key_bit_v << (i * 8);
246
                                               ^= (uint64_t)key_bit_u << (i * 8);
                              rk[2]
247
248
                              key_bit_v
                                               = (v >> (i + 8)) \& 0x1;
                                               = (u >> (i + 8)) \& 0x1;
                              key_bit_u
249
250
                              rk[1]
                                               ^= (uint64_t)key_bit_v << (i * 8);
251
                              rk[3]
                                               ^= (uint64_t)key_bit_u << (i * 8);
252
                      }
253
254
                      // add single bit
255
                      rk[5] \stackrel{\text{1}}{} = 1UL \stackrel{\text{2}}{} < (7 * 8);
256
257
                      // add round constants
                      rk[4] ^= ((uint64_t)(round_const[round] >> 0) & 0x1) << (0 * 8);
258
                      rk[4] ^= ((uint64_t)(round_const[round] >> 1) & 0x1) << (1 * 8);
259
```

```
rk[4] ^= ((uint64_t)(round_const[round] >> 2) & 0x1) << (2 * 8);
260
261
                       rk[4] ^= ((uint64_t)(round_const[round] >> 3) & 0x1) << (3 * 8);
                       rk[4] ^= ((uint64_t)(round_const[round] >> 4) & 0x1) << (4 * 8);
262
                       rk[4] ^= ((uint64_t)(round_const[round] >> 5) & 0x1) << (5 * 8);
263
264
265
                       // extend bits to bytes
                       for (size_t i = 0; i < 6; i++) {</pre>
266
                                rk[i] |= rk[i] << 1;
267
                                rk[i] |= rk[i] << 2;
268
269
                                rk[i] |= rk[i] << 4;
270
                       }
271
272
                       rks[round][0].val[0] = vsetq_lane_u64(rk[0], rks[round][0].val[0], 0);
273
                       rks[round][0].val[0] = vsetq_lane_u64(rk[1], rks[round][0].val[0], 1);
                       rks[round][0].val[1] = vsetq_lane_u64(rk[2], rks[round][0].val[1], 0);
rks[round][0].val[1] = vsetq_lane_u64(rk[3], rks[round][0].val[1], 1);
274
275
                       rks[round][0].val[2] = vdupq_n_u8(0);
276
277
                       rks[round][0].val[3] = vsetq_lane_u64(rk[4], rks[round][0].val[3], 0);
278
                       rks[round][0].val[3] = vsetq_lane_u64(rk[5], rks[round][0].val[3], 1);
                                              = rks[round][0];
279
                       rks[round][1]
280
281
                       // update key state
                       int k0 = (key_state[0] >> 0 ) & 0xffffUL;
282
283
                       int k1 = (key_state[0] >> 16) & 0xffffUL;
                      k0 = (k0 >> 12) | ((k0 & 0xfff) << 4);
k1 = (k1 >> 2) | ((k1 & 0x3 ) << 14);
284
285
                       key_state[0] >>= 32;
286
                      key_state[0] |= (key_state[1] & 0xffffffffUL) << 32;</pre>
287
288
                       key_state[1] >>= 32;
289
                       key_state[1] |= ((uint64_t)k0 << 32) | ((uint64_t)k1 << 48);</pre>
290
              }
291
292
293
     void gift_64_vec_sliced_init(void)
294
295
              // bit packing shuffle
296
              pack_shf = vld1q_u8_x2((uint8_t*)&pack_shf_u64[0]);
297
298
              // inverse bit packing shuffle
299
              pack_shf_inv = vld1q_u8_x2((uint8_t*)&pack_shf_inv_u64[0]);
300
301
              // permutations
              perm = vld1q_u8_x4((uint8_t*)&perm_u64[0]);
302
303
304
              // inverse permutations
305
              perm_inv = vld1q_u8_x4((uint8_t*)&perm_inv_u64[0]);
306
307
              // packing masks
308
              pack_mask_0 = vdupq_n_u8(0x55);
309
              pack_mask_1 = vdupq_n_u8(0x33);
310
              pack_mask_2 = vdupq_n_u8(0x0f);
311
312
313
     void gift_64_vec_sliced_encrypt(uint64_t c[restrict 16],
                                        const uint64_t m[restrict 16],
314
315
                                        const uint8x16x4_t rks[restrict ROUNDS_GIFT_64][2])
316
     {
317
              uint8x16x4_t s[2];
              s[0] = vld1q_u8_x4((uint8_t*)&m[0]);
318
319
              s[1] = vld1q_u8_x4((uint8_t*)&m[8]);
320
              gift_64_vec_sliced_bits_pack(s);
321
```

```
322
             for (int round = 0; round < ROUNDS_GIFT_64; round++) {</pre>
323
                     gift_64_vec_sliced_subcells(s);
324
                     gift_64_vec_sliced_permute(s);
325
326
                     // round key addition
327
                     s[0].val[0] = veorq_u8(s[0].val[0], rks[round][0].val[0]);
328
                     s[0].val[1] = veorq_u8(s[0].val[1], rks[round][0].val[1]);
329
                     s[0].val[2] = veorq_u8(s[0].val[2], rks[round][0].val[2]);
330
                     s[0].val[3] = veorq_u8(s[0].val[3], rks[round][0].val[3]);
331
                     s[1].val[0] = veorq_u8(s[1].val[0], rks[round][1].val[0]);
332
                     s[1].val[1] = veorq_u8(s[1].val[1], rks[round][1].val[1]);
333
                     s[1].val[2] = veorq_u8(s[1].val[2], rks[round][1].val[2]);
334
                     s[1].val[3] = veorq_u8(s[1].val[3], rks[round][1].val[3]);
335
336
337
             gift_64_vec_sliced_bits_unpack(s);
             vst1q_u8_x4((uint8_t*)&c[0], s[0]);
338
339
             vst1q_u8_x4((uint8_t*)&c[8], s[1]);
340
341
342
     void gift_64_vec_sliced_decrypt(uint64_t m[restrict 16],
                                      const uint64_t c[restrict 16],
343
                                      const uint8x16x4_t rks[restrict ROUNDS_GIFT_64][2])
344
345
346
             uint8x16x4_t s[2];
             s[0] = vld1q_u8_x4((uint8_t*)&c[0]);
347
             s[1] = vld1q_u8_x4((uint8_t*)&c[8]);
348
349
             gift_64_vec_sliced_bits_pack(s);
350
351
             for (int round = ROUNDS_GIFT_64 - 1; round >= 0; round--) {
352
                     // round key addition
353
                     s[0].val[0] = veorq_u8(s[0].val[0], rks[round][0].val[0]);
                     s[0].val[1] = veorq_u8(s[0].val[1], rks[round][0].val[1]);
354
355
                     s[0].val[2] = veorq_u8(s[0].val[2], rks[round][0].val[2]);
356
                     s[0].val[3] = veorq_u8(s[0].val[3], rks[round][0].val[3]);
357
                     s[1].val[0] = veorq_u8(s[1].val[0], rks[round][1].val[0]);
358
                     s[1].val[1] = veorq_u8(s[1].val[1], rks[round][1].val[1]);
359
                     s[1].val[2] = veorq_u8(s[1].val[2], rks[round][1].val[2]);
                     s[1].val[3] = veorq_u8(s[1].val[3], rks[round][1].val[3]);
360
361
362
                     gift_64_vec_sliced_permute_inv(s);
363
                     gift_64_vec_sliced_subcells_inv(s);
364
365
366
             gift_64_vec_sliced_bits_unpack(s);
             vst1q_u8_x4((uint8_t*)&m[0], s[0]);
367
368
             vst1q_u8_x4((uint8_t*)&m[8], s[1]);
369
```

B.2 Camellia

B.2.1 Optimized non-SIMD

Listing B.7: camellia/spec_opt.h

```
1 #pragma once
```

```
// 128-bit and 256-bit Camellia
    #include <stdint.h>
5
6
7
    #include "camellia_keys.h"
8
    uint64_t camellia_spec_opt_F(uint64_t X, const uint64_t k);
9
   uint64_t camellia_spec_opt_FL(uint64_t X, const uint64_t kl);
10
    uint64_t camellia_spec_opt_FL_inv(uint64_t X, const uint64_t kl);
11
12
    void camellia_spec_opt_feistel_round(uint64_t state[2], const uint64_t kr);
    void camellia_spec_opt_feistel_round_inv(uint64_t state[2], const uint64_t kr);
13
    void camellia_spec_opt_generate_round_keys_128(struct camellia_rks_128 *restrict rks,
14
15
                                                 const uint64_t key[restrict 2]);
16
17
    void camellia_spec_opt_encrypt_128(uint64_t c[restrict 2],
                                const uint64_t m[restrict 2],
18
                                const struct camellia_rks_128 *restrict rks);
19
20
21
    void camellia_spec_opt_decrypt_128(uint64_t m[restrict 2],
22
                                const uint64_t c[restrict 2],
23
                                const struct camellia_rks_128 *restrict rks);
```

Listing B.8: camellia/spec_opt.c

```
#include <stdint.h>
1
    #include <stddef.h>
3
    #include <string.h>
    #include "spec_opt.h"
    #include "spec_opt_table.h"
6
8
    static const uint64_t keysched_const[] = {
9
            0xa09e667f3bcc908bUL,
            0xb67ae8584caa73b2UL,
10
            0xc6ef372fe94f82beUL,
11
            0x54ff53a5f1d36f1cUL,
12
13
            0x10e527fade682d1dUL,
            0xb05688c2b3e6c1fdUL
14
15
    };
16
    // rotates for values larger than 64 are done by swapping array elements
17
18
    #define rol128(_a, _b, _n){\
            uint64_t _t = _b;\
(_b) = ((_b) << (_n)) | ((_a) >> (64 - (_n)));\
19
20
21
             (a) = ((a) << (n)) | ((t) >> (64 - (n)));
22
23
24
    static uint32_t rol32_1(uint32_t a)
25
    {
26
            return (a << 1) | (a >> 31);
27
28
29
    uint64_t camellia_spec_opt_F(uint64_t X, const uint64_t k)
30
            X ^= k;
31
32
33
            // compute P(S(X)) through large 64-bit lookup table
34
            uint64_t result = 0UL;
35
            result ^= SP0[(X >> 56) & 0xff];
            result ^= SP1[(X >> 48) & 0xff];
36
            result ^= SP2[(X >> 40) & 0xff];
37
```

```
result ^= SP3[(X >> 32) & 0xff];
38
39
            result ^= SP4[(X >> 24) & 0xff];
            result ^= SP5[(X >> 16) & 0xff];
40
            result ^= SP6[(X >> 8 ) & 0xff];
41
42
            result ^= SP7[(X >> 0 ) & 0xff];
43
44
            return result;
45
46
47
    uint64_t camellia_spec_opt_FL(uint64_t X, const uint64_t kl)
48
            const uint32_t XL = (X >> 32);
49
50
            const uint32_t XR = (X >> 0);
51
52
            const uint32_t klL = (kl >> 32);
53
            const uint32_t klR = (kl >> 0);
54
55
            const uint32_t YR = rol32_1(XL & klL) ^ XR;
            const uint32_t YL = (YR | klR) ^ XL;
56
57
58
            return ((uint64_t)YL << 32) | (uint64_t)YR;</pre>
59
60
    uint64_t camellia_spec_opt_FL_inv(uint64_t Y, const uint64_t kl)
62
    {
            const uint32_t YL = (Y >> 32);
63
            const uint32_t YR = (Y >> 0);
64
65
66
            const uint32_t klL = (kl >> 32);
67
            const uint32_t klR = (kl >> 0);
68
69
            const uint32_t XL = (YR | klR) ^ YL;
70
            const uint32_t XR = rol32_1(XL & klL) ^ YR;
71
72
            return ((uint64_t)XL << 32) | (uint64_t)XR;</pre>
73
74
75
    void camellia_spec_opt_feistel_round(uint64_t state[2], const uint64_t kr)
76
            const uint64_t Lr = state[1] ^ camellia_spec_opt_F(state[0], kr);
            state[1] = state[0];
78
79
            state[0] = Lr;
80
    }
81
82
    void camellia_spec_opt_feistel_round_inv(uint64_t state[2], const uint64_t kr)
83
84
            const uint64_t Rr = state[0] ^ camellia_spec_opt_F(state[1], kr);
85
            state[0] = state[1];
            state[1] = Rr;
86
87
88
89
    void camellia_spec_opt_generate_round_keys_128(struct camellia_rks_128 *restrict rks,
90
                                                     const uint64_t key[restrict 2])
91
    {
            uint64_t KL[2], KA[2];
92
93
94
            // compute KL
95
            memcpy(KL, key, sizeof(KL));
96
97
            // compute KA
            memcpy(KA, KL, sizeof(KA));
98
99
```

```
100
              KA[0] = camellia_spec_opt_F(KL[1] ^ camellia_spec_opt_F(KL[0], keysched_const
                   [0]),
101
                                              keysched_const[1]);
              KA[1] = camellia_spec_opt_F(KL[0], keysched_const[0]);
102
103
              camellia_spec_opt_feistel_round(KA, keysched_const[2]);
104
              camellia_spec_opt_feistel_round(KA, keysched_const[3]);
105
              struct camellia_rks_128 keys;
106
107
108
              // KL-dependent subkeys
109
              keys.kw[0] = KL[0]; keys.kw[1] = KL[1];
              rol128(KL[0], KL[1], 15); // KL << 15
110
111
              keys.ku[2] = KL[0]; keys.ku[3] = KL[1];
112
              \verb"rol128(KL[0], KL[1], 30) // \textit{KL} << 45
113
                       keys.ku[6] = KL[0]; keys.ku[7] = KL[1];
              rol128(KL[0], KL[1], 15) // KL << 60
keys.ku[9] = KL[1];
114
115
116
              rol128(KL[0], KL[1], 17) // KL << 77
              keys.kl[2] = KL[0]; keys.kl[3] = KL[1];
rol128(KL[0], KL[1], 17) // KL << 94</pre>
117
118
119
                       keys.ku[12] = KL[0]; keys.ku[13] = KL[1];
              \verb"rol128(KL[0], KL[1], 17) // \textit{KL} << 111
120
                       keys.ku[16] = KL[0]; keys.ku[17] = KL[1];
121
122
123
              // KA-dependent subkevs
124
              keys.ku[0] = KA[0]; keys.ku[1] = KA[1];
              rol128(KA[0], KA[1], 15); // KA << 15
125
              keys.ku[4] = KA[0]; keys.ku[5] = KA[1]; rol128(KA[0], KA[1], 15); // KA << 30
126
127
                       keys.kl[0] = KA[0]; keys.kl[1] = KA[1];
128
129
              rol128(KA[0], KA[1], 15) // KA << 45
              keys.ku[8] = KA[0];
rol128(KA[0], KA[1], 15) // KA << 60
130
131
132
                       keys.ku[10] = KA[0]; keys.ku[11] = KA[1];
              rol128(KA[0], KA[1], 34) // KA << 94
keys.ku[14] = KA[0]; keys.ku[15] = KA[1];
133
134
135
              rol128(KA[0], KA[1], 17) // KA << 111
136
                       keys.kw[2] = KA[0]; keys.kw[3] = KA[1];
137
138
              memcpy(rks, &keys, sizeof(keys));
139
140
              // KB not needed for 128 bit
141
142
143
     void camellia_spec_opt_encrypt_128(uint64_t c[restrict 2],
144
                                     const uint64_t m[restrict 2],
145
                                     const struct camellia_rks_128 *restrict rks)
146
147
              memcpy(c, m, sizeof(c[0]) * 2);
148
149
              c[0] ^= rks->kw[0];
              c[1] ^= rks->kw[1];
150
151
152
              for (size_t i = 0; i < 6; i++) {</pre>
                       camellia_spec_opt_feistel_round(c, rks->ku[i + 0]);
153
154
              }
155
156
              c[0] = camellia_spec_opt_FL(c[0], rks->kl[0]);
157
              c[1] = camellia_spec_opt_FL_inv(c[1], rks->kl[1]);
158
              for (size_t i = 0; i < 6; i++) {</pre>
159
                       camellia_spec_opt_feistel_round(c, rks->ku[i + 6]);
160
```

```
161
             }
162
163
             c[0] = camellia_spec_opt_FL(c[0], rks->kl[2]);
             c[1] = camellia_spec_opt_FL_inv(c[1], rks->kl[3]);
164
165
166
             for (size_t i = 0; i < 6; i++) {</pre>
                     camellia_spec_opt_feistel_round(c, rks->ku[i + 12]);
167
168
169
170
             // swap c[0] and c[1] (concatenation of R||L)
171
             uint64_t t = c[0];
             c[0] = c[1]; c[1] = t;
172
173
             c[0] ^= rks->kw[2];
174
             c[1] ^= rks->kw[3];
175
176
177
178
     void camellia_spec_opt_decrypt_128(uint64_t m[restrict 2],
179
                                  const uint64_t c[restrict 2],
180
                                  const struct camellia_rks_128 *restrict rks)
181
     {
182
             memcpy(m, c, sizeof(m[0]) * 2);
183
             m[0] ^= rks->kw[2]; m[1] ^= rks->kw[3];
184
185
186
             // swap c[0] and c[1] (concatenation of R||L)
187
             uint64_t t = m[0];
             m[0] = m[1]; m[1] = t;
188
189
190
             for (size_t i = 6; i --> 0; ) {
191
                     camellia_spec_opt_feistel_round_inv(m, rks->ku[i + 12]);
192
193
194
             m[1] = camellia_spec_opt_FL(m[1], rks->kl[3]);
195
             m[0] = camellia_spec_opt_FL_inv(m[0], rks->kl[2]);
196
197
             for (size_t i = 6; i --> 0; ) {
198
                     camellia_spec_opt_feistel_round_inv(m, rks->ku[i + 6]);
199
200
201
             m[1] = camellia_spec_opt_FL(m[1], rks->kl[1]);
202
             m[0] = camellia_spec_opt_FL_inv(m[0], rks->kl[0]);
203
204
             for (size_t i = 6; i --> 0; ) {
205
                     camellia_spec_opt_feistel_round_inv(m, rks->ku[i + 0]);
206
207
208
             m[0] ^= rks->kw[0]; m[1] ^= rks->kw[1];
209
210
```

B.2.2 Byteslicing

Listing B.9: camellia/bytesliced.h

```
#pragma once
2
3 // 128-bit bitsliced camellia with 16 blocks encrypted in parallel
```

```
4
5
    #include <stdint.h>
6
    #include <arm_neon.h>
7
9
    #include "camellia_keys.h"
10
    void rol32_1(uint8x16x4_t *a);
11
12
13
    void camellia_sliced_F(uint8x16x4_t X[restrict 2],
                            const uint8x16x4_t k[restrict 2]);
14
    void camellia_sliced_FL(uint8x16x4_t X[restrict 2],
15
16
                             const uint8x16x4_t kl[restrict 2]);
    void camellia_sliced_FL_inv(uint8x16x4_t Y[restrict 2],
17
                                 const uint8x16x4_t kl[restrict 2]);
18
19
    void camellia_sliced_feistel_round(uint8x16x4_t state[restrict 4],
                                        const uint8x16x4_t kr[restrict 2]);
20
21
    void camellia_sliced_feistel_round_inv(uint8x16x4_t state[restrict 4],
22
                                            const uint8x16x4_t kr[restrict 2]);
    void camellia_sliced_generate_round_keys_128(struct camellia_rks_sliced_128 *restrict
23
        rks,
                                                  const uint64_t key[2]);
24
25
26
    void camellia_sliced_pack(uint8x16x4_t packed[restrict 4];
27
                               const uint64_t x[restrict 16][2]);
28
    void camellia_sliced_unpack(uint64_t x[restrict 16][2],
30
                                 const uint8x16x4_t packed[restrict 4]);
31
32
    void camellia_sliced_init(void);
33
34
    void camellia_sliced_encrypt_128(uint64_t c[restrict 16][2],
                                      const uint64_t m[restrict 16][2],
35
36
                                      struct camellia_rks_sliced_128 *restrict rks);
37
38
    void camellia_sliced_decrypt_128(uint64_t m[restrict 16][2],
39
                                      const uint64_t c[restrict 16][2],
40
                                      struct camellia_rks_sliced_128 *restrict rks);
```

Listing B.10: camellia/bytesliced.c

```
#include <arm_neon.h>
    #include <stdint.h>
    #include <stddef.h>
    #include <string.h>
    #include "bytesliced.h"
6
    #include "spec_opt.h" // need the spec_opt key schedule
8
9
    static uint8x16x4_t pack_group;
    static uint8x16x4_t pack_group_inv;
10
    static uint8x16x4_t pack_single;
11
12
   static uint8x16_t lower_4_bits_mask;
13
    static uint8x16_t shiftrows_inv;
14
15
    static uint8x16_t rol32_1_overflow;
16
17
    // store two for low ([0]) and high ([1]) bits of matrix multiplication
18
    static uint8x16x2_t prefilter_0;
   static uint8x16x2_t prefilter_3; // s3(x) = s0(x <<< 1)
19
   static uint8x16x2_t postfilter_0;
```

```
| static uint8x16x2_t postfilter_1; // s1(x) = s0(x) \iff 1
22
   static uint8x16x2_t postfilter_2; // s2(x) = s0(x) >>> 1
24
    void rol32_1(uint8x16x4_t *a)
25
26
            uint8x16_t a3 = a->val[3];
27
28
            for (size_t i = 3; i > 0; i--) {
29
                    uint8x16_t *curr = &a->val[i];
30
                    uint8x16_t *prev = &a->val[i - 1];
31
32
                    uint8x16_t overflow = vshrq_n_u8(*prev, 7);
33
                     *curr = vorrq_u8(vshlq_n_u8(*curr, 1), overflow);
34
            }
35
36
            uint8x16_t overflow = vshrq_n_u8(a3, 7);
37
            a->val[0] = vorrq_u8(vshlq_n_u8(a->val[0], 1), overflow);
38
39
    static uint8x16_t s(const uint8x16_t X,
40
41
                         const uint8x16x2_t prefilter,
42
                        const uint8x16x2_t postfilter)
43
    {
44
            // prefilter
45
            uint8x16_t pre_low = vqtbl1q_u8(prefilter.val[0],
46
                                               vandq_u8(X, lower_4_bits_mask));
47
            uint8x16_t pre_high = vqtbl1q_u8(prefilter.val[1],
                                               vshrq_n_u8(X, 4));
48
49
            uint8x16_t pre = veorq_u8(pre_low, pre_high);
50
51
            // inverse ShiftRows
52
            pre = vqtbl1q_u8(pre, shiftrows_inv);
53
54
            // AES single round encryption (x <- AESSubBytes(AESShiftRows(x)))
            uint8x16_t aesd = vaeseq_u8(pre, vdupq_n_u8(0x0));
55
56
57
            // postfilter
58
            uint8x16_t post_low = vqtbl1q_u8(postfilter.val[0],
                                                vandq_u8(aesd, lower_4_bits_mask));
59
60
            uint8x16_t post_high = vqtbl1q_u8(postfilter.val[1],
                                                vshrq_n_u8(aesd, 4));
61
62
            uint8x16_t post = veorq_u8(post_low, post_high);
63
64
            return post;
65
66
67
    void camellia_sliced_F(uint8x16x4_t X[restrict 2],
68
                            const uint8x16x4_t k[restrict 2])
69
    {
70
            // key additions
71
            for (size_t byte = 0; byte < 8; byte++) {</pre>
                    uint8x16_t *reg = &X[byte / 4].val[byte % 4];
72
73
74
                    *reg = veorq_u8(*reg, k[byte / 4].val[byte % 4]);
75
76
            // S-boxes (beware of endianness)
77
            X[1].val[3] = s(X[1].val[3], prefilter_0, postfilter_0); // s0
78
            X[1].val[2] = s(X[1].val[2], prefilter_0, postfilter_1); // s1
79
80
            X[1].val[1] = s(X[1].val[1], prefilter_0, postfilter_2); // s2
81
            X[1].val[0] = s(X[1].val[0], prefilter_3, postfilter_0); // s3
82
            X[0].val[3] = s(X[0].val[3], prefilter_0, postfilter_1); // s1
```

```
83
               X[0].val[2] = s(X[0].val[2], prefilter_0, postfilter_2); // s2
               X[0].val[1] = s(X[0].val[1], prefilter_3, postfilter_0); // s3
X[0].val[0] = s(X[0].val[0], prefilter_0, postfilter_0); // s0
 84
 85
 86
 87
               // permutation
 88
               X[1].val[3] = veorq_u8(X[1].val[3], X[0].val[2]);
 89
               X[1].val[2] = veorq_u8(X[1].val[2], X[0].val[1]);
               X[1].val[1] = veorq_u8(X[1].val[1], X[0].val[0]);
 90
               X[1].val[0] = veorq_u8(X[1].val[0], X[0].val[3]);
 91
 92
               X[0].val[3] = veorq_u8(X[0].val[3], X[1].val[1]);
               X[0].val[2] = veorq_u8(X[0].val[2], X[1].val[0]);
 93
               X[0].val[1] = veorq_u8(X[0].val[1], X[1].val[3]);
 94
 95
               X[0].val[0] = veorq_u8(X[0].val[0], X[1].val[2]);
 96
 97
               X[1].val[3] = veorq_u8(X[1].val[3], X[0].val[0]);
               X[1].val[2] = veorq_u8(X[1].val[2], X[0].val[3]);
X[1].val[1] = veorq_u8(X[1].val[1], X[0].val[2]);
 98
99
100
               X[1].val[0] = veorq_u8(X[1].val[0], X[0].val[1]);
               X[0].val[3] = veorq_u8(X[0].val[3], X[1].val[0]);
X[0].val[2] = veorq_u8(X[0].val[2], X[1].val[3]);
101
102
103
               X[0].val[1] = veorq_u8(X[0].val[1], X[1].val[2]);
104
               X[0].val[0] = veorq_u8(X[0].val[0], X[1].val[1]);
105
106
107
               // X[0] and X[1] are swapped now; this is
108
               // taken into account in the feistel round
109
110
111
     void camellia_sliced_FL(uint8x16x4_t X[restrict 2],
112
                                  const uint8x16x4_t kl[restrict 2])
113
114
               const uint8x16x4_t XL = X[1];
               const uint8x16x4_t XR = X[0];
115
116
               const uint8x16x4_t klL = kl[1];
117
118
               const uint8x16x4_t klR = kl[0];
119
120
               uint8x16x4_t YR_prerotate = {
121
                        .val = {
122
                                  vandq_u8(XL.val[0], klL.val[0]),
                                  vandq_u8(XL.val[1], klL.val[1]),
vandq_u8(XL.val[2], klL.val[2]),
123
124
                                  vandq_u8(XL.val[3], klL.val[3])
125
126
                        }
127
               };
128
129
               rol32_1(&YR_prerotate);
130
               const uint8x16x4_t YR = {
131
132
                         .val = {
133
                                  veorq_u8(YR_prerotate.val[0], XR.val[0]),
                                  veorq_u8(YR_prerotate.val[1], XR.val[1]),
134
135
                                  veorq_u8(YR_prerotate.val[2], XR.val[2]),
136
                                  veorq_u8(YR_prerotate.val[3], XR.val[3])
                        }
137
138
               };
139
140
               const uint8x16x4_t YL = {
141
                        .val = {
                                  veorq_u8(vorrq_u8(YR.val[0], klR.val[0]), XL.val[0]),
veorq_u8(vorrq_u8(YR.val[1], klR.val[1]), XL.val[1]),
142
143
                                  veorq_u8(vorrq_u8(YR.val[2], klR.val[2]), XL.val[2]),
144
```

```
145
                                 veorq_u8(vorrq_u8(YR.val[3], klR.val[3]), XL.val[3])
146
                        }
147
              };
148
149
              X[0] = YR;
150
              X[1] = YL;
151
     }
152
     void camellia_sliced_FL_inv(uint8x16x4_t Y[restrict 2],
153
154
                                      const uint8x16x4_t kl[restrict 2])
155
     {
              const uint8x16x4_t YL = Y[1];
156
157
              const uint8x16x4_t YR = Y[0];
158
159
              const uint8x16x4_t klL = kl[1];
160
              const uint8x16x4_t klR = kl[0];
161
162
              const uint8x16x4_t XL = {
163
                        .val = {
                                 veorq_u8(vorrq_u8(YR.val[0], klR.val[0]), YL.val[0]),
164
165
                                 veorq_u8(vorrq_u8(YR.val[1], klR.val[1]), YL.val[1]),
                                 veorq_u8(vorrq_u8(YR.val[2], klR.val[2]), YL.val[2]),
veorq_u8(vorrq_u8(YR.val[3], klR.val[3]), YL.val[3])
166
167
168
                        }
169
              };
170
              uint8x16x4_t XR_prerotate = {
171
172
                        .val = {
173
                                 vandq_u8(XL.val[0], klL.val[0]),
174
                                 vandq_u8(XL.val[1], klL.val[1]),
                                 vandq_u8(XL.val[2], klL.val[2]),
vandq_u8(XL.val[3], klL.val[3])
175
176
177
                        }
178
              };
179
180
              rol32_1(&XR_prerotate);
181
182
              const uint8x16x4_t XR = {
183
                        .val = {
184
                                 veorq_u8(XR_prerotate.val[0], YR.val[0]),
                                 veorq_u8(XR_prerotate.val[1], YR.val[1]),
veorq_u8(XR_prerotate.val[2], YR.val[2]),
185
186
                                 veorq_u8(XR_prerotate.val[3], YR.val[3])
187
188
                        }
189
              };
190
191
              Y[0] = XR;
192
              Y[1] = XL;
193
     }
194
195
     void camellia_sliced_feistel_round(uint8x16x4_t state[restrict 4],
                                              const uint8x16x4_t kr[restrict 2])
196
197
198
              uint8x16x4_t F[2] = {
199
                        state[0], state[1]
200
              };
201
              // F function swaps result
202
203
              camellia_sliced_F(F, kr);
204
              for (size_t j = 0; j < 4; j++) {</pre>
205
                        F[0].val[j] = veorq_u8(state[3].val[j], F[0].val[j]);
206
```

```
207
                      F[1].val[j] = veorq_u8(state[2].val[j], F[1].val[j]);
208
             }
209
             state[2] = state[0];
210
211
             state[3] = state[1];
212
             state[0] = F[1];
213
             state[1] = F[0];
214
215
216
     void camellia_sliced_feistel_round_inv(uint8x16x4_t state[restrict 4],
217
                                              const uint8x16x4_t kr[restrict 2])
218
219
             uint8x16x4_t F[2] = {
220
                     state[2], state[3]
221
             };
222
             // F function swaps result
223
224
             camellia_sliced_F(F, kr);
225
             for (size_t j = 0; j < 4; j++) {</pre>
226
227
                      F[0].val[j] = veorq_u8(state[1].val[j], F[0].val[j]);
228
                      F[1].val[j] = veorq_u8(state[0].val[j], F[1].val[j]);
             }
229
230
231
             state[0] = state[2];
232
             state[1] = state[3];
             state[2] = F[1];
233
234
             state[3] = F[0];
235
236
     void camellia_sliced_generate_round_keys_128(struct camellia_rks_sliced_128 *restrict
237
238
                                                    const uint64_t key[restrict 2])
239
     {
240
             // use standard key derivation
241
             struct camellia_rks_128 rks_128;
242
             camellia_spec_opt_generate_round_keys_128(&rks_128, key);
243
             // now pack round keys by use of vdupq_n_u8 since all bytes are the same
244
245
             // in a bytesliced representation
246
247
             // whitening and FL layer keys
             for (size_t i = 0; i < 4; i++) {
248
249
                      for (size_t byte = 0; byte < 8; byte++) {</pre>
                              uint8x16_t *reg_kw = &rks->kw[i][byte / 4].val[byte % 4];
250
                              uint8x16_t *reg_kl = &rks->kl[i][byte / 4].val[byte % 4];
251
252
253
                              *reg_kw = vdupq_n_u8((rks_128.kw[i] >> (8 * byte)) & 0xff);
                              *reg_kl = vdupq_n_u8((rks_128.kl[i] >> (8 * byte)) & 0xff);
254
255
                      }
256
257
258
             // F function keys
259
             for (size_t i = 0; i < 18; i++) {</pre>
260
                      for (size_t byte = 0; byte < 8; byte++) {</pre>
261
                              uint8x16_t *reg_ku = &rks->ku[i][byte / 4].val[byte % 4];
262
                              *reg_ku = vdupq_n_u8((rks_128.ku[i] >> (8 * byte)) & 0xff);
263
                      }
264
265
             }
266
267
```

```
268
    void camellia_sliced_pack(uint8x16x4_t packed[restrict 4],
269
                                const uint64_t x[restrict 16][2])
270
             for (size_t i = 0; i < 4; i++) {</pre>
271
                     packed[i] = vld1q_u8_x4((uint8_t*)&x[i * 4][0]);
272
273
             }
274
275
             uint8x16x4_t packed_0[4];
276
277
             for (size_t i = 0; i < 4; i++) {</pre>
                      for (size_t j = 0; j < 4; j++) {</pre>
278
279
                              packed_0[i].val[j] = vqtbl4q_u8(packed[j], pack_group.val[i]);
280
                      }
281
             }
282
283
             for (size_t i = 0; i < 4; i++) {</pre>
284
                      for (size_t j = 0; j < 4; j++) {</pre>
285
                              packed[i].val[j] = vqtbl4q_u8(packed_0[i], pack_single.val[j]);
286
                      }
             }
287
288
     }
289
290
     void camellia_sliced_unpack(uint64_t x[restrict 16][2],
291
                                  const uint8x16x4_t packed[restrict 4])
292
     {
293
294
             uint8x16x4_t unpacked[4];
295
             for (size_t i = 0; i < 4; i++) {</pre>
296
                      for (size_t j = 0; j < 4; j++) {</pre>
297
                              unpacked[i].val[j] = vqtbl4q_u8(packed[j], pack_group_inv.val[i
298
                      }
299
             }
300
301
             uint8x16x4_t unpacked_0[4];
302
303
             // pack_single_inv = pack_group
304
             for (size_t i = 0; i < 4; i++) {</pre>
                      for (size_t j = 0; j < 4; j++) {</pre>
305
306
                              unpacked_0[i].val[j] = vqtbl4q_u8(unpacked[i], pack_group.val[j
                                  ]);
                      }
307
308
             }
309
             for (size_t i = 0; i < 4; i++) {</pre>
310
311
                      vst1q_u8_x4((uint8_t*)&x[i * 4][0], unpacked_0[i]);
312
             }
313
314
315
     void camellia_sliced_init(void)
316
317
318
             static const uint64_t pack_group_u64[4][2] = {
                      319
320
321
                      { 0x1b1a19180b0a0908UL, 0x3b3a39382b2a2928UL },
322
                      { 0x1f1e1d1c0f0e0d0cUL, 0x3f3e3d3c2f2e2d2cUL },
323
             };
324
325
             static const uint64_t pack_group_inv_u64[4][2] = {
326
                      { 0x3121110130201000UL, 0x3323130332221202UL },
                      { 0x3525150534241404UL, 0x3727170736261606UL },
327
```

```
{ 0x3929190938281808UL, 0x3b2b1b0b3a2a1a0aUL },
328
329
                      { 0x3d2d1d0d3c2c1c0cUL, 0x3f2f1f0f3e2e1e0eUL }
330
              };
331
332
              static const uint64_t pack_single_u64[4][2] = {
333
                      { 0x1c1814100c080400UL, 0x3c3834302c282420UL },
334
                      \{ 0x1d1915110d090501UL, 0x3d3935312d292521UL \},
                      335
336
337
              };
338
              static const uint64_t shiftrows_inv_u64[2] = {
339
340
                      0x0b0e0104070a0d00UL, 0x0306090c0f020508UL };
341
              static const uint64_t rol32_1_overflow_u64[2] = {
342
343
                      0x0605040302010010, 0x0e0d0c0b0a090807UL };
344
345
              static const uint64_t prefilter_0_u64[2][2] = {
                      { 0x862b832eed40e845UL, 0x88258d20e34ee64bUL }, 
{ 0x2a7bdb8aa0f15100UL, 0x2372d283a9f85809UL } };
346
347
348
349
              static const uint64_t prefilter_3_u64[2][2] = {
                      { 0x25204e4b2b2e4045UL, 0x74711f1a7a7f1114UL },
350
                      { 0x7283f8097b8af100UL, 0xdf2e55a4d6275cadUL } };
351
352
353
              static const uint64_t postfilter_0_u64[2][2] = {
                      \{ \ 0x31c1c2323fcfcc3cUL, \ 0xd12122d2df2f2cdcUL \ \},
354
                      { 0xa8512ed77f86f900UL, 0x0cf58a73db225da4UL } };
355
356
              static const uint64_t postfilter_1_u64[2][2] = {
357
                      { 0x628385647e9f9978UL, 0xa34244a5bf5e58b9UL }, { 0x51a25caffe0df300UL, 0x18eb15e6b744ba49UL } };
358
359
360
361
              static const uint64_t postfilter_2_u64[2][2] = {
                      { 0x98e061199fe7661eUL, 0xe8901169ef97166eUL }, 
{ 0x54a817ebbf43fc00UL, 0x06fa45b9ed11ae52UL } };
362
363
364
365
              pack_group
                                   = vld1q_u8_x4((uint8_t*)pack_group_u64);
                                   = vld1q_u8_x4((uint8_t*)pack_group_inv_u64);
              pack_group_inv
366
367
              pack_single
                                   = vld1q_u8_x4((uint8_t*)pack_single_u64);
368
369
              lower_4_bits_mask
                                   = vdupq_n_u8(0x0f);
                                   = vld1q_u8((uint8_t*)shiftrows_inv_u64);
370
              shiftrows_inv
371
              rol32_1_overflow
                                   = vld1q_u8((uint8_t*)rol32_1_overflow_u64);
372
373
              prefilter_0
                                   = vld1q_u8_x2((uint8_t*)prefilter_0_u64);
374
              prefilter_3
                                   = vld1q_u8_x2((uint8_t*)prefilter_3_u64);
375
              postfilter_0
                                   = vld1q_u8_x2((uint8_t*)postfilter_0_u64);
376
              postfilter_1
                                   = vld1q_u8_x2((uint8_t*)postfilter_1_u64);
377
              postfilter_2
                                   = vld1q_u8_x2((uint8_t*)postfilter_2_u64);
378
379
380
     void camellia_sliced_encrypt_128(uint64_t c[restrict 16][2],
381
                                         const uint64_t m[restrict 16][2],
382
                                         struct camellia_rks_sliced_128 *restrict rks)
383
     {
384
              uint8x16x4_t state[4];
385
              camellia_sliced_pack(state, m);
386
387
              // kw0/kw1
              for (size_t byte = 0; byte < 16; byte++) {</pre>
388
                      uint8x16_t *reg = &state[byte / 4].val[byte % 4];
389
```

```
390
                      uint8x16x4_t *key = &rks->kw[byte / 8 + 0][(byte % 8) / 4];
391
392
                      *reg = veorq_u8(*reg, key->val[byte % 4]);
             }
393
394
395
             for (size_t i = 0; i < 6; i++) {</pre>
396
                      camellia_sliced_feistel_round(state, rks->ku[i + 0]);
397
398
399
             camellia_sliced_FL(&state[0], rks->kl[0]);
             camellia_sliced_FL_inv(&state[2], rks->kl[1]);
400
401
402
             for (size_t i = 0; i < 6; i++) {</pre>
403
                     camellia_sliced_feistel_round(state, rks->ku[i + 6]);
404
405
406
             camellia_sliced_FL(&state[0], rks->kl[2]);
407
             camellia_sliced_FL_inv(&state[2], rks->kl[3]);
408
             for (size_t i = 0; i < 6; i++) {</pre>
409
410
                      camellia_sliced_feistel_round(state, rks->ku[i + 12]);
411
412
413
             // swap state[0,1] and state[2,3] (concatenation of R||L)
414
             uint8x16x4_t tmp = state[0];
415
             state[0] = state[2];
             state[2] = tmp;
416
417
             tmp = state[1];
418
             state[1] = state[3];
419
             state[3] = tmp;
420
             // kw2/kw3
421
422
             for (size_t byte = 0; byte < 16; byte++) {</pre>
423
                      uint8x16_t *reg
                                          = &state[byte / 4].val[byte % 4];
424
                                          = &rks->kw[byte / 8 + 2][(byte % 8) / 4];
                      uint8x16x4_t *key
425
426
                      *reg = veorq_u8(*reg, key->val[byte % 4]);
427
             }
428
429
             camellia_sliced_unpack(c, state);
430
431
     void camellia_sliced_decrypt_128(uint64_t m[restrict 16][2],
432
433
                                       const uint64_t c[restrict 16][2],
434
                                       struct camellia_rks_sliced_128 *restrict rks)
435
     {
436
             uint8x16x4_t state[4];
437
             camellia_sliced_pack(state, c);
438
439
             // kw2/kw3
440
             for (size_t byte = 0; byte < 16; byte++) {</pre>
                     uint8x16_t *reg = &state[byte / 4].val[byte % 4];
441
442
                      uint8x16x4_t *key
                                         = &rks->kw[byte / 8 + 2][(byte % 8) / 4];
443
                      *reg = veorq_u8(*reg, key->val[byte % 4]);
444
445
             }
446
447
448
             // swap state[0,1] and state[2,3] (concatenation of R||L)
449
             uint8x16x4_t tmp = state[0];
450
             state[0] = state[2];
             state[2] = tmp;
451
```

```
tmp = state[1];
452
453
             state[1] = state[3];
454
             state[3] = tmp;
455
456
             for (size_t i = 6; i --> 0; ) {
457
                     camellia_sliced_feistel_round_inv(state, rks->ku[i + 12]);
458
             }
459
460
             camellia_sliced_FL(&state[2], rks->kl[3]);
461
             camellia_sliced_FL_inv(&state[0], rks->kl[2]);
462
             for (size_t i = 6; i --> 0; ) {
463
                     camellia_sliced_feistel_round_inv(state, rks->ku[i + 6]);
464
465
             }
466
467
             camellia_sliced_FL(&state[2], rks->kl[1]);
             camellia_sliced_FL_inv(&state[0], rks->kl[0]);
468
469
             for (size_t i = 6; i --> 0; ) {
470
                     camellia_sliced_feistel_round_inv(state, rks->ku[i + 0]);
471
472
             }
473
             // kw0/kw1
474
475
             for (size_t byte = 0; byte < 16; byte++) {</pre>
476
                     uint8x16_t *reg = &state[byte / 4].val[byte % 4];
                                         = &rks->kw[byte / 8 + 0][(byte % 8) / 4];
477
                     uint8x16x4_t *key
478
479
                     *reg = veorq_u8(*reg, key->val[byte % 4]);
480
481
             camellia_sliced_unpack(m, state);
482
483
```

Bibliography

- [1] Subhadeep Banik et al. "GIFT: A Small Present". In: Aug. 2017, pp. 321–345. ISBN: 978-3-319-66786-7. DOI: 10.1007/978-3-319-66787-4_16.
- [2] Kazumaro Aoki et al. "Camellia: A 128-Bit Block Cipher Suitable for Multiple Platforms Design and Analysis". In: Selected Areas in Cryptography. Ed. by Douglas R. Stinson and Stafford Tavares. Berlin, Heidelberg: Springer Berlin Heidelberg, 2001, pp. 39–56. ISBN: 978-3-540-44983-6.
- [3] ARM Limited. "The Future is Built on Arm". URL: https://www.arm.com/company (visited on 04/07/2023).
- [4] "ODROID-N2+ with 4GByte RAM". URL: https://www.hardkernel.com/shop/odroid-n2-with-4gbyte-ram-2/#tab-description (visited on 04/03/2023).
- [5] ARM Limited. "ARM Architecture Reference Manual. ARMv8, for ARMv8-A architecture profile". 2013. URL: https://developer.arm.com/documentation/ddi0487/latest/(visited on 02/02/2023).
- [6] ARM Limited. "Arm Neon Intrinsics Reference". 2022. URL: https://arm-software.github.io/acle/neon_intrinsics/advsimd.html (visited on 02/07/2023).
- [7] Ryad Benadjila et al. "Implementing Lightweight Block Ciphers on x86 Architectures". In: Selected Areas in Cryptography SAC 2013. Ed. by Tanja Lange, Kristin Lauter, and Petr Lisoněk. Berlin, Heidelberg: Springer Berlin Heidelberg, 2014, pp. 324–351. ISBN: 978-3-662-43414-7.
- [8] Eli Biham. "A fast new DES implementation in software". In: Fast Software Encryption. Ed. by Eli Biham. Berlin, Heidelberg: Springer Berlin Heidelberg, 1997, pp. 260–272. ISBN: 978-3-540-69243-0.
- [9] Jussi Kivilinna. "Block Ciphers: fast Implementations on x86-64 Architecture". In: 2013.
- [10] Akashi Satoh and Sumio Morioka. "Unified Hardware Architecture for 128-Bit Block Ciphers AES and Camellia". In: vol. 2779. Sept. 2003, pp. 304–318.
 ISBN: 978-3-540-40833-8. DOI: 10.1007/978-3-540-45238-6 25.

BIBLIOGRAPHY 73

[11] ARM Limited. "Cortex-A72 Software Optimization Guide". 2015. URL: https://developer.arm.com/documentation/uan0016/a/ (visited on 04/06/2023).