

# Analog Net Constraint

1.50

## Features

Uses **AMUXBUSR** 

- Limits analog routing of a signal to a specific routing resource
- All terminals on the signal must connect directly to the routing resource

**Note** Routing is strict. All of the devices connected to the net with the resource constraint must have a direct hardware connection to the resource. Refer to the Analog Routing Diagram in the applicable Technical Reference Manual (TRM), which is available from the Cypress website, [www.cypress.com](http://www.cypress.com). If the resources do not have a hardware connection to the specified constraint, an error will occur.

## General Description

The Analog Net Constraint Component allows you to define the route of the analog signal to which it is connected. This is an advanced feature that is not needed for most designs, and should be used with caution.

## When to Use an Analog Net Constraint

The Analog Net Constraint should be used to manually control analog routing when strict control over the signal routing is required.

## Input/Output Connections


This section describes the various input and output connections for the Analog Net Constraint.

### connect – Input /Output

Provides the connection to the analog signal to which the Analog Net Constraint applies.

## Component Parameters

Drag an Analog Net Constraint onto your design and double-click it to open the **Configure** dialog.

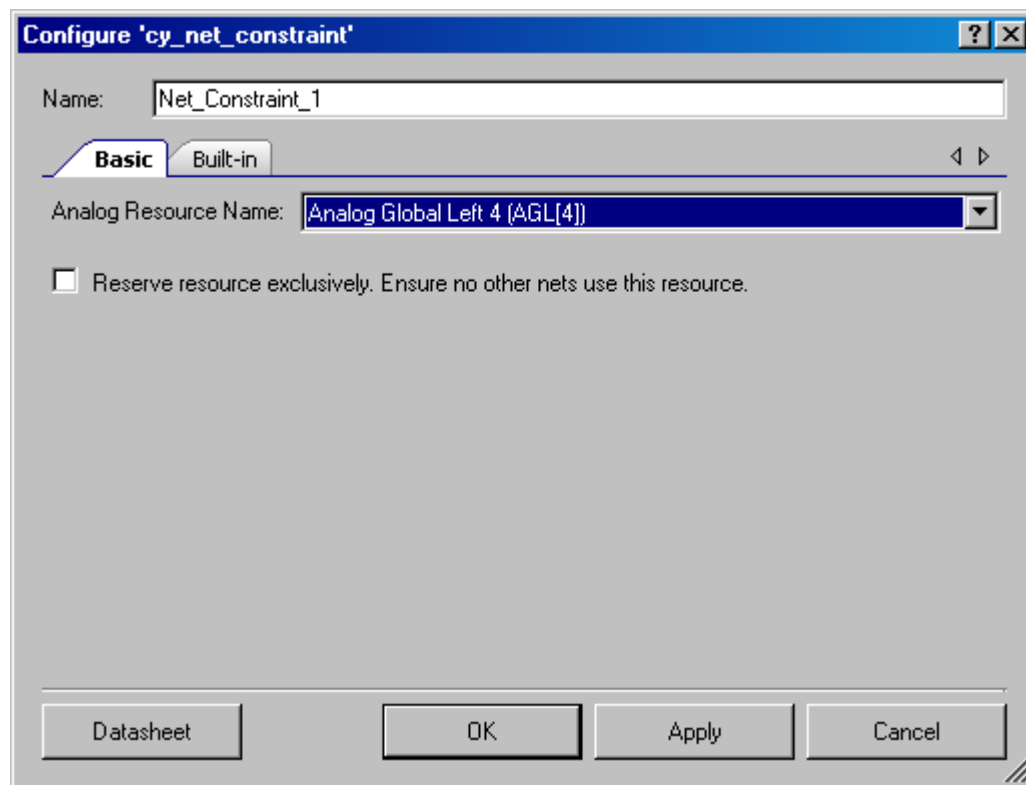

The Analog Net Constraint provides the following parameters:

### Analog Resource Name

The analog resource to assign to the connected signal. The default value, **Auto**, has no effect. The routing resource list depends on the selected family.

### Exclusive Use

Allows the Analog Net Constraint to reserve the resource exclusively. If another Analog Net Constraint is configured to use the same analog resource, the net will not be short-circuited. An error will be generated instead.

## Placement

The Analog Net Constraint consumes hardware resources because it specifies which hardware resource must be used by the router. It has no other placement specification.

## Resources

The Analog Net Constraint Component causes the connected analog signal to consume the selected analog routing resource.

## Functional Description

The following analog routing resource names are available for PSoC 3 and PSoC 5. Not every analog routing resource connects to every Component terminal. For detailed information about analog connectivity, refer to the applicable device datasheet and TRM. These documents are available on the Cypress website, [www.cypress.com](http://www.cypress.com).


- Analog globals: AGL[0] – AGL[7], AGR[0] – AGR[7]
- Analog local bus: abusl0 – abusl3, abusr0 – abusr3
- Analog mux bus: AMUXBUSL, AMUXBUSR
- Combined left/right resources: AG[0] – AG[7], abus0 – abus3, AMUXBUS

When an Analog Net Constraint is present on a signal, the signal will be routed using **only** the specified resource. All of the Component terminals connected to the signal must have a direct connection to the routing resource. The analog placer might not be able to automatically ensure that Components are placed in way that satisfies Analog Net Constraints. Components connected to constrained signals should be placed manually.

## Analog Net Constraint Example

In this example, the Analog Net Constraint is used to force a signal (Pin\_1) on P4[4] to be routed on Analog Global Left 4.

**Figure 1. Analog Net Constraint Example**

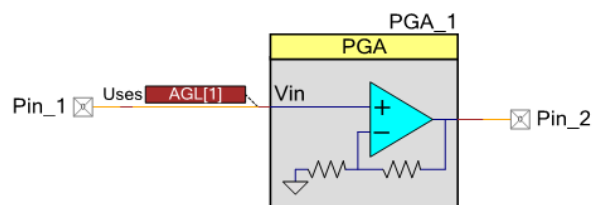

## Design-Wide Resources Settings

The following figures show settings in the Design-Wide Resources editors.

**Figure 2. Directives Editor**

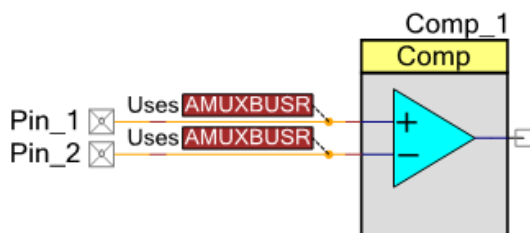
Component (Signal) Name	Directive Type	Directive Value
\PGA_1:SC\	ForceComponentFixed	F(SC,0)

**Figure 3. Pin Editor**

Alias	Name	Pin	Lock
	Pin_1	P4[4]	<input checked="" type="checkbox"/>
	Pin_2	P4[5]	<input checked="" type="checkbox"/>

## Short Circuit Example


If the same analog routing resource is specified for multiple signals that are not connected to an AMux, the signals will be connected to each other, which is not always the intended behavior.

**Figure 4. Short Circuit Example**

## Analog Net Tie Example

To apply multiple constraints to a signal or constrain a subset of the connections in a signal, use a Net Tie Component. Refer to the Net Tie Component datasheet for details (available from the PSoC Creator Component Catalog).

Figure 5. Net Tie Example

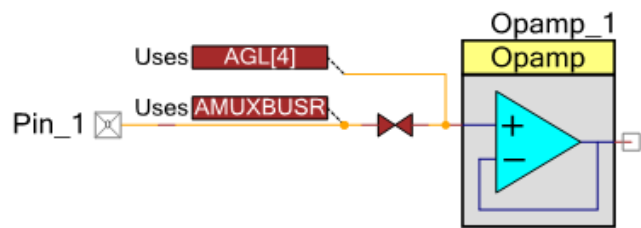

## Component Changes

This section lists the major changes in the Component from the previous version.

Version	Description of Changes	Reason for Changes / Impact
1.50.b	The Component was made visible for PSoC 6.	
1.50.a	Minor datasheet edits and updates	

© Cypress Semiconductor Corporation, 2012-2017. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical Components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical Component is any Component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.

