


Boil | Mean resets

Across observation-noise settings

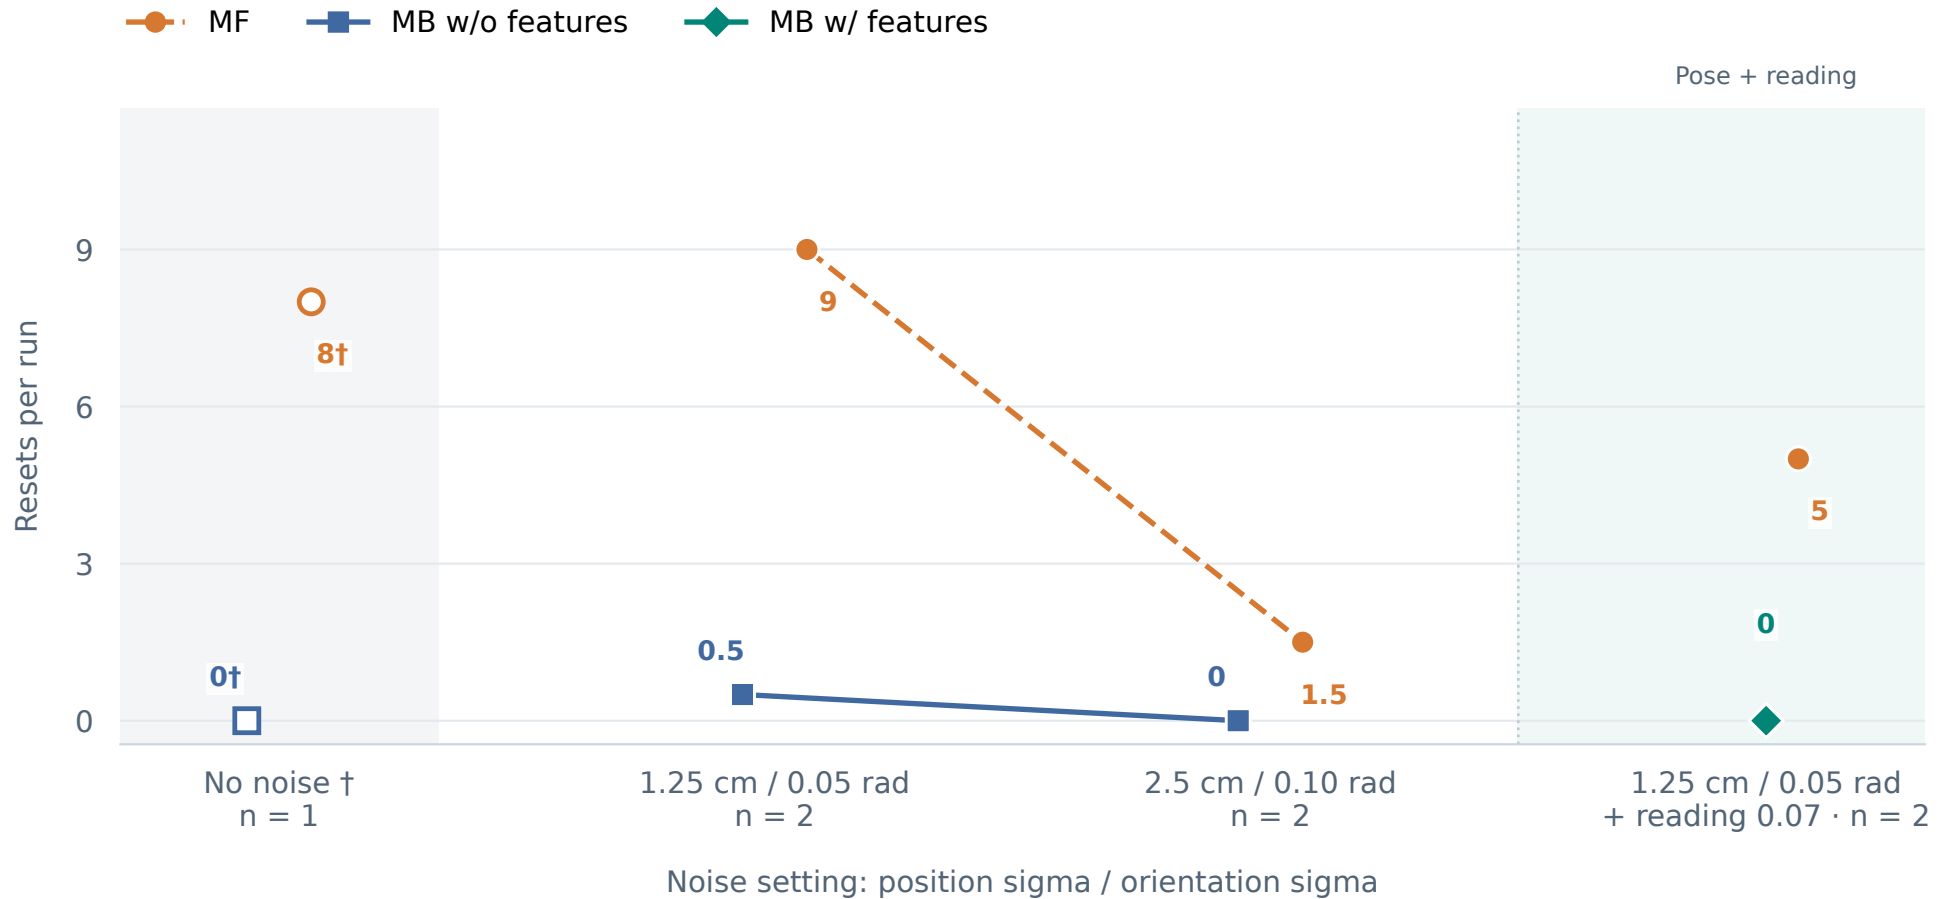

Points = all-seed means. Noiseless: $n = 1$; noisy: $n = 2$. Solve rate includes train + test.

† Unsanitized historical references, shown separately. The combined point is not on the pose sweep.

MB w/ features has one measured setting. Read step costs alongside solve rate.

Categorical x-axis; small offsets reveal overlapping points. Snapshot: 2026-09-08 13:05 UTC.