

Proxy Recitation

Jeffrey Liu


Recitation 13: November 23, 2015

Outline

- **Getting content on the web: Telnet/cURL Demo**
 - How the web really works
- Networking Basics
- Proxy
 - Due Tuesday, December 8th
 - Grace days allowed
- String Manipulation in C

The Web in a Textbook

- Client request page, server provides, transaction done.

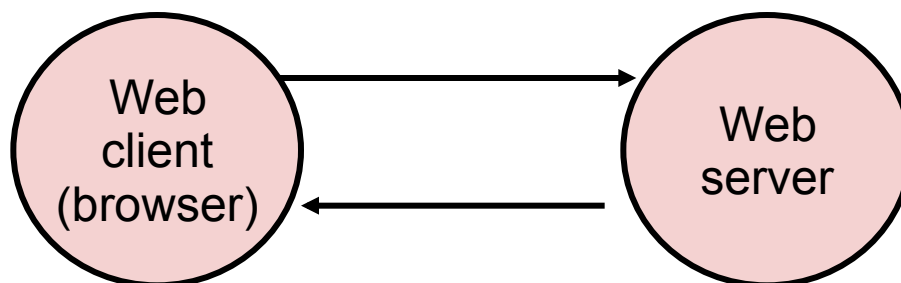

- A sequential server can handle this. We just need to serve one page at a time.
- This works great for simple text pages with embedded styles.

Telnet/Curl Demo

■ Telnet

- Interactive remote shell – like ssh without security
- Must build HTTP request manually
 - This can be useful if you want to test response to malformed headers

```
[rjaganna@makoshark ~]% telnet www.cmu.edu 80
Trying 128.2.42.52...
Connected to WWW-CMU-PROD-VIP.ANDREW.cmu.edu (128.2.42.52).
Escape character is '^]'.
GET http://www.cmu.edu/ HTTP/1.0

HTTP/1.1 301 Moved Permanently
Date: Sat, 11 Apr 2015 06:54:39 GMT
Server: Apache/1.3.42 (Unix) mod_gzip/1.3.26.1a mod_public/3.3.4a mod_ssl/2.8.31 OpenSSL/0.9.8e-fips-rhel5
Location: http://www.cmu.edu/index.shtml
Connection: close
Content-Type: text/html; charset=iso-8859-1

<!DOCTYPE HTML PUBLIC "-//IETF//DTD HTML 2.0//EN">
<HTML><HEAD>
<TITLE>301 Moved Permanently</TITLE>
</HEAD><BODY>
<H1>Moved Permanently</H1>
The document has moved <A HREF="http://www.cmu.edu/index.shtml">here</A>.<P>
<HR>
<ADDRESS>Apache/1.3.42 Server at <A HREF="mailto:webmaster@andrew.cmu.edu">www.cmu.edu</A> Port
      80</ADDRESS>
</BODY></HTML>
Connection closed by foreign host.
```

Telnet/cURL Demo

■ cURL

- “URL transfer library” with a command line program
- Builds valid HTTP requests for you!

```
[rjaganna@makoshark ~]% curl http://www.cmu.edu/
<!DOCTYPE HTML PUBLIC "-//IETF//DTD HTML 2.0//EN">
<HTML><HEAD>
<TITLE>301 Moved Permanently</TITLE>
</HEAD><BODY>
<H1>Moved Permanently</H1>
The document has moved <A HREF="http://www.cmu.edu/index.shtml">here</A>.<P>
<HR>
<ADDRESS>Apache/1.3.42 Server at <A HREF="mailto:webmaster@andrew.cmu.edu">www.cmu.edu</A> Port
80</ADDRESS>
</BODY></HTML>
```

- Can also be used to generate HTTP proxy requests:

```
[rjaganna@makoshark ~]% curl --proxy lemonshark.ics.cs.cmu.edu:3092 http://www.cmu.edu/
<!DOCTYPE HTML PUBLIC "-//IETF//DTD HTML 2.0//EN">
<HTML><HEAD>
<TITLE>301 Moved Permanently</TITLE>
</HEAD><BODY>
<H1>Moved Permanently</H1>
The document has moved <A HREF="http://www.cmu.edu/index.shtml">here</A>.<P>
<HR>
<ADDRESS>Apache/1.3.42 Server at <A HREF="mailto:webmaster@andrew.cmu.edu">www.cmu.edu</A> Port
80</ADDRESS>
</BODY></HTML>
```

How the Web Really Works


- **In reality, a single HTML page today may depend on 10s or 100s of support files (images, stylesheets, scripts, etc.)**
- **Builds a good argument for concurrent servers**
 - Just to load a single modern webpage, the client would have to wait for 10s of back-to-back request
 - I/O is likely slower than processing, so back
- **Caching is simpler if done in pieces rather than whole page**
 - If only part of the page changes, no need to fetch old parts again
 - Each object (image, stylesheet, script) already has a unique URL that can be used as a key

How the Web Really Works

■ Excerpt from www.cmu.edu/index.html:

```
<html lang="en" xml:lang="en" xmlns="http://www.w3.org/1999/xhtml">
<head>
  ...
  <link href="homecss/cmu.css" rel="stylesheet" type="text/css"/>
  <link href="homecss/cmu-new.css" rel="stylesheet" type="text/css"/>
  <link href="homecss/cmu-new-print.css" media="print" rel="stylesheet" type="text/
css"/>
  <link href="http://www.cmu.edu/RSS/stories.rss" rel="alternate" title="Carnegie
Mellon Homepage Stories" type="application/rss+xml"/>
  ...
  <script language="JavaScript" src="js/dojo.js" type="text/javascript"></script>
  <script language="JavaScript" src="js/scripts.js" type="text/javascript"></
script>
  <script language="javascript" src="js/jquery.js" type="text/javascript"></script>
  <script language="javascript" src="js/homepage.js" type="text/javascript"></
script>
  <script language="javascript" src="js/app_ad.js" type="text/javascript"></script>
  ...
  <title>Carnegie Mellon University | CMU</title>
</head>
<body> ...
```


Sequential Proxy

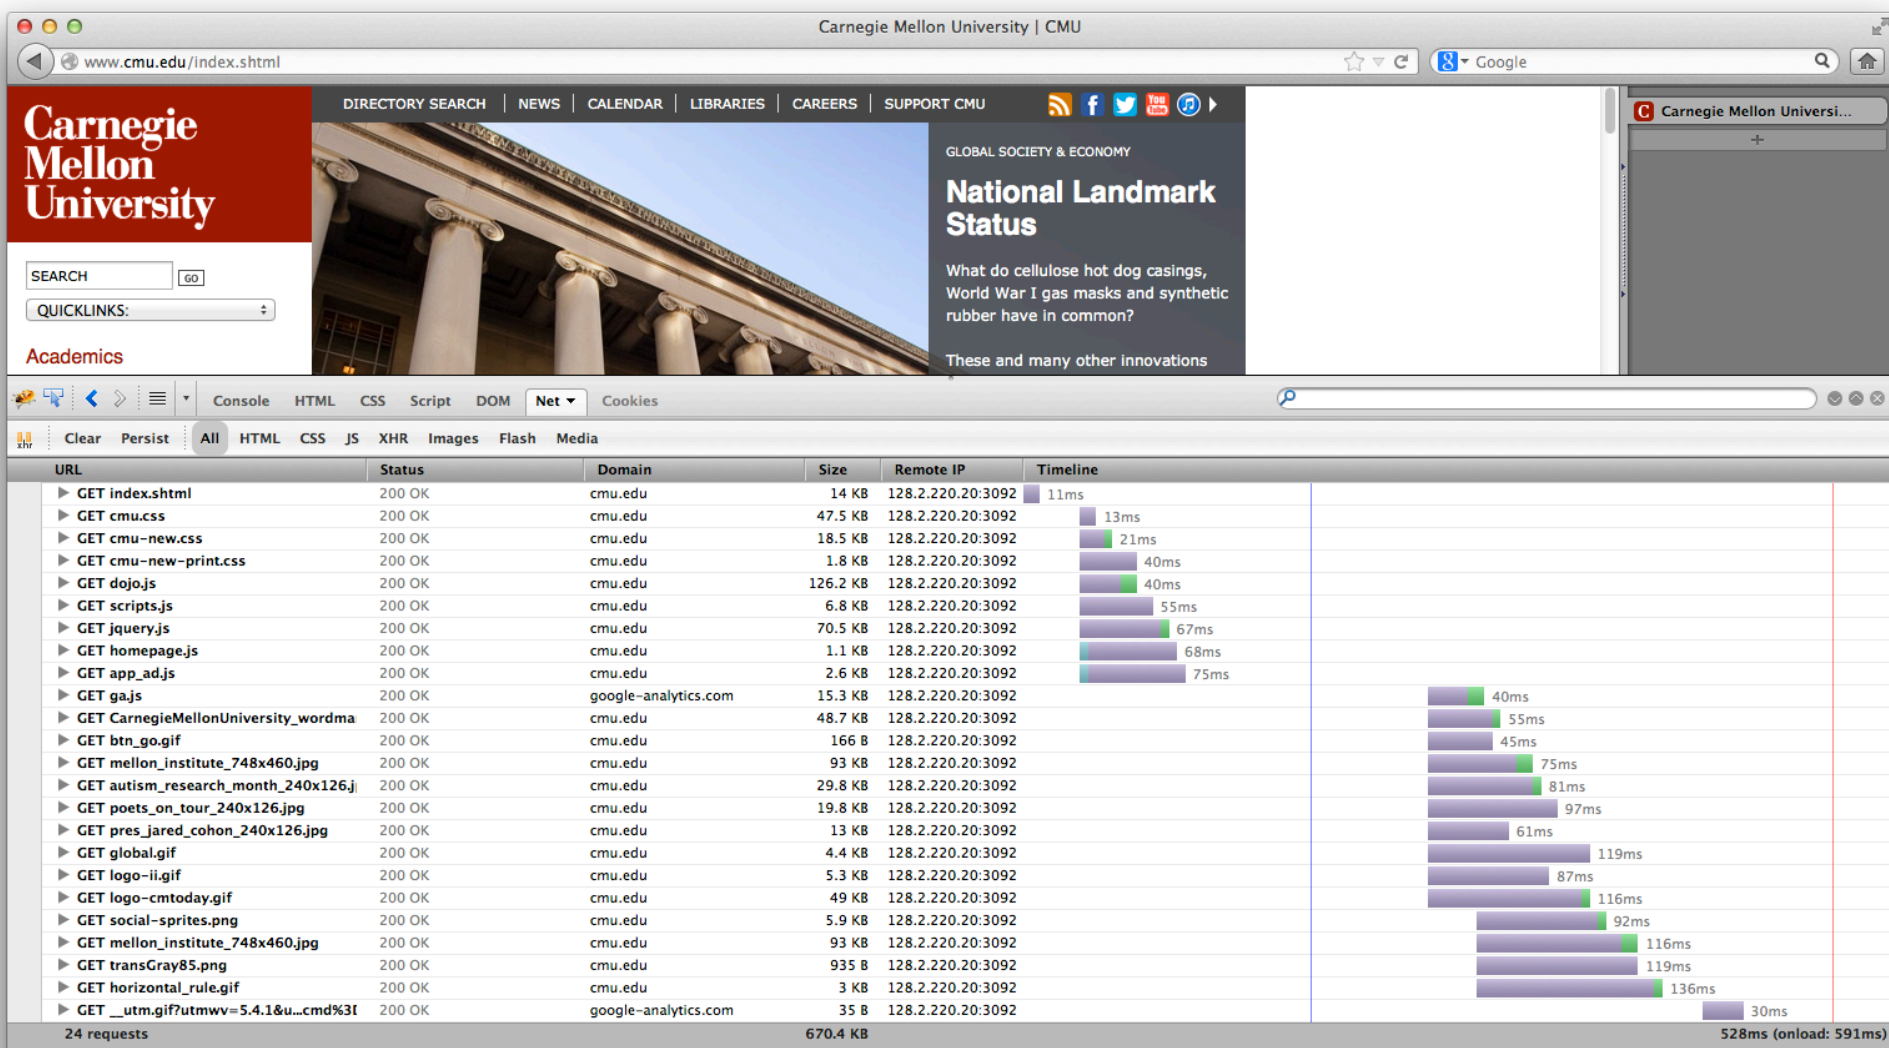

Sequential Proxy

- **Note the sloped shape of when requests finish**
 - Although many requests are made at once, the proxy does not accept a new job until it finishes the current one
 - Requests are made in batches. This results from how HTML is structured as files that reference other files.
- **Compared to the concurrent example (next), this page takes a long time to load with just static content**

Concurrent Proxy

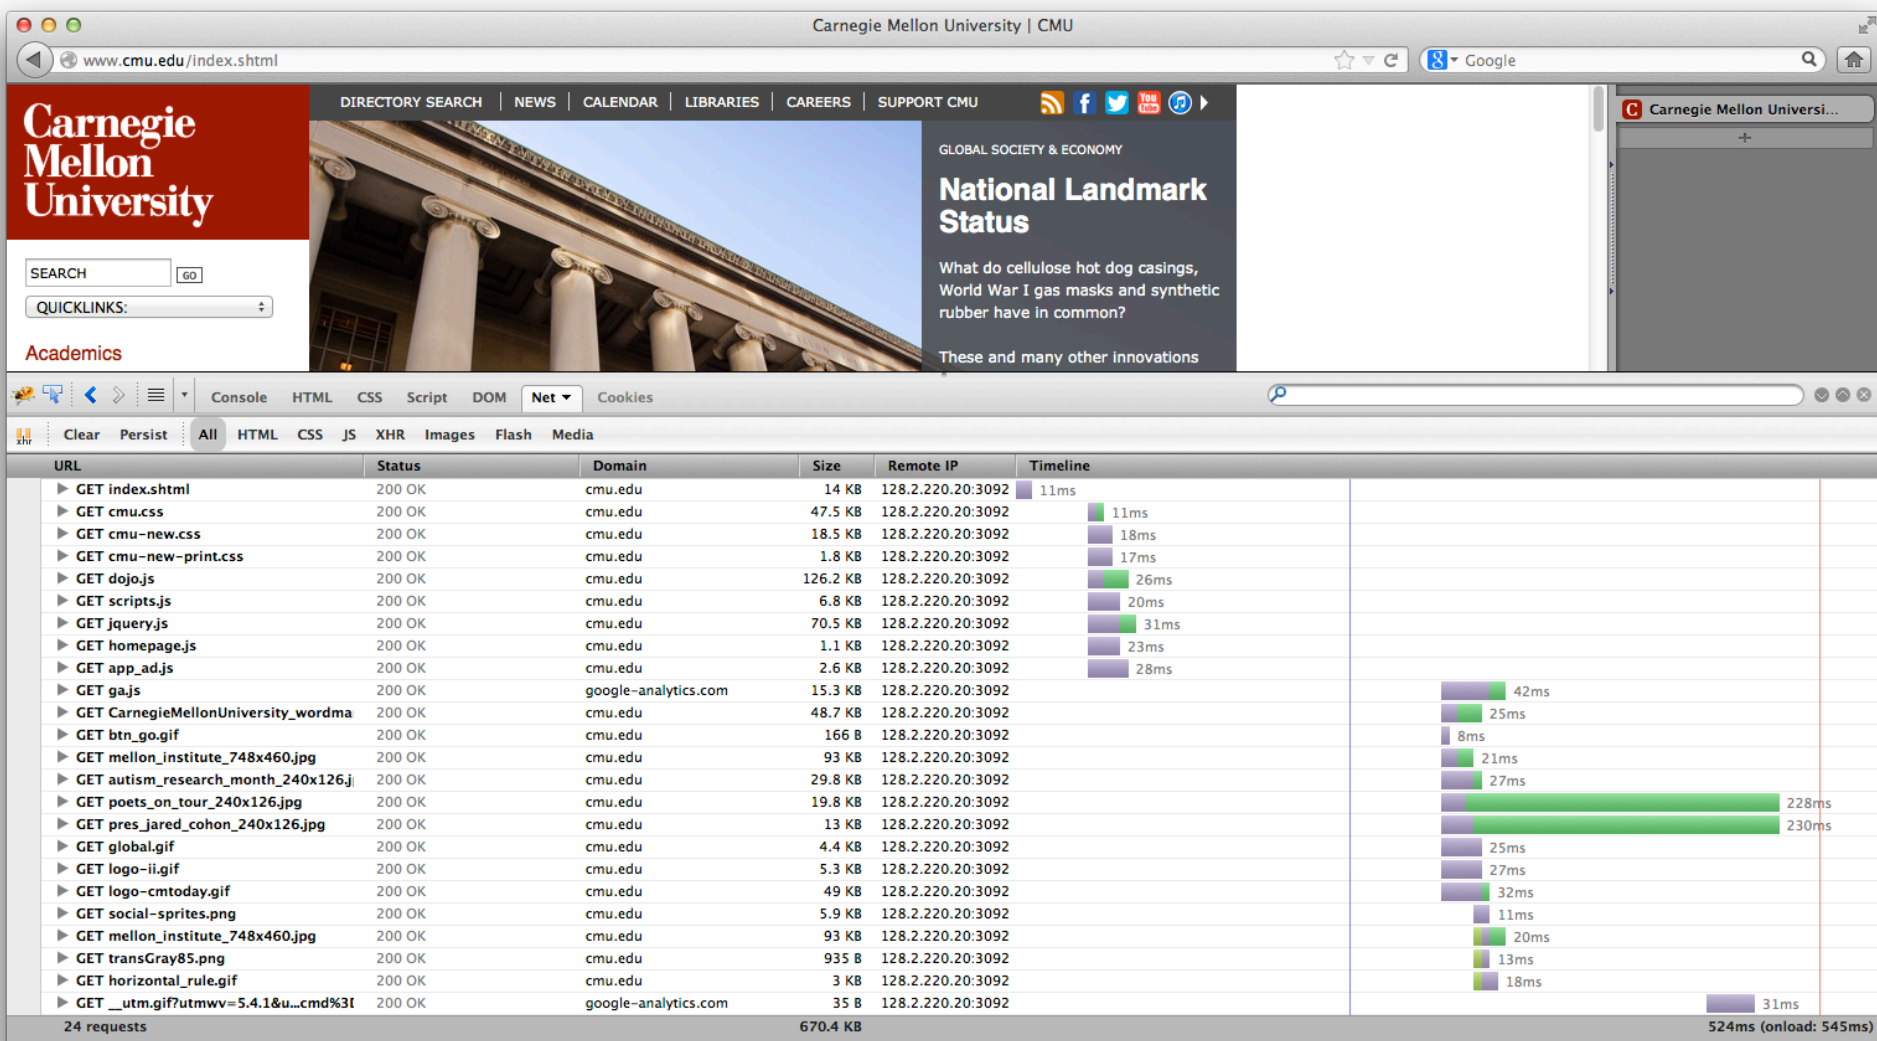

Concurrent Proxy

- Now, we see much less purple (waiting), and less time spent overall.
- Notice how multiple green (receiving) blocks overlap in time
 - Our proxy has multiple connections open to the browser to handle several tasks at once

How the Web Really Works

■ A note on AJAX (and XMLHttpRequests)

- Normally, a browser will make the initial page request then request any supporting files
- And XMLHttpRequest is simply a request from the page once it has been loaded & the scripts are running
- The distinction does not matter on the server side – everything is an HTTP Request

Outline


- **Getting content on the web: Telnet/cURL Demo**
 - How the web really works
- **Networking Basics**
- **Proxy**
 - Due Tuesday, December 8th
 - Grace days allowed
- **String Manipulation in C**

Sockets

■ What is a socket?


- To an application, a socket is a file descriptor that lets the application read/write from/to the network
- (all Unix I/O devices, including networks, are modeled as files)

■ Clients and servers communicate with each other by reading from and writing to socket descriptors

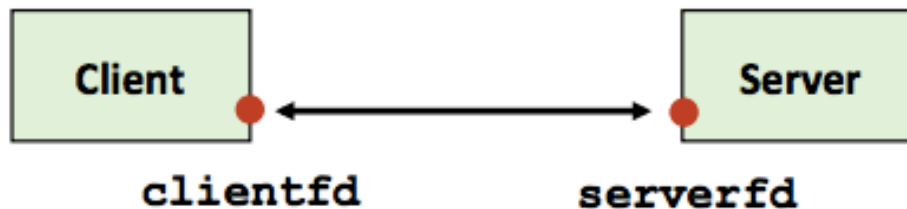

- The main difference between regular file I/O and socket I/O is how the application “opens” the socket descriptors

Overview of the Sockets Interface

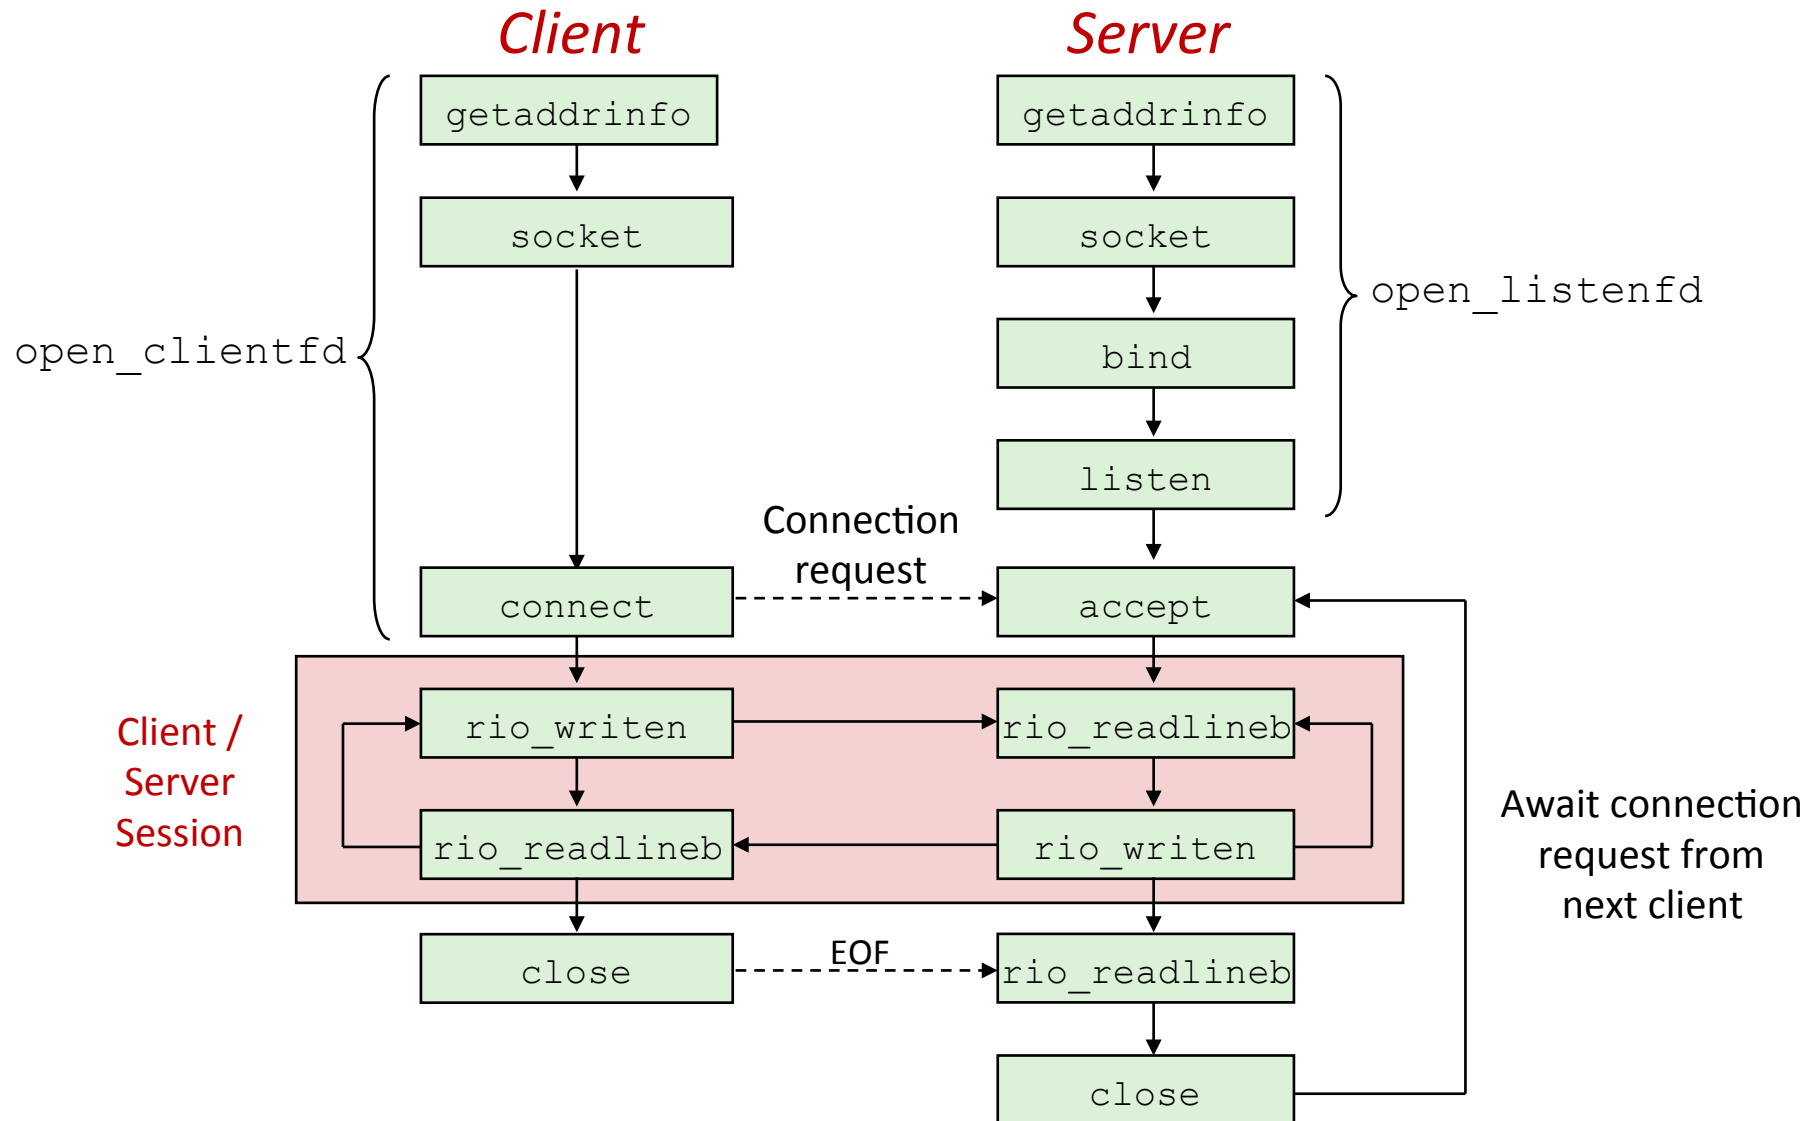

Host and Service Conversion: `getaddrinfo`

- **`getaddrinfo`** is the modern way to convert string representations of host, ports, and service names to socket address structures.
 - Replaces obsolete `gethostbyname` - unsafe because it returns a pointer to a static variable
- **Advantages:**
 - Reentrant (can be safely used by threaded programs).
 - Allows us to write portable protocol-independent code(IPv4 and IPv6)
 - Given `host` and `service`, `getaddrinfo` returns `result` that points to a linked list of `addrinfo` structs, each pointing to socket address struct, which contains arguments for sockets APIs.
- **`getnameinfo`** is the inverse of `getaddrinfo`, converting a socket address to the corresponding host and service.

Sockets API

- `int socket(int domain, int type, int protocol);`
 - Create a file descriptor for network communication
 - used by both clients and servers
 - `int sock_fd = socket(PF_INET, SOCK_STREAM, IPPROTO_TCP);`
 - One socket can be used for two-way communication

- `int bind(int socket, const struct sockaddr *address, socklen_t address_len);`
 - Associate a socket with an IP address and port number
 - used by servers
 - `struct sockaddr_in sockaddr` – family, address, port

Sockets API

- `int listen(int socket, int backlog);`
 - `socket`: socket to listen on
 - used by servers
 - `backlog`: maximum number of waiting connections
 - `err = listen(sock_fd, MAX_WAITING_CONNECTIONS);`

- `int accept(int socket, struct sockaddr *address, socklen_t *address_len);`
 - used by servers
 - `socket`: socket to listen on
 - `address`: pointer to `sockaddr` struct to hold client information after `accept` returns
 - return: file descriptor

Sockets API

- `int connect(int socket, struct sockaddr *address, socklen_t address_len);`
 - attempt to connect to the specified IP address and port described in address
 - used by clients

- `int close(int fd);`
 - used by both clients and servers
 - (also used for file I/O)
 - fd: socket fd to close

Sockets API

- `ssize_t read(int fd, void *buf, size_t nbyte);`
 - used by both clients and servers
 - (also used for file I/O)
 - `fd`: (socket) fd to read from
 - `buf`: buffer to read into
 - `nbytes`: buf length

- `ssize_t write(int fd, void *buf, size_t nbyte);`
 - used by both clients and servers
 - (also used for file I/O)
 - `fd`: (socket) fd to write to
 - `buf`: buffer to write
 - `nbytes`: buf length

Outline

- Getting content on the web: Telnet/cURL Demo
 - How the web really works
- Networking Basics
- **Proxy**
 - Due Tuesday, December 8th
 - Grace days allowed
- String Manipulation in C

Byte Ordering Reminder

- So, how are the bytes within a multi-byte word ordered in memory?
- Conventions
 - Big Endian: Sun, PPC Mac, Internet
 - Least significant byte has highest address
 - Little Endian: x86, ARM processors running Android, iOS, and Windows
 - Least significant byte has lowest address

Byte Ordering Reminder

- So, how are the bytes within a multi-byte word ordered in memory?
- Conventions
 - Big Endian: Sun, PPC Mac, **Internet**
 - Least significant byte has highest address
- Make sure to use correct endianness

Proxy - Functionality

■ Should work on vast majority of sites

- Twitch, CNN, NY Times, etc.
- Some features of sites which require the POST operation (sending data to the website), will not work
 - Logging in to websites, sending Facebook message
- HTTPS is not expected to work
 - Google, YouTube (and some other popular websites) now try to push users to HTTPs by default; watch out for that

■ Cache previous requests

- Use LRU eviction policy
- Must allow for concurrent reads while maintaining consistency
- Details in write up

Proxy - Functionality


- **Why a multi-threaded cache?**
 - Sequential cache would bottleneck parallel proxy
 - Multiple threads can read cached content safely
 - Search cache for the right data and return it
 - Two threads can read from the same cache block
 - But what about writing content?
 - Overwrite block while another thread reading?
 - Two threads writing to same cache block?

Proxy - How

- Proxies are a bit special - they are a server and a client at the same time.
- They take a request from one computer (acting as the server), and make it on their behalf (as the client).
- Ultimately, the control flow of your program will look like a server, but will have to act as a client to complete the request
- **Start small**
 - Grab yourself a copy of the `echo server` (pg. 946) and `client` (pg. 947) in the book
 - Also review the `tiny.c` basic web server code to see how to deal with HTTP headers
 - Note that `tiny.c` ignores these; you may not

Proxy - How

- What you end up with will resemble:

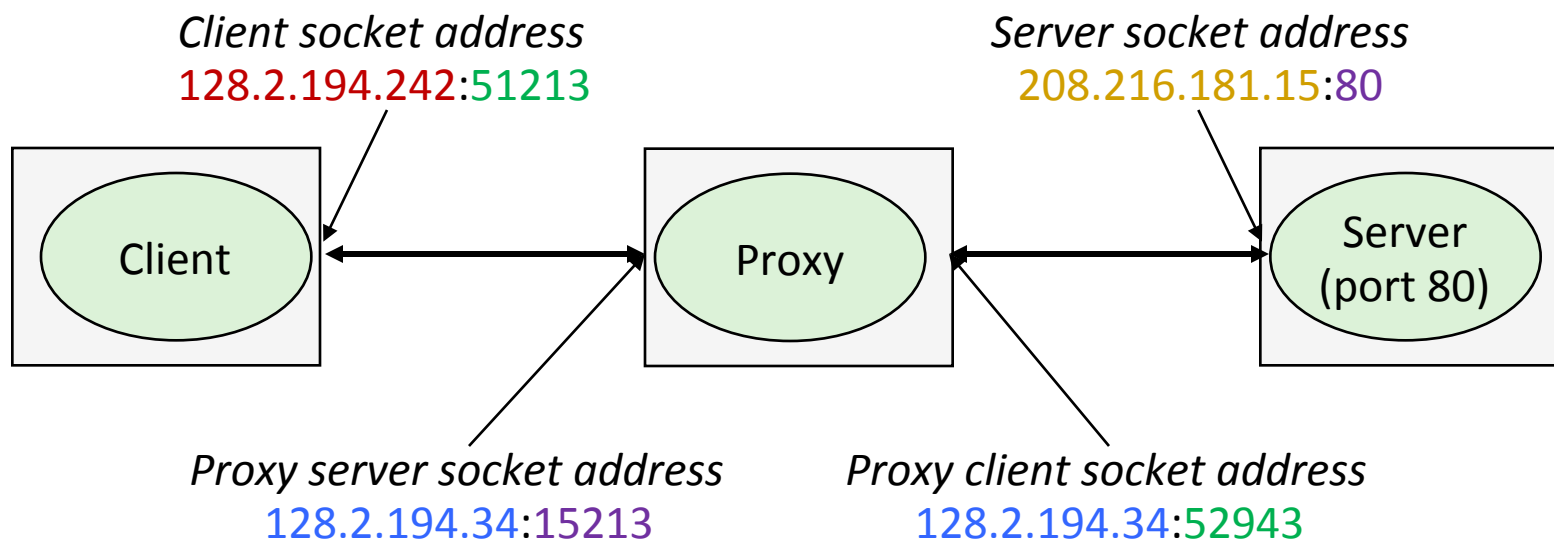

Summary

■ Step 1: Sequential Proxy

- Works great for simple text pages with embedded styles

■ Step 2: Concurrent Proxy

- multi-threading

■ Step 3 : Cache Web Objects

- Cache individual objects, not the whole page
- Use an LRU eviction policy
- Your caching system must allow for *concurrent reads* while maintaining consistency. Concurrency? Shared Resource?

Proxy – Testing & Grading

■ New: Autograder

- `./driver.sh` will run the same tests as autolab:
 - Ability to pull basic web pages from a server
 - Handle a (concurrent) request while another request is still pending
 - Fetch a web page again from your cache after the server has been stopped
- This should help answer the question “is this what my proxy is supposed to do?”
- Please don't use this grader to definitively test your proxy; there are many things not tested here

Proxy – Testing & Grading

■ Test your proxy liberally

- The web is full of special cases that want to break your proxy
- Generate a port for yourself with `./port-for-user.pl [andrewid]`
- Generate more ports for web servers and such with `./free-port.sh`
- Consider using your andrew web space (`~/www`) to host test files
 - You have to visit <https://www.andrew.cmu.edu/server/publish.html> to publish your folder to the public server

■ Create a handin file with *make handin*

- Will create a tar file for you with the contents of your proxylab-handin folder

Outline

- **Getting content on the web: Telnet/cURL Demo**
 - How the web really works
- **Networking Basics**
- **Proxy**
 - Due Tuesday, December 8th
 - Grace days allowed
- **String Manipulation in C**

String manipulation in C

■ sscanf: Read input in specific format

```
int sscanf(const char *str, const char *format, ...);
```

Example:

```
buf = "213 is awesome"
```

```
// Read integer and string separated by white space from buffer 'buf'
```

```
// into passed variables
```

```
ret = sscanf(buf, "%d %s %s", &course, str1, str2);
```

This results in:

course = 213, str1 = is, str2 = awesome, ret = 3

String manipulation (cont)

- **sprintf: Write input into buffer in specific format**

*int sprintf(char *str, const char *format, ...);*

Example:

buf[100];

str = "213 is awesome"

// Build the string in double quotes ("") using the passed arguments

// and write to buffer 'buf'

sprintf(buf, "String (%s) is of length %d", str, strlen(str));

This results in:


buf = String (213 is awesome) is of length 14

String manipulation (cont)

Other useful string manipulation functions:

- **strcmp, strncmp, strncasecmp**
- **strstr**
- **strlen**
- **strcpy, strncpy**

Aside: Setting up Firefox to use a proxy

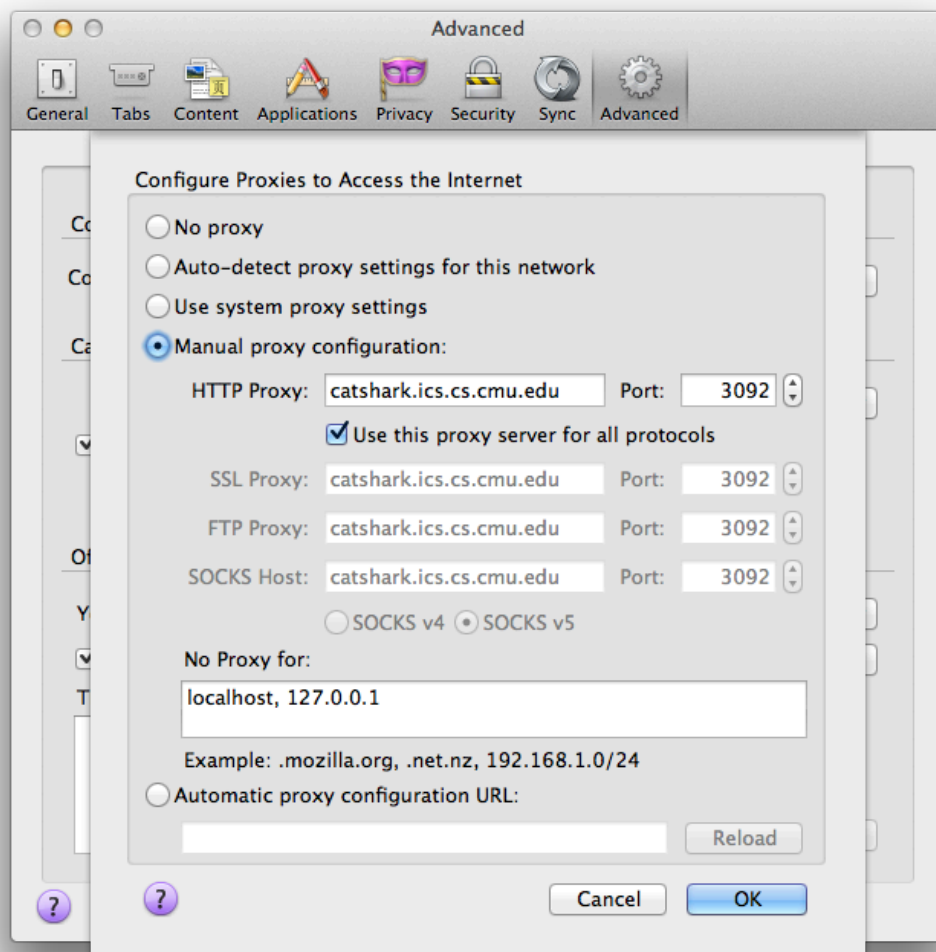

- You may use any browser, but we'll be grading with Firefox
- Preferences > Advanced > Network > Settings... (under Connection)
- Check "Use this proxy for all protocols" or your proxy will appear to work for HTTPS traffic.

Acknowledgements

- **Slides derived from recitation slides of last 2 years by**
 - Shiva
 - Hartaj Singh Dugal
 - Ian Hartwig
 - Rohith Jagannathan

Questions?