

Front-R43-Test-6

الاسم رباعي بالعربي / *

* / id

نقطة واحدة

A shorthand property for the grid-row-gap and grid-column-gap properties -1

grid-row

grid-column

grid-gap

none of all

نقطة واحدة Which CSS property is used to define the size and structure of columns in a CSS Grid .2
?layout

- a. grid-gap
- b. grid-column
- c. grid-template-columns
- d. grid-row

نقطة واحدة it is one of the properties for describing linear gradient -3

- fonts
- direction
- background
- top-left

نقطة واحدة Which of the following css property is used to define the number of times an animation -4
?should play

- transntion-iteration-count
- transntion-duration
- animation-value
- animation-iteration-count

نقطة واحدة

?How does grid-template-columns: 1fr 2fr behave -5

- a) Two columns of equal width
- b) Second column is twice as wide
- c) First column is 2x second
- d) All columns collapse

نقطة واحدة

?Which grid property is a shorthand for grid-row-gap and grid-column-gap -6

- a) gap
- b) spacing
- c) grid-spacing
- d) margin

نقطة واحدة

?What is the difference between fr and % in grid sizing -7

- a) fr needs media queries
- b) % is bigger
- c) They are equivalent
- d) % is based on container, fr is relative to free space

نقطة واحدة

In 2D , transform matrix (# , # , # , # ,(1)..... ,(2).....) -8

 scale x , scale y Skew x , skew y Translate x , translate y Rotate x , rotate y

نقطة واحدة

?Which timing function starts slow and ends fast -9

 A. linear B. ease-in C. ease-out D. ease-in-out

نقطة واحدة

Which of the following property defines the number of columns in a multicolumns text -10

? flow

 column column-flow column-number column-count

نقطة واحدة Which of the following property defines the style of the divider rule between columns -11
? in a multicolumns text flow

column

column-rule

column-style

none of the mentioned

نقطة واحدة .you have to write (special for 3d works only to work) -12

perspective : 600 px ; & transform-style: 3d;

transform-style : flat ;

transform-style: 3d ;

3d

none of all

نقطة واحدة method moves an element from its current position (according to the parameters -13
given for the X-axis and the Y-axis)

(a) translate()

(b) rotate()

(c) translate()

(d) skewY()

نقطة واحدة

?What unit is used to define flexible grid columns -14

- a) px
- b) em
- c) %
- d) fr

نقطة واحدة

?What does repeat(3, 1fr) mean in grid-template-columns -15

- a) Creates 3 fixed columns
- b) Creates 1 flexible column
- c) Creates 3 equal flexible columns
- d) Creates 1 row with 3 columns

نقطة واحدة

?What does minmax(100px, 1fr) do in a grid -16

- a) Fixes the column size
- b) Creates a column with max 100px
- c) Sets the column to flexible width between 100px and 1fr
- d) Makes the column 1fr always

نقطة واحدة

it is one of the properties for describing box-shadow - 17

speed blur inst background

نقطة واحدة

Which of the following css property allows elements to be offset, rotated, scaled, and skewed in a variety of different ways -18

transform-3D transform-origin transform transform-rotate: / transform-scale: /etc

نقطة واحدة

Which of the following css property is used to define a delay before an animation -19
?startstransition-delay transition transform animation-delay

نقطة واحدة

it is one of the values for describing radial gradient - 20

 shape fonts background circle

نقطة واحدة

If you want to create an animation that lasts for 2 seconds and repeats only once, .21
?which combination of properties should you use a. animation-duration: 2s; animation-iteration-count: 1; b. animation-duration: 1s; animation-iteration-count: 2; c. animation-duration: 2s; animation-iteration-count: infinite; d. animation-duration: 1s; animation-iteration-count: 0;

نقطة واحدة

.property applies shadow to text -22

 (a) text-shadow (b) element-shadow (c) box-shadow d- none of the above

نقطة واحدة

.....animation-direction property takes values .23

- a. normal
- b. reverse
- c. alternate-reverse
- d. all of the above

نقطة واحدة

?What does animation-fill-mode: forwards do -24

- A. Resets the element after animation ends
- B. Keeps final styles after animation ends
- C. Reverses the animation
- D. Loops the animation

نقطة واحدة

?What is the purpose of the animation-name property in CSS3 animations .25

- a. To define the animation's duration
- b. To specify the number of times the animation should repeat
- c. To set the name of the animation keyframes
- d. To control the timing function of the animation

نقطة واحدة

..... To Choose More Than 1 file upLoaded on Site You Have To Use -26

- read-only
- novalidate
- multiple
- required

نقطة واحدة

..... To Obligate the user to enter his information you have to use -27

- obligated
- no validate
- required
- get and post

نقطة واحدة

?Which of the following elements in HTML5 defines video or movie content -28

- <video>
- <movie>
- <audio>
- <media>

نقطة واحدة

an obligated property for operating a video in html5 -29

 control video required none of the above

نقطة واحدة

Which HTML5 element is used to mark up self-contained compositions that could be independently distributed or syndicated -30

 a. <footer> b. <aside> c. <article> d. <mark>

نقطة واحدة

.defines a file-select field and a "Browse" button for file uploads..... -31

 (a) <input type="file"> (b) <input type="upload"> (c) <input type="password"> (d) <input type="search ">

نقطة واحدة

?Which of the following is the correct HTML5 doctype declaration .32

- a. <!DOCTYPE HMLT>
- b. <!DOCTYPE html5>
- c. <!DOCTYPE HTML5 PUBLIC >
- d. <!DOCTYPE html>

نقطة واحدة

defines a date picker, the resulting value includes the year, month, day, and..... .33
time

- a. <input type="date ">
- b. <input type="datetime-local">
- c. <input type="url">
- d. <input type="search ">

نقطة واحدة

?In HTML, what does the <aside> element define .34

- a. Content aside from the page content
- b. A navigation list to be shown at the left side of the page
- c. The ASCII character-set; to send information between computers on the Internet
- d. attribute

نقطة واحدة

?Which HTML element is used to specify a header for a document or section .35

- a. <header>
- b. <head>
- c. <section>
- d. <top>

نقطة واحدة

choose the correct attribute that is used to hide your data from being in url -36

- get
- post
- hidden
- method

نقطة واحدة

?Which element is used to specify the source file for a video in the <video> element -37

- a. src
- b. source
- c. file
- d. video-source

نقطة واحدة

.Choose the correct HTML tag for inline paragraph -38

H4 P span select

نقطة واحدة

Choose the correct value for making all letters capital -39

capitalize size uppercase lowercase

نقطة واحدة

..... tag used in chemical equations -40

sup html sub select

نقطة واحدة

. to do float:left to some elements you have to make to parent -41

- overflow:hidden
- overflow: scroll
- overflow:auto;
- float:right;

نقطة واحدة

How do you apply a hover effect to all the buttons within a div element with the id .42
?container" in CSS"

- a. .container button:hover {}
- b. button .container:hover {}
- c. #container button:hover {}
- d. button:hover .container {}

نقطة واحدة

?What is the main difference between the "id" and "class" attributes in HTML .43

- a. The "id" attribute is used for inline styles, while "class" is used for external stylesheets.
- b. The "id" attribute can be used to style multiple elements, while "class" is unique to one element.
- c. The "id" attribute is global and unique to the entire HTML document, while "class" can be used multiple times.

نقطة واحدة

?Which property allows an image link to show a text label .44

- a. alt
- b. str
- c. src
- d. Alternative

نقطة واحدة

:The property "list-style-type" is used to .45

- a. Set the color of the bullet point in a list
- b. Change the style of the bullet point in a list item
- c. Control the spacing between list items
- d. Define the size of the bullet point in a list

نقطة واحدة

?What is the purpose of the universal selector (*) in CSS .46

- a. It selects all elements on a web page.
- b. It selects elements with a specific class.
- c. It selects elements with a specific ID.
- d. It selects the first child of an element.

نقطة واحدة

Which of the following values for the box-sizing property includes the padding and .47
?border in the specified width/height

- a. box-sizing: content-box;
- b. box-sizing: padding-box;
- c. box-sizing: border-box;
- d. box-sizing: margin-box;

نقطة واحدة

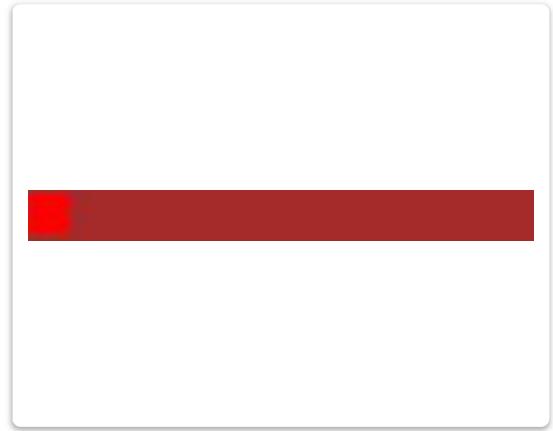
?What will happen if two elements have the same z-index value .48

- A. The last element in the HTML will appear on top.
- B. The first element in the HTML will appear on top.
- C. Both elements will overlap equally.
- D. None of the above.

نقطة واحدة

?What will be displayed in the browser based on the given HTML and CSS code -49

```
<head>
    <style>
        body{
            background-color: brown;
        }
        .parent{
            width: 100px;
            margin: auto;
            background-color: red;
        }
    </style>
</head>
<body>
    <div class="parent">
    </div>
</body>
```

b) a)

d) c) 

نقطة واحدة

?What will happen when the given HTML and CSS code is executed -50

```
> css
└─ Images
   └─ trainer-1.jpg
> webfonts
↳ index.html
```

```
1 <html>
2   <head>
3     <style>
4       div{
5         width: 300px;
6         height: 300px;
7         background-image: url(..../Images/trainer-1.jpg);
8       }
9     </style>
10    </head>
11    <body>
12      <div></div>
13    </body>
14  </html>
15
```

- A) The background image will be displayed correctly inside the div.
- B) The image might not load because the file format is incorrect.
- C) The div will show the image but with incorrect dimensions.
- D) The background image will appear only if background-size is set to cover.
- E) None of the above choices are correct.

لم يتم إنشاء هذا المحتوى ولا اعتماده من قبل Google.

نماذج Google