



INTRODUCTION TO HTML

What is HTML?

HTML (HyperText Markup Language) is the standard language for creating and structuring content on the web. It defines the structure and content of web pages using a series of elements and tags. HTML is the backbone of web development and is often used in conjunction with CSS (Cascading Style Sheets) and JavaScript to create interactive and visually appealing websites

HTML Structure:

```
<!DOCTYPE html>
<html>
  <head>
    <title> Page title </title>
  </head>
  <body>
    Hello World!
  </body>
</html>
```

THE FOLLOWING ARE THE BASIC TAGS THAT DEFINE THE BASIC HTML STRUCTURE –

DOCTYPE Declaration

<!DOCTYPE html>

The `<!DOCTYPE html>` declaration informs the web browser about the HTML version being used. The latest version is HTML5. But if this changes in the future (maybe 10 years down the line), the doctype declaration will be helpful!

Without `<!DOCTYPE html>` Browser behaves like **very old Internet Explorer (1990s style)**.

HTML Root Element

<html> </html>

The `<html>` tag is the root element that encapsulates all the content on the page.

The `</html>` tag marks the end of the `<html>` section.

Head Section

`<head>` `</head>`

The `<head>` tag contains metadata and links to external resources like CSS and JavaScript files.

The `</head>` tag marks the end of the `<head>` section.

Title Tag

`<title>` `</title>`

The `<title>` tag sets the title of the web page, which is displayed in the browser's title bar or tab.

Body Tag

`<body>` `</body>`

The `<body>` tag contains the visible content of the web page. This is where text, images, and other elements go.



HTML Basic Tags:

An HTML element is defined by a start tag, some content, and an end tag:

```
<tagname> Content goes here... </tagname>
```

➤ Headings tag:

The HTML heading tags are used to create headings for the content of a webpage. These tags are typically placed inside the body tag. HTML offers six heading tags, from `<h1>` to `<h6>`, each displaying the heading in a different font size.

Syntax:

```
<h1></h1>
.....
.....
.....
<h6></h6>
```

HTML:

```
<!DOCTYPE html>
<html>
<head>
    <title> Headings </title>
</head>
<body>
    <h1> This is Heading 1    </h1>
    <h2> This is Heading 2    </h2>
    <h3> This is Heading 3    </h3>
    <h4> This is Heading 4    </h4>
    <h5> This is Heading 5    </h5>
    <h6> This is Heading 6    </h6>
</body>
</html>
```

➤ HTML Paragraph and Break Elements

HTML <p> tags are used to write paragraph statements on a webpage. They start with the <p> tag and end with </p>.

```
// for Paragraph
<p> Content... </p>
```

The HTML
 tag is used to insert a single line break and does not require a closing tag. In HTML, the break tag is written as
.

```
// for Break
<br>
```

HTML:

```
<!DOCTYPE html>

<html>
<head>
  <title>My First HTML Page</title>
</head>
<body>
  <h1>Welcome to HTML</h1>
  <p>
    HTML stands for HyperText Markup Language.
    It is used to design web pages using a markup
    language.HTML is a combination of Hypertext
    and Markup language. Hypertext defines the
    link between web pages. A markup language
    is used to define the text document within the
    tag which defines the structure of web pages.
  </p>
  <h2>Second Paragraph Using Line Break</h2>
  <p>
    HTML stands for Hypertext Markup Language. <br>
    It is used to design web pages using a markup <br>
    language.HTML is a combination of Hypertext <br>
    and Markup language. Hypertext defines the <br>
    link between web pages. A markup language <br>
    is used to define the text document within the <br>
    tag which defines the structure of web pages.
  </p>
</body>
</html>
```

HTML Text Formatting Tags

HTML text formatting tags are used to **style** and **emphasize** parts of text. Below is a list of commonly used formatting tags in HTML, along with their descriptions and examples:

Tag	Description
	This tag makes the enclosed text bold .
<u>	This tag <u>underlines</u> the text
<i>	This tag is used to make the enclosed text <i>italic</i> .
 	Break line
	The tag is used for semantically important text.
<center>	The tag is used to center text
	The tag is used to <i>emphasize</i> text.
<sub>	The <sub> tag is used for sub _{script} text.
<sup>	The <sup> tag creates super ^{script} text.
<strike>	The <strike> tag shows text with a strike through effect.
<mark>	The <mark> tag highlights or marks text.
<pre>	The <pre> tag is used for preserving formatting

1 Bold Text

Anything that appears within ... element, is displayed in **bold** as shown below:

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>

  <p> This text is <b>bold</b> </p>
</body>
</html>
```

2 Underlined Text

Anything that appears within ... element, is displayed with **underline** as shown below:

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <p> This text is <u> underlined </u> </p>
</body>
</html>
```

3 Italic Text

Anything that appears within ... element is displayed in *italicized* as shown below:

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <p> This text is <i> italic </i> </p>
</body>
</html>
```

4 Break line

The
 tag in HTML is used to insert a **line break**, allowing text or content to continue on the next line. It is an empty tag, meaning it does not have a closing tag.

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <p> Line 1 using break tag <br> Line 2 after break tag for line break </p>
</body>
</html>
```

5 Strong Text

The tag is used for **semantically important** text.

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <p> This is a <strong>very important</strong> message. </p>
</body>
</html>
```

6 Center Text

The <center> tag in HTML was historically used to center-align text or other elements. However, it is deprecated in HTML5 and should no longer be used in modern web development.

```
<!DOCTYPE html>
<html>
```

```
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <p>   <center>This text is centered </center>  </p>
</body>
</html>
```

7 Emphasize Text

The `<em>` tag in HTML is used to *emphasize text*. By default, browsers render the text inside the `<em>` tag in *italic* style. It is also semantically meaningful, as it indicates that the text has stress emphasis, which can be useful for screen readers and accessibility.

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <p>   This text is <em>emphasized </em>  </p>
</body>
</html>
```

8 Superscript Text

The content of a `<sup>` element is written in superscript (e.g. X^2) the font size used is the same size as the characters surrounding it but is displayed half a character's height above the other characters.

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <p>   E = mc<sup>2</sup> </p>
</body>
</html>
```

9 Subscript Text

The content of a `<sub>` element is written in subscript (e.g. X_2) the font size used is the same as the characters surrounding it, but is displayed half a character's height beneath the other characters.

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
```

```
<h1>HTML Formatting Tags Example</h1>
<p> H<sub>2</sub>O </p>
</body>
</html>
```

10 Strike Text

The `<strike>` tag in HTML is used to display text with a ~~strikethrough~~ effect, indicating that the text is no longer relevant or has been "crossed out." However, it is considered deprecated in HTML5. Instead, the `<s>` tag is recommended for similar purposes.

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <p> This text is <strike>strikethrough </strike> </p>
</body>
</html>
```

11 Mark Text

The `<mark>` tag in HTML is used to **highlight** or emphasize text, typically by applying a yellow background color to the enclosed content. It is often used to indicate relevance or importance, such as search results or key points in a document.

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <p> This text is <mark>highlighted </mark> </p>
</body>
</html>
```

12 Preserve Formatting

Sometimes, you want your text to follow the exact format of how it is written in the HTML document. In these cases, you can use the preformatted tag

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Tags Example</title>
</head>
<body>
  <h1>HTML Formatting Tags Example</h1>
  <pre>
    This text is inside a pre tag. It keeps formatting like
```


```

spaces, tabs, and line breaks.
function testFunction( strText )
{
    alert (strText)
}
</pre>
</body>
</html>

```

Practice Task:

Create an HTML file and **use as many text formatting tags** as possible to display the following content exactly as shown.

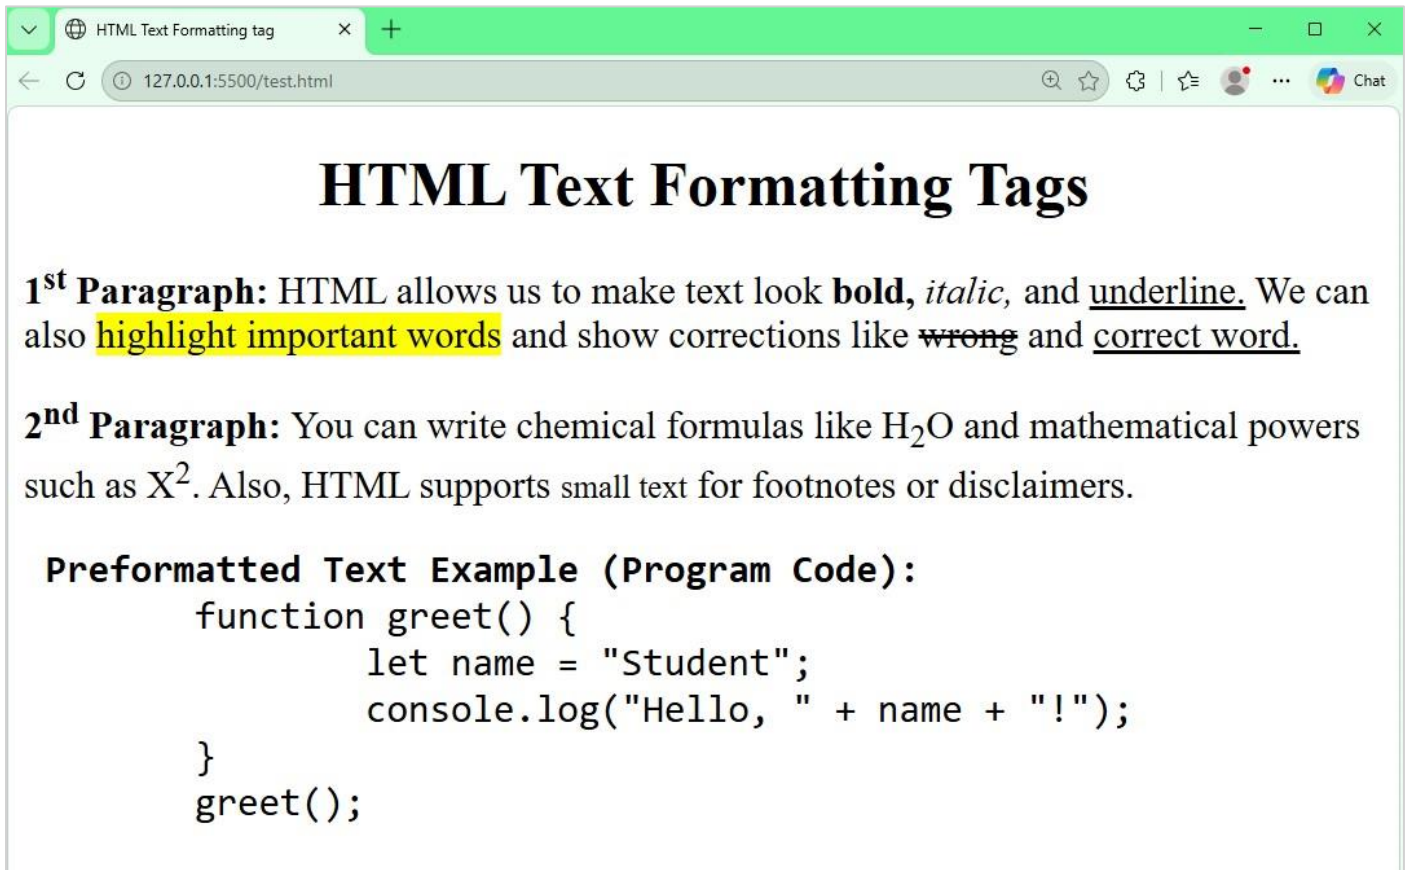

HTML Text Formatting Tags

1st Paragraph: HTML allows us to make text look **bold**, *italic*, and underline. We can also **highlight important words** and show corrections like ~~wrong~~ and correct word.

2nd Paragraph: You can write chemical formulas like H₂O and mathematical powers such as X². Also, HTML supports small text for footnotes or disclaimers.

Preformatted Text Example (Program Code):

```

function greet() {
    let name = "Student";
    console.log("Hello, " + name + "!");
}
greet();

```

[ [Click here to see live](#)]

HTML attributes

HTML attributes provide additional information about elements. They are always written in the start tag of an element.

Syntax: -

```
<tag attribute_name = "value"> ..... </tag>
```

⚠ Note:

- Always use **quotes** " around attribute values.
- Attributes are written **inside the start tag** of an element)

Tag	Attributes	Value
Body	bbgcolor	blue,red,green,pink
	background	"image_location/path"
	text	"blue"
<h1> to <h6>	align	"left" or "right" or "center"
	title	"any text"

bgcolor

The **HTML bgcolor attribute** sets background colors for elements like <body>, <table>, <td>, and <tr>. While it accepts color names, hex, or RGB values, it is deprecated in HTML5. CSS's background-color property is now preferred for styling backgrounds.

⚠ Note: It is deprecated in HTML5.

Syntax:

```
<body bgcolor="color_name">
```

```
<!DOCTYPE html>
<html>
<head>
  <title>bgcolor Example</title>
</head>
<body bgcolor="green">
  <h2> HTML bgcolor attribute </h2>
  <p> sets background colors for elements like body</p>
</body>
</html>
```

text

The text attribute is used to set the **text color** of the entire <body> content.

⚠ Note: It is only work in body tag (not in h1 or p)

```
<body text="color_name">
```

HTML:

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML text Example</title>
</head>
<body bgcolor="darkblue" text="yellow">
  <h1> The text attribute is used to set the text color of the entire body content.</h1>
</body>
</html>
```

background

The background attribute of the <body> tag sets a background **image** for the web page.


Syntax:

```
<body background="example.jpg">
```

HTML:

```
<!DOCTYPE html>
<html>
<head>
  <title>Background Example</title>
</head>
<body background="example.jpg" align="center" text="red">
  <h1> Welcome to My Website</h1>
  <p>This page uses the old HTML <b>background</b> attribute to set a background image.</p>
  <p>You can add more content here, and the background will cover the entire page.</p>
</body>
</html>
```

Output:

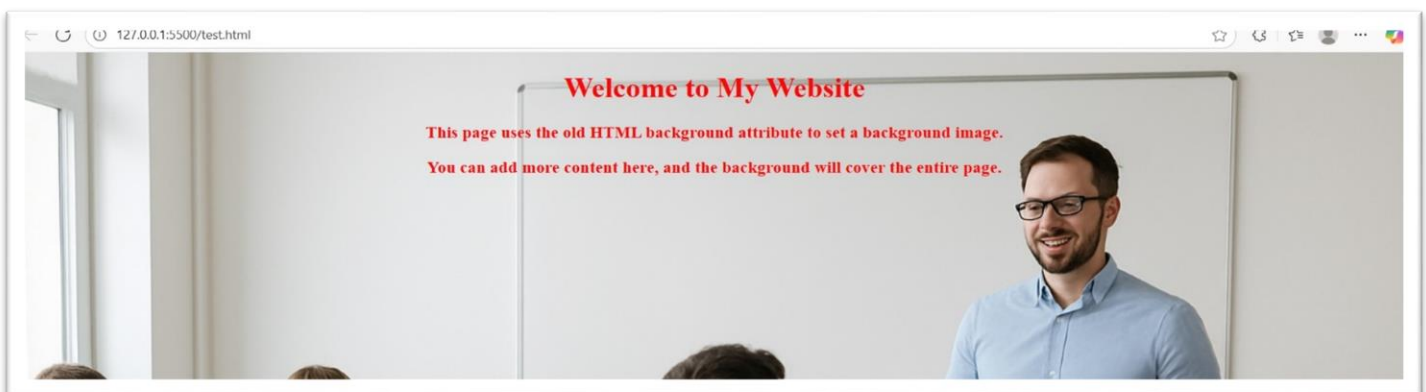

align

The **align** attribute is used to set the **alignment** of the text or paragraph.


HTML:

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML align Example</title>
</head>
<body bgcolor="darkblue" text="yellow">

<h1 align="center" title="Main heading">Heading 1 Center Aligned</h1>
  <h2 align="left" title="Subheading">Heading 2 Left Aligned</h2>
  <p align="right" title="Another Heading">Heading 3 Right Aligned</p>
</body>
</html>
```

Practice Task:

Create a basic HTML webpage use **background image and text color darkblue** to display the following content exactly as shown.

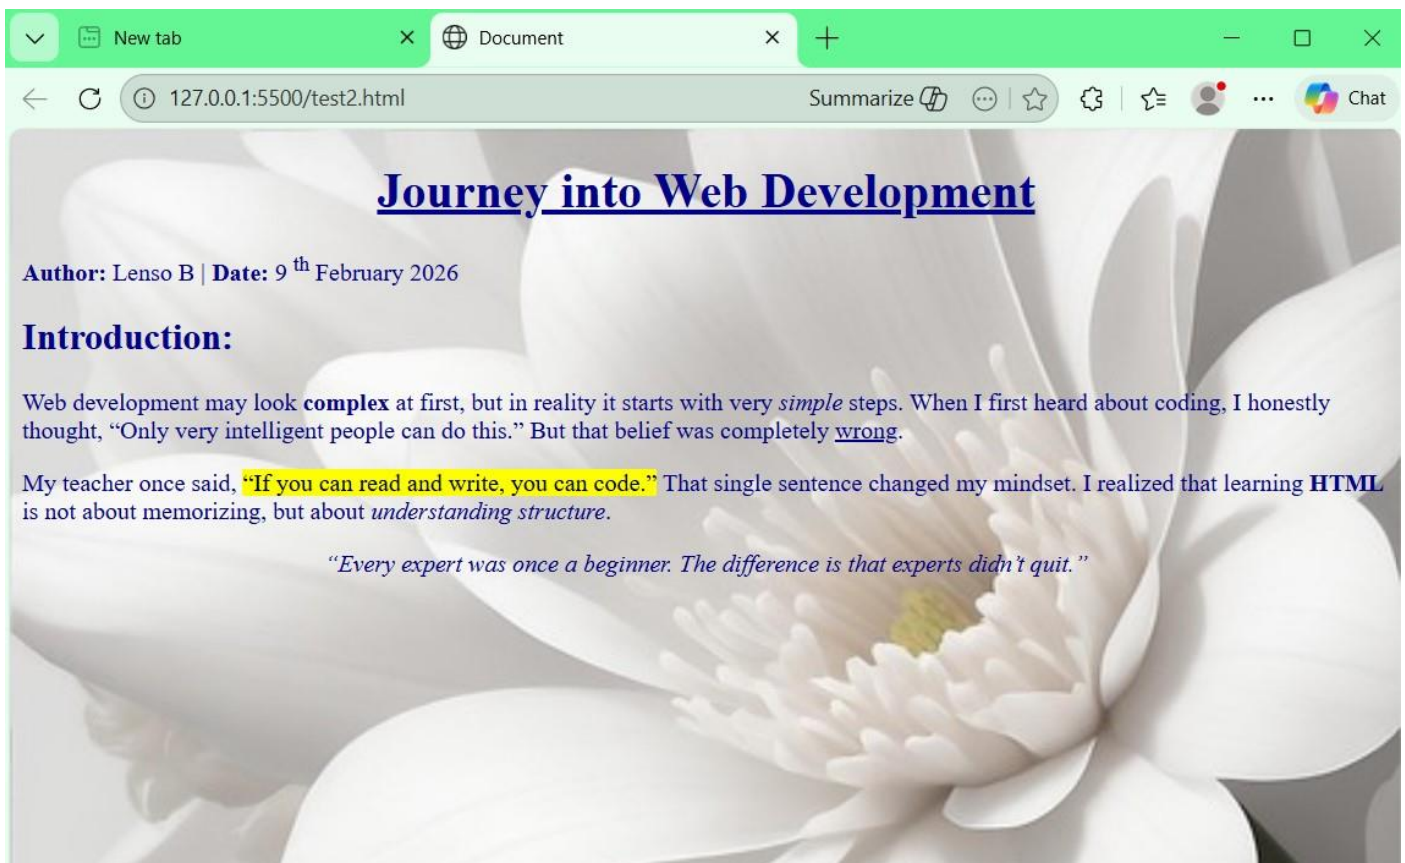

Horizontal Line (<hr> tag):

The Horizontal Rule tag (<hr>) is used to insert horizontal lines in the HTML document to separate sections of the document. It is an empty or unpaired tag, meaning there is no need for a closing tag.

	attributes	value
<hr>	color	blue,red,green,pink
	width	"50%" or "100"
	size	"10"
	align	"left" or "right" or "center"

HTML: hr

```
<!DOCTYPE html>
<html>
<head>
  <title>Horizontal line </title>
</head>
<body>
  <h1>Horizontal line using various attributes</h1>
  <hr>
  <p>The Horizontal Rule tag "hr" is used to insert horizontal lines in the HTML document to
  separate sections of the document. It is an empty or unpaired tag, meaning there is no need for a
  closing tag.</p>
</body>
</html>
```

HTML: hr >> color

```
<!DOCTYPE html>
<html>
<head>
  <title>Horizontal line </title>
</head>
<body>
  <h1>Horizontal line using various attributes</h1>
  <hr color="red">  <p>This is the first section of content. </p>
  <hr color="blue">  <p>This is the second section of content. </p>
  <hr color="green">
  <p>The Horizontal Rule tag "hr" is used to insert horizontal lines in the HTML document to
  separate sections of the document. It is an empty or unpaired tag, meaning there is no need for a
  closing tag.</p>
</body>
</html>
```

HTML: hr >> width

```
<!DOCTYPE html>
<html>
<head>
```

```

<title>Horizontal line </title>
</head>
<body>
  <h1>Horizontal line using various attributes</h1>
  <hr color="red" width="25%"> <p>This is the first section of content. </p>
  <hr color="blue" width="50%"> <p>This is the second section of content. </p>
  <hr color="green" width="80%">
  <p>The Horizontal Rule tag "hr" is used to insert horizontal lines in the HTML document to
  separate sections of the document. It is an empty or unpaired tag, meaning there is no need for a
  closing tag.</p>
</body>
</html>

```

HTML: hr >> size

```

<!DOCTYPE html>
<html>
<head>
  <title>Horizontal line </title>
</head>
<body>
  <h1>Horizontal line using various attributes</h1>
  <hr color="red" width="25%" size="4"> <p>This is the first section of content. </p>
  <hr color="blue" width="50%" size="8"> <p>This is the second section of content. </p>
  <hr color="green" width="80%" size="12">
  <p>The Horizontal Rule tag "hr" is used to insert horizontal lines in the HTML document to
  separate sections of the document. It is an empty or unpaired tag, meaning there is no need for a
  closing tag.</p>
</body>
</html>

```

HTML: hr >> align

```

<!DOCTYPE html>
<html>
<head>
  <title>Horizontal line </title>
</head>
<body>
  <h1>Horizontal line using various attributes</h1>
  <hr color="red" width="25%" size="4" align="left"> <p>This is the first section of content. </p>
  <hr color="blue" width="50%" size="8" align="center"> <p>This is the second section of content </p>
  <hr color="green" width="80%" size="12" align="right">
  <p>The Horizontal Rule tag "hr" is used to insert horizontal lines in the HTML document to
  separate sections of the document. It is an empty or unpaired tag, meaning there is no need for a
  closing tag.</p>
</body>
</html>

```

[ Click here to see live]

Marquee Tag:

The <marquee> tag in HTML creates a scrolling text or image effect within a webpage. It allows content to move horizontally or vertically across the screen, providing a simple way to add dynamic movement to elements. Although this tag is deprecated in HTML5, it is still useful to understand its functionality for legacy projects.

Syntax:

```
<marquee>
  <!-- contents -->
</marquee>
```

	attributes	value
<marquee>	direction	"up" "down" "right" "left"
	behavior	"scroll" or "alternate" or "slide"
	scrollamount	"50%" or "100"
	bgcolor	blue,red,green,pink

direction: Direction of movement: left, right, up, down.

behavior: Sets the type of scroll. Options: scroll, slide, alternate.

scrollamount: This specifies the speed of marquee text. This can have a value like 10 etc.

bgcolor: Background color of the marquee area.

HTML: marquee

```
<!DOCTYPE html>
<html>
<head>
  <title>Marquee Tag</title>
</head>
<body>
  <marquee>
    <h1>Techno IT Kokrajhar</h1>
  </marquee>
</body>
</html>
```

HTML: marquee >> direction

```
<!DOCTYPE html>
<html>
<head>
  <title>Marquee Tag</title>
</head>
<body>
  <marquee direction="left"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee direction="right"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee direction="up"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee direction="down"><h1>Techno IT Kokrajhar</h1></marquee>
</body>
</html>
```

HTML: `marquee >> behavior`

```
<!DOCTYPE html>
<html>
<head>
  <title>Marquee Tag</title>
</head>
<body>
  <marquee direction="left" behavior="alternate"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee direction="left" behavior="slide"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee direction="right" behavior="scroll"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee direction="up" behavior="alternate"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee direction="down" behavior="scroll"><h1>Techno IT Kokrajhar</h1></marquee>

  <marquee direction="down" width="250" height="200" behavior="alternate" bgcolor="red">
    <marquee behavior="alternate">This text will bounce</marquee>
  </marquee>

</body>
</html>
```

HTML: `marquee >> scrollamount`

```
<!DOCTYPE html>
<html>
<head>
  <title>Marquee Tag</title>
</head>
<body>
  <marquee scrollamount="7"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee scrollamount="14"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee scrollamount="21"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee scrollamount="30"><h1>Techno IT Kokrajhar</h1></marquee>
</body>
</html>
```

HTML: `marquee >> bgcolor`

```
<!DOCTYPE html>
<html>
<head>
  <title>Marquee Tag</title>
</head>
<body text="white">
  <marquee scrollamount="7" bgcolor="red"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee scrollamount="14" bgcolor="blue"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee scrollamount="21" bgcolor="pink"><h1>Techno IT Kokrajhar</h1></marquee>
  <marquee scrollamount="30" bgcolor="green"><h1>Techno IT Kokrajhar</h1></marquee>
</body>
</html>
```

Practice Task:



Instruction:

- a) **Direction:** from bottom to top
- b) **Speed:** 3

or,

[ [Click here to see live](#)]

HTML image:

The **HTML tag** is used to embed an image in web pages by linking them. It creates a placeholder for the image, defined by attributes like src, width, height, and alt, and does not require a closing tag.

There are **two ways** to insert the images into a webpage:

- By providing a full path or address (URL) to access an internet file.
- By providing the file path relative to the location of the current web page file.

Syntax:

```

```

The **src** (source) attribute **specifies the path (URL or location) to the image file** you want to display.

🔗 HTML:

```
<!DOCTYPE html>

<html>
<head>
  <title> images </title>
</head>
<body>
  
</body>
</html>
```

🔗 HTML: image+marquee

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
</head>
<body>
  <marquee behavior="scroll" direction="left" scrollamount="10">
    <!-- Set 1 -->
    
    
    
    
    

    <!-- Set 2 (duplicate) -->
    
    
```




```



</marquee>
</body>
</html>
```

Practice Task:

Create an image gallery with 3 different images in a **single row**, each image has a **border**

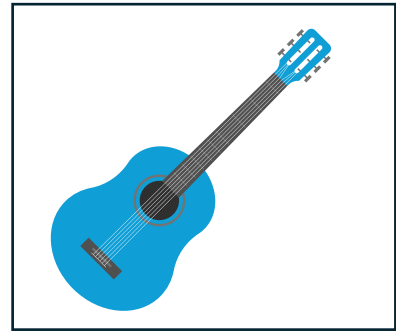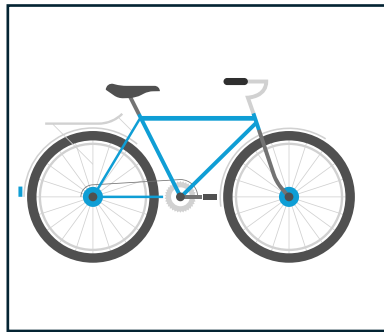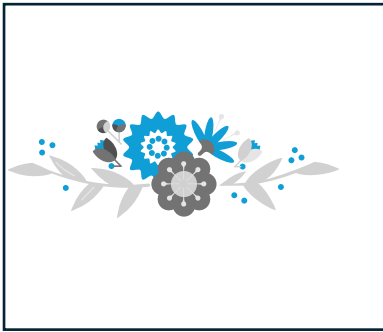

HTML Video:

The <video> element in HTML is used to add video content to web pages. It supports various video formats, including MP4, WebM, and Ogg. Video and audio tags are introduced in HTML5.

Syntax:

```
<video src="path/video_name.mp4" controls> </video>
```

- The **src** (source) attribute **specifies the path (URL or location) to the image file you want to display.**
- The **controls** attribute adds default video controls (play, pause, volume, etc.).

HTML:

```
<!DOCTYPE html>

<html >
<body>
  <video autoplay muted loop>
    <source src="example.mp4" type="video/mp4" >
    Sample Video.
  </video>
</body>
</html>
```

HTML: width & height

```
<!DOCTYPE html>

<html >
<body>
<video autoplay muted width="500">
  <source src="example.mp4" type="video/mp4">
</video>
</body>
</html>
```

HTML: controls

```
<!DOCTYPE html>

<html >
<body>
  <video width="420" height="340" controls>
    <source src="example.mp4" type="video/mp4">
    Sample Video.
  </video>
</body>
</html>
```

[ [Click here to see live](#)]

HTML audio:

The `<audio>` tag in HTML5 is used to embed audio content on a webpage. It allows you to play audio files like MP3, OGG, or WAV directly in the browser.

The `<audio>` element provides attributes for **controlling playback**, such as **play**, **pause**, and **volume**.

Syntax:

```
<audio controls>
  <source src="sample.mp3" type="audio/mp3">
  Your browser does not support the audio element.
</audio>
```

- Using the `<source>` element enables the specification of various audio files, allowing the browser to choose the compatible format.
- The `<audio>` element allows integration with JavaScript, enabling the creation of custom audio controls and behaviors.
- The `'controls'` attribute provides buttons for managing audio, like **play**, **pause**, and **volume** adjustment.
- Any text contained between the `<audio>` tags is visible only on browsers that can't render or support the `<audio>` element.

HTML:

```
<!DOCTYPE html>
<html>
<head>
  <title>Audio Example</title>
</head>
<body>
  <h2>My Audio Sample</h2>
  <p>Click play to hear the sound:</p>

  <audio controls>
    <source src="sample.mp3" type="audio/mpeg">
    <source src="sample.ogg" type="audio/ogg">
    Your browser does not support the audio element.
  </audio>
</body>
</html>
```

[ [Click here to see live](#)]

HTML tag:

The **HTML Tag** plays an important role in the web page to create an attractive and readable web page. The font tag is used to change the **color**, **size**, and **style** of a text and it was used in HTML4. The base font tag is used to set all the text to the same **size**, **color**, and **face**.

 **Note:** The tag is deprecated in HTML5. Use CSS instead.

Syntax:

```
<font
size="value"
face="font_family_name"
color="color_name"
>content.....</font>
```

HTML:

```
<!DOCTYPE html>

<html>
<head>
    <title>HTML fonts </title>
</head>
<body>
    <h1>HTML font tag</h1>
    <hr>
    <font face="Times New Roman" size="6">
        This line uses font face "Times New Roman" and size "6".
    </font><br />
    <font face=" Monotype Corsiva" size="4" color="red">
        This line uses font face "Monotype Corsiva" and size "4" and color "red".
    </font><br />
    <font face="Comic sans MS" size=" 6" color="blue">
        This line uses font face "Comic sans MS" and size "4" and color "blue".
    </font><br />
    <font face="Bradley Hand ITC" size="10" color="green">
        This line uses font face="Bradley Hand ITC" and size "10" and color "green".
    </font><br />
    <font face=" Freestyle Script" size="7" color="violet">
        This line uses font face "Freestyle Script" and size "7" and color "violet".
    </font><br />
</body>
</html>
```

 HTML:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
  <title>Document</title>
</head>
<body>
  <font color="blue" size="20">G</font>
  <font color="red" size="20">o</font>
  <font color="orange" size="20">o</font>
  <font color="blue" size="20">g</font>
  <font color="green" size="20">l</font>
  <font color="red" size="20">e</font>
</body>
</html>
```

[ Click here to see live]

HTML Lists

HTML lists are used to group related items in a web page. Lists make content easier to read and understand, and they can be styled with bullets, numbers, or other custom formats.

There are 3 main types of lists in HTML:

1. **Ordered List:**

An **ordered list** displays items in a specific **sequence** using **numbers or letters** (e.g., 1, 2, 3 or A, B, C). It is useful when the order of items matters — like steps in a recipe, instructions, or rankings.

2. **Unordered List:**

An unordered list displays items with bullets. It is used when the order does not matter — like shopping lists, features, or options.

3. **Definition list:**

A description list is defined by <dl> tag along with the <dt> and <dd> tags. Where <dt> tag defines the definition term, and <dd> tag defines the corresponding definition.

◆ Unordered List Example:

```
<!DOCTYPE html>

<html>
<head>
  <title>HTML List Example</title>
</head>
<body>
  <h2>Unordered List - Grocery Items (circle)</h2>
  <ul type="circle">
    <li>Milk</li>
    <li>Eggs</li>
    <li>Bread</li>
    <li>Butter</li>
  </ul>
  <hr>

  <h2>Unordered List - Stationery Items (disc)</h2>
  <ul type="disc">
    <li>Pen</li>
    <li>Notebook</li>
    <li>Highlighter</li>
    <li>Sticky Notes</li>
  </ul>
  <hr>

  <h2>Unordered List - Fruits (square)</h2>
  <ul type="square">
    <li>Apple</li>
    <li>Banana</li>
    <li>Mango</li>
    <li>Orange</li>
  </ul>
</body>
</html>
```

◆ Ordered List Example:

```
<!DOCTYPE html>

<html>
<head>
  <title>HTML Ordered List Example</title>
</head>
<body>
  <h2>Ordered List - Steps to Make Tea (type="1")</h2>
  <ol type="1"> <!-- Numbers -->
    <li>Boil Water</li>
    <li>Add Tea Leaves</li>
    <li>Add Sugar</li>
    <li>Pour into Cup</li>
  </ol>
  <hr>

  <h2>Ordered List - Morning Routine (type="a")</h2>
  <ol type="a"> <!-- Lowercase letters -->
    <li>Wake up</li>
    <li>Brush Teeth</li>
    <li>Take a Shower</li>
    <li>Have Breakfast</li>
  </ol>
  <hr>

  <h2>Ordered List - Assignment Submission Steps (type="i")</h2>
  <ol type="i"> <!-- Lowercase Roman numerals -->
    <li>Write the Assignment</li>
    <li>Review Content</li>
    <li>Make Final Edits</li>
    <li>Submit to Teacher</li>
  </ol>
</body>
</html>
```

◆ Definition List Example:

```
<!DOCTYPE html>

<html>
<head>
  <title>definition list</title>
</head>
<body>
  <dl>
    <dt>Term 1</dt>
    <dd>Definition for Term 1</dd>
    <dt>Term 2</dt>
    <dd>Definition for Term 2</dd>
    <dt>Term 3</dt>
    <dd>Definition for Term 3</dd>
```



```
</dl>
</body>
</html>
```

Practice Task:

Create a webpage that shows the following output:

HTML List Tag

Our Courses:

- ADCA
- PGDCA
- CCA
- DTP

Favorite movies:

- a. Captain America
- b. Iron Man
- c. Bat Man
- d. Black Panther

Computer terms:

HTML:

HTML (HyperText Markup Language) is the standard language for creating and structuring content on the web. It defines the structure and content of web pages using a series of elements and tags.

CSS:

CSS (Cascading Style Sheets) is used to style and layout HTML elements. It controls color, spacing, fonts, borders, positioning, and more.

PHP:

PHP (**H**yper**t**ext **P**re**p**rocessor) is a **server-side scripting language** widely used for building dynamic and interactive web applications. It can be embedded directly into HTML, making it easy to integrate with front-end code while executing logic on the server before sending the output to the browser.

HTML Details

The `<details>` and `<summary>` tags are HTML5 semantic elements used to create **expandable** and **collapsible** content without using JavaScript.

They are commonly used for: FAQs, Help sections, Extra information, Read more/ Read less content.

The `<details>` tag defines a **disclosure widget** that the user can open or close.

Key Points

- Content inside `<details>` is hidden by default
- Clicking the summary shows or hides the content
- Works without JavaScript

Syntax:

```
<details>
  <summary>caption/summary</summary>
  <p>content</p>
</details>
```

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>FAQ Page</title>
</head>
<body>
  <details>
    <summary>What is HTML?</summary>
    <p> HTML (HyperText Markup Language) is the standard language for creating and
structuring content on the web. It defines the structure and content of web pages using a series of
elements and tags. HTML is the backbone of web development and is often used in conjunction
with CSS (Cascading Style Sheets) and JavaScript to create interactive and visually appealing
websites <p>
  </details>
  <details>
    <summary>What is CSS?</summary>
    <p> CSS (Cascading Style Sheets) is used to style and layout HTML elements.
      It controls color, spacing, fonts, borders, positioning, and more.
      Without CSS, all HTML elements would look plain and default. CSS brings
      beauty and control to your web pages.
    </p>
  </details>
  <details>
    <summary>What is JavaScript?</summary>
    <p> JavaScript is a lightweight, interpreted programming language primarily
```

used to create dynamic and interactive features on web pages.
It is one of the core technologies of the web, alongside HTML and CSS.

```
</p>
</details>
<details>
  <summary>What is C language?</summary>
  <p> C is a general-purpose, structured, and machine-independent programming
    language created by Dennis M. Ritchie at Bell Labs in 1972. Initially
    developed for building the UNIX operating system, it has since become
    one of the most widely used languages for system software, embedded
    systems, and performance-critical applications.

</p>
</details>
</body>
</html>
```

Open Attribute: The open attribute keeps the details expanded by default.

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>details open attribute</title>
</head>
<body>
<details open>
<summary>Click me to collapse or expand</summary>
<p>the content is expanded by default because of the "open" attribute</p>
</details>

  <details open>
    <summary>Course Details</summary>
    <p>This course covers HTML, CSS, and JavaScript.</p>
  </details>
</body>
</html>
```

HTML Tables

An HTML table is used to organize data into **rows** and **columns**—just like in spreadsheets. Tables are ideal for displaying structured information such as **schedules, price lists, reports**, and more.

Tag	Description
<table>	To Create a table
<tbody>	To Create the group the body content of a table.
<thead>	To Create the group of table header
<tr>	To Create a Table row
<td>	To Create Table column
<th>	To create a Table heading

Syntax:

Row 1, Column 1	Row 1, Column 2
Row 2, Column 1	Row 2, Column 2

```
<!DOCTYPE html>
<html>
<head>
<title>HTML Tables</title>
</head>
<body>

<table border="1" align="center">
<tr id= "row1">
<td>Row 1, Column 1</td> <td>Row 1, Column 2</td>
</tr>
<tr id= "row2">
<td>Row 2, Column 1</td> <td>Row 2, Column 2</td>
</tr>
</table>

</body>
</html>
```

HTML:

```
<!DOCTYPE html>
<html>
<head>
<title>HTML Table Example</title>
</head>
<body>
<h1>HTML Table Example</h1>
<table border="1">
<tr>
<th>Name</th>
```

```
<th>Age</th>
<th>Course</th>
</tr>
<tr>
  <td>John</td>
  <td>21</td>
  <td>ADCA</td>
</tr>
<tr>
  <td>Mary</td>
  <td>22</td>
  <td>CCA</td>
</tr>
</table>
</body>
</html>
```

Output:

Name	Age	Course
John	21	ADCA
Mary	22	CCA

CellPadding & CellsSpacing

HTML table attributes are used to control the **appearance**, **spacing**, and **structure** of tables

HTML tables can adjust the padding inside the cells, and also the space between the cells.

With CellPadding		
hello	hello	hello
hello	hello	hello
hello	hello	hello

It defines the **padding inside** a table cell.

With CellsSpacing		
hello	hello	hello
hello	hello	hello
hello	hello	hello

It defines the **space between** table cells.

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Table Cellpadding Example</title>
</head>
<body>
  <h2 align="center">HTML Table
  cellpadding</h2>
  <table border="1" cellpadding="10"
  align="center">
    <tr>
      <td colspan="3">With padding</td>
    </tr><tr>
      <td>hello</td>
      <td>hello</td>
      <td>hello</td>
    </tr><tr>
      <td>hello</td>
      <td>hello</td>
      <td>hello</td>
    </tr><tr>
      <td>hello</td>
      <td>hello</td>
      <td>hello</td>
    </tr>
  </table>
</body>
</html>
```

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML Table Cellspacing Example</title>
</head>
<body>
  <h2 align="center">HTML Table
  cellspacing</h2>
  <table border="1" cellspacing="15"
  align="center">
    <tr>
      <td colspan="3">With cellspacing</td>
    </tr><tr>
      <td>hello</td>
      <td>hello</td>
      <td>hello</td>
    </tr><tr>
      <td>hello</td>
      <td>hello</td>
      <td>hello</td>
    </tr><tr>
      <td>hello</td>
      <td>hello</td>
      <td>hello</td>
    </tr>
  </table>
</body>
</html>
```



Image Gallery Using Table:

Design a simple image gallery using HTML <table> and tags.

HTML:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>image gallery</title>
</head>
<body bgcolor="pink">
  <table border="1" align="center" bgcolor="black" height="100" width="150">
    <tr>
      <td></td>
      <td></td>
      <td></td>
      <td></td>
    </tr>
    <tr>
      <td></td>
      <td colspan="2" rowspan="2"></td>
      <td></td>
    </tr>
    <tr>
      <td></td>
      <td></td>
    </tr>
    <tr>
      <td></td>
      <td></td>
      <td></td>
      <td></td>
    </tr>
  </table>
</body>
</html>
```

Output:

 Practice Task:

Write a html program to show the following results

I	I	I
Love		
India	India	India

STATE OF HEALTH	FASTING VALUE		AFTER EATING
	MINIMUM	MAXIMUM	
HEALTHY	70	100	2 HRS AFTER EATING
PRE-DIABETES	101	126	LESS THAN 140
DIABETES	MORE THAN 216	N/A	MORE THAN 200

HTML Forms and Input Elements

HTML **forms** are used to collect user input such as text, selections, and button clicks. Forms are essential for **login pages, registrations, feedback forms, and more.**

Syntax:

```
<form >
  <!-- input fields go here -->
</form>
```

Common Input Types

HTML provides a variety of input types to create interactive and user-friendly forms. Here's a concise list of commonly used input types:

Input Type: **text** and **number**

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML form Example</title>
</head>
<body>
  <form>
    <!-- Text input: Accepts a line of text -->
    <label>Name:</label>
    <input type="text" placeholder="Enter your name" required>
    <br><br>

    <!-- Number input: Only allows numeric input -->
    <label>Age:</label>
    <input type="number" max="100">
    <br><br>
  </form>
</body>
</html>
```

- `type="text"`: For text input. `maxlength`, `placeholder`, `required`, and `size` are common attributes.
- `type="number"`: Accepts only numbers. You can use `min`, `max`, and `step`.

Input Type: **date** and **time**

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML form Example</title>
</head>
<body>
  <form>
```

```
<!-- Date input: Select a calendar date -->
<label>Date:</label>
<input type="date">
<br><br>

<!-- Time input: Select a time (optional) -->
<label>Time:</label>
<input type="time">
</form>
</body>
</html>
```

✓ Input Type: **email** and **password**

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML form Example</title>
</head>
<body>
  <form>
    <!-- Email input: Must be a valid email address -->
    <label>Email:</label>
    <input type="email" placeholder="example@mail.com">
    <br><br>

    <!-- Password input: Text is hidden -->
    <label>Password:</label>
    <input type="password" maxlength="12">
    <br><br>
  </form>
</body>
</html>
```

✓ Input Type: **radio** and **checkbox**

```
<!DOCTYPE html>
<html>
<head>
  <title>HTML form Example</title>
</head>
<body>
  <form>
    <!-- Radio buttons: Choose one option only -->
    <label>Gender:</label>
    <input type="radio" name="gender"> Male
    <input type="radio" name="gender"> Female
    <br><br>

    <!-- Checkboxes: Select multiple options -->
    <label>Skills:</label>
```

```
<input type="checkbox" required> HTML  
<input type="checkbox" required> CSS  
<br><br>  
  
</form>  
</body>  
</html>
```

- type="radio": Used for selecting **only one** option in a group.
- type="checkbox": Used to select **multiple** options.

✔ Other Useful Input Types

```
<!DOCTYPE html>  
<html>  
<head>  
  <title>HTML form Example</title>  
</head>  
<body>  
  <form>  
    <!-- Multiline text input -->  
    <label>Text area:</label>  
    <textarea rows="5" cols="40" placeholder="Type your message here."></textarea>  
    <br><br>  
  
    <!-- Range slider -->  
    <label>Rate:</label>  
    <input type="range" min="0" max="10">  
    <br><br>  
  
    <!-- Search input -->  
    <label>Search:</label>  
    <input type="search">  
    <br><br>  
  
    <!-- Color picker -->  
    <label>Pick Color:</label>  
    <input type="color">  
    <br><br>  
  
    <!-- File upload -->  
    <label>Upload File:</label>  
    <input type="file">  
    <br><br>  
  
  </form>  
</body>  
</html>
```

✔ Form Buttons

```
<!DOCTYPE html>
```

```
<html>
<head>
  <title>HTML form Example</title>
</head>
<body>
  <form>
    <input type="text">
    <br><br>

    <!-- Button (does not submit form) -->
    <input type="button" value="Previous">
    <br><br>

    <!-- Submit button (sends form data) -->
    <input type="submit" value="Submit Form">

    <!-- reset: Button to reset the form fields. -->
    <input type="reset">
  </form>
</body>
</html>
```

[ Click here to see live]

HTML select Tag

The HTML <select> tag is used to create a drop-down list for user input, containing <option> tags to display the available choices. It provides functionality for selecting one or multiple options from a list.

 **Note:** The <select> tag is used in a form to receive user responses.

Syntax:

```
<select>
  <option> option 1 </option>
  <option> option 2 </option>
  ...
</select>
```

HTML:

```
<!DOCTYPE html>

<title>Drop down list</title>
</head>
<body>
  <form>
    Choose a color:
    <select>
      <option value="red">Red</option>
      <option value="green">Green</option>
      <option value="blue">Blue</option>
    </select>
  </form>
</body>
</html>
```

HTML legend Tag

The HTML <legend> tag is used to provide a title or caption for its parent <fieldset> element. It must be the first child inside the <fieldset> to describe the grouped content clearly. The <legend> tag also supports the Global Attributes and Event Attributes in HTML.

Syntax:

```
<form>
<fieldset>
  <legend> Legend Text </legend>
  <!-- input fields go here -->
  .....
</fieldset>
</form>
```



HTML:

```
<!DOCTYPE html>
<html>
<body>
  <h1>HTML Legend Tag</h1>
  <form>
    <fieldset>
      <!-- Legend tag -->
      <legend>STUDENT DETAILS::</legend>
      <label>Name:</label>
      <input type="text" required>
      <br><br>
      <label>Email:</label>
      <input type="text">
      <br><br>
      <label>Date of birth:</label>
      <input type="text">
      <br><br>
      <label>Gender</label>
      <select>
        <option> Male</option>
```

```

        <option> Female</option>
    </select>
    <br><br>
    <label>Address:</label>
    <input type="text">
    <br><br>
    <label>Enroll No:</label>
    <input type="text">
</fieldset>
<input type="submit">
</form>
</body>
</html>

```



Practice Task: Create a html form to show the following output

Student Form

Personal Details:

Name:

Father/Guardian's Name:

Date of Births:

Gender: ☐ Male ☐ Female ☐ Others

Email:

Phone:

Address:

Upload Photo: No file chosen

Education Qualification:

Highest Qualification:

Institute/Board/University:

Year of Passing:

Percentage/CGPA:

Other Qualification:

Bank Details:

Account Holder Name:

Account Number:

Bank Name:

Branch:

IFSC Code:

Account Type: Saving/Current/Other

☐ I agree to the Terms and Conditions

Anchor tag

The `<a>` tag (anchor tag) in HTML is used to create a hyperlink on the webpage. This hyperlink is used to link the webpage to other web pages or some section of the same web page. It's either used to provide an absolute reference or a relative reference as its "href" value.

Syntax:

```
< a href= "link" target="value">link_name < /a >
```

Note:

- The **href** attribute defines the **URL or destination** of the link.
- The **target** attribute specifies where to open the linked document.

target	What It Does
_self	Opens the link in the same tab (default)
_blank	Opens the link in a new tab or window
_parent	Opens in the parent frame (if using frames)
_top	Opens in the full body of the window

Link to External Website

```
<!DOCTYPE html>

<html>
<head>
  <title>Definition list</title>
</head>
<body>
  <h1>This opens "example.html" when clicked on link.<br>
  Make sure the file exists in the same folder.</h1>
  <a href="example.html">Go to Page</a>
</body>
</html>
```

Link to an Image

```
<!DOCTYPE html>

<html>
<head>
  <title>definition list</title>
</head>
<body>
  <a href="example.jpg" target="_blank">
    
  </a>
  <h2>Make sure the -- image("example.jpg") -- exists in the same folder.</h2>
</body>
</html>
```

Link to a PDF File

```
<!DOCTYPE html>

<html>
<head>
  <title>definition list</title>
</head>
<body>
  <a href="document.pdf" target="_blank">Open PDF File</a>
<h2>Make sure the -- file(document.pdf) -- exists in the same folder.</h2>
</body>
</html>
```

Link to a Video & audio File

```
<!DOCTYPE html>

<html>
<head>
  <title>definition list</title>
</head>
<body>
  <a href="video.mp4" target="_blank">Watch Video</a>
  <br>
  <a href="audio.mp3" target="_blank">Listen Audio</a>
<h2>Make sure the -- "video.mp4 and audio.mp3" -- exists in the same folder.</h2>
<h4>or you can give your custom video and audio file path/location/src</h4>
</body>
</html>
```

Download a File (Any Type)

```
<!DOCTYPE html>

<html>
<head>
  <title>definition list</title>
</head>
<body>
  <a href="notes.docx" download>Download Word Document</a><br>
  <a href="sheet.xlsx" download>Download Excel Sheet</a>
<h2>Make sure the -- "notes.docx and sheet.xlsx" -- exists in the same folder.</h2>
<h4>or you can give your file path/location/</h4>
</body>
</html>
```

Html project using anchor tag:

Preview:



1. First create a folder  "HTML project 1".
2. Inside this folder create following html files.
 - a) Index.html
 - b) About.html
 - c) Contact.html
1. save as "**index.html**"

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Home Page</title>
</head>
<body bgcolor="lightblue" >
  <center>
    <h1>Welcome to our Home Page!</h1>
    <p>This is the main page of our website.</p>
    <p>Click the link below to learn more about us:</p>

    <a href="about.html">Go to About Us Page</a>

    <p>You can also visit our </p>
    <a href="contact.html">Contact Page</a>
  </center>
</body>
</html>
```

1 of 3 (Continue.....)

2. save as "**about.html**"

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>About Us</title>
</head>
<body>
  <h1>About Our Company</h1>
  <p>We are a fictional company dedicated to providing excellent services.</p>
  <p>Learn more about our mission and values on this page.</p>

  <p><a href="index.html">Back to Home</a></p>
</body>
</html>
```



3. save as "contact.html"


```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Contact Us</title>
</head>
<body>
  <h1>Contact Us</h1>
  <p>Have a question or want to get in touch? Fill out the form below!</p>
  <form action="#">
    <label>Name:</label><br>
    <input type="text" required>
  <br>
    <label>Message:</label><br>
    <textarea rows="5" required></textarea>
  <br>
    <button type="submit">Send Message</button>
  </form>
  <p>You can also reach us directly at:</p>
  <p>Email: info@example.com</p>
  <p>Phone: +1 (123) 456-7890</p>
  <p><a href="https://www.facebook.com/">Facebook</a></p>

  <p><a href="index.html">Back to Home Page</a></p>
</body>
</html>
```

3 of 3 (end)

 Practice Task:

Create a webpage that displays PDF files link inside a table. When the user clicks the link, the PDF should open in a new tab.

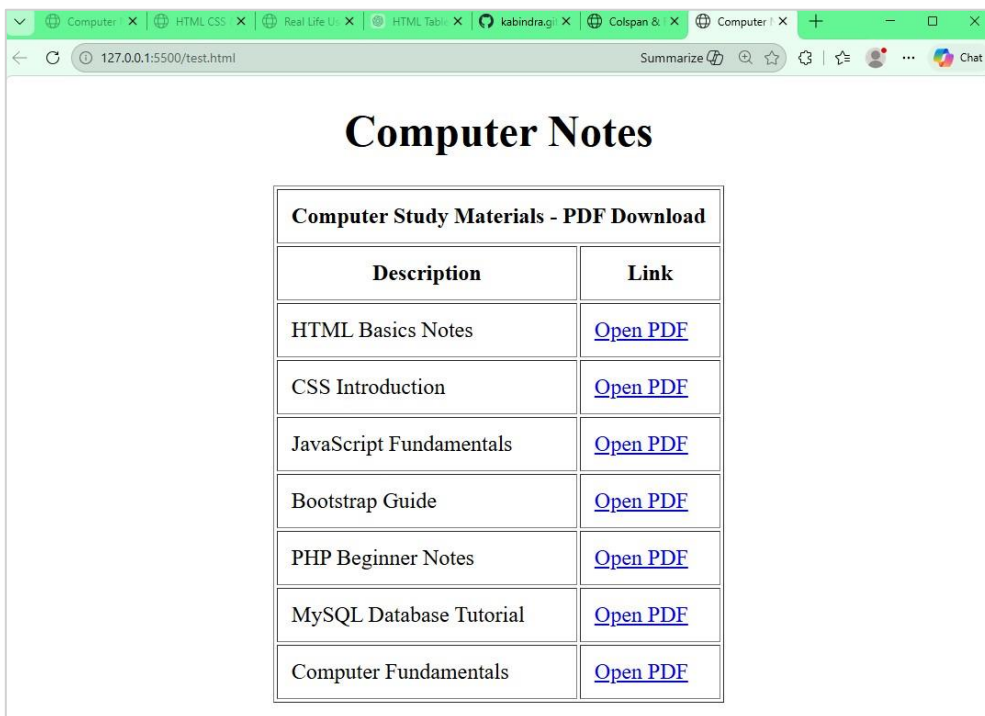

Computer Study Materials - PDF Download	
Description	Link
HTML Basics Notes	Open PDF
CSS Introduction	Open PDF
JavaScript Fundamentals	Open PDF
Bootstrap Guide	Open PDF
PHP Beginner Notes	Open PDF
MySQL Database Tutorial	Open PDF
Computer Fundamentals	Open PDF

HTML <iframe>

An iframe, or Inline Frame, is an HTML element represented by the <iframe> tag. It functions as a 'window' on your webpage through which visitors can view and interact with another webpage from a different source.


Iframes are used for various purposes like:

1. **Load internal page**: Incorporate forms or widgets from other sources without writing complex code.

Syntax:

```
<iframe src="URL"> </iframe>
```

- The **src** attribute specifies the **URL** of the document you want to embed.
Example: [form.html](#), [www.google.com](#), [image.jpg](#), [file.pdf](#) etc...
- Iframes can include **videos**, **maps**, or **entire web pages** from other sources.

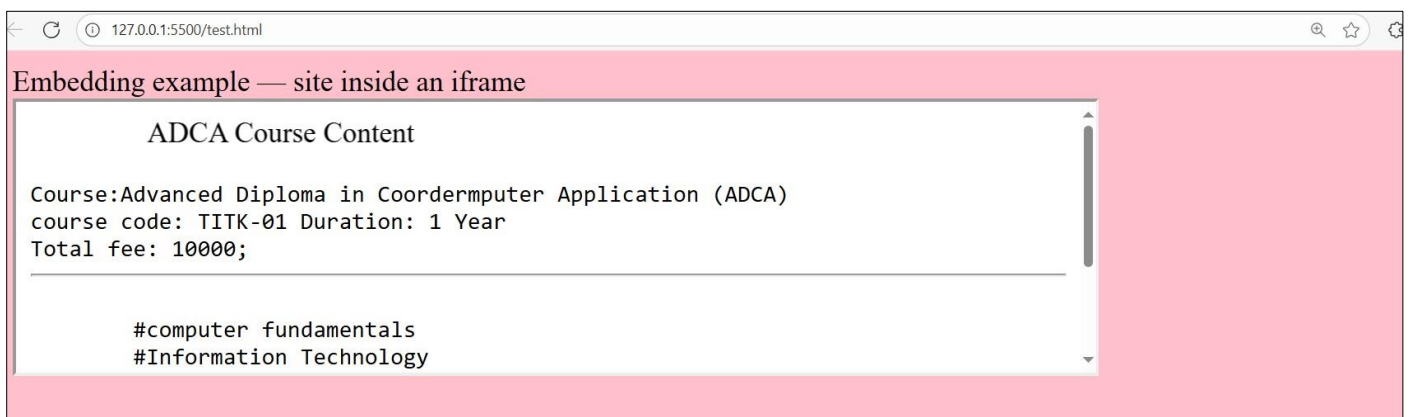

HTML:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Document</title>
</head>
<body>
  <h1>Embedding example -- site insite an iframe </h1>

  <!-- you can connect with any existing html/image/pdf file (src)-->
  <iframe src="about.html" frameborder="1" width="80%" height="500"></iframe>
  <iframe src="rose.jpg" frameborder="1" width="80%" height="500"></iframe>
  <iframe src="computer.pdf" frameborder="1" width="80%" height="500"></iframe>

  <h1>Incorporate forms or widgets from other sources without writing complex code.</h1>
  <h2>Iframes can include entire web pages from other sources.</h2>
</body>
</html>
```


2. Embedding Multimedia: Easily integrate videos, audio, or animations from platforms like YouTube, etc.

How to Get Embed Code from YouTube

- Make sure your computer is connected with internet
- Open the YouTube video.
- Click "**Share**" → "**Embed**".
- Copy the <iframe> code YouTube gives you.

Example:

```
<iframe width="560" height="315"
src="https://www.youtube.com/embed/dQw4w9WgXcQ"
title="YouTube video player"
frameborder="0"
allow="accelerometer; autoplay; clipboard-write; encrypted-media;
gyroscope; picture-in-picture; web-share"
allowfullscreen>
```

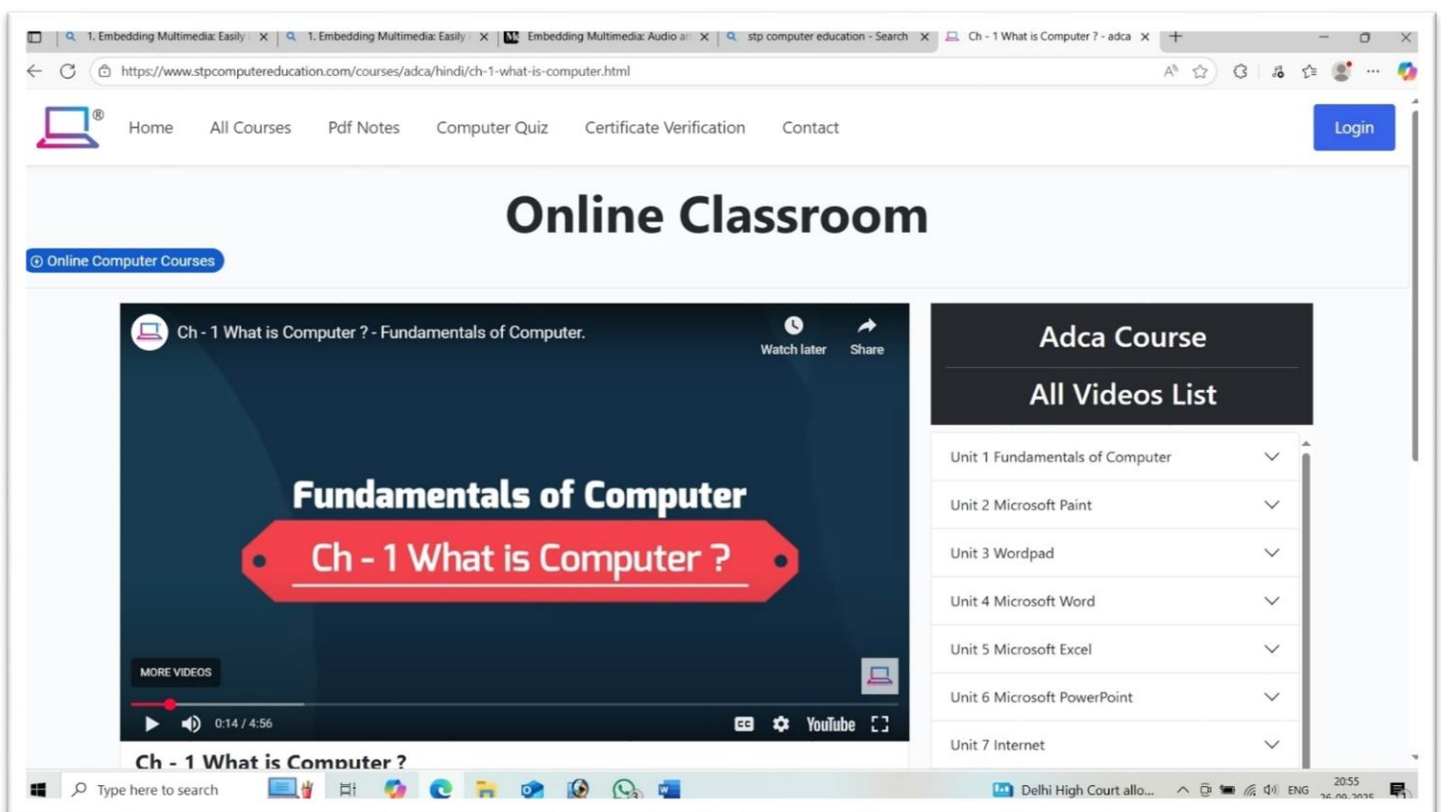

The screenshot shows a web browser window displaying an online classroom page. The URL is <https://www.stpcomputereducation.com/courses/adca/hindi/ch-1-what-is-computer.html>. The page has a navigation bar with links: Home, All Courses, Pdf Notes, Computer Quiz, Certificate Verification, and Contact. A 'Login' button is in the top right. The main heading is 'Online Classroom'. Below it, a section titled 'Online Computer Courses' features a video player. The video player shows a video titled 'Ch - 1 What is Computer ? - Fundamentals of Computer.' with a progress bar at 0:14 / 4:56. To the right of the video player is a sidebar titled 'Adca Course' with a section 'All Videos List'. This list contains seven units, each with a dropdown arrow: Unit 1 Fundamentals of Computer, Unit 2 Microsoft Paint, Unit 3 Wordpad, Unit 4 Microsoft Word, Unit 5 Microsoft Excel, Unit 6 Microsoft PowerPoint, and Unit 7 Internet. The Windows taskbar at the bottom shows various application icons and the system clock at 20:55 on 26.09.2023.


3. Including Maps: Embed maps from services like **Google Maps** directly into your site.

How to Get the embed code:

- Go to [Google Maps](https://www.google.com/maps)
- Search your desired place (e.g., "Techno IT Institute, Kokrajhar")
- Click the **"Share"** button → **"Embed a map"** tab
- Copy the `<iframe>` code



```
<iframe
  src="https://www.google.com/maps/embed?pb=!1m18!1m12!1m3!1d3650.1646788504114!2d90.40420987583855!3d23.811059678624438!2m3!1f0!2f0!3f0!3m2!1i1024!2i768!4f13.1!3m3!1m2!1s0x3755c7a1e12e65cd%3A0xf5c7e5367dd3ff87!2sYour%20Institute!5e0!3m2!1sen!2sin!4v1710000000000!5m2!1sen!2sin"
  width="600"
  height="450"
  style="border:0;"
  allowfullscreen=""
  loading="lazy"
  referrerpolicy="no-referrer-when-downgrade">
```

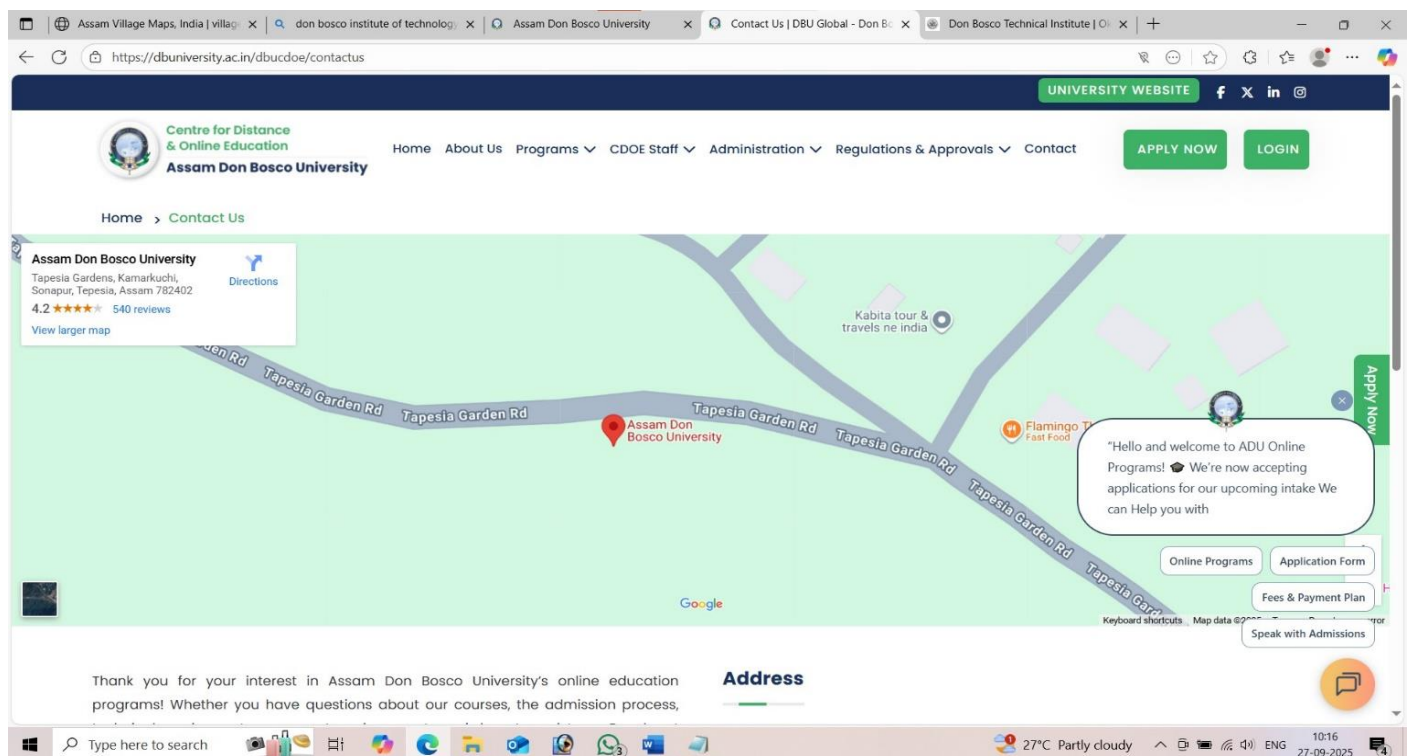

4. HTML Link Targets

In HTML, you can use the target attribute to specify where to open linked documents. One common use is making links open inside an <iframe> rather than in the main window or a new tab.

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Document</title>
</head>
<body>
  <h1>Html target link to a iframe</h1>
  <p>In HTML, you can use the target attribute to specify where to open linked documents. One common use is making links open inside an &lt;iframe&gt; rather than in the main window or a new tab.</p>

  <iframe src="" frameborder="1" width="80%" height="500" name="mydisplay"> </iframe>


  <table border="1" cellspacing="0" cellpadding="5">
    <tr>
      <td>Target</td>
      <td>Link</td>
    </tr>
    <tr>
      <td>_self</td>
      <td><a href="/project/blog.html" target="_self">blog</a></td>
    </tr>
    <tr>
      <td>_blank</td>
      <td><a href="/project/blog.html" target="_blank">blog</a></td>
    </tr>
    <tr>
      <td>custom name(mydisplay)</td>
      <td><a href="/project/blog.html" target="mydisplay">blog</a></td>
    </tr>
  </table>
  <p>Links with this target attribute <mark>mydisplay</mark> will open inside that iframe instead of opening in the current tab or window.</p>

</body>
</html>
```




Html project using <iframe>

Preview:

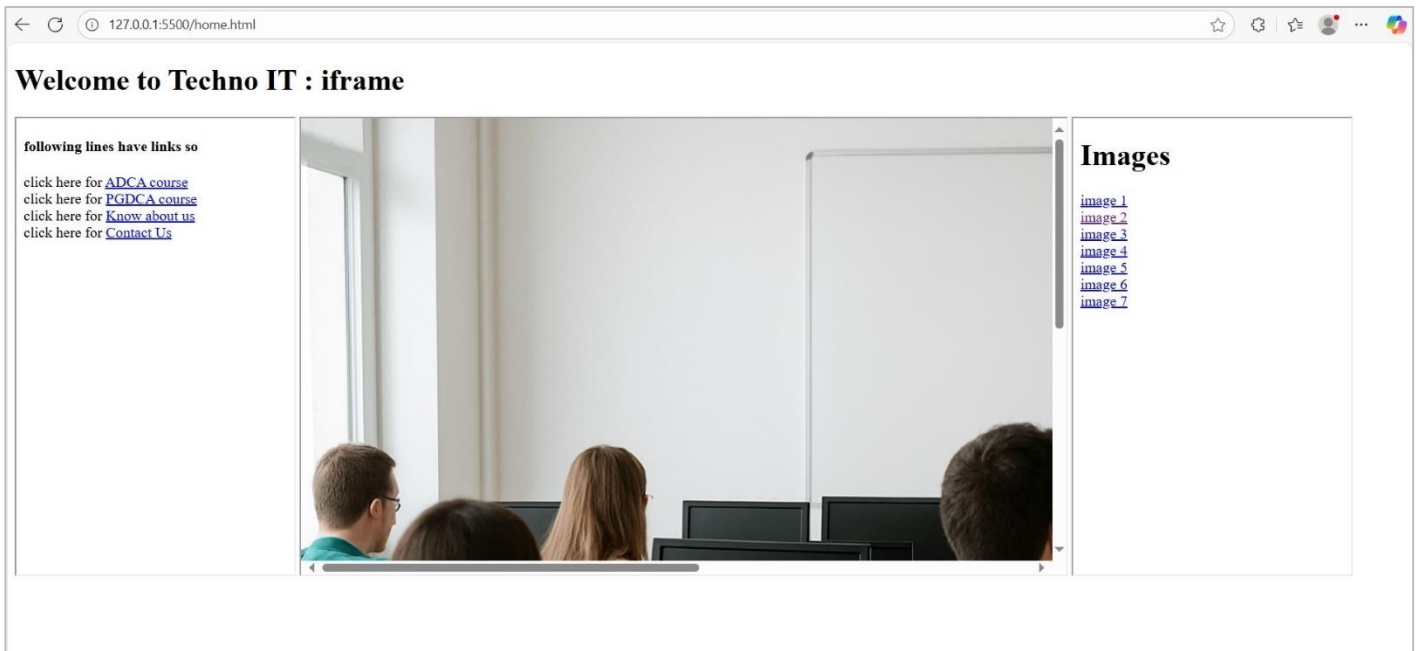

1. First create a folder 📁 “HTML project”.
2. Inside this folder create following html files.
 - a) home.html
 - b) hyperlink.html
 - c) Image.html

a) Save as → **home.html**

```
<!DOCTYPE html>
<html>
<head>
  <title>home Document</title>
</head>
<body>
  <h1> HTML Iframe Layout Project - Techno IT</h1>
  <iframe src="hyperlink.html" width="20%" height="500">for link show</iframe>
  <iframe width="55%" height="500" name="displayFrame">main Display</iframe>
  <iframe src="image.html" width="20%" height="500" >for image show</iframe>
</body>
</html>
```

1 of 3



b) Save as → **hyperlink.html**

```
<!DOCTYPE html>
<html lang="en">
<head>
  <title>Document</title>
</head>
<body>
  <h4>following lines have links so</h4>
```

```

click here for <a href="webpage1.html" target="displayFrame">ADCA course</a> <br>
click here for <a href="webpage2.html" target="displayFrame">PGDCA course</a> <br>
click here for <a href="webpage3.html" target="displayFrame">Know about us</a> <br>
click here for <a href="webpage4.html" target="displayFrame">Contact Us</a> <br>
</body>
</html>

```

2 of 3

c) Save as → **image.html**

```

<!DOCTYPE html>
<html lang="en">
<head>
  <title>Document</title>
</head>
<body>
  <h1>Images</h1>
  <a href="img1.png" target="displayFrame">image 1</a><br>
  <a href="img2.png" target="displayFrame">image 2</a><br>
  <a href="img3.png" target="displayFrame">image 3</a><br>
  <a href="img4.png" target="displayFrame">image 4</a><br>
  <a href="img5.png" target="displayFrame">image 5</a><br>
  <a href="img6.png" target="displayFrame">image 6</a><br>
  <a href="img7.png" target="displayFrame">image 7</a>
</body>
</html>

```

3 of 3

📌 Now Open [home.html](#) in browser to see the final result.

ID Attribute

HTML id attribute provides a unique identifier for an element within a document. It allows targeted selection and manipulation of the element through **CSS** and **JavaScript**, facilitating specific styling and functionality. In CSS, the id attribute is used using the **#** symbol followed by id. quotes are not mandatory in tag=" " in all cases. But writing with quotes is a good practice.

Syntax:

```
<tag id="any_id_name"></tag>
```

```
<!DOCTYPE html>
<html>
<head><title>id attributes</title>
</head>
<body>
<h1 id="header">Welcome to My Website</h1>
<p id="paragraph">Unique: Each id must be unique within the document.</p>
</body>
</html>
```

 **Note:** No two elements should have the same id in a single HTML document.

 Don't Do:

```
<p id="test">First</p>
<p id="test">Second</p> <!--  Duplicate id -->
```

Class Attribute

The HTML **class attribute** is used to assign one or more **CSS classes** to an HTML element. By using classes, you can group elements together and apply consistent styles across them, streamlining both design and functionality.

Syntax

```
<tag class="class_name"></tag>
```

You can also assign multiple classes in single element:

```
<tagname class="class1 class2">Content</tagname>
```

You can also assign same classes in different element:

```
<h2 class="country china">CHINA</h2>  
<h2 class="country india">INDIA</h2>  
<h2 class="country usa">UNITED STATES</h2>
```