



NetworkPortEval

A simple step-by-step guide for anyone who needs to check a Mac network connection and send the result to IT.

Who is this for?

Your IT team can prepare the test template. You only need to review it, run the checks and share the report. No networking expertise is required.

Before you start

Use only the template and destinations supplied or approved by your IT team. A test checks network reachability; it does not prove that an application or service is healthy.

Quick path: [Templates](#) -> [review](#) -> [Run tests](#) -> [Results](#) -> [Email report](#)

1. Open the app and choose a template

Open NetworkPortEval from Applications. On the Templates screen, choose the template your IT team gave you.

Workspace

- Templates
- Overview
- Results
- Scheduled...

Reports

- All Report...

NetworkPortEval - MAS

NetworkPortEval
Network evaluation utility for Mac devices

Language

Templates

Template name: Public network checks

New template Manage categories + Add flow Save template

Template files

Select tests to include in this run

- ☒ All categories
- ☒ General
 - ☒ TCP sandbox test
example.com:443 - TCP Pending
 - ☒ Sandbox test
 - ☒ Cloudflare DNS UDP
1.1.1.1:53 - UDP Pending
 - ☒ Web
 - ☒ Google HTTPS
www.google.com:443 - HTTPS Pending
 - ☒ Apple HTTPS
www.apple.com:443 - HTTPS Pending
 - ☒ Cloudflare HTTPS
www.cloudflare.com:443 - HTTPS Pending
 - ☒ GitHub HTTPS
github.com:443 - HTTPS Pending
 - ☒ Wikipedia HTTPS

Run settings

Timeout per attempt	Delay between test starts	Wait before retry	Retries after failure
5 s	1 s	1 s	3

7 flows - 0 confirmed

TCP checks connectivity, not TLS or application health. UDP requires a response; silence is inconclusive.

Saved automatically - Reports Run tests

Review the selected destinations before starting. Imported flows are intentionally unchecked so you always know what will run.

2. Create or import a template

A **template** is a saved test plan. Use **New template** to create one from scratch, or open **Template files** to import a CSV prepared by your IT team.

After importing, give the template a clear name, review its categories and select only the flows you want to run. Imported flows start unchecked. Save the template when the scope is correct.

Use the optional **Endpoint catalog** for Apple, Adobe or Jamf starter examples. These files are reference material, not complete firewall allowlists.

3. Create and manage flows

A **flow** is one destination and protocol check inside a template. Choose **Add flow** to enter a hostname or IP address, port and protocol: TCP, UDP or HTTPS.

Use the edit control on a flow to correct its destination, port, category or description. Use the trash control to remove an obsolete flow. Category and template changes are saved with the template.

Keep the list focused: add only destinations approved by your IT team. A smaller template is easier for a colleague to run and easier to interpret in a report.

4. Run the checks

When the template looks correct, click **Run tests**. The app may ask whether to include optional public Internet checks. Follow your IT team's instructions; you can skip them.

Workspace

Templates

Overview

Results

Scheduled...

Reports

All Report...

NetworkPortEval-MAS

NetworkPortEval

Network evaluation utility for Mac devices

Public Internet diagnostics (app-added)
These checks are separate from the network flows selected in Templates.
Internet available
Public IP (api.ipify.org): 82.230.163.139
Google: Reachable · HTTP 204 · 192.168.5.79 · TLS Valid
Apple: Reachable · HTTP 200 · 192.168.5.79 · TLS Valid
api.ipify.org: Reachable · HTTP 200 · 192.168.5.79 · TLS Valid
Each web check contacts its named public service. The local MAC is not sent to remote hosts.
Hostnames use the macOS system DNS resolver. Configured servers are listed, but macOS does not report which one answered a lookup. You cannot choose a DNS server in NetworkPortEval.

Network report — 2026-09-28 21.04
28 sept. 2026 à 21:04

Export... Email report

Review report before sharing

The report may include hostnames, tested services, public and local IP addresses, MAC addresses, DNS and VPN details. Redact anything sensitive before sending.

Folder No folder

Completed
7
Click to view results

Failed
0
Click to view results

Open
7
Click to view results

Inconclusive
0
Click to view results

Results

7 flows · 0 confirmed
TCP checks connectivity, not TLS or application health. UDP requires a response; silence is inconclusive.

Saved automatically · Reports

TCP checks whether a connection can be established. UDP needs a response; no response is inconclusive. HTTPS also checks the certificate and requested hostname.

5. Read the results

Open **Results** to see each destination and its status. Use the details view when your IT team needs timing, DNS, TLS or connection information.

Workspace

Templates

Overview

Results

Scheduled...

Reports

All Report...

NetworkPortEval-MAS

NetworkPortEval

Network evaluation utility for Mac devices

Language

Results

Show full details

Status

All

Export...

Status	Name	Host	Port	Protocol	Details
☐ Pending · 0/4	Google HTTPS Web Public HTTPS and TLS certificate check.	www.google.com	443	HTTPS	—
☐ Pending · 0/4	Apple HTTPS Web Public HTTPS and TLS certificate check.	www.apple.com	443	HTTPS	—
☐ Pending · 0/4	Cloudflare HTTPS Web Public HTTPS and TLS certificate check.	www.cloudflare.com	443	HTTPS	—
☐ Pending · 0/4	GitHub HTTPS Web Public HTTPS and TLS certificate check.	github.com	443	HTTPS	—
☐ Pending · 0/4	Wikipedia HTTPS Web Public HTTPS and TLS certificate check.	www.wikipedia.org	443	HTTPS	—
☐ Pending · 0/4	TCP sandbox test General	example.com	443	TCP	—
☐ Pending · 0/4	Cloudflare DNS UDP Sandbox test Single DNS query used to verify UDP responses in the experimental macOS App...	1.1.1.1	53	UDP	—

7 flows · 0 confirmed


TCP checks connectivity, not TLS or application health. UDP requires a response; silence is inconclusive.

Saved automatically · Reports

A blocked or failed check can be caused by a firewall, proxy, VPN or network policy. Share the report with the exact template used so IT can interpret it correctly.

6. Save and share the report

Open the report overview, then choose **Export** for CSV, TXT, PDF or JSON.

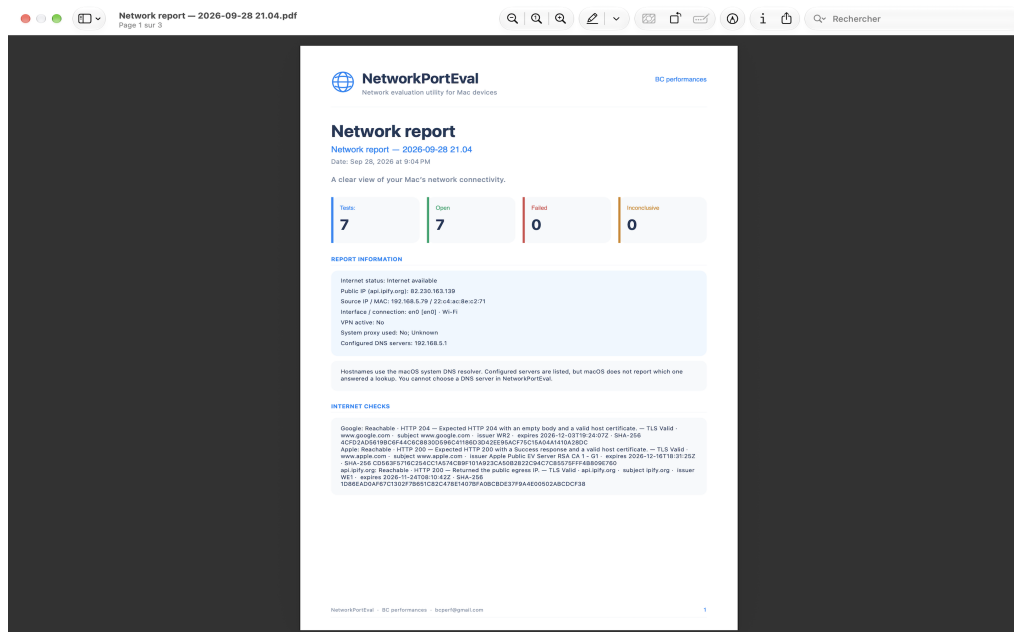

Review the report before sending. Remove sensitive hostnames, IP addresses, MAC addresses or VPN details unless your IT team needs them.

7. Send a report by email

From the report overview, choose **Email report**, select the intended recipient and confirm the draft. NetworkPortEval opens a message in your configured mail app with the report attached.

Check the recipient, subject and attachment before clicking Send. NetworkPortEval does not collect email credentials or send the message itself; you remain in control of the final send.

8. Schedule a recurring check

Open **Scheduled tests**, choose a saved template and interval, and decide whether public Internet checks are enabled. Schedules run only while NetworkPortEval is open.

Troubleshooting and privacy

If a scheduled test pauses, open the template and make sure at least one valid flow is selected. Correct the destination or protocol, then enable the schedule again.

NetworkPortEval does not require an account and has no advertising, analytics or telemetry. Reports and settings stay on your Mac. Optional public checks contact Google, Apple and api.ipify.org only when you choose them.

More help

For endpoint examples, see the **Endpoint catalog**. For CSV imports and technical details, see the user guides in the GitHub repository. If you are unsure what a result means, send the report to your IT team rather than changing firewall or proxy settings yourself.

NetworkPortEval - network diagnostics for everyone