



TERMO DE ACEITE TÉCNICO

Solicitante: SES – Secretaria de Estado de Saúde de Minas Gerais

NOC/Operadora: Pedro Henrique da R. Bernardes

Operadora/Cliente: Marco Aurelio

GRE/Prodemge: Douglas Alvares


Responsável/cliente: Ana Maria

Consórcio
STM/Vodanet

VSAT-ID
SES-PIGA-4320

Porta kbps
384/153

Plataforma
VSAT

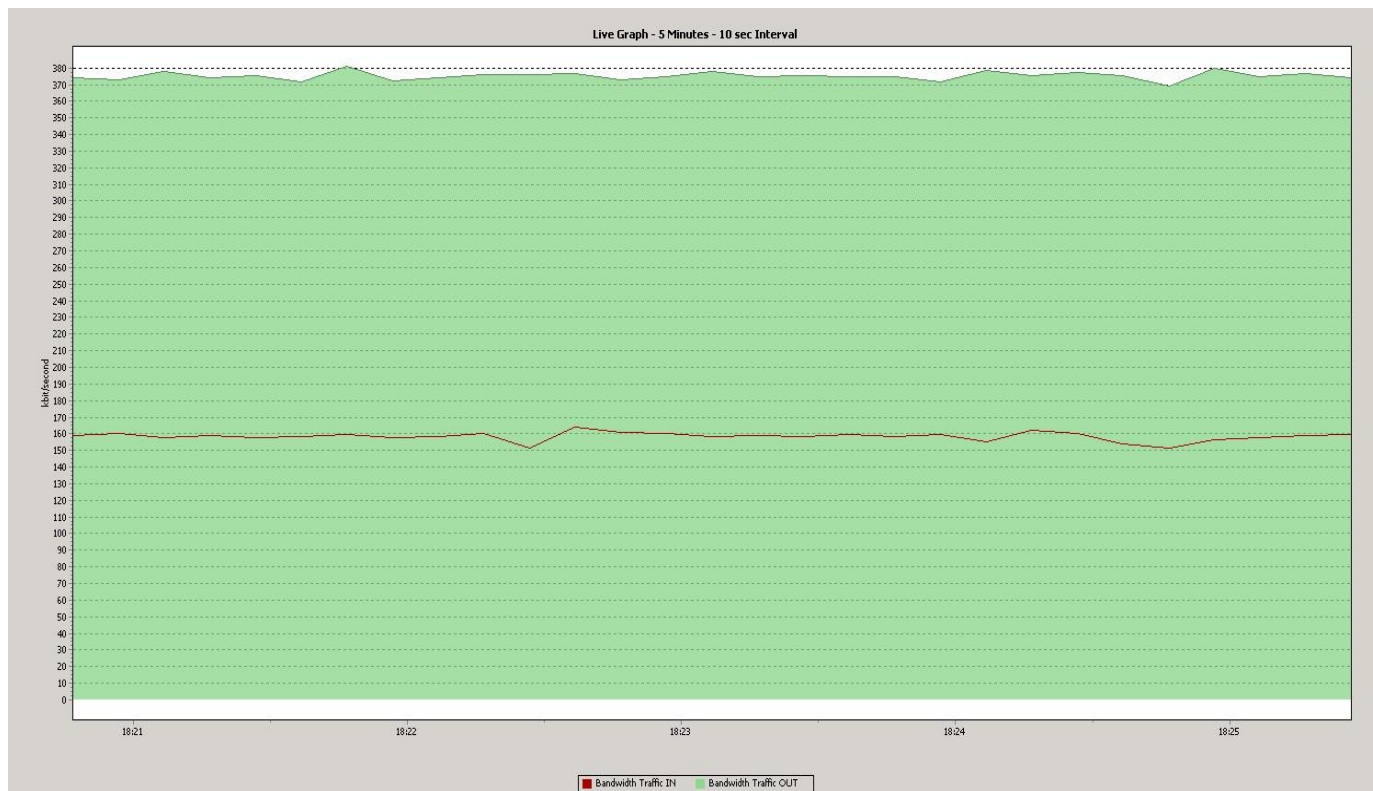

Satellite (DVB) RX Configuration

Auto start : Enabled
Max MODCOD : 15 8PSK-5/6 (SNR threshold: 10.6 dB)
RX watchdog : 15 minute

Idx	Pri	SymbRate[Msp/s]	Freq[GHz]	Mode	PopId	Enable
* 0	0	45.000000	11.606250	DVB-S2	2	Yes
1	1	0.000000	0.000000	DVB-S2	2	Yes

Satellite (DVB) Receiver Status

Rx State : On
DVB State : Forward link up
Network : 65281, Prodemge@Vodanet
Frequency : 11.606621 GHz
Symbol Rate : 44.999758 Msp/s
S2 ModCod
- receiving : 4 QPSK-1/2
- current max : 10 QPSK-8/9
Pilot : On
Frame length : Short
DVB S2 Mode : ACM
Roll off : 0.20
SNR : 8.9 dB
Input Power : -24 dBm

Satellite (DVB) TX Configuration

Auto start : Enabled
IDU Output Power : -23 dBm
IDU Max Output Power: 0.0 dBm
ODU Output Power : 33.2 dBm
EIRP : 46.5 dBW
Default CW Frequency: 0.000000 GHz
ATM mode : VC-Mux
Header Compression : UDP/IP/DSM-CC

Satellite (DVB) Transmitter Status

State : On (TDMA)
IDU Output Power : -21.9 dBm
ODU Output Power : 33.1 dBm
EIRP : 46.4 dBW
Es/No : 9.5 dB
Header Compression : DSM-CC
Timing correction : 1 us (251909 us)
Frequency correction: 60 Hz

IP DVB: 10.148.4.57/32

C:\>ping -n 10 10.172.14.1

Pinging 10.172.14.1 with 32 bytes of data:

Reply from 10.172.14.1: bytes=32 time=569ms TTL=62
Reply from 10.172.14.1: bytes=32 time=577ms TTL=62
Reply from 10.172.14.1: bytes=32 time=596ms TTL=62
Reply from 10.172.14.1: bytes=32 time=603ms TTL=62
Reply from 10.172.14.1: bytes=32 time=528ms TTL=62
Reply from 10.172.14.1: bytes=32 time=546ms TTL=62
Reply from 10.172.14.1: bytes=32 time=584ms TTL=62
Reply from 10.172.14.1: bytes=32 time=577ms TTL=62
Reply from 10.172.14.1: bytes=32 time=586ms TTL=62
Reply from 10.172.14.1: bytes=32 time=539ms TTL=62

Ping statistics for 10.172.14.1:

Packets: Sent = 10, Received = 10, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 528ms, Maximum = 603ms, Average = 570ms