


TERMO DE ACEITE TÉCNICO

Solicitante: VIVO- Projeto Escolas Rurais

NOC/Operador: Allan Santos Cliente: VIVO

EmpresaVSAT-IDLink kbpsPlataformaEMC BrasilVIVO-PER-31149349-MG256k/128kVSAT

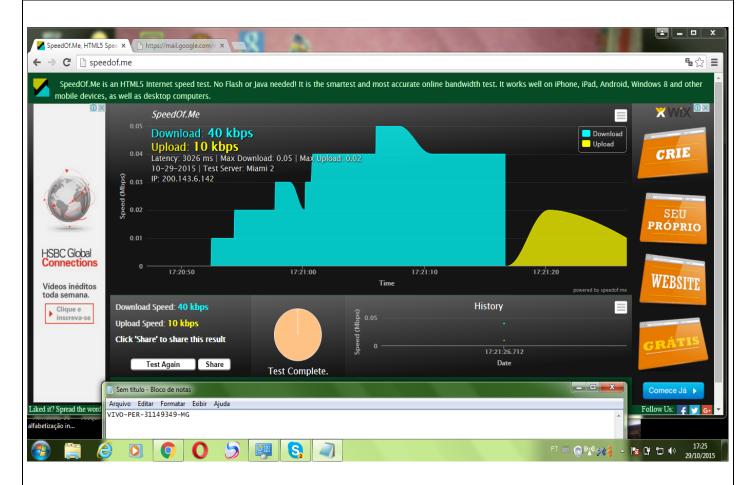

dvb tx show

Satellite (DVB) TX Configuration

Auto start : Enabled

IDU Output Power : -30 dBm

IDU Max Output Power: 0.0 dBm

ODU Output Power : 33.7 dBm

EIRP : 47.0 dBW

Default CW Frequency: 0.000000 GHz

ATM mode : VC-Mux Header Compression : None

Satellite (DVB) Transmitter Status

State : On (TDMA)

IDU Output Power : -20.5 dBm

ODU Output Power : 33.6 dBm

EIRP : 46.9 dBW

Eb/No : 14.0 dB

```
Header Compression : Disabled
Timing correction : -412 us (261750 us)
Frequency correction: -90 Hz
# dvb rx show
Satellite (DVB) RX Configuration
______
Auto start : Enabled

Max MODCOD : 23 16APSK-9/10 (SNR threshold: 23.5 dB)

RX watchdog : 15 minute
Idx Pri SymbRate[Msps] Freq[GHz] Mode PopId Enable
* 0 0 9.320000 12.055825 DVB-S2 4 Yes
Satellite (DVB) Receiver Status
_____
             : On
: Forward link up
: 1326, GlobalIP@Telstar-14R
Rx State
DVB State
Network
Frequency : 12.055623 GHz
Symbol Rate : 9.319974 Msps
S2 ModCod
    - receiving : 16 8PSK-8/9
     - current max : 23 16APSK-9/10
: On
Frame length : Sho
DVB S2 Mode : ACM
                   : Short
                   : ACM
Roll off
                    : 0.25
                   : 13.9 dB
SNR
Input Power : -26 dBm
IP DVB 10.50.0.139/32
Ping desde o MGMT- Server ao IP de trafego e para o DVB.
Ping desde dentro da VSAT 8.8.8.8
# ping 8.8.8.8
64 bytes from 8.8.8.8: time=610 ms
64 bytes from 8.8.8.8: time=770 ms
64 bytes from 8.8.8.8: time=670 ms
64 bytes from 8.8.8.8: time=740 ms
64 bytes from 8.8.8.8: time=750 ms
--- 8.8.8.8 ping statistics ---
5 packets transmitted, 5 received, 0.00 percent packet loss
rtt min/avg/max = 610/700/770 ms
```