

Table of contents

RMS RD - Content and Branding

Global Category Knowledge	2
SOP_Branding Change Management	4
SOP_Characteristics Management	23
SOP_NIV Existing Country maintenance (OGRDS headings)	56
SOP_Local Country Descriptive Headings Maintenance	62
SOP_Client & Consumer NDX Heading	71
SOP_Descriptive Heading_Copy Functionality	79
SOP_Proposal Management	88
SOP_Rule Set Browser	99
Explicit Pairings Overview	130
Schema mapping Rule Set	154

RMS RD - Cross Coding

SOP_Cross coding	177
------------------------	-----

Global Category Knowledge

Global Category Knowledge

Introduction

Please select the relevant industries below to access the appropriate knowledge documentation aligned with each Global Category.

Upon selection, you will receive a Category pack link containing a comprehensive list of characteristics, along with any supporting training materials associated with the selected category.

Note: Not all characteristics are available in every country. For detailed insights into the availability of Categories and Characteristics by country, please refer to the designated dashboard.

Reference to the Super Group list for visual context:

[Automotive](#)

[Baby](#)

[Beverages](#)

[Confectionery](#)

[Cosmetics](#)

[Food](#)

[Healthcare](#)

[Homecare](#)

[Personal Care](#)

[Pet](#)

[Tobacco](#)

Summary and Closing Remarks

This documentation serves as a centralized resource for accessing Global Category-specific knowledge and training materials. By selecting the relevant industry, users are provided with Category links containing a curated list of characteristics and any associated documentation to support their understanding and application.

It is important to note that characteristic availability may vary by country. For detailed, country-specific insights, users are encouraged to consult the dashboard, which offers granular visibility into the deployment of Categories and Characteristics across markets.

We recommend regularly reviewing this documentation and dashboard to stay informed of updates and ensure alignment with current standards and practices.

SOP_Branding Change Management

Standard Operating Procedure

RD – Branding Processes Management

Process:	Branding Processes Management
Country:	All OGRDS Countries
Workstream:	Reference Data
Last revision Date	10 Aug 2023
Document Owner	Global RD Content Process
Document Owner Backup	Global RD Content Process
Document Approver	Rute Louro
Global RD Transformation SPOC	Anisha Patel

Brief description

This document covers best practices for Branding characteristics management.

The goal is to ensure that characteristics are set correctly in accordance with OGRDS, so it is recognizable what is a purpose, concept, and the ownership of each of them.

This document describes processes for branding changes, how, when, and why to use it in order to produce a good content.

Table of contents:

Level of knowledge required	BAU	Setup
1. BRAND OWNERSHIP CHANGE PROCESS	L1	n/a
1.1. Definition of the process	L1	n/a

1.2. Purpose of the process	L1	n/a
1.3. Process Inputs	L1	n/a
1.4 Process Outputs	L1	n/a
1.5. Outcome of the process	L1	n/a
1.6. Use of the Process (when & why)	L1	n/a
1.7. Process Map	L1	n/a
2. WEEKLY CHANGE PROCESS	L1	
2.1. Definition of the process	L1	n/a
2.2. Purpose of the process	L1	n/a
2.3. Process Inputs	L1	n/a
2.4. Process Outputs	L1	n/a
2.5. Outcome of the Process	L1	n/a
2.6. Use of the Process (When & Why)	L1	n/a
2.7. Process Map	L1	n/a
3. SENSITIVITY MANAGEMENT	L1	
3.1. Definition of the process	L2	n/a
3.2. Purpose of the process	L2	n/a
3.3. Process Inputs	L2	n/a
3.4. Process Outputs	L2	n/a
3.5. Outcome of the Process	L2	n/a
3.6. Use of the Process (When & Why)	L2	n/a

3.7. Process Map	L2	n/a
4. EXCLUSIVITY MANAGEMENT	L2	
4.1. Definition of the process	L2	L2
4.2. Purpose of the process	L2	L2
4.3. Process Inputs	L2	L2
4.4. Process Outputs	L2	L2
4.5. Outcome of the Process	L2	L2
4.6. Use of the Process (When & Why)	L2	L2
4.7. Process Map	L2	L2
5. APPENDIX	n/a	n/a
6. GLOSSARY	n/a	n/a
7. CONTACT US	n/a	n/a

Branding Process overview

Branding characteristics are used in client deliverables, Strategic Planner, processes validations, etc and it's very important to have a standard process when it involves changes or sensitivity set up.

Purpose of this SOP is to ensure that all of the changes to BOI and Brand 1 are requested using the correct processes as the changes are managed centrally at dictionary level.

1. Brand Ownership Process

1.1 Process Definition:

This process is used when there is Brand Owner – International a **merger or acquisition completed in the last 3 years** and it needs to be reflected in Branding characteristics in OGRDS.

1.2 Purpose of the process:

This process is used to manage centrally all BOI and Brand 1 changes in OGRDS and the purpose of this SOP is to ensure that all of the changes to BOI and Brand 1 are requested and actioned via this process,

- 17436 BRAND OWNER INTERNATIONAL (BOI)
- 1538 BRAND 1 (few exceptions like parentheses rule/error or similar values)

1.3 Process inputs:

Requests to change Global Brand Ownership can come from a variety of sources and are typically a result of Mergers & Acquisitions in the marketplace, from different teams thru BAU process or Global Category Validation.

Mergers & Acquisitions in the marketplace - old than 3 years - go to Weekly Change process.

Requestor should investigate and provide correct information with proper validations and source in order to share with BOCP community in advance for them to be prepared and action according that.

After an initial review period the Dictionary Team will share the M&A deals (GR) already completed with the relevant research and information acquired whilst conducting the reviewing.

Standard process requires 8 weeks notice before this implementation is actioned in OGRDS. e.g. if first weekly communication is sent on Friday of week 4, the implementation date will be on Monday of week 13th.

1.4 Process outputs:

The process is implemented by a Global Dictionary Team.

The implementation across entire OGRDS - all Countries in a controlled manner (across all relevant items at the same time) .

Changes are implemented in existing items and all back data for the brand is realigned to the new Brand Owner.

1.5 Outcome of the process:

Changes are managed and implemented by Global Dictionary Team to ensure consistency for client deliverables.

To request the Local Country Ops Teams (Globally/All Countries) to update their Local Characteristics to align to the Brand Ownership changes within the same time period as the changes are actioned to the Global Branding Characteristics.

This implies that the Client Deliverables need to be aligned. However, specific instructions and the coordination of the necessary changes are the accountability of Local Teams and/or GSC and CS, dependent on the type of Database impacted.


These Teams will still adhere to their current processes regarding changes to existing Client Deliverables.

Policy endorsed by Product Leadership.

1.6 Use of the process (when & why):

- When – changes are required in BOI/B1 characteristics
- Why – due to mergers and acquisitions

1.7 Process map:

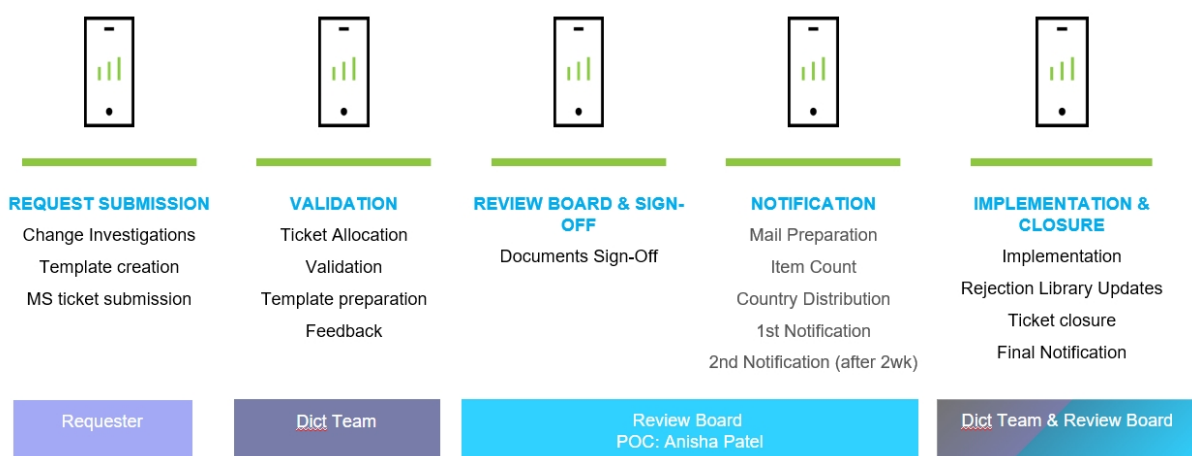

2. Weekly Change Process

2.1 Process Definition:

This process is used when Brand Owner – International and/or Brand 1 need to be changed from a current value to a new value. These changes **exclude mergers or acquisitions in the last 3 years**.

2.2 Purpose of the process:

This process is used to manage centrally all BOI and Brand 1 changes in OGRDS and the purpose of this SOP is to ensure that all of the changes to BOI and Brand 1 are requested and actioned via this process,

- 17436 BRAND OWNER INTERNATIONAL (BOI)
- 1538 BRAND 1
- all versions of Multi Country Brand Extension - only in the instance where Brand 1 changes denote a change to Brand Extension

2.3 Process inputs:

Requests to amend Global Branding Characteristic values can come from a variety of sources and are typically a result of Branding Misalignments (Coding Errors), old Mergers and Acquisitions (older than 3 years) and Global Category Validation.

Requestor should investigate and provide correct information with proper validations and source in order to share with RD LDC users in order to check and approve.

The process includes changes like:

- Changes due to Change or Reject value when validating old proposals (older than a week) from the Proposal Browser
- Incorrect Grammar/Structure Rules - parenthesis errors/spelling errors, etc
- Similar Values
- Multilinked Brands

There are two exceptions to this where the BOI and the Brand 1 can be updated by the individual users/coders these are:

- where the current value is equal or contains NOT DETERMINED

- where the item has been created in the last 10 days

Users will not be able to update BOI/B1 characteristics positive values for items where created date is > 10 days

Through ICV surgery system will provide an error in surgery output and in Workspace a warning will be displayed

After grammar rules validation done by Dictionary Team for all changes requested, file is shared with LDC users to review changes where country distribution is involved.

Countries should review what is proposed and provide feedback to the requestor.

Standard process requires 2 weeks, 1 week for submission and 1 week form country revision.

In case of disagreements the requestor should align with involved countries and take final decision:

From	Type of feedback	Definition
Countries	Agree (1)	<i>the Country agrees with the change proposed</i>
	Disagree - under discussion (2)	<i>the Country disagrees with the proposal, adding a comment for the requestor and it is under discussion with the requestor until finding a final solution</i>
	Disagree (3)	<i>the Country disagrees with the change proposed (if the disagree results in new proposals raise a new ticket)</i> <i>If you disagree with the value proposed, it is mandatory to add a comment with 'why'. If you do not post a comment, there is a risk that the change will be implemented on the agreed date.</i>

	BOCP (4)	<i>the Country disagrees with the proposal and the change should be submitted as BOCP ticket</i>
Final Decision	To be implemented (1)	<i>the changes proposed will be implemented in the OGRDS next Tuesday - all Countries agree with the changes (those Countries that have not given feedback are included here)</i>
	On hold (2)	<i>the changes are under discussion and pending until the final decision and if resolved in current week are implemented or otherwise postponed to the next wave (the first two weeks without raise a new ticket - the proposals will be copied to the new file / 3rd week a reminder is sent to the involved Countries to resolve or the proposals will be deleted/not implemented)</i>
	To be removed (3/4)	<i>the changes after discussion were denied and will not be implemented in the OGRDS (due to varied reasons)</i>

2.4 Process outputs:

The process is implemented by a Global Dictionary Team.

The implementation across entire OGRDS - all Countries in a controlled manner (across all relevant items at the same time) .

Changes are implemented in existing items and all back data

Dictionary Team will implement all Multicountry Brand Extensions wherever there is a change in Brand 1 at the time of implementation.

Applying the agreed changes on the given date - one week after of the 1st mail notification (Tuesday)

Dictionary Team will upload Rejection Library the wrong values in order to not be used in future.

2.5 Outcome of the process:

Changes are managed and implemented by Global Dictionary Team to ensure consistency for client deliverables.

To request the Local Country Ops Teams (Globally/All Countries) to update their Local Characteristics to align to the Branding changes within the same time period as the changes are actioned to the Global Branding Characteristics.


This implies that the Client Deliverables need to be aligned. However, specific instructions and the coordination of the necessary changes are the accountability of Local Teams and/or GSC and CS, dependent on the type of Database impacted.

These Teams will still adhere to their current processes regarding changes to existing Client Deliverables.

2.6 Use of the process (when & why):

- When – changes are required in BOI/B1 characteristics
- Why – due to incorrect grammar rules, coding errors, etc.

2.7 Process map:

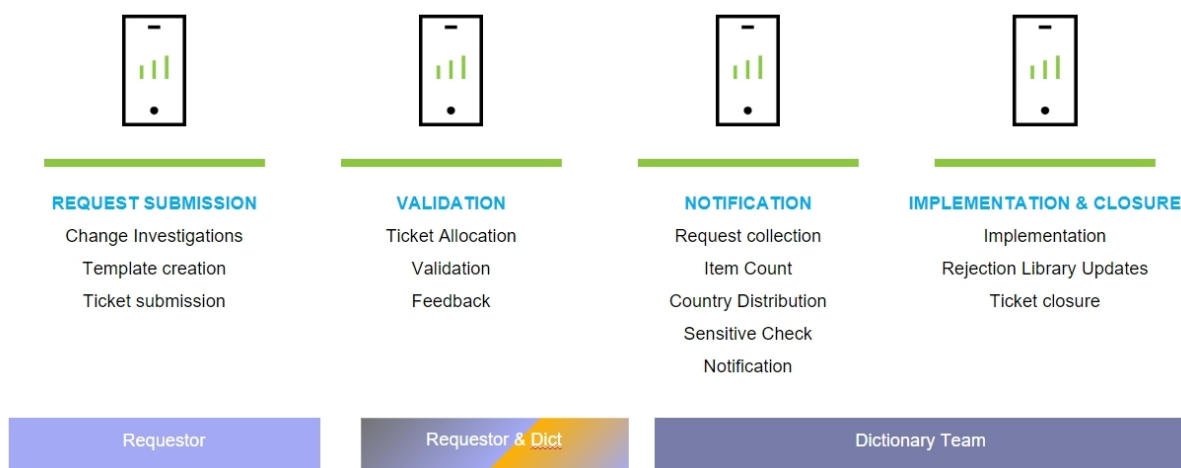

3. Sensitivity Management

3.1 Process Definition:

This process is used to help countries to manage Sensitivity (private label mask).

Private Label definition:

- These Products are owned by the Retailer
- The Branding is usually the Retailer name but in some cases the Retailer creates their own Brand name – such as Daisy for Tesco (for these products it will not be obvious for the consumer that it is a private label product)
- They are typically only sold in that Retailer's stores (although there are exceptions to this)
- The Retailer typically requests that these items are masked in Deliverables

Aligned definition of sensitivity within single global characteristic across countries and across Local and Global Deliverables.

Alignment for PDO Matrix - simplified to use only BOI.

All Retailer Brand Owner International values are flagged as Sensitive.

The sensitive value is applied at characteristic value level and there are a limited selection of characteristics that should be used to drive sensitivity in CIP Deliverables:

- Brand Owner International
- Publisher (the modules where the BOI is not present)
- *Exception* – Input First Countries tend to use Local Manu or Brand characteristics to drive sensitivity as they are still producing deliverables from their legacy output systems

Only one sensitive value can be present on an item for the CIP selected 'sensitive' characteristics.

If the Country does not respect these Business Rules, then the Ogrds load in Eclipse & Nrsp fails at step F_PRIOLAF with message "unique constraint error" for the Country.

3.2 Purpose of the process:

Changing the sensitivity flag in OGRDS has a direct impact in NRSP/Client deliverables, therefore these changes need to be agreed and communicated across all Countries both for RD and CI teams.

With this process is ensured that the sensitive flag is actioned via this process and to explain the steps for sensitivity Management including:

- RD Process Steps
- Sensitivity amendments

3.3 Process inputs:


Requestor should reach out involved countries to get approval to add/remove sensitive flag.

Requestor should investigate and provide correct information with proper validations and source in order to share with RD LDC users in order to check and approve.

After final sign off the requirement should be done to Dictionary Team in order to validate what is required is correct or not and latety send official communication.

3.4 Process outputs:

Dictionary Team will add/remove sensitive flag accordling with what was requested

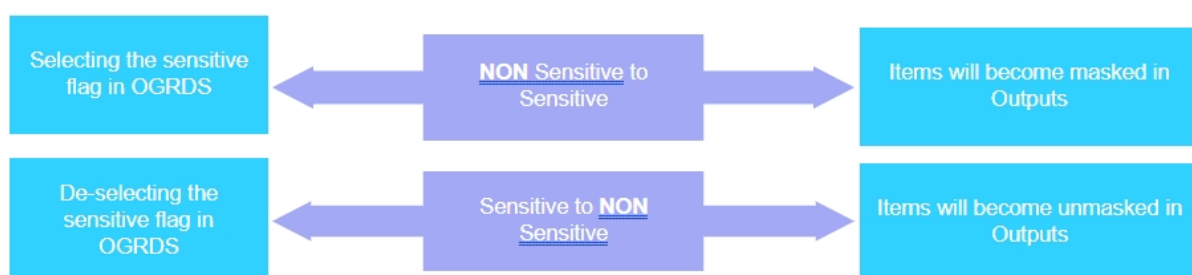

3.5 Outcome of the process:

Sensitive flag set up is managed by Global Dictionary Team.

Is important that the Local teams be aware of the impact that any change on the sensitive flag will have on the deliverables.

These Teams will still adhere to their current processes regarding changes to existing Client Deliverables.

The RD Team should inform their respective Output team regarding value being set up/changed as sensitive or non-sensitive in OGRDS during the daily DOT* calls.

In some cases a reviewing Country may not view the items as sensitive for the BOI even though they agree the BOI represents a Retailer

The Countries which do not want to mask the items then the flag setting is still changed to sensitive in OGRDS but these Countries can 'de-sensitize' the value in Outputs to ensure there is no impact to Deliverables.

Sign off should be taken from Country Output teams before confirming on the request.

Change from Non-Sensitive to Sensitive	Country agrees that value represents a Retailer and accepts with Sensitive flag change?	Country wants to mask items in Outputs?
Country A	YES	YES
Country B	YES	NO

Country requests additional action with CI team to unmask items in Outputs?
NO
YES


Change from Sensitive to Non-Sensitive	Country agrees that value does not represents a Retailer and accepts with Sensitive flag change?	Country wants to mask items in Outputs?
Country A	YES	NO
Country B	YES	YES

Country requests additional action with CI team to mask items in Outputs?
NO (1)
YES (2)

3.6 Use of the process (when & why):

- When – a Brand Owner value at dictionary level needs to have sensitivity ammendment
- Why – to drive sensitivity in client deliverables

3.7 Process map:

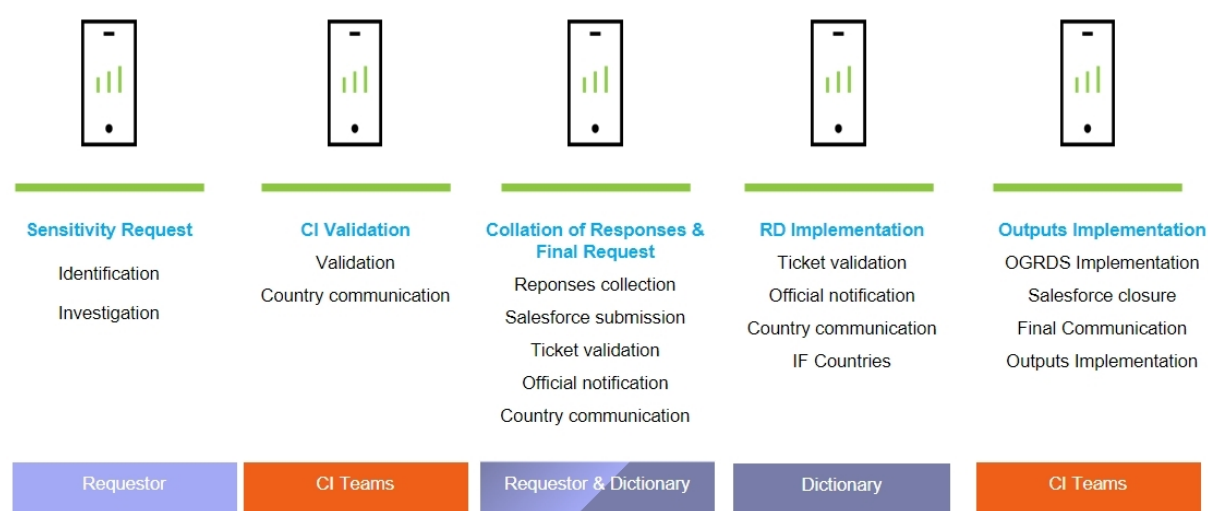

4. Exclusivity Management

4.1 Process Definition:

This process is used to help countries to manage Exclusivity when it should be used and how.

Exclusive Brands/Items definition:

- These Products are not owned by the Retailer
- But in these cases, the Retailer has an Exclusivity Agreement with the Manufacturer/Brand Owner that the items are only sold in that Retailer's stores

- The Exclusivity Agreement may be for an entire Brand or a subset of the Brand (such as specific variants or sizes)
- The Exclusivity Agreement may be for a limited period of time
- The Exclusivity Agreement is at a Country Level
- Due to the Exclusivity of the items the Retailer can request that these items are masked in Deliverables

There is a requirement to supply via the Publication an 'Exclusivity Flag', similar to the 'Sensitivity Flag'.

This is so NRSP can use this flag to apply a different level of masking to the Exclusive items compared to the Sensitive Items.

The exclusivity value is applied at characteristic dictionary level or characteristic value level.

Only the Local Characteristics can be used to drive exclusivity in CIP Deliverables:

- Local Brand / Manuf Characteristic
- Specific Local Characteristic for exclusivity

Only one exclusive value can be present on an item for the CIP selected "exclusive" characteristics.

If the Country does not respect these Business Rules, then the Ogrds load in Eclipse & Nrsp fails step F_PRIOLAF with message "unique constraint error" for the Country.

4.2 Purpose of the process:

Purpose of this SOP is to provide information about the Exclusive Functionality and Processes for Set up and Maintenance.

The setup is done after Global RD Content team and the maintenance is can be done by Local Country LDC.

There needs to be a decision taken to identify which Local Characteristics will be used to group the items that should have the Exclusive Masking applied for the Country.

4.3 Process inputs:

Country needs to understand the requirement and do the setup by Brand level, Item level or both options can be used but not for the same item.

The Requirement from the Retailer needs to be reviewed:

- Is the requirement to mask all items for one Brand or Manu?
 - Use existing local Brand/Manufacturer characteristic
- Is the requirement to mask a defined set of EANS?
 - Use local Exclusivity characteristic

Exclusivity flag management:

- Existing local Brand/Manufacturer characteristic
 - Characteristic level
 - country needs to raise ticket to Schema ticket requesting flag setup for existing local characteristic
 - Value Level
 - LDC needs to identify exclusive brand values and apply exclusivity flag
- New local Exclusivity characteristic:
 - Characteristic level
 - Country follows CRB process for approval of new alternate source characteristic creation
 - The concept of this Characteristic is that it is coded at the point of set up from a Surgery file and then the values remain as they are until another update is sent by the Retailer
 - Values are only added to the Exclusive items and the rest of the items remain NULL
 - This means that the values are not intended to be updated by the coder at all
 - Value level:
 - LDC should create in advance exclusive values and apply exclusivity flag
 - It can be the case where retailer name is included in value description in order to be managed in eclipse/NRSP exclusivity matrix

The Exclusivity Characteristic should not be flagged as Aligned characteristic.

4.4 Process outputs:

Rules for item coding:

- When coding more than one Exclusive value in same item during, Save or Commit action the user will get a **restriction**.
- When coding a Sensitive and Exclusive value in same item during, Save or Commit action the user will get a **warning**.

Brand level:

- All items coded with that Local Brand value are flagged as Exclusive for that Country in NRSP
- New items coded with that Local Brand value are also automatically flagged as Exclusive
- NRSP identifies the Exclusive Flag (the same as as the Sensitive flag) and applies the required level of masking to the deliverable

Item level:

- All items coded with that Local Retailer value are flagged as Exclusive for that Country in NRSP
- The management of the item set is done as per agreement with the Retailer - twice a year? No new items are coded with the value as BAU
- NRSP identifies the Exclusive Flag (the same as as the Sensitive flag) and applies the required level of masking to the deliverable

4.5 Outcome of the process:

Brand level:

- Any new item coded with the specific Brand or Manu will automatically be considered as Exclusive in NRSP
- Watch out for changes to Brand or Manu Values that may mean a different value is used to represent the brand - in these cases a decision needs to be made about whether the new value requires the exclusive flag and communications would be needed with Output Team

Item level:


- No new items are coded with the Exclusive value

- Any updates for new items to be flagged needs to be requested by the Retailer
- The Coder should not be expected to code this value - and it is not copied over/and is not mandatory/and is alternate source so the coder should not see it

4.6 Use of the process (when & why):

- When – there is need to have exclusivity management
- Why – to drive exclusivity in client deliverables

4.7 Process Map:

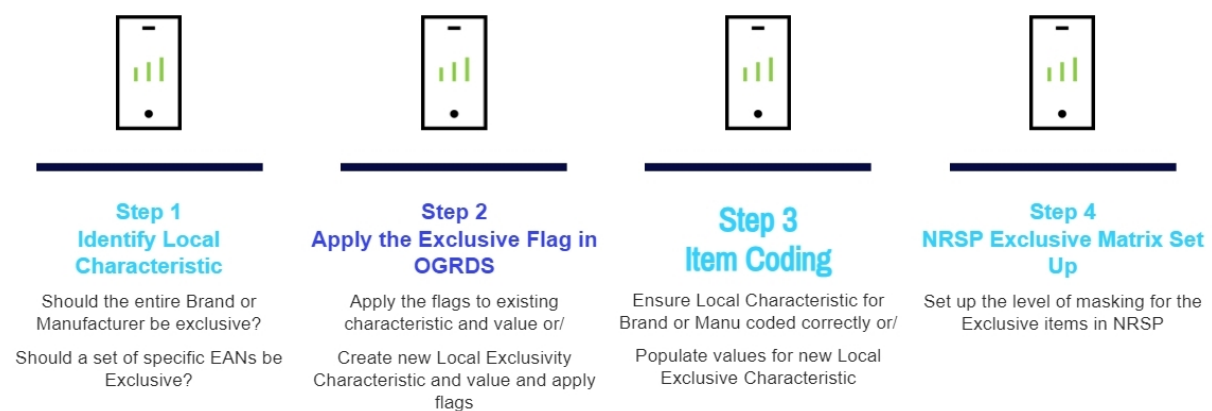

5. Appendix

Topic	Document	Additional Comment
Brand Ownership Change Process	OGRDS Brand Ownership Change Process	
Weekly Change Process	OGRDS Weekly Change Process	
Sensitivity Management	Sensitivity Management E2E Process	
Exclusivity Management	Exclusivity Management E2E Process	

Knowledge level definitions

L0 Onboarding, unable to perform tasks without support
L1 basic knowledge execution only; limited understanding Associate is able to operate within one assigned function's platform and conduct BAU tasks without help. Associate has limited, high-level understanding of the E2E production process flow, knows basic KPIs, can name the CIP components and share the basic dependencies between them.
L2 intermediate knowledge, effective execution & understanding of the process and dependencies Associate is able to effectively operate and understand the purpose of the processes within the BAU process flow as well as the dependencies and consequences within the assigned function application. Is able to set up simple processes.
L3 expert knowledge, full understanding of dependencies, additional entitlements; ability to setup Associate has full knowledge of the majority of options in his platform, is able to perform non-standard tasks (e.g., setup) also requiring additional permissions/entitlements. Understands all dependencies between platforms, is able to suggest workarounds or solve problems in case of issues.

7. Glossary: This covers the list of key words used in this document – [Glossary Master](#)

8. Contact Us:

In case of any questions

Raise a Dynamics ticket for:

Sub Type 1: RD: OGRDS PnB

Sub Type 2: Central Execution Team

Sub Type 3: Brand Owner/Brand

Sub Type 4: All Questions

This will be assigned to GBS-RD-OGRDS CET (Queue); so, RD Content team will check the query.

SOP_Characteristics Management

Standard Operating Procedure

RD – Characteristics management

Process:	Characteristics Management
Country:	All OGRDS Countries
Workstream:	Reference Data
Last revision Date	April'24
Document Owner	Global RD Transformation
Document Owner Backup	Global RD Transformation
Document Approver	Rute Louro/Kamila Sobiecka

BRIEF DESCRIPTION

This document covers best practices for characteristics management.

The goal is to ensure that characteristics are set correctly in accordance with OGRDS, so it is recognizable what is a purpose, concept, and the ownership of each of them.

This document describes a set of flags and attributes that must be selected on each characteristic to ensure the above. It also provides the knowledge on other flags and functionalities around characteristics that should be used to assist the coder in coding process, in automations, as well as to produce a good content.

Table of contents:

Level of knowledge required	BAU	Setup
1. CHARACTERISTICS OVERVIEW	L2	n/a
2. CHARACTERISTICS CLASSIFICATION	L2	n/a
2.1 Group & Sub Group	L2	n/a
2.2 Category	L2	n/a
2.3 Scope	L2	n/a
2.4 Domain	L2	n/a
2.5 Subdomain	L2	n/a
2.6 Country	L2	n/a
2.7 Sort Order	L2	n/a
2.8 Customer	L2	n/a
2.9 Product	L2	n/a
3. CHARACTERISTICS SETTINGS	L1	n/a
3.1 Abbreviation Method	L1	n/a
3.2 Fixed Value List	L1	n/a
3.3 Copy Flag	L1	n/a
3.4 Mandatory flag	L1	n/a
3.5 Numeric Flag	L1	n/a

3.6 Fixed Item values flag	L1	n/a
3.7 Sensitive Flag	L1	n/a
3.8 Exclusive Flag	L1	n/a
3.9 Auto Default flag	L1	n/a
3.10 Exclude from Heading flag	L1	n/a
3.11 Internal use flag	L1	n/a
3.12 Major Flag	L1	n/a
3.13 Exclude from Legacy Publication	L1	n/a
3.14 Availability	L1	n/a
3.15 Core Options	L1	n/a
3.16 Proposal Workflow	L1	n/a
3.17 SKU Value	L1	n/a
3.18 Aligned flag	L1	n/a
3.19 Unique flag	L1	n/a
3.20 Bucket Consolidated item	L1	n/a
3.21 Auto Authorize	L1	n/a
3.22 Translation Flag	L1	n/a
3.23 Anomaly Skip Values	L1	n/a

3.24 Predict Skip Values	L1	n/a
3.25 Dynamic coding configuration	L1	n/a
3.26 Processing group set overrides	L1	n/a
4. CHARACTERISTICS ASSIGNMENTS	L2	n/a
4.1 CRB Process	L2	n/a
4.2 CRB Flow	L2	n/a
5. CHARACTERISTICS VALIDATIONS - DICTIONARY	L1	
6. CHARACTERISTICS KNOWLEDGE BASE	L1	n/a
7. CHARACTERISTICS PAIRS	L2	n/a
8. CHARACTERISTICS MAPPING	L2	n/a
9. UNUSED CHARACTERISTICS DELETION	L2	n/a
10. VALUE ADMINISTRATION HOUSEKEEPING	L1	n/a
11. KNOWLEDGE LEVEL DEFINITIONS	n/a	n/a
12. APPENDIX	n/a	n/a

13. GLOSSARY	n/a	n/a
14. CONTACT US	n/a	n/a

1. CHARACTERISTICS OVERVIEW

Characteristic is an entity used to describe a product attribute.

Each characteristic has defined settings like Country, Scope, Category, Group, Subgroup and others, that define and differentiate one from another.

Refer to [OGRDS Characteristic - Overview](#)

2. CHARACTERISTICS CLASSIFICATION

2.1 Group & Sub Group

Refer to [Characteristic Type - Group and Sub Group.pptx \(sharepoint.com\)abb](#)

Simplified classification of characteristics

Group	Sub Group	Definition	
<u>Physical</u>	<u>Foundation</u>	Chars that contain values that match the wording on the pack	
	<u>Harmonised</u>	Where one value equals more than one foundational value	Yes

	<u>Derived</u>	Chars that can be derived or mapped from the Foundational/ Harmonised set	Yes
	<u>Enrichment</u>	Chars loaded into Enrichment Layer – These chars are not seen by coder in OGRDS, they are only seen in the publication. Values provided by a 3rd party	Yes
<u>Technical</u>	<u>Technical</u>	Chars required for deliverables, for technical reasons	
<u>Custom</u>	<u>Client Maintained</u>	Chars maintained (coded) by Client / Retailer	
	<u>NIQ Maintained</u>	Chars defined by a single client or retailer and maintained by NIQ	Possibly

Represents a Physical Concept?	Defined by NIQ	Maintained by NIQ
Yes	Yes	Yes
Yes	Yes	Global If carbonated Global If diet/light product #GB LOC 00028 Level of sugar

Yes	Yes	BOI Global flavour group Global colour group
Possibly	Possibly (but not in OGRDS)	LI Chars – loaded via back end and only seen in publication-eg #GB LOC BB LI MAY CONTAIN MILK QUALIFIED #FR OTC FONCT OPEN HEALTH SUB CATEGORIES
Possibly	Yes	Yes
Possibly	No	No
No	Yes	Specific Client segmentations

Some Examples

BRAND 1

Global Colour

Global Flavour

#GB LOC - 00033 Flavour of petfood

#GB LOC - 00076 Stage of baby food

Private Label chars –eg

#GB LOC 00122 If private/own label

Exclusive chars

EAN

Banded pack child

Item description

Chars where the client updates new product listings and NIQ loads values into OGRDS

The best practice is to create and code non customized core/physical NielsenIQ defined characteristics in OGRDS. This type of content can be then used to create mappings in Output systems to satisfy client's need.

Char Category	Group	Subgroup
Physical	Physical	Derived
Physical	Physical	Foundation
Physical	Physical	Harmonized

Char Description	Customer field
No Client name	No
No Client name	No
No Client name	No

There are cases when Client request customization that can't be derived from the above physical concepts and therefore a Marketing/Custom characteristic is added into OGRDS.

These chars are either coded based on Client's definition completely, partially (Client classifies new items or may request coding changes) or based on Client's input (Client classifies all items – back data and new) and the content is loaded into OGRDS via surgery.

Char Category	Group	Subgroup
Marketing	Custom	Client Maintained
Marketing	Custom	NIQ Maintained
Alternate Source	Custom	Client Maintained

Char Description	Customer field
Client name present	Yes
Client name present	Yes
Client name present	Yes

There are characteristics that represent a physical concept and are populated by automated process/mapping or the input is provided by third party or internal clients/teams. These are not to be coded by the coders and therefore the expected setting may be as follows:

Char Category	Group	Subgroup
Alternate Source	Physical	Derived
Alternate Source	Physical	Enrichment
Alternate Source	Physical	Foundation
Alternate Source	Physical	Harmonised

Char Description	Customer field
------------------	----------------

No Client name	No
No Client name	No
No Client name	No
No Client name	No

There are also characteristics that were historically added because of technical reasons, lack of functionality in legacy or in OGRDS or SOP not followed by Countries.

They are typically set as follows.

It is against a content strategy to create and assign Technical characteristics*.

Char Category	Group	Subgroup
Alternate Source	Technical	Technical
Physical	Technical	Technical

Char Description	Customer field
No Client name	No
No Client name	No

*The exception are Technical characteristics considered as SOP such as Exclusivity Alternate Source chars.

2.2 Category

Refer to [Characteristic Category - Physical vs Marketing vs Alternate Source.pptx \(sharepoint.com\)](#)

Characteristic Category is defined on each characteristic in OGRDS to determine if the characteristic is to be coded based on Nielsen definition or a Client definition.

- **Physical:**
 - Characteristics are used to describe the properties of a product, this information could be present on the packaging in terms of writing or images, or the information could be derived from the physical presence of the product.
- **Marketing:**
 - coded according to a set of rules supplied by the Client/Retailer. Each Marketing characteristic should be used for 1 specific Cliented.
- **Alternate Source:**
 - coded based on input from an alternate source. These may include Client, third party venture, premium definition etc.
 - They are populated after item creation via surgery or specific mapping process outside OGRDS.
- **Enrichment:**
 - used e.g for Retailer specific Characteristics for Retailer Characteristic Load process where values are applied to the corresponding items via external file submission surgery into CIP Regional Pub based on input from Retailer; or characteristics populated on items via rules set in the backend. The coding, values, assignment/presence are not visible in OGRDS.

2.3 Scope

- **Global:**
 - Multi Country characteristics assigned to the Modules that typically belong in Fully designed Nielsen Categories. They are subscribed to Specific subset of Countries due to various projects (Global content population for specific Client) or following Characteristic Review Board revision. Defined by Content Governance.
- **Generic:**
 - Multi Country characteristics typically present on all Scanning Modules and Subscribed for all Countries. These include: Brand Owner International, Brand 1, Promotional Activity – Type, Promotional Offer, Publisher.
- **Euro:**

- Multi Country characteristics assigned to the Modules. Brought over from Euro IMDB. Subscribed to some European & Africa Countries. Some Transition Countries use EURO Weight Characteristics. These should not be assigned and subscribed ongoing.
- **Local**
 - Single Country characteristics. Brought over from Legacy Platforms. They are used and owned by a single Country (that is defined in a Characteristic Type Country setting). Only present on Items where there is matching Country Distribution
- **AR Foundational:**
 - Multi Country characteristic used for Brand Bank attributes loading. Captures simple values found on pack. Not visible on items in OGRDS

2.4 Domain:

Refer to: [SOP_Characteristic Domain Maintenance.pptx \(sharepoint.com\)](#)

- Used to group/display similar characteristics, Local and Multi Country together on a workspace screen to enable coder to code them in alignment. The Domain values are Product Identification, Volume, Promotion, Packaging, Branding, Category Specific, Segmentation and Nutrition.

2.5 Sub Domain:

Refer to: [Characteristic Subdomain.pptx \(sharepoint.com\)](#)

- Classification is used to group characteristics by the concept they represent across countries. There are 22 subdomains capturing key business groups and an additional 3 to group the remaining chars together.

2.6 Country:

Defines characteristic Country ownership depending on the Scope selection:

- Local Scope – specific Country assigned
- Global, Euro, Generic, AR Foundational Scope – Global

2.7 Sort Order:

Defines the order of characteristics displayed on an item within the Domain

Refer to [OGRDS Sort Order - Country Prefix.xlsx \(sharepoint.com\)](#)

2.8 Customer:

Defines the owner of Marketing/Custom characteristic. Should be populated on every Marketing/Custom characteristic.

- Due to historical reason 'Multi Clients' customer value is applicable for Marketing characteristics with multiple owners across LPCs – Not allowed for new

2.9 Product:

To identify characteristics populated by Label Insight for the Nielsen Product Insight/NPI.

Two values – NPI / ANY (for non label insight chars)

3. CHARACTERISTICS SETTINGS

3.1 Abbreviation Method

Used to abbreviate alternate descriptions of the descriptive values in a way they fit into specified length.

The recommended default option is TRUNCATE + UNIQUE to ensure meaningful alternate descriptions and alternate description uniqueness.

This setting is available only at Dictionary Level.

There are 4 options:

- **ABBREVIATE or TRUNCATE**
 - If one of this option is selected, duplicate alternate descriptions of values may be generated by the system and will need to be solved by the user – NOT RECOMMENDED
- **ABBREVIATE UNIQUE or TRUNCATE UNIQUE**
 - If one of this option is selected system generates unique alternate descriptions
- **US ABBREVIATE**
 - This option is specifically for US. System generates unique alternate descriptions based on specific US rules for alternate description calculation

3.2 Fixed Value List

- Characteristic Dictionary level:

- If selected, stops creation of new values for the Dictionary
- New values cannot be created during item coding process. Only values that exist in characteristic dictionary can be used.
- Values can be manually added from the Char type level by Local Dictionary controllers (Local chars) and Schema Controllers (Multi Country chars) following request from the Coder.
- This way the quality of values added in the dictionary is controlled.
- In case there is a need to populate char with multiple new values, it is possible to remove the flag temporarily by raising a ticket to Schema Team.
- It is mandatory to select for characteristics that have less than 200 values and any characteristic that has a fixed/closed list of values.
- It is mandatory to select for binary characteristics
- Exception for target mapped chars
- **Characteristic Assignment level:**
 - If selected, stops a value being introduced to a Module or Local PC for the first time, even though it may already exist in the Dictionary for that Characteristic.
 - User can only select a value that is already used in the PC/Module during item coding process.
 - A value that is present in the Dictionary but not currently used on any item in the Local Product Class CAN NOT be selected. In such case Local Dictionary Controller (Local chars) or Schema Controller (Multi Country chars) needs to deselect a flag temporarily, allow coder to code and fix the characteristic back.
 - It is recommended to fix characteristic assignment once the list of values is closed/determined to ensure new bad values are not introduced for that characteristic in particular PC/Module
 - It is a good practice to fix the characteristic assignment after the initial population once most available values are covered.

3.3 Copy Flag

- **Characteristic Dictionary level**
 - It is mandatory to select it for all characteristic types unless a value on an item is always different.
 - If deselected at this level, the values of that characteristic will not be copied over to new items even if the flag is set for the below levels.
- **Characteristic Assignment level**
 - By default, the flag is set for all assignments.

- If it is decided not to copy over the values for specific PC/Module, it can be deselected as the PC/Module level.
- **Value level**
 - By default, the flag is set for all values.
 - If it is decided to stop copying over a specific value of a characteristic, the flag can be deselected.
 - It is mandatory to deselect the flag at the characteristic value level for internal use values, e.g., NOT DETERMINED, NOT AVAILABLE, NA. This is to ensure that the coder will review a characteristic and potentially populate a real value.

*For Alternate source characteristic the Copy flag business rules are ignored – value is never copied over to the new item.

If user does not have a permission to populate a specific characteristic, the value will not be copied over to the new item.

3.4 Mandatory flag

- **Characteristic Assignment (Local) and Subscription (Multi Country level)**
 - Should be selected to ensure that the characteristic is fully populated on all items – user cannot save an item without Mandatory characteristics populated
 - It is mandatory to select it on Physical Core characteristics
 - It is mandatory to select it on characteristics that are used by downstream systems where it is needed to fully maintain the characteristic (Sirval, CPS, DA, etc)
 - If it is decided to switch a characteristic from Non-Mandatory to Mandatory, an impact on items as well as the Outputs needs to be considered.
 - Once characteristic is set as Mandatory, a default value selected by the users at this point will be populated on every item that was not coded previously.
 - Default value can be saved permanently - 'Save as Permanent' default, according to the needs and other characteristic settings.

Refer to: [Permanent Default Value - Functionality.pptx \(sharepoint.com\)](#)

3.5 Numeric Flag

- Applicable for Global or Local Characteristics

- It is mandatory to select it for characteristics representing numeric values such as the below characteristics and for any other numeric characteristics where it is important to have numeric value field that can be used for calculations and conversions in Outputs
- Weight/volume
- Number in pack
- Multi packs
- Number of Doses
- Each value contains a numeric field and a Unit of Measure (UOM) field as well as a descriptive fields (Long description and short description)
- Value in Numeric value field is mandatory to be populated for all values representing numbers
- Values that do not represent numbers will not have Numeric value field populated, e.g. NOT DETERMINED.
 - If it is required to create a new descriptive value without number in Numeric value field, it can be done directly in characteristic dictionary by Local Dictionary controllers (Local chars) and Schema Controllers (Multi Country chars)
- Unit field is mandatory only in case a characteristic has Unit(s) assigned.
- Each numeric value MUST be mutually exclusive.

3.6 Fixed Item values flag

- **Characteristic Dictionary level**
- The flag is to be used when the coding is not done by the coder in a workspace – once it is selected characteristic is non editable by the user, it can only be maintained via surgery
- It is a good practice to select this flag on Alternate Source characteristic
- When selected the system will not allow any updates to the Characteristic coding
- Particularly used by Transition Countries where they are still coding Local Chars on their legacy IMDB's and cannot have additional updates happening to these characteristics within OGRDS
- Values are updated only by surgery tools
- Values are copied over to the new items if characteristic, assignment, and that value is flagged as Copy.

3.7 Sensitive Flag

Sensitive means that the Products are owned by the Retailer and they are typically only sold in that Retailer's stores (although there are exceptions to this).

The Retailer typically requests that these items are masked in Deliverables.

- **Characteristics Dictionary level**
 - This is used to drive the sensitivity management in output (Eclipse/NRSP).
 - This Flag is only activated in two Global Characteristics

BRAND OWNER – INTERNATIONAL

PUBLISHER

- **Value Level**
 - Sensitivity Flag identifies Values that are classified as Private Label/Retailer
 - This is used in Local Factory Output/Processing Applications to mask data.
 - The Flag can be amended as required by selecting/de-selecting

3.8 Exclusive Flag

Exclusive means that the Products are not owned by the Retailer but in these cases the Retailer has an Exclusivity Agreement with the Manufacturer/Brand Owner that the items are only sold in that Retailer's stores

The Exclusivity Agreement may be for an entire Brand or a subset of the Brand (such as specific variants or sizes)

The Exclusivity Agreement may be for a limited period of time

The Exclusivity Agreement is at a Country Level

Due to the Exclusivity of the items the Retailer can request that these items are masked in Deliverables.

- **Characteristics Dictionary level**
 - This is used to drive the exclusivity management in output (Eclipse/NRSP).
 - This Flag can be activated only in Local Characteristics
- **Value Level**

- Exclusive Flag identifies Values that are classified exclusivity (non-private label)
- This is used in Local Factory Output/Processing Applications to mask data.
- The Flag can be amended as required by selecting/de-selecting.

3.9 Auto Default flag

Auto Default Flag determines whether the Alternate Descriptions are automatically updated when a Long Description update is actioned

- **Characteristic Assignment level**
 - De-selection of this flag
 - The Long Description can be updated
 - The Alternate Descriptions remain unchanged
 - Although they can be manually updated if required
 - Selection of this flag (set as default on new values)
 - The Alternate Descriptions are automatically updated because of the long description update
- **Value level**
 - Auto Default Flag determines whether the Alternate Descriptions are automatically updated when a Long Description update is actioned.
 - Must be unticked if only Long Description is to be updated on the characteristics and no change is required on the Alternate descriptions.

3.10 Exclude from Heading flag

- **Value Level:**
 - Exclude from Heading Flag determines whether the value will appear in the descriptive headings for an item
 - If selected -The specific value if coded to the item will not appear in the heading for that item
 - If De-selected - The specific value if coded to the item will appear in the heading for that item

3.11 Internal use flag

- **Value Level:**
 - Internal Use is used for UNKNOWN values. E.g. Not determined
 - If this is selected the values will not be included in the descriptive headings.
 - The best practice is to exclude from headings all internal use values.

3.12 Major Flag

This flag is used to determine Major Brand owners for Global categories.
Applied by default for BRAND OWNER INTERNATIONAL & PUBLISHER

- **Value Level:**
 - Major BOI value flag enables Dictionary & Char Pair Proposals for BRAND 1 values used on items coded with Major BOI to be managed by the separate Central Team.
 - If not selected for a BOI Value, new B1 Dictionary Proposals & BOI/B1 Char Pair Proposals are managed by the Local VA Team.
 - If selected for a BOI Value, new B1 Dictionary Proposals & BOI/B1 Char Pair Proposals are managed by the Central VA Team.

3.13 Exclude from Legacy Publication

- **Characteristics Dictionary Level:**
- Enable Exclude from Legacy Publication flag for any characteristic Category for the US Local characteristics and Global Characteristics & PUBLISHER

3.14 Availability

- **Value Level:**
 - Used to specify the date from and/or to the value will be available for selection.
 - If the From Date is specified on value and that value is not yet used on any item, this value will not be removed by Value Administration Housekeeping job.
 - If To Date is specified on value, once the value becomes out of date:
 - Coder will not be able to use it - it is not displayed anymore in the inspector panel for selection.
 - It is not copied over to new items.
 - If the same value is being proposed by the user, system displays error message.

3.15 Core Options

- **Assignment Level for Local Chars:**
 - Indicates if a characteristic within the assignment meets or does not meet Core criteria or whether it is a Duplicate of another existing char assignment.
 - There are 3 options for Core Flagging:

- CORE
- UNFLAGGED
- DUPLICATE
- If no selection/unflagged - char assignment can be used ongoing in DB's (if there is no other viable Core that can be used). It will remain until no longer required.
- If Duplicate option selected - char assignment must not be used ongoing in new set ups
- If Core flag is selected it means that this char assignment should be used ongoing - for DB's, IPM, RDaaS, etc. “

3.16 Proposal Workflow

- Proposal workflow is used for the characteristics where it is important to ensure new values are validated.
- Proposal workflow helps the value to be populated into a Browser to be reviewed by the content SME/LDC.
- Dictionary Level Proposals (for some Countries) are not allowed through to Client Deliverables
- It Enables the coder to complete and save the item, even if they have created a new value.

3.17 SKU Value

- **Value Level:**
 - It is used on SKU Items if there are specific requirements in the Country to show higher level of detail than the Scanning Items associated with the SKU
 - It is used by Countries using SKU / Scanning Links functionality.
 - Flag applied to values containing less granular detail than usual for the characteristic, therefore normally not acceptable for the dictionary
 - Examples: ALL SHAPES, ALL FLAVOURS, ALL COLOURS
 - Value not flagged as SKU Value can be used on both SKU and Scanning Items
 - Value flagged as SKU Value can be used only on SKU Items

3.18 Aligned flag

- **Assignment Level:**
 - It is used for Countries using SKU / Scanning Links functionality.
 - Aligned flag is applied at the point of assigning Characteristics to the SKU Characteristic tab within Local Product Class

- It is used to ensure the aligned characteristic coding within SKU family for the Local PC
- If characteristic not set for alignment, system allows different values to be coded on items in SKU family for that characteristic.
- If characteristic set for alignment, system ensures the same value is used for every item in the SKU family for that characteristic.

3.19 Unique flag

- **Assignment Level:**
 - It is used for Countries using SKU / Scanning Links functionality.
 - Aligned flag is applied at the point of assigning Characteristics to the SKU Characteristic tab within Local Product Class
 - Enables to select set of characteristics that will be included into the Duplicate SKU identification Algorithm for the Local PC
 - Helps to prevent creation of duplicated SKU items.
 - No unique characteristics flagged for Local PC - system allows to create duplicate SKU item with the same set of Char and Char Values as the ones coded to an existing SKU
 - Set of unique characteristics flagged for Local PC - system will not allow user to create new SKU with the same set of Char and Char Values that are already coded to existing SKU.

1. Bucket Consolidated item

- **LPC Value Level:**
 - Equivalent to Product Group, they are used for Out or In Market bucketing, with just a few chars assigned, often LPC, two technical Conso item chars and a technical char to define the In or Out Market.
 - List of Bucket Consolidated items available in the BCI Country Settings tab is based on the values flagged as "Bucket Consolidated Item" in the characteristic that is driving BCI – by SOP LPC.

3.21 Auto Authorize

- **Dictionary Level:**
 - Used to increase efficiency when working on Dictionary Proposals for defined Global Characteristics, e.g. GLOBAL FLAVOUR GROUP (Group chars)
 - Dictionary Proposals are automatically authorized if the proposed value meets a specific set of criteria. The criteria are specific to a small set of particular Global Characteristics

- “If this option is not selected, proposal is reviewed in the Proposal Browser.”
- If this option is selected Proposals are populated in the Proposal Browser and periodically checked by the system and automatically authorized if the rule is met

3.22 Translation Flag

- **Value Level:**
 - Used to help the countries to translate OGRDS content from Central Language into their own Local Language
 - The default Language in OGRDS is Central Language CL (using the English language in multi-country entities).
 - Each Country can configure their Local language according to their requirements and select the type of entities they want/need to translate.
 - Global/Euro Characteristic Values – are translated into all available Parent Languages
 - Local Characteristic Values are only translated into the required (specified) Parent languages that are associated with the Country.
 - For each Characteristic, Translation settings are specified which apply to the values of that characteristic. There are 3 options for Characteristic value translation:
 - No Translation
 - Optional Translation
 - Mandatory Translation

3.23 Anomaly Skip Values

- **Value Level:**

Used for SSV Dictionary - If characteristic to be used for anomaly detection. There are characteristics where SSV cannot perform validations or it does not make sense to do a validation, e.g. Pcode, old characteristic, Alternate Source char, etc.

- Values that are coded as default when information to code them is not sufficient should be skipped from anomaly detection. Examples of such values: NOT DETERMINED, NA, NOT STATED, etc. Blank values are skipped by default.

l

- 1. Predict Skip Values
- Value Level:

Used for SSV Dictionary - If characteristic should be used as predictor, i.e. if the characteristic can be used by DMLE SSV model to check the other characteristics correctness. Characteristics that are not recommended for anomaly detection are also not recommended for prediction.

- values that should not be used as a source of identifying anomalies on other char values. Examples: NOT DETERMINED, NA, NOT_ACTIVE, temporary / not real values. Note! Blank values are skipped by default.

1. Dynamic coding configuration

- **Local Product class**
 - 3 phases – Not Activated, Testing, BAU
- **Local Product class assignment Level and Multi Country subscription level**
 - 3 status – System Coded, Manually Coded and Testing, Manually Coded
 - Dynamic coding Configuration is used to automate item coding to reduce average item coding time.
 - It is used for specific Local/Multi Country characteristics – **System Coded characteristics**.
 - **System Coded flag** needs to be set for relevant characteristics assignments/subscriptions.
- **Dynamic Coding Configuration:**
 - **System Coded** characteristics – initial set for Testing phase should include characteristics that are **not used in Quick Search / Predictive Model** and are not manually typed ITEM DESCRIPTION
 - Characteristics used in Quick Search will be considered as **Manually Coded** and will not be set as System Coded
 - Excluded from the set up are mapped/calculated and Alternate Source characteristics – the settings are not to be updated by the user – the relevant setting will be applied by the system.
 - I.e. Mapped/Calculated characteristics will be set as System Coded & [NO DEFAULT] automatically; for Alternate Source characteristic – the setting is disabled & deselected.
 - By default [COPY ITEM VALUE] should be set for the System Coded characteristics.
 - Mapped/Calculated characteristics will be set as System Coded & [NO DEFAULT] automatically; for Alternate Source characteristic – the setting is disabled & deselected.

- Scenarios – Dynamic Coding Configuration – System Coded value options
 - COPY ITEM VALUE
 - NO DEFAULT
 - DICTIONARY VALUE

Dynamic Coding Configuration:

☒ System Coded

System Coded Value: COPY ITEM VALUE

Sort Order:

- ☒ COPY ITEM VALUE
- ☐ NO DEFAULT
- ☐ DICTIONARY VALUE

- There are 3 phases of Dynamic Coding available at Local Product Class level:
 - **Not Activated** - characteristics are manually coded for the PC, Dynamic Coding settings are not activated, standard coding process followed.
 - **Testing** - characteristic are manually coded for the PC, standard coding process followed, items are staged for Dynamic Coding test where the values are defined following System coding process for each System coded flagged characteristic assignment.
 - The result of System coding is not applied to items, but it can be generated in a later step of this process for the user to review and get confidence on the applied System coding configuration for each characteristic assignment. Final decision on the setting is taken after test results analysis.
 - **BAU** - System coded flagged characteristics are coded by Dynamic Coding process, they are hidden from the user on a new item template. Characteristics not flagged as System coded are manually coded by the coders.
- Local Product Class should be switched to **Testing** phase once all the Characteristics assignment/subscription level settings are complete.

#PT LOC 0001 : PC 4070

Details Source Characteristic Types - Standard Super Groups Products Groups Descriptive Headings Definition Guidelines

Save Translations CENTRAL LANGUAGE

Code: 20561391

Hierarchy:

Long Description: 4070

Alternate Desc 30 Max: 4070

Coding Level: Standard

Flags:
 ☐ Sensitive
 ☐ Internal Use
 ☒ Auto Default
 ☐ Exclude from Heading
 ☒ Copy Item Values
 ☐ Bucket Consolidated Item
 ☒ Enable Core

Enable Dynamic Coding: Not Activated

Availability:

- Not Activated
- Testing
- BAU

 12/31/9999

Manual Characteristics - Dynamic Coding settings:

- Ignore Proposals in Dynamic Coding
 - Do not switch item to the full coding mode if new value/proposal is used on that char on a new Item
 - Do not use the characteristic in Copy item search - This manually coded characteristic will not be used in finding Domain Copy Item and All Char Copy item further in the process
- Include in Copy Item Search
 - Always Include manually coded characteristic in Domain Copy item search – acts like a Control property characteristic. For each of the Domains, include flagged characteristic in copy item search to find a copy item value.

3.26 Processing group set overrides

- Assignment Level:
 - It can be defined at Characteristic Assignment level (Module/LPC) in order to enable specific sorting of the Characteristics on a New Item in the Workspace when the exception is coming from specified Processing Group Set.
 - Additionally, the Default Value can be defined and populated if the value of the characteristics on items that have that set only.

4. CHARACTERISTICS ASSIGNMENTS

Every control property (PC / Module) has a set of characteristics available for the coder to code - Characteristics assignments.

Local characteristics must be assigned to the Local Control Properties – LPCs, while Multi-Country Characteristics must be assigned to Modules.

Local characteristics are assigned to LPC's by Local Dictionary Controllers and Multi Country characteristics are assigned to Modules by Schema Team.

It is not a standard procedure to assign Local Characteristics to Module. If required to assign to the Module, then that must be discussed and agreed with Process Owner.

Characteristics assignments should be set as Mandatory for the Physical Core Characteristics to ensure that the values are populated on every item during coding. (Exception are Physical chars populated by the Rule Set Mapping)

Any new Characteristic assignment should be followed by CRB Process.

Refer to [OGRDS Local Characteristic Assignment Management.pptx \(sharepoint.com\)](#)

4.1 CRB Process (Characteristic Review Board)

Every new Global and/or Local Physical/Alt Source/Technical characteristic creation must be requested and approved by Content Governance Team via Characteristic Review Board/New Concept request process.

Every characteristic assignment to the Control Property (PC/Module) in the scope of Characteristic Review Board, must be requested and approved by Characteristic Review Board.

- The exceptions are:
 - US, XK, IS Countries
 - chars to be assigned to any other than Scanning Schema and Consolidated Modules
 - Custom Marketing Characteristics approval process - Customization Review Board


Existing discontinued characteristics should not be used/renamed to cover a new concept. Such characteristic should be removed and a new one requested and added in OGRDS.

Characteristics representing a particular concept in a set of LPC's/Modules should not be used to cover a different concept.

Description and settings of new characteristics are defined by Local RD Teams (LDC) and verified by Global Schema Team.

Every characteristic in OGRDS should have a definition/guideline.

4.2 CRB Workflow:

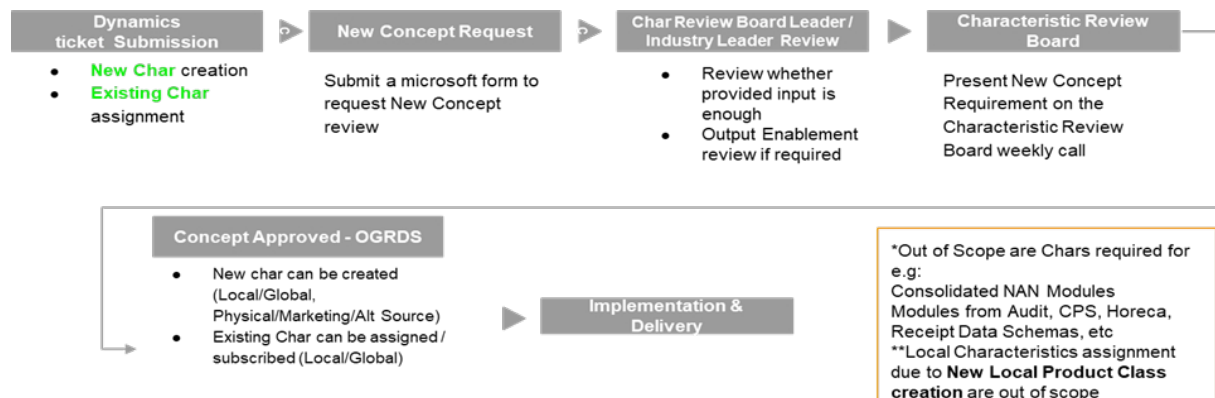

For more details refer to the links:

[CRB process](#)

[Local characteristic assignment management](#)

[Local characteristics management](#)

5. CHARACTERISTICS VALIDATIONS - DICTIONARY

Dictionary Value Validation offers to the Coder validations checks while introducing a new value in a Dictionary and helps user to make better coding decisions into the item coding process.

The process has flexibility to choose required Validation checks at a Characteristic Type level.

Country should analyse characteristics definitions and rules for coding and apply the necessary and possible validations on the target characteristics (this validations are for Dictionary and what is good for one LPC could not be valide for a different LPC).

The benefits of the 'on the spot' validations are:

- More efficient - item already opened/ image already visible
- More 'real time' - new values reviewed at the point of coding

Validations at the point of new dictionary value creation (Item coding, ICD, XCD):

- *Restriction*: By restricting certain input based on rules
 - E.g. Brand values parentheses rules
- *Warning*: Inform coder to correct or follow guidelines
 - E.g. similar value check (shown in screen), where system determines top 3 similar values (ES “Similar to” function)
- *Auto correction*: System to autocorrect input value, coders to be informed
 - E.g. Double spaces to be removed
- *Auto Population*: System will autopopulate Match Char with existing value on source char
 - E.g. Brand Extension rules

Link to the [Item Coding – Characteristics Validation SOP](#)

6. CHARACTERISTICS KNOWLEDGE BASE

- The Knowledge Base relates to Definitions and Guidelines that allows the user to code the characteristics values.
- Knowledge base is available at both Dictionary Level and assignment levels.
- The main purpose of the Knowledge base in OGRDS is to guide the coders during an item coding to
 - To ensure first time right coding
 - Reduce quality escapes / coding errors
 - Enable an easy decision-making process
- The knowledge base for the Global and generic characteristics is defined by Global RD Industry leaders.
 - Request for the missing definitions & guidelines or amendments if any required to the existing definition or guidelines should be raised to schema queue (GBS-RD-OGRDS AR VA Non-Num (Queue)) and must be approved by the Industry Leader.
- Knowledge base for the Local characteristics is defined by Local Dictionary controllers.

7. CHARACTERISTICS PAIRS

- Characteristic pairs are used to improve characteristics coding quality.
 - Coders are guided by seeing already existing value combinations
 - Proposal Management can be set for new Characteristic Pairs value combinations

- Value combinations can be fixed to avoid wrong value combinations to be introduced by coders
- It helps the coders to get the right char value combinations
- It is necessary to ensure that correct Module – LPC value combinations are used on items in OGRDS and that every new combination is validated.
- It is best practice to create characteristic pairs in OGRDS to support the coding process and ensure the good quality of coding.

8. CHARACTERISTICS MAPPING

OGRDS enables users to create mappings to eliminate redundant coding.

Where possible a mapping should be created to automate coding.

Alternate Source or Marketing characteristics should not be used as a target in OGRDS mapping.

Rule Set browser enables Countries to automate the coding of some of their existing Characteristics, by the creation of mapping rules.

Less Characteristics to code should relate to increased productivity and consistent rules implemented by the system should improve quality.

The functionality allows different mappings, Mapped Standard rules (where the rules are build based on source chars) or Special rules (where the values derive from chars or other attributes).

There is also the possibility to map from Global characteristics to Local characteristics.

Refer to:

[Rule Set Browser - Overview.pptx \(sharepoint.com\)](#)

[Rule Set Browser - Mapped Rule Set - Set Up](#)

[Rule Set Browser - Mapped Rule Set - Download & Upload Rules functionality](#)

[Rule Set Browser - Calculated Rule Set - Set Up](#)

[Rule Set Browser - Unmapped Rule Set - Set Up](#)

[Rule Set Browser - Rule Set Maintenance](#)

[Unmapped Manual Coding Browser](#)

9. UNUSED CHARACTERISTICS DELETION

Any characteristic that is displayed on an item template must be coded according to the definitions and guidelines.

OGRDS data is used by multiple downstream systems and processes. Discover, Eclipse, NRSP, HHT, Srival, CPS, etc...

It is therefore not allowed to discontinue/stop coding, unassign and delete a characteristic without checking its usage.

It is needed to perform regular check/clean up on characteristics usage in order not to maintain characteristics that are not needed anymore. Such characteristics should be unassigned from the Local Control Property Values by the Local Dictionary Controller.

Characteristics that are not assigned to any Control Property Value, should be deleted from OGRDS following a request to the Schema Team.

*Have in mind that there are characteristics that are independent of the assignment and required for specific processes (e.g. characteristics populated by OMNI, Label Insight, Brand Bank, OGRDS mappings. This should be identified during characteristic usage check.

10. VALUE ADMINISTRATION HOUSEKEEPING

Value administration housekeeping is an automated surgery that deletes unused Characteristic Values, according to a predefined set of Business Rules.

It is activated on all the GLOBAL (for all Euro/Global characteristics) and Local characteristics for each country that goes live in OGRDS.

It runs automatically and is actioned daily.

11. Knowledge level definitions

L0 Onboarding, unable to perform tasks without support
L1 basic knowledge execution only; limited understanding

Associate is able to operate within one assigned function's platform and conduct BAU tasks without help. Associate has limited, high-level understanding of the E2E production process flow, knows basic KPIs, can name the CIP components and share the basic dependencies between them.

L2 intermediate knowledge, effective execution & understanding of the process and dependencies

Associate is able to effectively operate and understand the purpose of the processes within the BAU process flow as well as the dependencies and consequences within the assigned function application. Is able to set up simple processes.

L3 expert knowledge, full understanding of dependencies, additional entitlements; ability to setup

Associate has full knowledge of the majority of options in his platform, is able to perform non-standard tasks (e.g., setup) also requiring additional permissions/entitlements. Understands all dependencies between platforms, is able to suggest workarounds or solve problems in case of issues.

12. Appendix

This table contains list of all documents related to this activity and provides further details to the process mentioned in this document

Topic	Document	Additional Comment
OGRDS Characteristic Overview	OGRDS CHARACTERISTIC – OVERVIEW .pptx (sharepoint.com)	
Local Characteristics management	Local Characteristics Management.pptx (sharepoint.com)	

Local Characteristic Assignment Management	OGRDS Local Characteristic Assignment Management.pptx (sharepoint.com)	
Local Country - Characteristic Pairs management	Local Country - Characteristic Pairs Management .pptx (sharepoint.com)	
Knowledge Base - Functionality	OGRDS Knowledge Base.pptx (sharepoint.com)	
New Concept Requests - Characteristic Review Board	New Concept Requests .pptx (sharepoint.com)	
Item Coding - Characteristic Validation SOP	Item Coding - Characteristic Validation SOP.pptx (sharepoint.com)	

13. Glossary

This covers the list of key words used in this document – [Glossary Master](#)

14. Contact Us:

In case of any questions raise a Dynamics ticket for:

Sub Type 1: RD: OGRDS PnB Sub

Sub Type 2: SOP/Training

Sub Type 3: Content & Schema & VA

Sub Type 4: All Questions

This will be assigned to GBS-RD-OGRDS SOP Content/Characteristics (Queue); RD Process Governance team will check the query.

SOP_NIV Existing Country maintenance (OGRDS headings)

Nielsen Instore Vision (NIV) Existing Country Maintenance (OGRDS headings)

Process:	NIV Existing Country – OGRDS maintenance
Country / Scope:	NIV Existing Country
Workstream:	NIV Existing Country
Last revision Date	01/11/2022
Document Owner	Kamila Sobiecka
Document Owner Backup	-
Document Approver	Global RD Transformation

Nielsen Instore Vision (NIV) - Existing Country Maintenance

This document provides a comprehensive overview of the maintenance process for existing countries under the Nielsen Instore Vision (NIV) project, specifically focusing on OGRDS headings.

It outlines the procedures, responsibilities, and configurations required for effective data management and integration. The content is derived from the original presentation created by Kamila Sobiecka and updated in July 2023.

Key Points Overview

- NIV maintenance involves updating and configuring OGRDS headings for countries in scope.

- Local RD Leads are responsible for implementing changes provided by the DA Special Project Team.
- Headings such as HHT and ICS CDAR are used for item descriptions and data collection.
- Requests for new headings include templates with required settings and characteristics.
- Settings include description type, function, number, concatenator, drop priority, and sequence.
- Timely implementation and consistency with existing configurations are critical.

NIV Existing Country – OGRDS maintenance

- For Countries in scope of NIV (Nielsen instore vision) it may be required **to include additional categories** for the project.
- Local RD Lead should be contacted by DA Special Project Team and informed about the planned changes. List of RD contact people – OGRDS Country Contacts
- HHT and/or ICS CDAR **headings will need to be assigned** for the requested Modules/Product classes
- DA Special Project Team will provide the necessary information that includes Modules/Product Classes and list of characteristics required to be added in the heading.
- Local RD task is to add relevant settings: function, number, concatenator, drop priority and sequence into provided file.
- Local RD needs to ensure that relevant **branding characteristics** have been provided and included in the heading configuration.
- OGRDS provides an ability to bulk upload new headings and/or heading updates – Headings Configuration Update Surgery
- In case Heading needs to be assigned for only few Modules/Product classes, this can be done manually in the Heading Configuration screen. Copy Heading option can be used as well.
- It is critical to implement new headings within 2 working days

What are the headings used for

Headings used for NIV studies are HHT and ICS CDAR Headings*

HHT Heading usually exists for the Country for most of Modules/Local Product Classes and it is shared between NIV and Retail Audit or even with Sirval. It may be required to assign this heading to the additional Modules/Product Classes for NIV purposes. HHT Heading is used to generate an item description.

Code	Description	Max Le...	Heading Type	Assignment Level	Generate Item D...	Remove Du...	Coun...
1041	SPANISH HHT HEADING	999	HHT	Module			SPAIN
187	SPANISH ICS MOD HEADING	999	CDAR	Module			SPAIN

ICS CDAR Heading was created during NIV set up for Country for limited set of Modules/Product Classes. Additional Modules/Product classes may need to have this heading assigned. This heading is used to define characteristics to be collected as well as for the NIV Output purposes.

*Italy is using HHT/ICS CDAR for [eSOS](#) (local platform used by Store Audit team)

* US has 2 HHT headings (not possible from UI, it's in backend config. 129 - [CatGen/ICS](#) - 530 – GLT)

Headings creation requests

Request from DA Special Project Team to create headings for additional Module/Product class for NIV will include the template with the below details.

This contains information on which CPV needs which heading and what are the required chars in the format that can be updated by RD and loaded in via surgery.

	A	B	C	D	E	F	G	H	I	J	K	L
1	Heading Description	CPV Code	CPV Description	Char Code	Char Name	Description Type	Function	Number	Concatenator	Drop Priority	Remove Duplicate Values Priority	Seq
2	SPANISH ICS MOD HEADING	939432	BEER	3843	#ES LOC HOLG : HOLDING GROUP							
3	SPANISH ICS MOD HEADING	939433	BEER	5952	#ES LOC VDA : VARIEDAD							
4	SPANISH ICS MOD HEADING	939434	BEER	5953	#ES LOC VDA1 : VARIEDAD 1							
5	SPANISH ICS MOD HEADING	939435	BEER	6314	#ES LOC MCA : MARCA							
6	SPANISH ICS MOD HEADING	939436	BEER	6406	#ES LOC PROD : PRODUCTO							
7	SPANISH ICS MOD HEADING	939437	BEER	6411	#ES LOC PROMO: PROMOCION							
8	SPANISH ICS MOD HEADING	939438	BEER	13988	#ES LOC TIP : TIPO							
9	SPANISH ICS MOD HEADING	939439	BEER	14874	#ES LOC PY1 : PYCASA 1							
10	SPANISH ICS MOD HEADING	939440	BEER	38026	#ES LOC HHT CATALOGO							
11	SPANISH ICS MOD HEADING	939441	BEER	6355	#ES LOC NUN : NUMERO UNIDADES							
12	SPANISH ICS MOD HEADING	939442	BEER	3779	#ES LOC ENV : TIPO ENVASE							
13	SPANISH ICS MOD HEADING	939442	BEER	13950	#ES LOC SMCA : SUBMARCA							
14	SPANISH ICS MOD HEADING	939442	BEER	6380	#ES LOC PESO : PESO 5 N							

RD Team needs to add required settings into the file and load it in OGRDS using [Headings Configuration Update Surgery](#)

	A	B	C	D	E	F	G	H	I	J	K	L
18	Heading Description	CPV Code	CPV Description	Char Code	Char Name	Description Type	Function	Number	Concatenator	Drop Priority	Remove Duplicate Values Priority	Seq
19	SPANISH ICS MOD HEADING	939432	BEER	3843	#ES LOC HOLG : HOLDING GROUP	LONG DESCRIPTION	NO FUNCTION		,	13		1
20	SPANISH ICS MOD HEADING	939433	BEER	5952	#ES LOC VDA : VARIEDAD	LONG DESCRIPTION	NO FUNCTION		,	6		8
21	SPANISH ICS MOD HEADING	939434	BEER	5953	#ES LOC VDA1 : VARIEDAD 1	LONG DESCRIPTION	NO FUNCTION		,	5		9
22	SPANISH ICS MOD HEADING	939435	BEER	6314	#ES LOC MCA : MARCA	LONG DESCRIPTION	NO FUNCTION		,	12		2
23	SPANISH ICS MOD HEADING	939436	BEER	6406	#ES LOC PROD : PRODUCTO	LONG DESCRIPTION	NO FUNCTION		,	7		7
24	SPANISH ICS MOD HEADING	939437	BEER	6411	#ES LOC PROMO: PROMOCION	LONG DESCRIPTION	NO FUNCTION		,	3		11
25	SPANISH ICS MOD HEADING	939438	BEER	13988	#ES LOC TIP : TIPO	LONG DESCRIPTION	NO FUNCTION		,	4		10
26	SPANISH ICS MOD HEADING	939439	BEER	14874	#ES LOC PY1 : PYCASA 1	LONG DESCRIPTION	NO FUNCTION		,	2		12
27	SPANISH ICS MOD HEADING	939440	BEER	38026	#ES LOC HHT CATALOGO	LONG DESCRIPTION	NO FUNCTION		NONE	1		13
28	SPANISH ICS MOD HEADING	939441	BEER	6355	#ES LOC NUN : NUMERO UNIDADES	LONG DESCRIPTION	NO FUNCTION		,	10		4
29	SPANISH ICS MOD HEADING	939442	BEER	3779	#ES LOC ENV : TIPO ENVASE	LONG DESCRIPTION	NO FUNCTION		,	9		5
30	SPANISH ICS MOD HEADING	939442	BEER	13950	#ES LOC SMCA : SUBMARCA	LONG DESCRIPTION	NO FUNCTION		,	11		3
31	SPANISH ICS MOD HEADING	939442	BEER	6380	#ES LOC PESO : PESO 5 N	LONG DESCRIPTION	NO FUNCTION		,	8		6

Headings settings

SPANISH ICS MOD HEADING
BEER/SPANISH ICS MOD HEAD

Save
Insert Element
Delete Element
Move Up
Move Down
Generate Examples
Copy

Module: BEER

Heading: SPANISH ICS MOD HEADING

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
#ES LOC HOLG : HOLDING GROUP	LONG DESCRIPTION	NO FUNCTION		,	13
#ES LOC MCA : MARCA	LONG DESCRIPTION	NO FUNCTION		,	12
#ES LOC SMCA : SUBMARCA	LONG DESCRIPTION	NO FUNCTION		,	11
#ES LOC NUN : NUMERO UNIDADES	LONG DESCRIPTION	NO FUNCTION		,	10
#ES LOC ENV : TIPO ENVASE	LONG DESCRIPTION	NO FUNCTION		,	9
#ES LOC PESO : PESO 5 N	LONG DESCRIPTION	NO FUNCTION		,	8
#ES LOC PROD : PRODUCTO	LONG DESCRIPTION	NO FUNCTION		,	7
#ES LOC VDA : VARIEDAD	LONG DESCRIPTION	NO FUNCTION		,	6
#ES LOC VDA1 : VARIEDAD 1	LONG DESCRIPTION	NO FUNCTION		,	5
#ES LOC TIP : TIPO	LONG DESCRIPTION	NO FUNCTION		,	4
#ES LOC PROMO : PROMOCION	LONG DESCRIPTION	NO FUNCTION		,	3
#ES LOC PY1 : PYCASA 1	LONG DESCRIPTION	NO FUNCTION		,	2
#ES LOC HHT CATALOGO	LONG DESCRIPTION	NO FUNCTION		NONE	1

Headings settings for additional CPV's should follow the same logic as for already set up ones.

DESCRIPTION TYPE – determines which char value description will be included in Item Descriptions – Long or Alternative.

FUNCTION - ability to shorten the value description that will be displayed in other interfaces – No function, left truncate, de-vowel options

NUMBER – applicable if function left truncate was selected, otherwise needs to be left blank. Used to specify a number of characters to which the characteristic value description is truncated when included in item descriptions

CONCATENATOR – used between values: space, a coma, a full stop, a slash, etc.) The concatenator set in OGRDS can be taken over to Output (NRSP), to HHTPro and to LHHT, it is not taken over to HHT32 for HHT Headings (here there are specific instructions created within the HHT system

DROP PRIORITY - indicates the importance of the characteristics in terms of which will be dropped if the description is too long in other interfaces. The lowest number is dropped first (i.e. For drop priority in the range of 1 and 15, number 1 will be dropped first)

REMOVE DUPLICATE VALUES PRIORITY – not applicable for CDAR and HHT Headings, can be left blank

SEQ – sequence in which the characteristics will be displayed and populated in Headings configuration screen

	A	B	C	D	E	F	G	H	I	J	K	L
	Heading Description	CPV Code	CPV Description	Char Code	Char Name	Description Type	Function	Number	Concatenator	Drop Priority	Remove Duplicate Values	Priority
18	SPANISH ICS MOD HEADING	939432	BEER	3843	#ES LOC HOLG : HOLDING GROUP	LONG DESCRIPTION	NO FUNCTION		,	13		1
19	SPANISH ICS MOD HEADING	939433	BEER	5952	#ES LOC VDA : VARIEDAD	LONG DESCRIPTION	NO FUNCTION		,	6		8
20	SPANISH ICS MOD HEADING	939434	BEER	5953	#ES LOC VDA1 : VARIEDAD 1	LONG DESCRIPTION	NO FUNCTION		,	5		9
21	SPANISH ICS MOD HEADING	939435	BEER	6314	#ES LOC MCA : MARCA	LONG DESCRIPTION	NO FUNCTION		,	12		2
22	SPANISH ICS MOD HEADING	939436	BEER	6406	#ES LOC PROD : PRODUCTO	LONG DESCRIPTION	NO FUNCTION		,	7		7
23	SPANISH ICS MOD HEADING	939437	BEER	6411	#ES LOC PROMO : PROMOCION	LONG DESCRIPTION	NO FUNCTION		,	3		11
24	SPANISH ICS MOD HEADING	939438	BEER	13988	#ES LOC TIP : TIPO	LONG DESCRIPTION	NO FUNCTION		,	4		10
25	SPANISH ICS MOD HEADING	939439	BEER	14874	#ES LOC PY1 : PYCASA 1	LONG DESCRIPTION	NO FUNCTION		,	2		12
26	SPANISH ICS MOD HEADING	939440	BEER	38026	#ES LOC HHT CATALOGO	LONG DESCRIPTION	NO FUNCTION		NONE	1		13
27	SPANISH ICS MOD HEADING	939441	BEER	6355	#ES LOC NUN : NUMERO UNIDADES	LONG DESCRIPTION	NO FUNCTION		,	10		4
28	SPANISH ICS MOD HEADING	939442	BEER	3779	#ES LOC ENV : TIPO ENVASE	LONG DESCRIPTION	NO FUNCTION		,	9		5
29	SPANISH ICS MOD HEADING	939442	BEER	13950	#ES LOC SMCA : SUBMARCA	LONG DESCRIPTION	NO FUNCTION		,	11		3
30	SPANISH ICS MOD HEADING	939442	BEER	6380	#ES LOC PESO : PESO 5 N	LONG DESCRIPTION	NO FUNCTION		,	8		6

Use RR113 - Descriptive Heading Assignment Level report to compare new headings with an existing ones; to use existing configuration as an example for new headings; for the headings updates – when e.g. one char needs to be added to the existing heading of the Module/PC

Do's and Don'ts

✓ Do's:

- Ensure all heading updates are implemented within 2 working days.
- Use the provided templates and follow the configuration logic of existing headings.
- Coordinate with the DA Special Project Team and Local RD Leads for accurate implementation.
- Use the RR113 report to validate and compare heading configurations.

✗ Don'ts:

- Do not delay the implementation of heading updates.
- Avoid inconsistent configurations that deviate from existing standards.
- Do not ignore the importance of branding characteristics in heading setup.
- Avoid manual updates when bulk upload is more efficient.

Summary

This document has outlined the structured approach to maintaining existing country configurations under the Nielsen Instore Vision project.

It emphasized the importance of timely updates, consistent configuration practices, and collaboration between project teams and local RD leads. By adhering to the guidelines and leveraging the tools provided, teams can ensure accurate and efficient data integration for NIV studies.

Thank you

SOP_Local Country Descriptive Headings Maintenance

SOP-Local Country Descriptive Headings Maintenance

Process:	Local Country Descriptive Heading Maintenance
Country / Scope:	All BAU Countries
Workstream:	Global RD Transformation
Last revision Date	01/07/2023
Document Owner	
Document Owner Backup	
Document Approver	Global RD Transformation

Content Overview

- Important Note: After making changes, the system needs time to process them (via the DC Queue), so try to make all edits at once.
- Previewing Results: Use the “Generate Examples” feature to see how the heading will look on real items.
- Unassigning a Heading: If a heading is no longer needed, you can remove it from the module.
- Maintaining a Heading: You can edit the heading’s structure—like changing the order of words, shortening them, or removing vowels.
- Assigning a Heading: Choose a heading and link it to a product module or LPC (Local Product Code).

◆ Key Steps Explained Simply:

◆ Why is it important?

- It helps ensure that product descriptions are clear, consistent, and follow local standards.

◆ Who uses it?

- Mainly Local Country Dictionary Controllers and users involved in item data management.

◆ What is this SOP about?

- It explains how to manage 'Descriptive Headings' for different countries in the OGRDS system.

Quick Guide for New Users

This SOP document covers the following sections:

- SOP Purpose & Supporting Documents
- Local Country Descriptive Headings Overview
- Assigning a Descriptive Heading to a Module
- Maintaining Existing Descriptive Heading
- Unassigning a Descriptive Heading from a Module

SOP Purpose & Supporting Documents

The purpose of this SOP is to enable users to manage Local Country Descriptive Headings within the OGRDS system. This includes assigning new headings to modules or LPCs, maintaining existing headings, and removing headings when necessary.

Supporting documents include:

[OGRDS Item Updates and DC Queue Limits SOP](#)

[OGRDS Descriptive Headings](#)

[OGRDS Descriptive Headings - Copy Functionality](#)

[OGRDS Heading Configuration Update Surgery](#)

Local Country Descriptive Headings Overview

Descriptive Headings Maintenance

Descriptive Headings for specific countries can be maintained by the Local Country Dictionary Controller.

For the Country specific Descriptive Headings the maintenance can be actioned by the Local Country Dictionary Controller

This includes:


- ❖ Assigning a Descriptive Heading to a Module or LPC
- ❖ Maintaining an existing Descriptive Heading
 - Adding /removing Characteristics
 - Amending options selected for the Characteristics – Long vs Alternate descriptions for example
 - Changing the Order of the Characteristics
 - Changing the concatenator
- ❖ Removing a Descriptive Heading from a Module or LPC

The User profile required to action these tasks is 'Local Dictionary Controller' and the individual User permission is 'Local Heading Maintenance'

Each individual Heading can be set only at one level - either Module or PC Level.

Available Country Headings

The following browser in OGRDS shows the available Headings – if a new Heading is required then this must be raised via SF

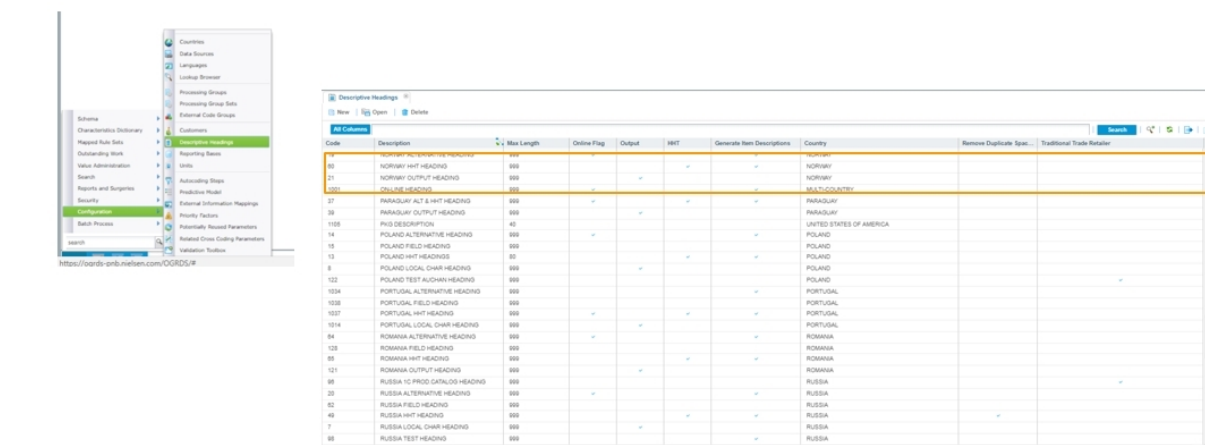

Code	Description	Max Length	Online Flag	Output	HWT	Generate Item Descriptions	Country	Remove Duplicate Spec.	Traditional Trade Marker
10	NORWAY HWT-HEADING	999					NORWAY		
11	NORWAY HWT-HEADING	999					NORWAY		
12	NORWAY OUTPUT-HEADING	999					NORWAY		
13	NORWAY OUTPUT-HEADING	999					NORWAY		
14	ONLY ONE HEADING	999					ONLY ONE COUNTRY		
15	PARAGUAY ALT & HWT-HEADING	999					PARAGUAY		
16	PARAGUAY OUTPUT-HEADING	999					PARAGUAY		
17	PARAGUAY OUTPUT-HEADING	999					PARAGUAY		
18	POLAND ALTERNATIVE HEADING	999					POLAND		
19	POLAND FIELD-HEADING	999					POLAND		
20	POLAND HWT-HEADING	999					POLAND		
21	POLAND LOCAL CHAIR-HEADING	999					POLAND		
22	POLAND TEST ALTERNATIVE HEADING	999					POLAND		
23	PORTUGAL ALTERNATIVE HEADING	999					PORTUGAL		
24	PORTUGAL FIELD-HEADING	999					PORTUGAL		
25	PORTUGAL HWT-HEADING	999					PORTUGAL		
26	PORTUGAL LOCAL CHAIR-HEADING	999					PORTUGAL		
27	ROMANIA ALTERNATIVE HEADING	999					ROMANIA		
28	ROMANIA HWT-HEADING	999					ROMANIA		
29	ROMANIA OUTPUT-HEADING	999					ROMANIA		
30	RUSSIA TO PROD CATALOG-HEADING	999					RUSSIA		
31	RUSSIA ALTERNATIVE HEADING	999					RUSSIA		
32	RUSSIA FIELD-HEADING	999					RUSSIA		
33	RUSSIA HWT-HEADING	999					RUSSIA		
34	RUSSIA LOCAL CHAIR-HEADING	999					RUSSIA		
35	RUSSIA TEST HEADING	999					RUSSIA		

Assigning a Descriptive Heading to a Module/LPC


Assigning a Heading to a Module

For Headings where the flag is selected for **GENERATE ITEM DESCRIPTIONS**, it means that any changes or new assignments to a Module/LPC will generate an item description, and therefore this will send the affected items to DC computation and Publication.

Code	Description	Max Length	Online Flag	Output	HHT	Generate Item Descriptions	Country	Remove Duplicate Spec	Traditional Trade Relation
19	NORWAY ALTERNATIVE HEADING	500					NORWAY		
80	NORWAY HHT HEADING	500					NORWAY		
21	NORWAY OUTPUT HEADING	500					NORWAY		
1001	ONLINE HEADING	500					MULTICOUNTRY		
37	PARAGUAY ALT & HHT HEADING	500					PARAGUAY		
20	PARAGUAY OUTPUT HEADING	500					PARAGUAY		
1105	PVD DESCRIPTION	40					UNITED STATES OF AMERICA		
14	POLAND ALTERNATIVE HEADING	500					POLAND		
18	POLAND FIELD HEADING	500					POLAND		
13	POLAND HHT HEADING	80					POLAND		
8	POLAND LOCAL CHAR HEADING	500					POLAND		
102	POLAND TEST ALTERNATIVE HEADING	500					POLAND		
1034	PORTUGAL ALTERNATIVE HEADING	500					PORTUGAL		
1038	PORTUGAL FIELD HEADING	500					PORTUGAL		
1037	PORTUGAL HHT HEADING	500					PORTUGAL		
1014	PORTUGAL LOCAL CHAR HEADING	500					PORTUGAL		
84	ROMANIA ALTERNATIVE HEADING	500					ROMANIA		
128	ROMANIA FIELD HEADING	500					ROMANIA		
86	ROMANIA HHT HEADING	500					ROMANIA		
121	ROMANIA OUTPUT HEADING	500					ROMANIA		
86	RUSSIA TO PROD CATALOG HEADING	500					RUSSIA		
20	RUSSIA ALTERNATIVE HEADING	500					RUSSIA		
82	RUSSIA FIELD HEADING	500					RUSSIA		
46	RUSSIA HHT HEADING	500					RUSSIA		
7	RUSSIA LOCAL CHAR HEADING	500					RUSSIA		
86	RUSSIA TEST HEADING	500					RUSSIA		

If more than 1,000 items with the specific Country distribution, the approval needs to be given – ticket raised to AR Schema.
Refer to: [OGRDS Item Updates and DC Queue Limits SOP](#)

Assigning Descriptive Heading Procedure

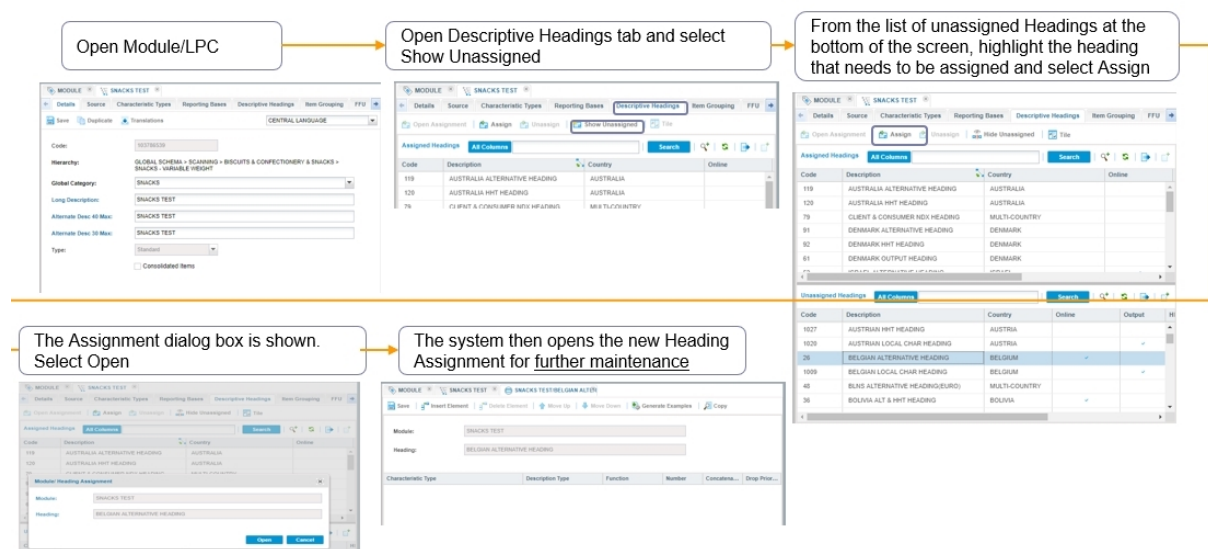

Maintaining Existing Descriptive Heading

The heading maintenance screen displays the characteristics included in the heading, their description types (long or alternate), order, applied functions, truncation numbers, concatenators, and drop priorities. Drop priority determines which characteristics are removed first if the description exceeds length limits in other interfaces.

The screen shows the open Heading assignment details

The screenshot shows the 'BEER/BELGIAN LOCAL CHAR' heading maintenance screen. It includes a table of characteristics with the following data:

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
#BE LOC MAR : MARQUES	LONG DESCRIPTION	NO FUNCTION		.	1
#BE LOC CLA : M#F3CLASSIFICATION	LONG DESCRIPTION	NO FUNCTION		.	2
#BE LOC VAR : VARIETY	LONG DESCRIPTION	NO FUNCTION		.	3
#BE LOC MPA : MUTLI PACK	LONG DESCRIPTION	NO FUNCTION		.	4
#BE LOC DESCF : M#DESCRIPTION	LONG DESCRIPTION	NO FUNCTION		.	5
#BE LOC EMB : REFILL	LONG DESCRIPTION	NO FUNCTION		.	6
#BE LOC MAT : MATIERE SUPPORT	LONG DESCRIPTION	NO FUNCTION		NONE	7

Callouts explain the following fields:

- Characteristics that are included in the Heading**: Points to the 'Characteristic Type' column.
- The order that the characteristics appear on this screen is also the order their values are seen in the heading**: Points to the 'Drop Priority' column.
- Description Type - whether the Long description or an alternate description of the value is used in the item heading**: Points to the 'Description Type' column.
- Whether a Function is applied**: Points to the 'Function' column.
- Number - relevant when the function of LEFT or DE-VOWEL is used**: Points to the 'Number' column.
- Concatenator - the character used to separate the values in the heading**: Points to the 'Concatenator' column.
- Drop Priority - indicates the importance of the characteristics in terms of which will be dropped if the description is too long in other interfaces (The lowest number is dropped first (e.g. For drop priority in the range of 1 and 15, number 1 will be dropped first))**: Points to the 'Drop Priority' column.

Heading Function Details

Two functions can be applied to characteristic values:

- DE-VOWEL: Removes vowels (AEIOU) from the value except when the vowel is the first letter of a word.
- LEFT TRUNCATE: Truncates the value to a specified number of characters. These functions are independent of the alternate value description shortening function.

DE-VOWEL: If the user has specified a de-vowel function, the system includes a reformatted version of the value descriptions in the item descriptions that are generated from the heading

The algorithm used for devowelling is as follows:

- ❖ Vowels are removed from the value, except where the vowel is the first letter in a word
- ❖ Vowels relate to the following characters AEIOU and nothing else
- ❖ This de-vowelling function is independent from (and additional to) OGRDS Alternate Value description shortening function

LEFT TRUNCATE: If the user has specified a Left Truncate function, the system enforces that the user also specifies a number of characters to which the characteristic value description is truncated when included in item description.

Characteristic Type	Description Type	Function	Number
BRAND 2 - EXTENSION	LONG DESCRIPTION	LEFT TRUNCATE	10
#PL LOC THP : THP TYPE HOUSEHOLD PRODUCTS	LONG DESCRIPTION	DE-VOWEL	5
#PL LOC FRM : FRM PRODUCT FORM	LONG DESCRIPTION	LEFT TRUNCATE	3
#PL LOC FRH : FRH FRAGRANCE HOUSEHOLD	LONG DESCRIPTION	LEFT TRUNCATE	3
#PL LOC RFL : RFL IF REFILL	LONG DESCRIPTION	LEFT TRUNCATE	4
#PL LOC PRO : PRO PRO	LONG DESCRIPTION	LEFT TRUNCATE	4
#PL LOC PNU : PNU PNU	LONG DESCRIPTION	LEFT TRUNCATE	4
#PL LOC MUTUA : MUTUA MUTUA	LONG DESCRIPTION	LEFT TRUNCATE	4

Value with Left-Truncate function truncated after 10 characters

Value INTERMITTENT FRESHENER - SPRAY with De-Vowel function applied and truncated up to 5 characters

Elements Amendment

To amend an element:

- Select the element to open the Inspector Panel.
- Modify the details such as characteristic type, description type, function, number, and concatenator.
- Click 'Apply' and then 'Save' to confirm changes.

The list of Characteristics that make up a Heading are known as 'Elements'

INSPECTOR PANEL DETAILS

Characteristic Type Includes:

- Module
- All Multi Country Chars assigned to the Module
- All the Local Characteristic type that are associated with the same country as the Country on the heading type of the assignment

Description Type: relates to Long and Alternate Descriptions present for the Characteristic

Functions available:

- No Function, Left Truncate, De-vowel

Number: if Left Truncate selected

Concatenator:

- # (), - , . , : , ; , X \ ^ | ~ None, Space, Split

To amend an 'element' the element is selected.

- This opens Inspector panel that contains element details.
- The details can be amended as necessary.
- Apply is selected
- New settings are displayed in the grid
- Save is selected to apply the changes to the Heading

Adding, Reordering, and Deleting Elements

- Select an existing element and click 'Insert Element'.
- Choose the characteristic and configure its details in the Inspector Panel.
- Click 'Apply' and then 'Save'.

[illegible]

- Use 'Move Up' or 'Move Down' options.
- Click 'Save' to apply changes.

- Select the elements and click 'Delete'.

Delete an Element

- Select the element or elements to delete
- Select DELETE
- Elements are removed from the heading



BEER/BELGIAN LOCAL CHAR

Save | Insert Element | **Delete Element** | Move Up | Move Down | Generate Examples | Copy

Module: BEER

Heading: BELGIAN LOCAL CHAR HEADING

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
#BE LOC MAR : MARQUES	LONG DESCRIPTION	NO FUNCTION		-	1
#BE LOC CLA : MF3CLASSIFICATION	LONG DESCRIPTION	NO FUNCTION		-	2
#BE LOC VAR : VARIETY	LONG DESCRIPTION	NO FUNCTION		-	3
#BE LOC MPA : MULTI PACK	LONG DESCRIPTION	NO FUNCTION		-	4
#BE LOC DESCF : MDESCRIPTION	LONG DESCRIPTION	NO FUNCTION		-	5
#BE LOC EMB : REFILL	LONG DESCRIPTION	NO FUNCTION		-	6
#BE LOC MAT : MATIERE SUPPORT	LONG DESCRIPTION	NO FUNCTION		NONE	7

Re-order

- Select the element to re-order
- Use the Move Up and Move Down options to re-order the element
- Continue with other element re-ordering
- Select SAVE


Heading Amendments and DC Queue

After making changes to a heading assignment, all relevant items in the module or LPC must pass through the DC Computation Queue before further changes can be made. OGRDS enforces this by preventing additional changes until the queue is cleared. It is recommended to make all necessary changes at once to minimize processing delays.

- ❖ Once a change is made for a Heading assignment, all relevant items in the Module/LPC need to be passed through the DC Computation Queue **before another change can be made to that specific heading assignment** (OGRDS will not allow the user to do this - an error will be shown)
- ❖ It is SOP to ensure that all changes are made **to one particular heading at the same time** so that the relevant set of items is only passed to the DC Computation queue once.

Generate Examples

Users can preview how headings will appear by selecting 'Generate Examples'. The system displays sample item descriptions based on existing items or randomly selected characteristic values if fewer than six items exist.

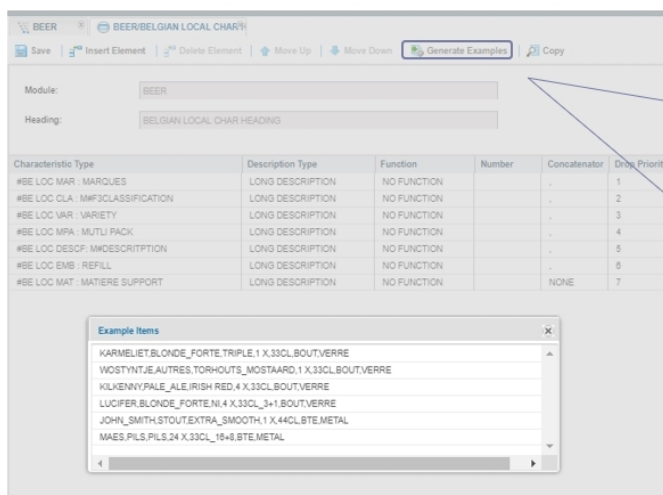

This provides the user with some examples of what the headings will look like for a selection of the items


- Open a specific heading
- Select Generate Examples
- Example Items window is populated for 6 items based on the following rules:
 - If there are items in existence in the assignment module, the system employs randomly selected items as the basis for the example descriptions
 - If there are no items (or less than 6) in the module, the system assembles randomly selected characteristic values from the specified Characteristic Types in order to generate examples descriptions, where necessary

Unassigning a Descriptive Heading from a Module

To unassign a heading:

- Open the Module or LPC.
- Navigate to the Descriptive Headings tab.
- Highlight the heading and select 'Unassign'.
- Confirm the action in the dialog box.

The heading will be removed from the list of assigned headings.

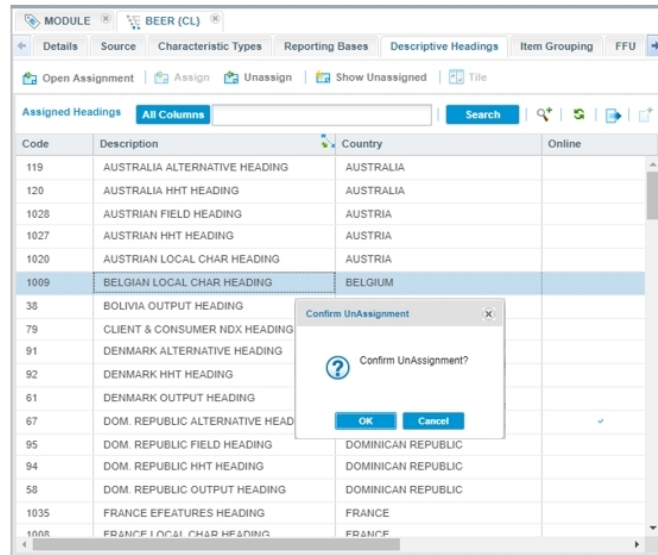

- Open Module/LPC
- Open Descriptive Headings Tab
- From the list of assigned Headings - highlight the heading that needs to be unassigned
- Select Unassign
- The Unassignment dialog box is shown - Select OK
- The system then unassigns the selected descriptive Heading and will remove from the list of assigned heading.

Summary

This SOP provides comprehensive guidance on managing Local Country Descriptive Headings in OGRDS. It outlines procedures for assigning, maintaining, and unassigning headings, including the use of functions, configuration of elements, and implications for DC computation. Following these steps ensures accurate and consistent item descriptions across modules and LPCs.

Thank you

SOP_Client & Consumer NDX Heading

Client & Consumer NDX Heading – SOP Document

Process:	Active Items Extraction (EHDV21073P)
Country / Scope:	All Bau Countries
Workstream:	Global RD Transformation Content
Last revision Date	01/07/2023
Document Owner	Anisha Patel
Document Owner Backup	Kamila Sobiecka
Document Approver	Sandy Cox

Overview

This Standard Operating Procedure (SOP) outlines the configuration, usage, and publication rules for the Client & Consumer NDX Heading within the Global RD Transformation framework.

It provides detailed guidance on how item descriptions are generated, the rules for masking sensitive data, and the publication process.

The document is intended for RD teams and system users responsible for managing item descriptions in the RD ecosystem.

Client Item Description & Consumer Item Description for NDX

Generated based on CLIENT & CONSUMER NDX HEADING settings in OGRDS

- Title case is used to create Client & Consumer Item Description
- Duplicate Values are removed based on defined rules
- The description is suffixed with EAN/UPC (no LAC/RVW) considering Code type Classification Hierarchy defined in autocoding; Masked Item descriptions (Sensitive) are suffixed with NAN Key instead of EAN/UPC
- In case of shared items if one of Countries is not subscribed to one/some of the chars used in the Heading configuration, the description will be generated for that item considering all configured chars coded by at least one Country

Example:

CLIENT & CONSUMER NDX H2A BEER/CLIENT & CONSUMER H2

Save Insert Element Delete Element Move Up Move Down Generate Examples Copy

Module: BEER

Heading: CLIENT & CONSUMER NDX HEADING

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority	Remove Duplic...
GLOBAL BEER - TYPE	LONG DESCRIPTION	NO FUNCTI...		SPACE	1	1
GLOBAL BRAND EXTENSION	LONG DESCRIPTION	NO FUNCTI...		SPACE	7	7
GLOBAL FLAVOUR	LONG DESCRIPTION	NO FUNCTI...		SPACE	4	4
GLOBAL PERCENTAGE ALCOHOL CONTENT BY VOLUME	LONG DESCRIPTION	NO FUNCTI...		Space	3	
GLOBAL PACKAGING	LONG DESCRIPTION	NO FUNCTI...		SPACE	2	2
GLOBAL WEIGHT/VOLUME PER MEASURED UNIT - AC...	LONG DESCRIPTION	NO FUNCTI...		Space	6	
GLOBAL NUMBER IN MULTIPACK - ACTUAL	LONG DESCRIPTION	NO FUNCTI...		None	5	


Heineken lager 0% can 330mlX6 123 (Client Item Description)

Client & Consumer NDX Heading Details

This heading is used to create Client Item Description and Consumer Item Description outside of OGRDS Core in the RD Eco System.

- Only one heading per Country can be checked with this flag
- This heading can be set only at specific level depending on Country selection:
- If the Heading Type is Client Heading and Country is 'Multi-Country' the Assignment Level should be Module.
- If the Heading Type is Client Heading and the Country is not 'Multi-Country' the Assignment Level should be 'Product Classes' . (Local IPM Headings)
- Generate Item description option is disabled - because the descriptions are not required to be created in OGRDS Core
- Country selection is default to multi-Country

- No changes will be seen on the item even though it has configuration.

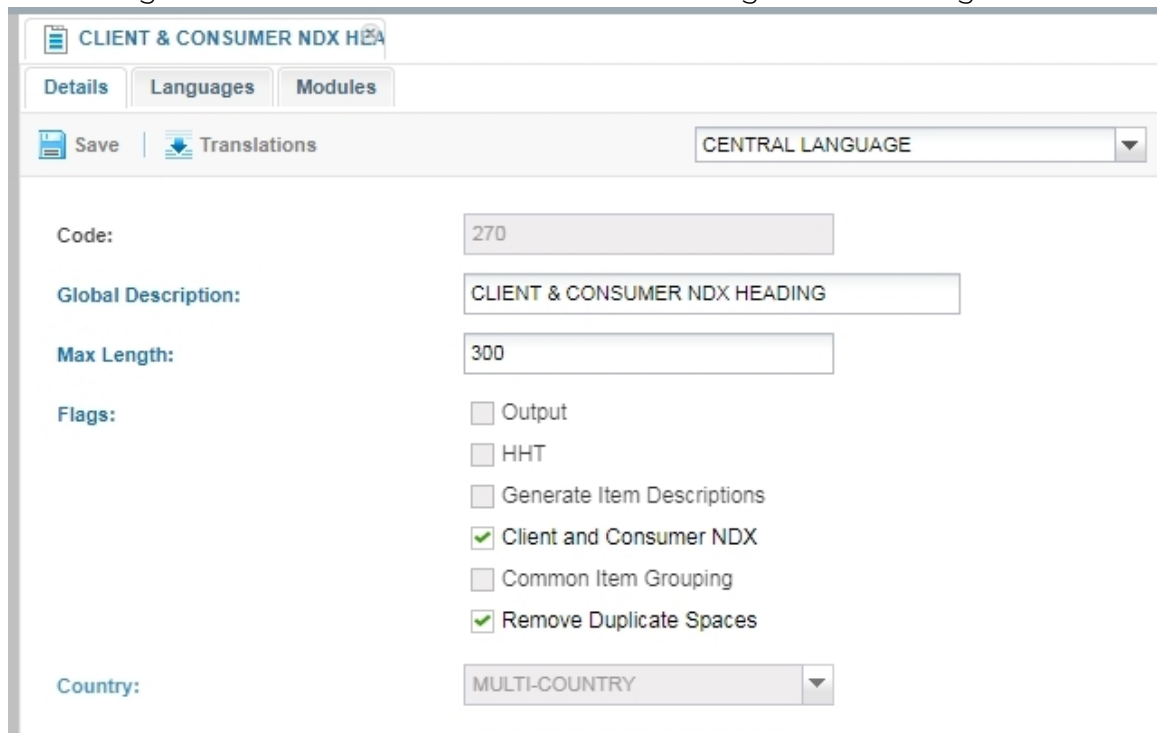

CLIENT & CONSUMER NDX HEADING

Details Languages Modules

Save Translations CENTRAL LANGUAGE

Code: 270

Global Description: CLIENT & CONSUMER NDX HEADING

Max Length: 300

Flags:

- ☐ Output
- ☐ HHT
- ☐ Generate Item Descriptions
- ☒ Client and Consumer NDX
- ☐ Common Item Grouping
- ☒ Remove Duplicate Spaces

Country: MULTI-COUNTRY

Client & Consumer NDX Heading Publication

This heading is used to create Client Item Description and Consumer Item Description outside of OGRDS Core in the RD Eco System.

- Configuration and updates to the Client & Consumer Headings are not sent to DC Queue
- New Heading configuration and Removal of All Characteristics elements are included only in Full Publication (no item limit) however actions like:
- Insert/Update/Remove Characteristic element from Module
- Subscribe/Unsubscribe Characteristic from Country that is used in Module as Char Element
- Are included in Full, Incremental and Micro publications, therefore number of updated items must be taken into account.

* Heading updates – user actions:

Users are not allowed to update the details on a Module-heading type if there is a process already running to update item descriptions related to the same heading type. Once the current process is completed only then the user will be able to update the heading type configuration.

Client & Consumer NDX Heading assignment

Characteristics available for selection are limited to **AR Flagged Global and Generic** characteristics for the Multi Country Heading Set at the Module Level.

For the **Local Headings - IPM headings**, characteristics available for selection are: **Generic, Global Numerics and Local** characteristics (only **Local Core** flags should be selected).

Remove Duplicate Values Priority option is enabled only for NON NUMERIC characteristics.

All other functionality remains same for Heading Configuration

The screenshot shows a software interface for configuring air fresheners. At the top, there are two tabs: "CLIENT & CONSUMER NDX H2A" and "AIR FRESHENERS CONTINUOUS". Below the tabs is a toolbar with icons for Save, Insert Element, Delete Element, Move Up, Move Down, Generate Examples, and Copy. The main area is divided into two sections. On the left, there are two input fields: "Module:" with the value "AIR FRESHENERS CONTINUOUS - NO DEVICE - GRANULES/POWDER/STONES" and "Heading:" with the value "CLIENT & CONSUMER NDX HEADING". On the right, there is a table with the following columns: "Characteristic Type", "Description Type", "Function", "Number", "Concatenator", "Dr...", and "Re...". The table is currently empty. To the right of the table, there are several dropdown menus and input fields: "Characteristic Type:" (select), "Description Type:" (select), "Function:" (select), "Number:" (input), "Concatenator:" (select), "Drop Priority:" (input), and "Remove Duplicate Values Priority:" (input).

Remove Duplicate Values Priority option is enabled only for NON NUMERIC characteristics.

All other functionality remains same for Heading Configuration

Required settings related with characteristics selection, order and functions are defined and provided by Product Leadership

Remove Duplicate Values Priority

Based on Characteristics ranking priority, if entire Characteristic Value of Lower priority Characteristic is contained in a Characteristic Value of Higher Priority Characteristic, then the Lower Characteristic Value will be dropped in Item Description generation.

CLIENT & CONSUMER NDX H2A

BEER/CLIENT & CONSUMER H2

Save

Insert Element

Delete Element

Move Up

Move Down

Generate Examples

Copy

Module:

BEER

Heading:

CLIENT & CONSUMER NDX HEADING

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority	Remove Duplic...
GLOBAL BEER - TYPE	LONG DESCRIPTION	NO FUNCTL...		SPACE	1	1
GLOBAL BRAND EXTENSION	LONG DESCRIPTION	NO FUNCTL...		SPACE	7	7
GLOBAL FLAVOUR	LONG DESCRIPTION	NO FUNCTL...		SPACE	4	4
GLOBAL PERCENTAGE ALCOHOL CONTENT BY VOLUME	LONG DESCRIPTION	NO FUNCTL...		Space	3	
GLOBAL PACKAGING	LONG DESCRIPTION	NO FUNCTL...		SPACE	2	2
GLOBAL WEIGHT/VOLUME PER MEASURED UNIT - AC...	LONG DESCRIPTION	NO FUNCTL...		Space	6	
GLOBAL NUMBER IN MULTIPACK - ACTUAL	LONG DESCRIPTION	NO FUNCTL...		None	5	

In the range from 1 to 7, number 1 is considered as Lowest Priority similarly to the Drop Priority option where number 1 would be dropped first if the description extends the limit

Lowest Priority

Highest Priority

Example:

If

GLOBAL BRAND EXTENSION = NESQUIK **CHOCOLATE & ROSE** (Remove Duplicate Values Priority = 5)

GLOBAL FLAVOUR = **CHOCOLATE & ROSE** (Remove Duplicate Priority =2)

then Global Flavour Char Value will be removed from heading description

NESQUIK **CHOCOLATE & ROSE**, **CHOCOLATE & ROSE**, TUB, 1000G, X1

**Generate Example option is disabled*

Masked Characteristics Tab

Tab is available only for 'Common Item Grouping' and 'Client and Consumer NDX' flagged headings.

- Enables user to select characteristics that are going to be masked in Client and Consumer item descriptions
- Characteristics in scope/available for assignment:
 - AR flagged (Global & Generic) - Characteristics to be assigned are defined by Product Leadership
 - Local characteristics used in the Headings set up at the LPC level (IPM Local Headings) - defined by Local Teams

Common Item Grouping

Details

Language

Module

Masked Characteristics

Assign

Unassign

Hide Unassigned

Tile

Assigned Characteristics

Search

Code	Description	Scope
1538	BRAND1	Generic

Unassigned Characteristics

Search

Code	Description	Scope
33986	Global Category	Generic
17436	BRAND OWNER INTERNATIONAL	Generic
40	PROMOTIONAL ACTIVITY TYPE	Generic
11031	PROMOTIONAL OFFER	Generic

Masked Description

Masked Description

- Chars values for the characteristics that are assigned as the Masked Characteristics will be displayed as 'Private Label' in the Masked Description if an item has any of its characteristics values (BOI Values) marked as Sensitive
- In such case all characteristics configured for CIG/Client and Consumer NDX descriptions as Masked Characteristics will be considered as Sensitive by the default and displayed as 'Private Label' in the Masked Description.

Masked Description example:

Characteristics used for Description Generation for BEER Module

GLOBAL BRAND EXTENSION characteristic is assigned in Masked Characteristic Tab.

Masked description will be created for Tesco Item because one of the characteristics (BOI) for this item is coded with value marked as Sensitive.

GBE value TESCO will be presented as 'Private Label' in the Masked Description.

GLOBAL BRAND EXTENSION	TESCO
GLOBAL BEER – TYPE	ALE
GLOBAL PACKAGING	BOTTLE
GLOBAL WEIGHT/VOLUME PER MEASURED UNIT - BASE	250ML
GLOBAL NUMBER IN MULTIPACK - BASE	X1

Characteristic assigned in the Masked Characteristics Tab

UNMASKED (Level 0) Client Item Description

Tesco Ale Bottle 250Ml X1 123 (suffixed with EAN/UPC)

MASKED (Level 1) Client Item Description:

Private Label Ale Bottle 250Ml X1 456 (suffixed with NAN Key)

Key Bullet Points

- Client & Consumer item descriptions are generated based on specific heading configurations in OGRDS.
- Only one heading per country can be flagged for Client & Consumer NDX.
- Descriptions are suffixed with EAN/UPC or NAN Key depending on sensitivity.
- Masked characteristics are displayed as 'Private Label' in masked descriptions.
- Updates to these headings are not sent to DC Queue but are included in publications.

Do's and Don'ts

✓ Do's:

- Use title case for item descriptions.
- Ensure only one heading per country is flagged for Client & Consumer NDX.

- Follow the defined characteristic selection and priority rules.
- Use AR flagged characteristics for multi-country headings.
- Use local core characteristics for IPM local headings.

✗ Don'ts:

- Do not update heading configurations while a publication process is running.
- Do not assign multiple Client & Consumer NDX headings per country.
- Do not use non-AR flagged characteristics for multi-country headings.
- Do not exceed the recommended number of characteristics in a heading.

Summary

The Client & Consumer NDX Heading SOP provides a structured approach to generating item descriptions in the RD ecosystem.

It ensures consistency, compliance with sensitivity rules, and proper configuration management.

By adhering to the defined rules and processes, RD teams can maintain accurate and secure item descriptions across countries and modules.

Thank you

SOP Update History

Change Date	Author(s)	Changes
July 2020	Kamila Sobiecka	Local IPM Headings details

SOP_Descriptive Heading_Copy Functionality

OGRDS Descriptive Heading SOP – Copy Functionality

Process:	OGRDS Descriptive Heading SOP – Copy Functionality
Country / Scope:	All Bau Countries
Workstream:	Global RD Transformation
Last revision Date	01/07/2023
Document Owner	Global Content Governance
Document Owner Backup	-
Document Approver	Global Content Governance

Overview

This Standard Operating Procedure (SOP) outlines the process and business rules for using the COPY functionality within the OGRDS system to duplicate Descriptive Headings across modules.

Introduction to COPY Functionality

The COPY function allows users to duplicate a Descriptive Heading from one module to another. This feature is accessible from both the Headings browser and the Module/Descriptive Headings tab. It is also applicable to Local Product Classes.

Key Rule:


- When a Descriptive Heading is copied, any existing configuration in the target heading is removed and replaced with the configuration from the source heading.

COPY Function Business Rules

The following rules apply when assigning characteristics during the copy process:

- Only characteristics that are already assigned to the target module can be copied.
- If characteristics are removed from the copied heading, OGRDS will automatically renumber the drop priority.
- OGRDS validates the assignment: if a characteristic type is not assigned to the module or Local Product Class, it will not be copied.

Users can find the COPY button for Descriptive Headings both from the Headings browser and from the Module/Descriptive Headings tab

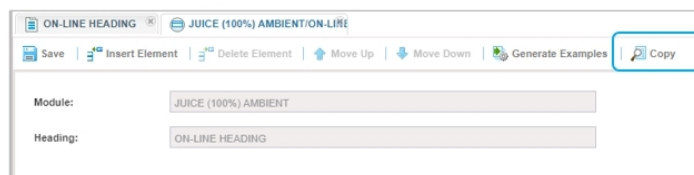

- **COPY** function will remove any existing configuration that is present in the Target Descriptive Heading and copy the new configuration from the Source Descriptive Heading
- **COPY** function enables the user to copy a Descriptive Heading from one Module to another. This is also available for Local Product Class.

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
---------------------	------------------	----------	--------	--------------	---------------

Characteristics Assignment

- Only characteristics that are assigned to the Target Module can be copied to the Target Descriptive Heading
- OGRDS will validate and if a char type is not assigned to the Module/Local PC it will not be copied to the Heading
- In case of characteristics removal (from the copied Heading) OGRDS will renumber the drop priority

Module: BEER						Source
Heading: ON-LINE HEADING						
Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority	
BRAND OWNER - INTERNATIONAL	LONG DESCRIPTION	NO FUNCTION	.		15	
BRAND 1	LONG DESCRIPTION	NO FUNCTION	.	SPLIT	14	
GLOBAL BRAND EXTENSION	LONG DESCRIPTION	NO FUNCTION	.		13	
GLOBAL ITEM IDENTIFIER	LONG DESCRIPTION	NO FUNCTION	.		12	
GLOBAL BEER - TYPE	LONG DESCRIPTION	NO FUNCTION	.		11	
GLOBAL IF WITH GLUTEN FREE CLAIM	LONG DESCRIPTION	NO FUNCTION	.		10	
GLOBAL FLAVOUR GROUP	LONG DESCRIPTION	NO FUNCTION	.		9	
GLOBAL FLAVOUR	LONG DESCRIPTION	NO FUNCTION	.		8	
GLOBAL PERCENTAGE ALCOHOL CONTENT BY VOL...	LONG DESCRIPTION	NO FUNCTION	.		7	
GLOBAL PACKAGING MATERIAL	LONG DESCRIPTION	NO FUNCTION	.		6	
GLOBAL PACKAGING	LONG DESCRIPTION	NO FUNCTION	.		5	
GLOBAL IF REFILLABLE PACKAGING	LONG DESCRIPTION	NO FUNCTION	.		4	
GLOBAL WEIGHT/VOLUME PER MEASURED UNIT - B...	LONG DESCRIPTION	NO FUNCTION	.		3	
GLOBAL NUMBER IN MULTIPACK - BASE	LONG DESCRIPTION	NO FUNCTION	.		2	
PROMOTIONAL ACTIVITY - TYPE	LONG DESCRIPTION	NO FUNCTION	.	NONE	1	

Module: VODKA						Target
Heading: ON-LINE HEADING						
Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority	
BRAND OWNER - INTERNATIONAL	LONG DESCRIPTION	NO FUNCTION	.		12	
BRAND 1	LONG DESCRIPTION	NO FUNCTION	.	SPLIT	11	
GLOBAL BRAND EXTENSION	LONG DESCRIPTION	NO FUNCTION	.		10	
GLOBAL ITEM IDENTIFIER	LONG DESCRIPTION	NO FUNCTION	.		9	
GLOBAL FLAVOUR GROUP	LONG DESCRIPTION	NO FUNCTION	.		8	
GLOBAL FLAVOUR	LONG DESCRIPTION	NO FUNCTION	.		7	
GLOBAL PERCENTAGE ALCOHOL CONTENT BY VOLUME	LONG DESCRIPTION	NO FUNCTION	.		6	
GLOBAL PACKAGING MATERIAL	LONG DESCRIPTION	NO FUNCTION	.		5	
GLOBAL PACKAGING	LONG DESCRIPTION	NO FUNCTION	.		4	
GLOBAL WEIGHT/VOLUME PER MEASURED UNIT - BASE	LONG DESCRIPTION	NO FUNCTION	.		3	
GLOBAL NUMBER IN MULTIPACK - BASE	LONG DESCRIPTION	NO FUNCTION	.		2	
PROMOTIONAL ACTIVITY - TYPE	LONG DESCRIPTION	NO FUNCTION	.	NONE	1	

Country Subscription Considerations

Users must manually check for characteristics that are unsubscribed for a specific country and reconfigure them accordingly.

For Global, Generic, or Euro characteristics, there is no automatic subscription check for the country.

Country Subscription

- For Global/Generic/Euro chars there will be **no** automatic subscription check for the Country
- The user has to check the characteristics which are unsubscribe for a Country and re-arrange the characteristics configuration

Module: BEER						BEERGLOBAL BEER - TYPE
Heading: ON-LINE HEADING						
Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority	
BRAND OWNER - INTERNATIONAL	LONG DESCRIPTION	NO FUNCTION	.		15	
BRAND 1	LONG DESCRIPTION	NO FUNCTION	.	SPLIT	14	
GLOBAL BRAND EXTENSION	LONG DESCRIPTION	NO FUNCTION	.		13	
GLOBAL ITEM IDENTIFIER	LONG DESCRIPTION	NO FUNCTION	.		12	
GLOBAL BEER - TYPE	LONG DESCRIPTION	NO FUNCTION	.		11	
GLOBAL IF WITH GLUTEN FREE CLAIM	LONG DESCRIPTION	NO FUNCTION	.		10	
GLOBAL FLAVOUR GROUP	LONG DESCRIPTION	NO FUNCTION	.		9	
GLOBAL FLAVOUR	LONG DESCRIPTION	NO FUNCTION	.		8	
GLOBAL PERCENTAGE ALCOHOL CONTENT BY VOLUME	LONG DESCRIPTION	NO FUNCTION	.		7	
GLOBAL PACKAGING MATERIAL	LONG DESCRIPTION	NO FUNCTION	.		6	
GLOBAL PACKAGING	LONG DESCRIPTION	NO FUNCTION	.		5	
GLOBAL IF REFILLABLE PACKAGING	LONG DESCRIPTION	NO FUNCTION	.		4	
GLOBAL WEIGHT/VOLUME PER MEASURED UNIT - BASE	LONG DESCRIPTION	NO FUNCTION	.		3	
GLOBAL NUMBER IN MULTIPACK - BASE	LONG DESCRIPTION	NO FUNCTION	.		2	
PROMOTIONAL ACTIVITY - TYPE	LONG DESCRIPTION	NO FUNCTION	.	NONE	1	

Permissions and Access Control

Only users with the **Maintain Local Headings** permission can use the COPY functionality.

In the source heading dropdown, users will see Local Country Headings relevant to their profile and Multi-Country Headings.

LDC users can use a Multi-Country Heading as a source but can only copy it into a Local Country Heading.

User has Maintain Local Headings for many countries

User has Maintain Local Headings for BELGIUM

Module/Heading Assignment

Module: BEER

Heading:

- ON-LINE HEADING
- LONG TIT
- MALAWI OUTPUT HEADING
- MEXICO OUTPUT HEADING
- MOZAMBIQUE DMS & HHT HEADING
- MOZAMBIQUE OUTPUT HEADING
- NAMIBIA OUTPUT HEADING
- NETHERLANDS HHT DESCRIPTION
- NETHERLANDS LOCAL CHAR HEADING
- NIGERIA DMS & HHT HEADING
- NIGERIA OUTPUT HEADING
- NORWAY ALTERNATIVE HEADING
- NORWAY HHT HEADING
- NORWAY OUTPUT HEADING
- ✓ ON-LINE HEADING

Module/Heading Assignment

Module: BEER

Heading:

- BELGIAN ALTERNATIVE HEADING
- ✓ BELGIAN LOCAL CHAR HEADING
- BLNS ALTERNATIVE HEADING(EURO)
- I-SIGHT ITEM HEADING
- ON-LINE HEADING

Source Heading Assignment

A new Descriptive Heading assignment can be created from an existing one.
The source Descriptive Heading can be:


- A similar module with different portions or forms.
- A different heading within the same module.
- An online heading.

Module:	JUICE (100%) FRESH
Heading:	FRANCE LOCAL CHAR HEADING
Module:	VODKA
Heading:	ON-LINE HEADING
Module:	BEER
Heading:	SPANISH HHT HEADING
Module:	JUICE (100%) AMBIENT
Heading:	FRANCE LOCAL CHAR HEADING
Module:	VODKA
Heading:	FRANCE LOCAL CHAR HEADING
Module:	BEER
Heading:	SPANISH FIELD HEADING

Creating a New Descriptive Heading – Step-by-Step

1. Open the Descriptive Heading.
2. Select the Country Heading.
3. Navigate to the Modules tab.
4. Click Show Unassigned.

5. Assign the new module.
6. Close the target Descriptive Heading.
7. Open the source Descriptive Heading from the browser.
8. Click the COPY button.
9. Select the target Descriptive Heading from the dropdown (Module and Headings).
10. The system will copy the characteristics configuration to the target.
11. Review and amend the characteristics order as needed.
12. Save it.

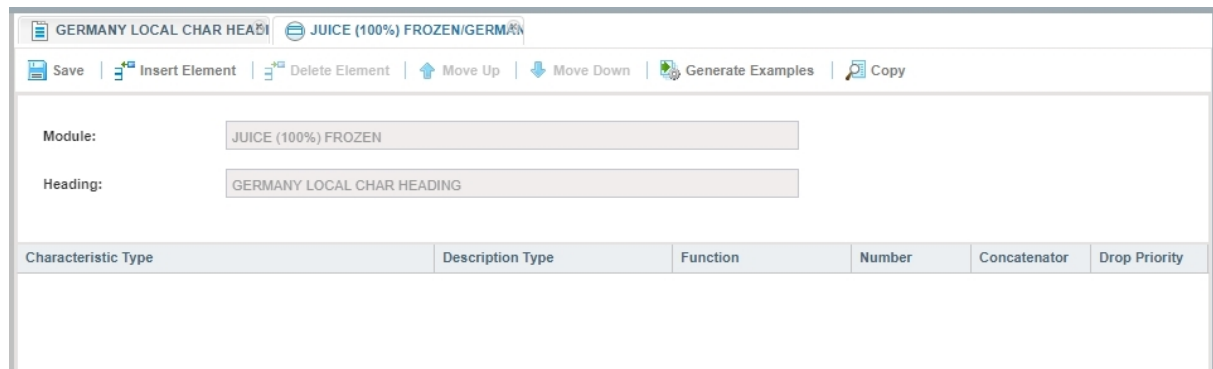


GERMANY LOCAL CHAR HEADING | JUICE (100%) FROZEN/GERMANY

Save | Insert Element | Delete Element | Move Up | Move Down | Generate Examples | Copy

Module: JUICE (100%) FROZEN

Heading: GERMANY LOCAL CHAR HEADING

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
---------------------	------------------	----------	--------	--------------	---------------

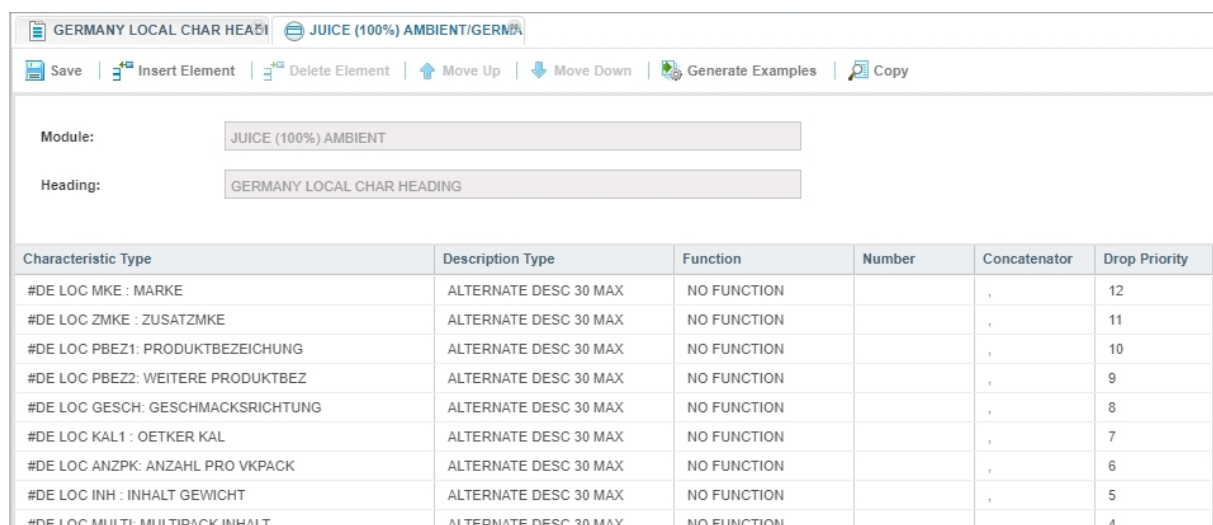GERMANY LOCAL CHAR HEADING | JUICE (100%) AMBIENT/GERMANY

Save | Insert Element | Delete Element | Move Up | Move Down | Generate Examples | Copy

Module: JUICE (100%) AMBIENT

Heading: GERMANY LOCAL CHAR HEADING

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
#DE LOC MKE : MARKE	ALTERNATE DESC 30 MAX	NO FUNCTION		,	12
#DE LOC ZMKE : ZUSATZMKE	ALTERNATE DESC 30 MAX	NO FUNCTION		,	11
#DE LOC PBEZ1: PRODUKTBEZEICHUNG	ALTERNATE DESC 30 MAX	NO FUNCTION		,	10
#DE LOC PBEZ2: WEITERE PRODUKTBEZ	ALTERNATE DESC 30 MAX	NO FUNCTION		,	9
#DE LOC GESCH: GESCHMACKSRICHTUNG	ALTERNATE DESC 30 MAX	NO FUNCTION		,	8
#DE LOC KAL1 : OETKER KAL	ALTERNATE DESC 30 MAX	NO FUNCTION		,	7
#DE LOC ANZPK: ANZAHL PRO VKPACK	ALTERNATE DESC 30 MAX	NO FUNCTION		,	6
#DE LOC INH : INHALT GEWICHT	ALTERNATE DESC 30 MAX	NO FUNCTION		,	5
#DE LOC MULTI: MULTIPACK INHALT	ALTERNATE DESC 30 MAX	NO FUNCTION		,	4

GERMANY LOCAL CHAR HEAD					
JUICE (100%) AMBIENT/GERMA					
JUICE (100%) FROZEN/GERMA					
Save Insert Element Delete Element Move Up Move Down Generate Examples Copy					
Module: JUICE (100%) FROZEN					
Heading: GERMANY LOCAL CHAR HEADING					
Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
#DE LOC MKE : MARKE	ALTERNATE DESC 30 MAX	NO FUNCTION		,	12
#DE LOC ZMKE : ZUSATZMKE	ALTERNATE DESC 30 MAX	NO FUNCTION		,	11
#DE LOC PBEZ1: PRODUKTBEZEICHUNG	ALTERNATE DESC 30 MAX	NO FUNCTION		,	10
#DE LOC PBEZ2: WEITERE PRODUKTBEZ	ALTERNATE DESC 30 MAX	NO FUNCTION		,	9
#DE LOC GESCH: GESCHMACKSRICHTUNG	ALTERNATE DESC 30 MAX	NO FUNCTION		,	8
#DE LOC KAL1 : OETKER KAL	ALTERNATE DESC 30 MAX	NO FUNCTION		,	7
#DE LOC ANZPK: ANZAHL PRO VKPACK	ALTERNATE DESC 30 MAX	NO FUNCTION		,	6
#DE LOC INH : INHALT GEWICHT	ALTERNATE DESC 30 MAX	NO FUNCTION		,	5
#DE LOC MULTI: MULTIPACK INHALT	ALTERNATE DESC 30 MAX	NO FUNCTION		,	4
#DE LOC WEG : EW SYSTEM TRAD	ALTERNATE DESC 30 MAX	NO FUNCTION		,	3
#DE LOC VPA : VERPACKUNGSGART	ALTERNATE DESC 30 MAX	NO FUNCTION		,	2
#DE LOC BON: *BONUSPACK	ALTERNATE DESC 30 MAX	NO FUNCTION		NONE	1

Amending an Existing Descriptive Heading – Step-by-Step

1. Open the Descriptive Heading.
2. Select the Country Heading.
3. Review the target heading assignment to be amended.
4. Close the target heading's module assignment.
5. Open the source heading assignment from the browser.
6. Click the COPY button.
7. Select the target heading assignment from the dropdown (Module and Headings).
8. OGRDS will give warning message that you are about to update an existing heading - module assignment
9. The system will copy the characteristics configuration to the target.
10. Review and amend the characteristics order as needed.
11. Save it.

ITALIAN FIELD HEADING

VODKA/ITALIAN FIELD HEADING

Save

Insert Element

Delete Element

Move Up

Move Down

Generate Examples

Copy

Module:

VODKA

Heading:

ITALIAN FIELD HEADING

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
#IT LOC FTE : FABBRICANTE	ALTERNATE DESC 30 MAX	NO FUNCTION		,	1
#IT LOC MCA : MARCA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	2
#IT LOC CRA : COLTURA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	3
#IT LOC VTA : VARIETA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	4
#IT LOC LEA : LINEA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	5
#IT LOC PZI : PEZZI 2.0N	ALTERNATE DESC 30 MAX	NO FUNCTION		,	6
#IT LOC FTO : FORMATO 5.0N	ALTERNATE DESC 30 MAX	NO FUNCTION		,	7
#IT LOC UMI : UNITA DI MISURA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	8
#IT LOC PNE : PROMOZIONE	ALTERNATE DESC 30 MAX	NO FUNCTION		NONE	9



ITALIAN FIELD HEADING

VODKA/ITALIAN ALTERNATIVE

VODKA/ITALIAN FIELD HEADING

Save

Insert Element

Delete Element

Move Up

Move Down

Generate Examples

Copy

Module:

VODKA

Heading:

ITALIAN ALTERNATIVE HEADING

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
#IT LOC 0001 : PC	LONG DESCRIPTION	NO FUNCTION		,	15
BRAND OWNER - INTERNATIONAL	LONG DESCRIPTION	NO FUNCTION		,	14
BRAND 1	LONG DESCRIPTION	NO FUNCTION		,	13
GLOBAL BRAND EXTENSION	LONG DESCRIPTION	NO FUNCTION		,	12
GLOBAL COLLECTION CLAIM	LONG DESCRIPTION	NO FUNCTION		,	11
GLOBAL ITEM IDENTIFIER	LONG DESCRIPTION	NO FUNCTION		,	10
GLOBAL PRODUCT SOURCE	LONG DESCRIPTION	NO FUNCTION		,	9
GLOBAL FLAVOUR GROUP	LONG DESCRIPTION	NO FUNCTION		,	8
GLOBAL FLAVOUR	LONG DESCRIPTION	NO FUNCTION		,	7
GLOBAL PERCENTAGE ALCOHOL CONTENT BY VOLUME	LONG DESCRIPTION	NO FUNCTION		,	6
GLOBAL PACKAGING MATERIAL	LONG DESCRIPTION	NO FUNCTION		,	5
GLOBAL PACKAGING	LONG DESCRIPTION	NO FUNCTION		,	4
GLOBAL WEIGHT/VOLUME PER MEASURED UNIT - BASE	LONG DESCRIPTION	NO FUNCTION		,	3
GLOBAL NUMBER IN MULTIPACK - BASE	LONG DESCRIPTION	NO FUNCTION		,	2
PROMOTIONAL ACTIVITY - TYPE	LONG DESCRIPTION	NO FUNCTION		NONE	1

ITALIAN FIELD HEADING

VODKA/ITALIAN ALTERNATIVE

VODKA/ITALIAN FIELD HEADING

Save

Insert Element

Delete Element

Move Up

Move Down

Generate Examples

Copy

Module:

VODKA

Heading:

ITALIAN FIELD HEADING

Characteristic Type	Description Type	Function	Number	Concatenator	Drop Priority
#IT LOC FTE : FABBRICANTE	ALTERNATE DESC 30 MAX	NO FUNCTION		,	1
#IT LOC MCA : MARCA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	2
#IT LOC CRA : COLTURA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	3
#IT LOC VTA : VARIETA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	4
#IT LOC LEA : LINEA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	5
#IT LOC PZI : PEZZI 2.0N	ALTERNATE DESC 30 MAX	NO FUNCTION		,	6
#IT LOC FTO : FORMATO 5.0N	ALTERNATE DESC 30 MAX	NO FUNCTION		,	7
#IT LOC UMI : UNITA DI MISURA	ALTERNATE DESC 30 MAX	NO FUNCTION		,	8
#IT LOC PNE : PROMOZIONE	ALTERNATE DESC 30 MAX	NO FUNCTION		NONE	9

Do's and Don'ts

✓ Do's:

- Ensure the target module has the necessary characteristics assigned before copying.
- Review and adjust the order of characteristics after copying.
- Confirm user permissions before attempting to use the COPY function.
- Use the correct source heading based on module compatibility.

✗ Don'ts:

- Do not assume automatic country subscription for Global/Generic/Euro characteristics.
- Avoid copying into a target heading without validating existing configurations.
- Do not use Multi-Country Headings as targets if you are an LDC user.

Summary

The COPY functionality in OGRDS is a powerful tool for replicating Descriptive Headings across modules and product classes. It ensures consistency in configuration while allowing flexibility in managing characteristics. Adhering to the outlined business rules and steps ensures accurate and efficient use of this feature. Proper permissions, validation, and post-copy review are essential for maintaining data integrity.

Thank you

SOP_Proposal Management

OGRDS Proposal Browser -

BAU Management

Process:	Proposal Browser - BAU Management
Country / Scope:	All Countries
Workstream:	Global RD Transformation
Created Date	31/12/2018
Last revision Date	31/07/2023
Document Owner	Rute Louro
Document Owner Backup	-
Document Approver	Global RD Transformation

Overview

This document provides a comprehensive overview of the Proposal Browser BAU (Business as Usual) Management process.

It is based on the training material created by Rute Louro and updated in July 2023.

The document outlines the business need, standard operating procedures (SOPs), high-level and detailed process steps, and best practices for managing proposals within the OGRDS system.

Content

This Training Material contains the following sections.

- BUSINESS NEED/SOP PURPOSE
- HIGH LEVEL PROCESS STEPS
- PROCESS STEPS (Proposal browser BAU management)
- Ref documentation : [Reference Data Learning Home - Home](#)

Business Need/Purpose

Business Need


- Proposal Browser is populated with all instances of Proposals
- Aim of the Browser to identify and show the new instances of a value being used
- The first time the value is used for a Characteristic (Dictionary Level)
- The first time the value is used for a Local Product Class (Local Product Class Level)
- The first time the value is used for a Module (Module Level)
- The first time the value pair is present on an item (Char Pair Level)
- Allows the SME to review new values that have been created by item coding activities
- Different types of validation occur depending on the channel/level of proposal
- Final chance to review and validate new instances of values before item is sent to publication
- Important exercise to ensure new Brands, new Flavors, new Sizes, etc. are coded correctly for the end Client Deliverable

SOP Purpose


- To define the process on the top-level flow for Proposal Browser management and to detail the BAU management of this browser.

Proposal Management Top level Process Flow

Authorising a Proposal



Rejecting a Proposal




Changing a Proposal



Detailed Process Steps

High Level Process Steps

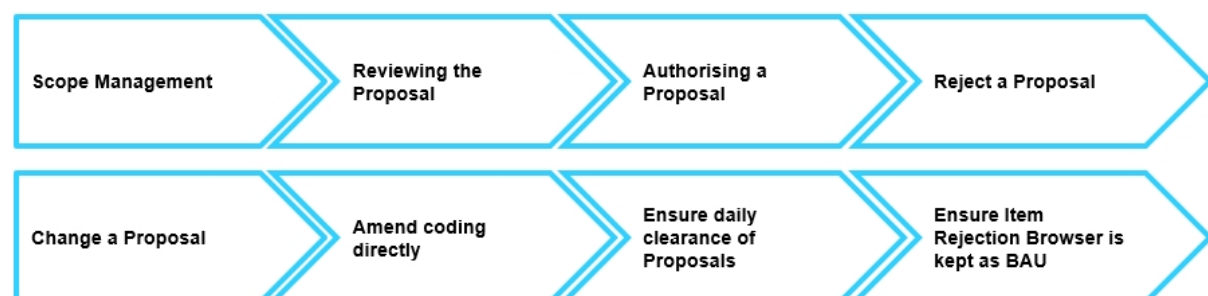

Scope Management



Scope manages the Proposals that are shown to the VA Users in the Proposal Browser. This is done via Global Schema selection

Best Practice

- To allocate all Super Groups between the VA Users within a Team
- This ensures that all proposals are seen and reviewed and that none are missed
- For a VA User to set their default to their complete set of allocated Super Groups
- This ensures that the Scope selection screen only needs to be opened once, to initially select the default selection
- This also ensures that all of the Proposals that the VA User needs to resolve in the day are displayed together, so that the total amount of work required is understood

Large Backlogs

- For Countries/Team with Large backlogs then Advanced search needs to be used to ensure that the recent proposals are shown and worked by the VA User as a priority
- This is done by using Date Search found in Advanced Search

Refer to SOP - Proposal Scope Management

Reviewing the Proposal



Proposals need to be reviewed following the Best Practices detailed in the specific SOP document

This is a targeted validation of new values that are

- New to the Characteristic
- Is the value correct for the Characteristic? Does it align with the Definitions/Guidelines?
- New to the Module / Local Product Class
- Is the value correct for the Characteristic AND the Module, would a product with this value be expected to be found in this Module?
- New combinations of values being used together on item (in the instance where there is a Characteristic Pairing created in OGRDS)
- Is the value pair logical? Is it correct that both values would be present on one item?

Best Practices

- Each proposal must go through the review process

Refer to SOP - Reviewing a Proposal

Authorising a Proposal



Once Proposals have been reviewed and they are found to be correct then they should be Authorized

- Authorization

- Removes the proposal from the Proposal Browser
- Removes the proposal indicator from the Value
- **Best Practices**
- To review and authorize the proposal individually
- To ensure the Proposal is correct before Authorizing
- Once Authorized the value is available as an Authorized value for all Users – globally
- It is NOT Best Practice to –
- Mass Authorize proposals without the proper review process being followed

Refer to SOPs - Authorising a Proposal & Resolving Characteristic Value Duplicate Alternate Descriptions

Reject a Proposal



Once Proposals have been reviewed and they are found to be incorrect then they can be either Rejected/Changed from within the Proposal Browser or the items can be recoded directly in OGRDS.

- Rejecting a Proposal -
- Removes the Proposal from the Proposal Browser
- Places the items connected with the Rejected Value into the Item Rejection Browser
- Sends an Email Notification to the User that proposed the value
- Removes the Proposal indicator from the value and replaces it with a Rejection Indicator
- Populates the Rejection Library with the Rejected Value
- **Best Practices**

- To review and reject proposals individually
- To ensure the value is incorrect for the Channel/Level before Rejecting
- To ensure the option of Rejection is appropriate for the incorrect proposal
- To ensure the Rejection message is clear and concise and explains why the proposal was incorrect for the Channel/Level
- It is NOT Best Practice to -
- reject a value that is wrong for the item it has been coded to but actually could be correct for the Dictionary or Module/Local PC channel.

Refer to SOPs - Incorrect Proposal Resolution & Rejection Library Management

Change a Proposal



Once Proposals have been reviewed and they are found to be incorrect then they can be either Rejected/Changed from within the Proposal Browser or the items can be recoded directly in OGRDS

- Changing a Proposal -
- Removes the Proposal from the Proposal Browser
- Recodes the associated items with the replacement value
- Sends an Email Notification to the User that proposed the value
- Populates the Rejection Library with the Changed Value and the Replacement Value
- **Best Practices**
- To review and Change proposals individually
- To ensure the value is incorrect for the Channel/Level before Changing
- To ensure the option of Change is appropriate for the incorrect proposal

- To ensure the Change message is clear and concise and explains why the proposal was incorrect for the Channel/Level
- It is NOT Best Practice to -
- change a value that is wrong for the item it has been coded to but actually could be correct for the Dictionary or Module/Local PC channel

Refer to SOPs - Incorrect Proposal Resolution & Rejection Library Management

Amend Coding Directly




Once Proposals have been reviewed and they are found to be incorrect then they can be either Rejected/Changed from within the Proposal Browser or the items can be recoded directly in OGRDS.

- Amending the Coding directly results in
- Proposal being removed from the Proposal Browser
- The items being populated with a different value
- **Best Practices**
- To ensure that this option is only used for Backlog proposals and not for BAU Proposals
- However this option should be used if the proposal for the item is incorrect but actually the proposal could be correct for the Dictionary or Module or Local PC Channel.
- In this instance the wrong value has been used for the specific item, but could be correct for another item in the Module or Local PC so it should not be Rejected or Changed in the Proposal Browser .
- In these instances the value should be corrected on the item by coding activity.

Refer to SOP - Incorrect Proposal Resolution

Ensure daily/weekly clearance of Proposals

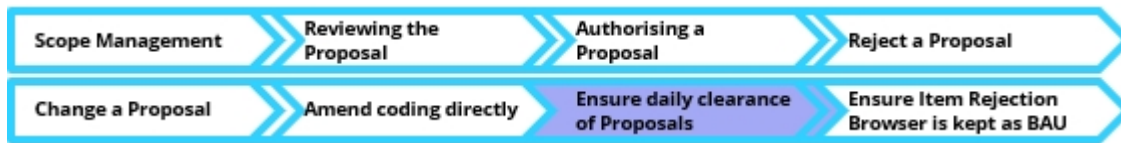

The consequences of a proposal not being worked as BAU, could be that the value description is not taken through to the Client Deliverable (this is due to an outstanding Dictionary Channel Proposal), or could be that an incorrect value is seen on a Client Deliverable – both of these instances could result in Quality Escapes.

- Best Practices
- To ensure the proposals are worked on a daily basis
- To ensure that each day the proposals are cleared (to ensure that items are not sent to the publication with proposals still outstanding at any channel/Level)

Refer to Value Administration Reports

Ensure Item Rejection Browser is kept as BAU



In the result of a Rejection the items that are associated with the rejected proposal are sent to the Coding Browser – Item Rejection Browser.

- This enables the Coding Teams to easily identify these items and to correct the Rejected values.

- To ensure that fully coded, correctly coded items are sent to the Publication then this browser needs to be worked as BAU, so all items should be cleared in a daily basis

Refer to SOP - Resolving Rejected Proposals

Key Bullet Points

- Proposal Browser captures all new instances of values used in coding.
- Proposals must be reviewed and validated before publication.
- Authorization removes proposals from the browser and makes them globally available.
- Rejection or change of proposals should be justified and documented.
- Daily clearance of proposals is essential to avoid quality escapes.

Do's and Don'ts

✓ Do's:

- Review each proposal individually and thoroughly.
- Use advanced search for large backlogs.
- Ensure clear and concise messages for rejections or changes.
- Maintain daily BAU practices for proposal and rejection browsers.

✗ Don'ts:

- Do not mass authorize proposals without review.
- Do not reject values that may be valid at other levels.
- Do not change values without proper justification.

Summary

Effective management of the Proposal Browser is critical to ensure data quality and consistency in client deliverables.

By following the outlined SOPs and best practices, teams can ensure that new values are validated, authorized, or corrected appropriately. Daily management of proposals and rejections helps prevent quality issues and supports accurate publication of coded items.

THANK YOU

SOP_Rule Set Browser

Rule Set Browser - Overview

Process:	Global RD Transformation
Country / Scope:	All Countries
Workstream:	Global RD Transformation
Created Date	01/10/2018
Last revision Date	01/11/2023
Document Owner	Kamila Sobiecka
Document Owner Backup	-
Document Approver	Global RD Transformation

Rule Set Browser – Overview

This document provides a comprehensive overview of the Rule Set Browser, its functionality, types of mappings, and its role in schema mapping within OGRDS.

It is based on the PowerPoint presentation created by Kamila Sobiecka and last updated in November 2023.

Content

This Training Material contains the following sections;

- INTRODUCTION
- FUNCTIONALITY
- POSSIBLE FLOWS
- MAPPED & CALCULATED CHARACTERISTICS IN OGRDS
- REPORTS
- SUPPORTING DOCUMENTS

INTRODUCTION

Rule Set Browser

The **Rule Set Browser** is a part of the **OGRDS Mapping Tool** designed to streamline and enhance the process of managing characteristic data. It enables the creation of **derived characteristic data** from existing **coded characteristics**, offering a more efficient and scalable approach to data governance.

It is OGRDS Mapping tool that provides the capability to create derived characteristic data from existing coded characteristics.

Key Features & Benefits

1. **Eliminates Redundant Coding**
 - Reduces duplication in characteristic coding.
 - Promotes consistency across datasets.
2. **Enables Easy Creation of Roll-Up Characteristics**
 - Supports mapping from detailed coded characteristics to less detailed ones.
 - Facilitates hierarchical data structuring.
3. **Supports In-Transition Countries**
 - Helps populate **Multi-Country Characteristics** using **Local Content**.
 - Assists in populating the **Global Module** from **Local Content**, ensuring alignment with global standards.


Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- Derived Characteristics
- Coded Characteristics
- Redundant Coding
- Roll-Up Characteristics
- Multi-Country Characteristics
- Global Module
- Local Content
- In-Transition Countries

Accessing Rule Set Browser

All existing Rule Sets for Country are displayed when Browser opens

Browser displays: Code, Name, Method (mapped, calculated, unmapped), Country, State (edit vs committed), Scope, Target, Exceptions, Last Run and Last Changed, Activate Rule Set from Distribution Date, Activate Rule Set from Creation date



RuleSet Browser										
New Open Delete										
All Columns										
Code	Name	Method	Country	State	Scope	Target	Exceptions	Last Run	Last Changed	Activate Ruleset from Distributi...
2677	#TR LOC 56PP7-IMDB PACKTYPE	Mapped	TR	Edit	1LOCAL PRODUCT CLASS	#TR LOC 56PP7: 56PP PACK	2	10/03/2018 0...	10/03/2018 0...	10/01/2018
2764	#TR LOC H3TC2: H3TC CATEGORY	Mapped	TR	Committed	1LOCAL PRODUCT CLASS	#TR LOC H3TC2: H3TC CATEGORY		09/18/2018 0...	09/18/2018 0...	09/03/2018
2896	77 pecete	Mapped	TR	Committed	1LOCAL PRODUCT CLASS	#TR LOC 77L12: 77L1 SUBSECTOR		10/19/2018 0...	10/19/2018 0...	10/08/2018
2917	77 rule set #TR LOC 77LIE	Mapped	TR	Edit	1LOCAL PRODUCT CLASS	#TR LOC 77L12: 77L1 LILATYPE		10/25/2018 0...	10/25/2018 0...	10/19/2018
2780	TR LOC SBS1 - #TR LOC JSPN2: JSPN TY...	Mapped	TR	Committed	1LOCAL PRODUCT CLASS	#TR LOC JSPN2: JSPN TYPE		09/10/2018 0...	09/10/2018 0...	09/06/2018
2781	TR LOC SBS2 - #TR LOC JSPN6: JSPN M...	Mapped	TR	Committed	1LOCAL PRODUCT CLASS	#TR LOC JSPN6: JSPN MEAT		09/06/2018 0...	09/06/2018 0...	09/06/2018

When the **Rule Set Browser** is opened, it automatically displays **all existing Rule Sets** for the selected country. This interface is a key component of the **OGRDS Mapping Tool**, used for managing and reviewing characteristic mapping rules.

Displayed Elements in the Browser

The Rule Set Browser provides a comprehensive view of each rule set through the following columns:

- **Code:** Unique identifier for the rule set.
- **Name:** Descriptive name of the rule set.
- **Method:** Indicates how the rule is applied — *Mapped*, *Calculated*, *Unmapped*.
- **Country:** The country to which the rule set applies.
- **State:** Status of the rule — *Edit* or *Committed*.
- **Scope:** Defines the extent or applicability of the rule.
- **Target:** Specifies the target characteristic or module (e.g., #TR LOC 5PP7).
- **Exceptions:** Highlights any exceptions or anomalies in the rule set.
- **Last Run:** Date when the rule set was last executed.
- **Last Changed:** Date of the most recent modification.
- **Activate Rule Set from Distribution Date:** Activation based on distribution timeline.
- **Activate Rule Set from Creation Date:** Activation based on creation timestamp.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- SOP Overview
- Accessing Rule Set Browser
- Rule Set Elements
- Mapped/Calculated/Unmapped
- Edit vs Committed
- Scope and Target
- Exceptions
- Last Run / Last Changed
- Activation Dates

Purpose of the SOP

This SOP ensures that users understand how to access and interpret the Rule Set Browser interface. It supports efficient governance of characteristic mapping by providing visibility into rule configurations, their status, and history.

Purpose

Why to create mappings in OGRDS and not Eclipse

- Typically Target characteristic that is populated via OGRDS mapping is to be used by multiple Clients.
- Mappings for Client customized characteristics are done in Eclipse.
- If the Target characteristic is to be used in multiple instructions by multiple Clients, it makes sense in some instances to set them up in OGRDS rather than to copy in multiple instructions in Eclipse.
- Existing redundant coding can be eliminated by setting up rules using existing char as a target

This section of the SOP outlines the strategic reasoning behind using **OGRDS** (Operational Global Rule Data System) for mapping target characteristics, especially when they are intended for broader use across multiple clients and instructions.

Key Points & Explanation

1. Shared Usage Across Clients

- Target characteristics mapped via OGRDS are designed for **multi-client usage**, making them ideal for centralized setup.
- This avoids duplication and ensures consistency across client instructions.

2. Client-Specific Customization

- **Eclipse** is used for mapping **client-customized characteristics**, which are unique to individual client needs.
- This separation ensures that global and local mappings are managed appropriately.

3. Efficiency in Multi-Instruction Scenarios

- When a target characteristic is used in **multiple instructions** by **multiple clients**, setting it up in OGRDS is more efficient than replicating it in Eclipse.
- This reduces manual effort and improves scalability.

4. Elimination of Redundant Coding

- OGRDS allows the creation of rules using **existing characteristics as targets**, helping to **eliminate redundant coding**.
- This promotes reuse and simplifies rule management.

Keywords

- OGRDS
- Eclipse
- Mappings
- Target Characteristic
- Client Customization
- Multi-Client Usage
- Efficiency
- Redundant Coding
- Rule Set Browser
- SOP Overview

FUNCTIONALITY

Types of Mapping (Method)

Mapped Rule Set

- **Most common mapping**
 - Local characteristic to Local characteristic
 - Multi Country characteristic to Multi Country characteristic
 - Multi Country characteristic to Local Characteristic
 - Local characteristic to Multi Country characteristic (in transition Countries only)
 - Local characteristic to Global module (in transition Countries only)



Calculated Rule Set

- **Numeric mapping**
 - Creates a numeric characteristic through calculations performed on coded numeric characteristics



Unmapped Rule Set

- **Allows user to set a normally mapped characteristic to be manually coded for a specific Local Product Class(s)**



1. Mapped Rule Set

This is the **most commonly used mapping method**. It enables direct mapping between different types of characteristics:

- **Local → Local**: Mapping between two local characteristics.
- **Multi-Country → Multi-Country**: Mapping across shared regional characteristics.
- **Multi-Country → Local**: Used when a broader characteristic is mapped to a specific local one.
- **Local → Multi-Country** (*In-Transition Countries only*): Supports transition from local to regional standards.
- **Local → Global Module** (*In-Transition Countries only*): Facilitates integration into global systems.

1. Calculated Rule Set

This method is used for **numeric mappings**:

- It creates a **numeric characteristic** by performing **calculations** on existing **coded numeric characteristics**.
- Useful for deriving values like averages, totals, or other computed metrics.

1. Unmapped Rule Set

This method allows for **manual coding**:

- A normally mapped characteristic can be set to be **manually coded** for specific **Local Product Classes**.

- Offers flexibility when automated mapping is not suitable.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- Mapped Rule Set
- Calculated Rule Set
- Unmapped Rule Set
- Local Characteristic
- Multi-Country Characteristic
- Global Module
- In-Transition Countries
- Numeric Mapping
- Manual Coding


Example

A 'Rule Set' allows a user to set a rule at Multi Country level or by Country identifying a **Target characteristic** and a **Scope** (either all items or by module/Local Product Classes).



Within a Rule Set, user creates a **Subset** to identify the **Source Characteristics** used to populate the Target characteristic.

For example – within a Mapped Rule Set, a user can set a rule within a specific Local Product Class(s) specifying that if local characteristic A has value X and local characteristic B has value Y, populate local characteristic C with value of Z.



How Rule Sets Work

A **Rule Set** enables users to define mapping rules at either the **Multi-Country level** or **Country level**, targeting specific characteristics and scopes. This is a core functionality of the **OGRDS Mapping Tool**, used to automate and standardize characteristic population across product classes.

Key Concepts

1. Target Characteristic & Scope

- The rule identifies a **Target Characteristic** to be populated.
- The **Scope** can be:

- All items
- Specific modules or **Local Product Classes (LPCs)**

2. Subset Creation

- Within a Rule Set, users create a **Subset** to define the **Source Characteristics**.
- These source characteristics are used to determine the value of the target characteristic.

3. Example of a Mapped Rule Set

- **Context:** Within a specific LPC (e.g., JUICE)
- **Rule Logic:**
 - If **Local Characteristic A** = X
 - And **Local Characteristic B** = Y
 - Then **populate Local Characteristic C** with value Z

Rule Format:

Within LPC = JUICE

If Local Char A = X

And Local Char B = Y

Populate → Local Char C = Z

Keywords

- Rule Set
- OGRDS Mapping Tool
- Multi-Country Level
- Country Level
- Target Characteristic
- Scope
- Local Product Class (LPC)
- Subset
- Source Characteristics
- Mapped Rule Set
- Rule Logic

Terminology

Understanding the key terms used in the **Rule Set Browser** is essential for effectively creating and managing mappings within the **OGRDS Mapping Tool**. These terms define the structure and logic of rule sets used for characteristic population.

TARGET	<i>Characteristic to be mapped - characteristic where the values will be populated based on created rule</i>
SOURCE	<i>“FROM” Characteristic - based on which the target characteristic will be mapped</i>
SCOPE	<i>The LPC/Modules/All Items where the rule applies</i>
RULE SET	<i>A set of rules where the Country, Target Characteristic, Scope are applied</i>
SUBSET	<i>A set of rules within a Mapped Rule Set that specify the Source (“From”) characteristic(s)</i> • <i>Multiple subset for a Rule Set can be created if it is needed to utilize different source characteristic to populate the Target characteristic values.</i>
ALL OTHER SUBSET	<i>Automatically/system created for every Rule Set.</i> <i>After testing/committing a rule, it contains all items within the scope that do not meet a specified rule. These items are called ‘Exceptions’.</i>

Key Terms & Definitions

- **TARGET**
 - The **characteristic to be mapped**.
 - This is where values will be **populated based on the rule** created.
- **SOURCE**
 - The **“FROM” characteristic**.
 - The rule uses this characteristic to determine the value of the **Target**.
- **SCOPE**
 - Defines **where the rule applies**.

- Can be specific **Local Product Classes (LPCs)**, **Modules**, or **All Items**.
- **RULE SET**
 - A collection of rules that apply to a specific **Country**, **Target Characteristic**, and **Scope**.
- **SUBSET**
 - A group of rules within a **Mapped Rule Set** that specify the **Source characteristic(s)**.
 - Multiple subsets can be created to use **different source characteristics** for populating the same target.
- **ALL OTHER SUBSET**
 - A **system-generated subset** created for every Rule Set.
 - After testing or committing a rule, it includes **all items within the scope** that do **not meet the specified rule**.
 - These items are referred to as **Exceptions**.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- Target Characteristic
- Source Characteristic
- Scope
- Rule Set
- Subset
- All Other Subset
- Exceptions
- LPC
- Modules

Mapping Process

The **Rule Set Browser** in the **OGRDS Mapping Tool** governs how **mapped characteristic values** are applied to items. This process ensures accurate and timely population of data based on predefined rules and system logic.

Mapped characteristic values are applied to items when:

- Committing a Rule Set
- Item Save/Commit (new items/changed source chars values).

Committed BAU Mappings (Mapped Rule Sets) execution is not happening in a real time. The processing speed depends on the DC queue load, but must be completed on the same day of updating/setting an item;

For Mapped Rulesets with Calculate Expression and Calculated Ruleset, System will compute values during Save Item procedure, not staging ICVs in DC Process – populated in a real time.

Item will be Committed by User with all mapped (calculate expression) and calculated characteristic values.

System handles recursiveness e.g. target characteristic of one ruleset is a source characteristic in another ruleset for the same scope. (Calculated & Calculate expressions)

Key Mapping Triggers

1. Committing a Rule Set

- Applies the mapping rules to relevant items.
- Initiates the population of target characteristics based on source values.

2. Item Save/Commit

- Triggered when:
 - New items are added.
 - Source characteristic values are changed.
- Ensures updated mappings are applied during item processing.

Execution Timing

- **BAU Mappings (Business-As-Usual)**
 - These are **not executed in real-time**.
 - Execution depends on DC queue load.
 - Must be completed **on the same day** the item is updated or set.
- **Mapped Rulesets with Calculated Expressions**
 - Calculations are performed **during the Save Item procedure**.
 - These are **real-time computations**, not staged in DC processes.
 - Items are committed with all calculated values immediately.

System Intelligence: Recursiveness

- The system supports **recursive mapping logic**:
 - A **target characteristic** in one rule set can act as a **source characteristic** in another rule set.
 - This applies within the **same scope**, ensuring seamless data propagation.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- Mapped Characteristic Values
- Rule Set Commit
- Item Save/Commit
- BAU Mappings
- DC Queue Load
- Calculate Expression
- Calculated Ruleset
- Real-Time Mapping
- Recursiveness
- Source and Target Characteristics

Rule Set Limitation

The **Rule Set Browser** in the **OGRDS Mapping Tool** has a technical limitation that affects how many items can be included or updated in a single rule set. Understanding this constraint is crucial for effective rule configuration and execution.

There is limitation of 400K items that can be included/updated via single the Rule Set.

This refers to the initial Rule Set set up and is applicable to all Rule Set methods.

It must be considered when selecting Scope = ALL. Mapping may need to be split by the scope.

If the item limit is reached for already committed mappings, there is no issue as the values are applied to the new items only.

If existing mapping that already exceeds the 400K item limit is edited - e.g. additional Product Class/Module added to the Scope, new target value(s), new source characteristic (etc), and the number of items updated by committing the rule again is less than 400K, there is no issue.

If existing mapping that already exceeds the 400K item limit is edited in such way that Commit action will update all items in the scope, the Commit job will fail.

Key Points

1. Item Limit

- A **maximum of 400,000 items** can be included or updated via a **single Rule Set**.
- This applies to **all Rule Set methods** (Mapped, Calculated, Unmapped).

2. Scope Consideration

- When selecting **Scope = ALL**, this limit must be considered.
- If the scope exceeds 400K items, **mapping may need to be split** across multiple rule sets.

3. Committed Mappings

- If the 400K limit is reached in **already committed mappings**, there is **no issue**.
- The system will only apply values to **new items**, not reprocess existing ones.

4. Editing Existing Mappings

- If changes (e.g., adding Product Classes, Modules, new target/source characteristics) affect **less than 400K items**, the commit will succeed.
- If changes require updating **all items in the scope** and exceed the 400K limit, the **commit job will fail**.

Keywords


- Rule Set Limitation
- OGRDS Mapping Tool
- 400K Item Limit
- Scope = ALL
- Committed Mappings
- Product Class
- Module
- Target Values
- Source Characteristics
- Commit Job Failure

POSSIBLE FLOWS

Types of Mapping

Possible flows

Rules can be created by the users with ‘Maintain Local Derived Characteristic Rules’ permission (LDC Profile). Country flag setting determines what kind of rules can be added and which characteristics can be used as a Target.

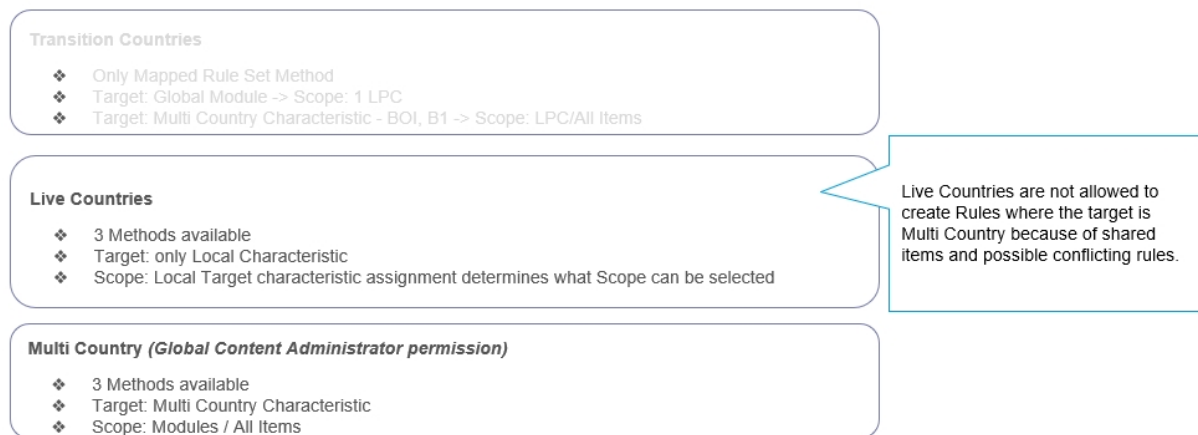

Possible Flows: Rule Creation Based on Country Status

The **Rule Set Browser** in the **OGRDS Mapping Tool** allows users to create rules based on their permissions and the country’s operational status. The rule creation process varies depending on whether the country is in **Transition**, **Live**, or managed under **Multi-Country** governance.

User Permissions

- Rules can be created by users with the ‘Maintain Local Derived Characteristic Rules’ permission (LDC Profile).
- The **Country Flag Setting** determines:
 - The **type of rules** that can be added.
 - Which **characteristics** can be used as **Target**.

Country-Specific Rule Flows

Transition Countries

- **Method Allowed:** Only Mapped Rule Set
- **Target Options:**
 - Global Module → Scope: 1 LPC
 - Multi-Country Characteristic (e.g., BOI, B1) → Scope: LPC / All Items

Live Countries

- **Methods Available:** All 3 Methods (Mapped, Calculated, Unmapped)
- **Target:** Only Local Characteristic
- **Scope:** Determined by Local Target Characteristic Assignment

⚠️ **Live Countries** cannot create rules with **Multi-Country targets** due to shared items and potential rule conflicts.

Multi-Country (Global Content Administrator Permission)

- **Methods Available:** All 3 Methods
- **Target:** Multi-Country Characteristic
- **Scope:** Modules / All Items

Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- Maintain Local Derived Characteristic Rules
- LDC Profile
- Country Flag Setting
- Transition Countries
- Live Countries
- Multi-Country
- Global Module
- Multi-Country Characteristic
- Scope
- LPC
- Modules
- All Items
- Rule Conflict

Types of Mapping - possible flows – detailed

METHOD	Country	TARGET CHAR	
MAPPED	In-Transition	Global Module	
		Multi Country Char	LPC/All Items
MAPPED & CALCULATED	Non-Transition	Local Char (assigned exclusively to PC)	
		Local Char (assigned exclusively to Modules)	Modules/All Items

		Local Char (assigned to both Modules/PC)	All Items
UNMAPPED	Non-Transition	Local Char (assigned exclusively to PC)	
		Local Char (assigned exclusively to Modules)	Modules
		Local Char (assigned to both Modules/PC)	Not Possible
MAPPED & CALCULATED	MULTI COUNTRY	Multi Country Char	
UNMAPPED		Multi Country Char	Modules

SCOPE
One LPC
LPC/All Items
LPC
Modules/All Items

Detailed Mapping Types and Possible Flows

This section outlines the **types of mapping methods** available in the **OGRDS Mapping Tool**, categorized by **country type**, **target characteristic**, and **scope**. It helps users understand which combinations are valid based on system rules and governance structures.

Key Insights

- **In-Transition Countries** can only use **Mapped** methods with limited scope (e.g., one LPC or all items).

- **Non-Transition Countries** have access to **Mapped**, **Calculated**, and **Unmapped** methods, depending on how the local characteristic is assigned.
- **Multi-Country Rules** require **Global Content Administrator** permissions and support **Mapped**, **Calculated**, and **Unmapped** methods for **Multi-Country Characteristics**.
- **Local Characteristics** assigned to both **Modules** and **Product Classes** cannot be used in **Unmapped** methods.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- Mapping Methods
- Mapped
- Calculated
- Unmapped
- In-Transition Countries
- Non-Transition Countries
- Multi-Country
- Local Characteristic
- Multi-Country Characteristic
- Global Module
- Scope
- LPC
- Modules
- All Items

Mapped & Calculated Characteristics in OGRDS

Once Characteristic is used as a Target in a Rule Set, it changes its status at the Assignment Level.

Mapped Characteristic - Assignment Level view

This section explains how **local characteristics** are assigned and managed within the **OGRDS Mapping Tool** when used in a **Mapped Rule Set**. It highlights the automatic transition of coding methods and the configuration options available at the assignment level.

Local characteristic #TR LOC H3TC2: H3TC CATEGORY has been used as a Target in Mapped Rule Set for the Scope LPC = 00H3.

The screenshot displays the SAP configuration interface for a Mapped Rule Set. At the top, a breadcrumb trail shows the path: #TR LOC H3TC2: H3TC CATEGORY. Below this, a navigation bar includes tabs for Details, Source, Modules, Product Classes, SKU Product Classes, Values, Definition, and Guidelines. A toolbar contains icons for Open Assignment, Assign, Unassign, Show Unassigned, and Tile.

The 'Assigned Product Classes' section features a table with the following data:

Code	Description	Se...	Inte...	Fixed	Copy	Field	Method
14530893	00D9				✓	✓	MANUAL
17877736	00H3				✓	✓	MAPPED
221970	00H8				✓	✓	MANUAL

Below the table, the configuration form for the selected product class (00H3) is shown. It includes the following fields and options:

- Product Class:** 00H3
- Characteristic Type:** #TR LOC H3TC2: H3TC CATEGORY
- Coding Method:** MAPPED
- Flags:**
 - ☐ Fixed Value List
 - ☒ Copy Item Values
 - ☒ Field Collection
 - ☒ Mandatory
- Workflow:**
 - ☐ Local
 - ☐ Regional
 - ☐ Global
- Default:** [NO DEFAULT]
- Sort Order:** 350030240

At the bottom, there is a section for 'Processing Group Set Overrides' with a table containing columns for Processing Gr..., Default, Sort Order, and Delete.

Coding Method of that Characteristic is automatically changed from MANUAL to MAPPED for the Product class used as a Scope of the Rule Set once the Rule is committed

Key Concepts

1. Target Characteristic in Rule Set

- Example: #TR LOC H3TC2: H3TC CATEGORY is used as a Target Mapped Rule Set.
- Scope: Applied to LPC = 00H3.

2. Coding Method Transition

- When a rule is **committed**, the **coding method** for the characteristic changes from **MANUAL** to **MAPPED** for the relevant **Product Class**.
- This ensures automated population of values based on rule logic.

3. Assignment Level View

- Displays how characteristics are assigned across different product classes.
- Shows coding methods (e.g., MANUAL, MAPPED) and associated metadata.

4. Configuration Options

- **Flags:**
 - Fixed Value List
 - Copy from Values
 - Field Collection
 - Mandatory
- **Other Fields:**
 - Order: NO DEFAULT
 - Short Code: 3500032406

Keywords


- Rule Set Browser
- OGRDS Mapping Tool
- Mapped Characteristic
- Assignment Level View
- Local Characteristic
- Coding Method
- MANUAL vs MAPPED
- Product Class
- Scope LPC
- Fixed Value List
- Field Collection
- Mandatory Fields

Mapped Characteristic - Item Level view


This section explains how **mapped characteristics** behave at the **individual item level** within the **OGRDS Mapping Tool**, and outlines best practices for users when interacting with these characteristics.

It is up to the User to decide whether Mapped characteristics are visible items for him or not.

User should not manually code the Target char value (during new item creation), as the DC process will overwrite the manual changes in case of source characteristic value updates, unless specified differently in the Rule Set (Manual Option used).
User should not change Target value on existing item as the next commit will restore the previous value according to the specified rule. Target value will get updated in case of source value updates as well.

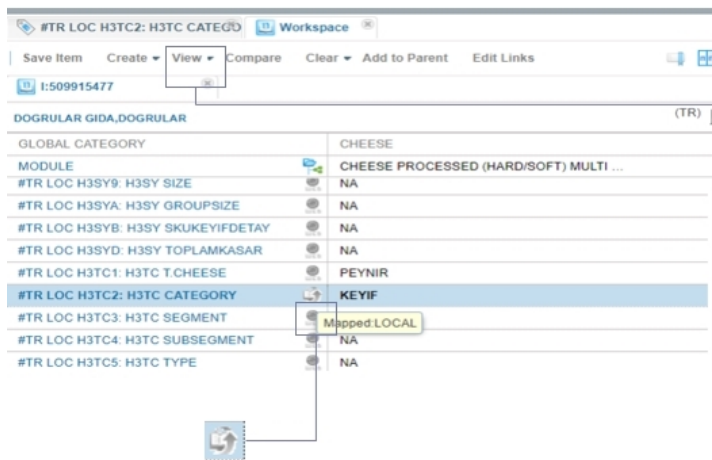

Mapped Characteristic value will be populated via DC process and not in a real time; Therefore user can opt out from seeing Mapped chars on items by deselecting Mapped chars flag in a Custom View.

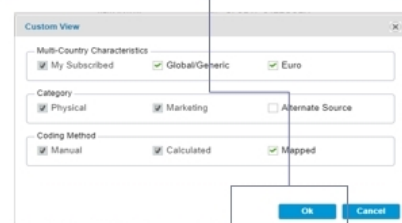

Key Guidelines for Users

1. Visibility Control

- Users can choose whether **mapped characteristics** are visible on items by **deselecting the Mapped Chars flag** in a Custom View.

2. Manual Coding Restrictions

- Users **should not manually code the target characteristic value** during new item creation.
- The DC (Data Collection) process will **overwrite manual entries** if source characteristic values are updated.
- Exception: If the **Manual Option** is specified in the Rule Set, manual coding may be allowed.

3. Editing Existing Items

- Users **should not change target values** on existing items.
- Any manual changes will be **reverted** during the next **commit**, restoring values based on the rule logic.
- Target values will also **automatically update** if source values change.

4. Timing of Updates

- Mapped characteristic values are populated via the **DC process, not in real-time**.
- This delayed update mechanism ensures consistency across items but requires users to follow proper procedures.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool

- Mapped Characteristics
- Item Level View
- Manual Coding
- Target Characteristic
- Source Characteristic
- DC Process
- Commit
- Manual Option
- Custom View

Calculated Characteristic - Assignment Level view

This section explains how **local characteristics** are managed when used as **targets in Calculated Rule Sets** within the **OGRDS Mapping Tool**. It highlights the automatic transition of coding methods and the implications for product class assignments.

Local Characteristic #RU LOC WT1A : WT1A has been used as a Target in Calculated Rule Sets for the Scope of several LPC's.

#RU LOC WT1A : WT1A

Details

Source

Modules

Product Classes

SKU Product Classes

Units

Reporting Bases

Values

Definition

Guidelines

Open Assignment

Assign

Unassign

Show Unassigned

Tile

Assigned Product Classes

All Columns

Search

Code	Description	Se...	Inte...	Fixed	Copy	Field	Method	Mandatory	Local	Regional
45085087	0AER				✓		CALCULATED	✓		
45085088	0AFC				✓		CALCULATED	✓		
74730263	0AFI				✓		CALCULATED	✓		

#RU LOC WT1A : WT1A 0AFC/#RU LOC WT1A : WT1A

Details Values Used Definition Guidelines

Save

Product Class: 0AFC

Characteristic Type: #RU LOC WT1A : WT1A

Coding Method: CALCULATED

Flags: ☐ Fixed Value List ☒ Copy Item Values ☐ Field Collection ☒ Mandatory ☐ System Maintained

Workflow: ☐ Local ☐ Regional ☐ Global

Default: [NO DEFAULT]

Sort Order: 320000007

Processing Group Set Overrides

Processing Gr...	Default	Sort Order	Delete

Coding Method of that Characteristic is automatically changed from MANUAL to CALCULATED for the Product classes used as a Scope of the Rule Set once the Rule is committed

Key Concepts

1. Target Characteristic in Calculated Rule Sets

- Example: #RU LOC WT1A : WT1A is used as a **Target** in **Calculated Rule Sets**.
- Applied across **multiple LPCs (Local Product Classes)**.

2. Coding Method Transition

- When the rule is **committed**, the **coding method** for the characteristic changes from **MANUAL** to **CALCULATED**.
- This ensures that the characteristic values are derived through system-defined calculations rather than manual input.

3. Assignment Level View

- Displays how characteristics are assigned to product classes.
- Shows the transition in coding method and confirms rule application across the defined scope.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- Calculated Characteristic
- Assignment Level View
- Local Characteristic
- Target Characteristic
- Calculated Rule Sets
- LPC (Local Product Class)
- Coding Method
- MANUAL to CALCULATED

Calculated Characteristic - Item level view

This section outlines how **calculated characteristics** behave at the **item level** in the **OGRDS Mapping Tool**, emphasizing system behavior, user restrictions, and real-time data handling.

Unlike Mapped, Calculated **Characteristics** are always visible on Items in the Workspace.

System will not allow user to:

- manually code the Target char value
- change already coded Target char value

Calculated Characteristic value will be calculated and populated in a real time

The screenshot shows the OGRDS application interface. The top navigation bar includes tabs for 'Copy', 'DRAFT', 'Rule', 'OGR', 'CR 10', 'Search', 'CR 5', 'DASH', 'OGR', and 'Check'. The main workspace displays a list of characteristics for item 'S.C. JOHNSON RALLY (S.C. JOHNSON) RALLY ...'. The list includes characteristics like 'GLOBAL CATEGORY', 'MODULE', 'PCS', 'PNU', 'WTU', 'WTUA', 'WT1A', 'PRODUCT CLASS', 'BRAND', 'MANUFACTURER', 'PRIVATE LABEL', 'VARIANT (SUB-BRAND)', 'USAGE - HOUSEHOLD PROD...', 'PRODUCT FORM', 'IF REFILL', 'FRAGRANCE', and 'NOVELTY (PACKAGING/SHAPE)'. The 'BRAND' characteristic is highlighted with a yellow background and labeled 'Calculated LOCAL (ION WAX)'. The bottom status bar shows 'Count: 15885 (Code Type Not Populated: Results > 1000)' and '0 record(s) selected'.

Calculated Characteristic value will be calculated and populated in a real time



Key Characteristics

1. Visibility

- Unlike mapped characteristics, **calculated characteristics** are always **visible** on items in the workspace.
- Users cannot hide or deselect them from view.

2. User Restrictions

- The system **does not allow manual coding** of the **target characteristic value**.
- Users **cannot modify** already calculated values.
- This ensures data integrity and consistency across all items.

3. Real-Time Calculation

- Calculated characteristic values are **computed and populated in real time**.
- This allows immediate reflection of changes based on source data, without waiting for batch processing or DC queue execution.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool

- Calculated Characteristic
- Item Level View
- Real-Time Calculation
- Target Characteristic
- Manual Coding Restriction
- Workspace Visibility
- Data Integrity

CHANGE MANAGEMENT

Source characteristics updates on items

Item update

This section outlines how updates to **source characteristics** affect **mapped** and **calculated characteristics** within the **OGRDS Mapping Tool**, and provides guidance for users managing item updates.

Mappings are in place for logically linked characteristics where the coding needs to be done in alignment following the rules set by the user. An update on a source characteristic will typically cause an update of mapped/calculated characteristic value on item (depending on the rule).

- For calculated characteristics this happens in a real time and can be seen in Standard Workspace.

#RU LOC WT1A : WT1A	0.21
---------------------	------

- For the mapped characteristics update to the target characteristic is done via DC process (around 15 minutes after update to the source char). Typically, mapped characteristic is excluded from the view (Custom View).

#IT LOC MDD : MARCA DEL DISTRIBUTORE	MDD CORE
--------------------------------------	----------



Mapped and Calculated characteristics are not be visible in Lite Workspace during Item creation (they are visible only after save action)

Users updating items should be educated and understand what mappings are in place. It is not indicated on an item, which characteristic is a Source/Input used in the Rule Set.

In case there are mappings in place where the Source characteristic is a Multi Country one:

- User needs to pay attention in case of Global projects where the Source chars may need to be updated – impact needs to be checked for a Multi Country char value change as well as a Target value change.
- In case there is a request to update a Local/Target value, user needs to make an update on a Global/Source char.

Surgeries should include only Source chars updates. Calculated characteristics can't be updated via surgeries nor via workspace.

Key Concepts

1. Impact of Source Characteristic Updates

- Mappings are applied to **logically linked characteristics**.
- Updates to a **source characteristic** will trigger updates to the **target characteristic**, depending on the rule type.

2. Real-Time vs Delayed Updates

- **Calculated Characteristics:**
 - Updated in **real time**.
 - Changes are immediately visible in the **Standard Workspace**.

- Example: #RU LOC W1TA : W1TA 0.21
 - **Mapped Characteristics:**
 - Updated via the **DC process**, typically **15 minutes** after the source update.
 - Often excluded from **Custom View**.
 - Example: #IT LOC MDD : MARCA DEL DISTRIBUTORE MDD CORE
3. **Workspace Visibility**
- Mapped and calculated characteristics are **not visible in Lite Workspace** during item creation.
 - They become visible **only after the item is saved**.
4. **User Awareness**
- Users must be **educated** about existing mappings.
 - Items do **not indicate** which characteristics are used as **Source/Input** in the Rule Set.
 - This requires users to understand the rule logic before making updates.
5. **Multi-Country Source Characteristics**
- Special attention is needed for **Global Projects**:
 - Changes to **Multi-Country source characteristics** may affect both **source and target values**.
 - If a **Local/Target value** needs updating, the change must be made on the **Global/Source characteristic**.
6. **Surgery Guidelines**
- Surgeries should **only include source characteristic updates**.
 - **Calculated characteristics cannot be updated** via surgeries or workspace.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- Change Management
- Source Characteristic
- Target Characteristic
- Mapped Characteristic
- Calculated Characteristic
- DC Process
- Real-Time Update
- Standard Workspace
- Lite Workspace
- Custom View
- Multi-Country Characteristic

- Global Projects
- Surgeries

Reports

Rule Set Reports

The **Rule Set Browser** in the **OGRDS Mapping Tool** provides several types of reports to help users monitor, validate, and troubleshoot rule set behavior and data mapping. These reports are essential for ensuring data accuracy and consistency across local and global modules.

The reports below are available to display details of mapping actions that happened from committed Rulesets. Rulesets that are in Edit State or in process are excluded.

- **RR91 - Current Mapping Outcomes Detail Report** - Report that allows the user to filter and extract all the mapping actions that have resulted from currently committed (not in progress) rule sets. There is facility to output only exceptions and facility to filter the output by multiple other criteria. If the mapping outcome is an exception due to conflicting rules, the output will include multiple records for each conflicted rule
- **RR92 - Current Mapping Outcomes Summary Report** - Extracts the total number of impacted items, created proposals, exceptions, manual work items and missing values per PC that derived from all the mapping actions that have resulted from currently committed rule sets.
- **RR93 – Committed Schema Report** - Extracts the information on committed mappings where the target is a Global module. e.g PC-Module Mappings.

Rule Set Reports Output examples

RR91

RR91

Rules 28193,28196 evaluate to different values for the target characteristic 33064.																						
	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T		
	Rule Set	Rule Set Name	Rule Sub-set Name	Rule ID	Source Values	Target Characteristic	Value	Item Col	Code	Local PC	Module Descripti	Item Descripti	Exception Message	Duplicate Rule Sub-Set	Duplicate Rule ID	Duplicate Rule Source Values	Duplicate Target Value	Proposal	Module	Dictionary	Last Chg Date/Ti	
1	Count=1	ID=220	SYND HAIR COLOR / ALL OTHER-SYND HAI	#####		#US LOC SYND HAIR CI	3,79E+08	'7575828			COLOURA		Exception					N	N	2018-C		
6	UNITED ST	220	SYND HAIR COLOR / ALL OTHER-SYND HAI	#####		#US LOC SYND HAIR CI	2,59E+08	'0400032			COLOURA		Exception					N	N	2018-C		
7	UNITED ST	220	SYND HAIR COLOR / ALL OTHER-SYND HAI	#####		#US LOC SYND HAIR CI	25463602	'0071249			COLOURA	L'OREAL /	Exception					N	N	2018-C		
12	UNITED ST	220	SYND HAIR COLOR / ALL OTHER-SYND HAI	#####		#US LOC SYND HAIR CI	3,49E+08	'0400007			COLOURA		Exception					N	N	2018-C		
15	UNITED ST	220	SYND HAIR COLOR / ALL OTHER-SYND HAI	#####		#US LOC SYND HAIR CI	45136987	'0400008			HAIR CON	L'OREAL /	Exception					N	N	2018-C		
18	UNITED ST	220	SYND HAIR COLOR / ALL OTHER-SYND HAI	#####		#US LOC SYND HAIR CI	4,89E+08	'7475828			COLOURA		Exception					N	N	2018-C		
30	UNITED ST	220	SYND HAIR COLOR / ALL OTHER-SYND HAI	#####		#US LOC SYND HAIR CI	5,03E+08	'0400148			COLOURA		Exception					N	N	2018-C		
40	UNITED ST	220	SYND HAIR COLOR / ALL OTHER-SYND HAI	#####		#US LOC SYND HAIR CI	4,72E+08	'0400098			COLOURA		Exception					N	N	2018-C		
50	UNITED ST	220	SYND HAIR COLOR / ALL OTHER-SYND HAI	#####		#US LOC SYND HAIR CI	2,63E+08	'0400001			COLOURA		Exception					N	N	2018-C		
51	UNITED ST	220	SYND HAIR COLOR / HAIR COLOR AFTER T	#####	LINENSE L	#US LOC SYND HAIR CI	3,56E+08	'7575828			COLOURA		Rules 28193	HAIR COLC	28196	AUBURN C RED		N	N	2018-C		
52	UNITED ST	220	SYND HAIR COLOR / HAIR COLOR AFTER T	#####	LINENSE L	#US LOC SYND HAIR CI	3,56E+08	'7575828			COLOURA		Rules 28193	HAIR COLC	28196	CHERRY C RED		N	N	2018-C		
53	UNITED ST	220	SYND HAIR COLOR / HAIR COLOR AFTER T	#####	LINENSE L	#US LOC SYND HAIR CI	3,56E+08	'7575828			COLOURA		Rules 28193	HAIR COLC	28196	COPPER G RED		N	N	2018-C		
54	UNITED ST	220	SYND HAIR COLOR / HAIR COLOR AFTER T	#####	LINENSE L	#US LOC SYND HAIR CI	3,56E+08	'7575828			COLOURA		Rules 28193	HAIR COLC	28196	CINNAMON RED		N	N	2018-C		

RR92

RR91

	A	B	C	D	E	F	G	H
1	Country	Local PC	Target	Items	Proposals	Exceptions	Manual	Missing Values
2	TURKEY	00J8	CHARACTERISTICS	5	0	0	0	0
3	TURKEY	00H3	CHARACTERISTICS	7	0	0	4	0
4								

RR93

RR91

	A	B	C	D	E	F	G
1	Rule Set ID	Rule Set Name	Local PC Id	Local PC Name	Country	Global Module Id	Global Module Name
11	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	1401384	AIR FRESHENERS INSTANT - MANUAL DEVICE - BASE/COMPLETE PACK
12	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	2194062	AIR FRESHENERS INSTANT - NO DEVICE - LIQUID
13	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	6951765	AIR FRESHENERS CONTINUOUS - BURNER - BASE/COMPLETE PACK
14	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	7106398	AIR FRESHENERS CONTINUOUS - NO DEVICE - LIQUID/OIL
15	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	10487437	AIR FRESHENERS - AUTOMOTIVE - GEL/GRANULES/SOLID
16	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	11174104	AIR FRESHENERS CONTINUOUS - NO DEVICE - GEL
17	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	12815806	AIR FRESHENERS CONTINUOUS - DEVICE REFILL - LIQUID/OIL
18	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	12933740	BANDED PACKS - HOMECARE
19	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	13232301	AIR FRESHENERS INSTANT - MANUAL DEVICE - REFILL - LIQUID
20	1982	Air Fresheners	96763688	AIR FRESHENERS	KOREA, REPUBLIC OF	16628032	AIR FRESHENERS CONTINUOUS - ELECTRIC - BASE/COMPLETE PACK

Key Report Types and Their Purpose

RR91 – Rule Conflict Evaluation Report

- **Purpose:** Identifies conflicts where multiple rules evaluate to **different values** for the **same target characteristic**.
- **Example Message:**
Rules 28193, 28196 evaluate to different values for the target characteristic 33064.
- **Key Columns:**
 - Rule Set ID & Name
 - Rule Type Description
 - Target Characteristic Name & Values (Calculated vs Evaluated)
 - Item Code Lists (Calc vs Eval)
 - Module Name
 - Exception Messages
 - Duplicate Module Indicators

RR92 – Proposal and Exception Summary

- **Purpose:** Summarizes the number of **target items**, **proposals**, **exceptions**, and **missing values** for each rule set by country and product class.
- **Example Data:**
 - Country: TURKEY

- Local PC: 00J8
- Target Items: 5
- Proposals: 0
- Exceptions: 0
- Manual: 4
- Missing Values: 0

RR93 – Rule Set Mapping Overview

- **Purpose:** Provides a detailed view of rule set mappings across local product classes and global modules.
- **Example Data:**
 - Rule Set ID: 1952
 - Rule Set Name: Air Fresheners
 - Country: KOREA REPUBLIC OF
 - Global Modules: INSTANT - MANUAL DEVICE - BASE/COMPLETE PACK, etc.

Keywords

- Rule Set Browser
- OGRDS Mapping Tool
- Rule Set Reports
- RR91
- RR92
- RR93
- Target Characteristic
- Rule Conflict
- Exceptions
- Proposals
- Manual Coding
- Global Module
- Local Product Class
- Data Validation

SUPPORTING DOCUMENTS

[Rule Set Browser - Mapped Rule Set - Set Up \(Live & Transition Countries\).pptx \(sharepoint.com\)](#)

[Rule Set Browser - Calculated Rule Set - Set Up.pptx \(sharepoint.com\)](#)

[Rule Set Browser - Unmapped Rule Set - Set Up.pptx \(sharepoint.com\)](#)

[Rule Set Browser - Rule Set Maintenance.pptx \(sharepoint.com\)](#)

[Unmapped Manual Coding Browser.pptx \(sharepoint.com\)](#)

[Rule Set Browser - Mapped Rule Set - Download & Upload Rules functionality.pptx \(sharepoint.com\)](#)

Do's and Don'ts

✓ Do's:

- Ensure that rules are committed to apply mapped values.
- Use the Rule Set Browser for shared characteristics across multiple clients.
- Use calculated rules for numeric characteristics where applicable.

✗ Don'ts:

- Do not manually code target values that are mapped or calculated.
- Avoid exceeding the 400K item limit in a single rule set commit.
- Do not create conflicting rules for shared items across countries.

Summary

The Rule Set Browser is a powerful tool within OGRDS that facilitates the mapping and calculation of characteristic values based on predefined rules.

It supports multiple mapping methods including mapped, calculated, and unmapped rule sets. This tool enhances data consistency, reduces redundant coding, and supports both local and multi-country schema mapping.

Proper use of the Rule Set Browser ensures efficient data management and alignment across global and local schemas.

SOP Update History

Change Date	Author(s)	Changes

9'th Sep 2020	Oleksandr Medvetsky	Update to slide: Mapping Process: Committed BAU Mappings (Mapped Rule Sets) execution is targeted for 15 minutes after updating/setting an item -> processing speed depends on the DC queue load, but must be completed on the same day of updating/setting an item;
2'nd Dec 2020	Kamila Sobiecka	Map Global characteristics flag removed for all Countries. This option is excluded from the Rule Set flows.
6'th Apr 2022	Kamila Sobiecka	Slide 18 – manual updates of the Target value
16th May 2024	Kamila Sobiecka	Slide 21/22 - change management – Source value updates

Explicit Pairings Overview

OGRDS Explicit Pairings Overview

Process:	Global RD Transformation
Country / Scope:	All Bau Countries
Workstream:	Enablement
Last revision Date	01/07/2023
Document Owner	-
Document Owner Backup	-
Document Approver	Brenda Krause / Khushali Desai
Created Date	01/09/2014

Overview

- This document provides a comprehensive overview of the Explicit Pairings functionality within the Global RD Transformation initiative.
- It is based on the PowerPoint presentation reviewed by Brenda Krause and Khushali Desai, originally created in September 2014 and updated in July 2023.
- The document expands on the slide content to offer detailed explanations, structured sections, and professional insights into the purpose, setup, functionality, and scenarios of explicit pairings.

Key Bullet Points

- Purpose and importance of explicit pairings in item coding and data integrity.
- Setup and rule creation for explicit pairings.
- Functionality in item view, coding amendments, and proposal management.

- Scenarios illustrate 1-to-1 and 1-to-many pairings.
- Considerations for global mapping and local characteristics.

Content

This document is designed to explain the concept and implementation of **Explicit Pairings** within the **OGRDS** system. Here's a breakdown of each section:

1. Target Audience and Objective

- **Explanation:** This section likely defines who the content is intended for (e.g., data stewards, governance leads, system users) and what the document aims to achieve.
- **Keywords:** Stakeholders, governance, onboarding, training, clarity.

2. Purpose of Explicit Pairing

- **Explanation:** Describes why explicit pairings are necessary in OGRDS. This could involve improving data accuracy, ensuring correct relationships between entities, or enhancing governance controls.
- **Keywords:** Data integrity, relationship mapping, governance, accuracy, compliance.

3. Things to Know

- **Explanation:** Covers prerequisites, assumptions, or important background information users need before engaging with the pairing process.
- **Keywords:** Prerequisites, dependencies, system behavior, limitations, best practices.

4. Set Up

- **Explanation:** Details the steps or configurations required to enable or initiate explicit pairings in the system.
- **Keywords:** Configuration, onboarding, system setup, user roles, permissions.

5. Functionality

- **Explanation:** Explains how explicit pairings work within OGRDS, including features, workflows, and user interactions.
- **Keywords:** Features, workflows, automation, manual pairing, validation.

6. Scenarios

- **Explanation:** Provides real-world examples or use cases where explicit pairings are applied, helping users understand practical applications.
- **Keywords:** Use cases, examples, business scenarios, edge cases, troubleshooting.

Target Audience and Objective

Section: Target Audience and Objective

1. Target Audience

This overview is intended for professionals involved in reference data management and governance. The audience includes:

- **Reference Data Enablement Subject Matter Experts (SMEs)**
Experts responsible for enabling and supporting reference data capabilities across systems.
- **Reference Data Subject Matter Experts**
Specialists who understand the structure, usage, and governance of reference data.
- **Cross Pillar Subject Matter Experts**
Individuals who work across multiple business pillars, ensuring consistency and integration of reference data.
- **Reference Data Value Administration**
Teams managing the values and hierarchies within reference data domains.
- **Reference Data BAU Cross and Characteristic Coders**
Coders and administrators involved in Business-As-Usual (BAU) operations, focusing on cross-reference and characteristic coding.

2. Objective

The primary goal of this content is:

- **To provide knowledge of Explicit Pairing**
Educating users on what explicit pairing means within the OGRDS framework.
- **To enable users to explain the concept of Explicit Pairing**
Empowering stakeholders to articulate the purpose, setup, and functionality of explicit pairings confidently.

Key Concepts and Keywords

- **Explicit Pairing:** A method of directly linking reference data elements to ensure accurate relationships and governance.
- **Reference Data:** Structured data used to categorize and manage business information.
- **Subject Matter Experts (SMEs):** Individuals with deep expertise in specific domains.
- **Cross Pillar Integration:** Ensuring data consistency across different business units.
- **BAU Operations:** Routine tasks and processes that maintain system functionality.

Purpose of Explicit pairing (EP)

The purpose of an Explicit Pairing is to ensure the correct values are identified on new items as well as to protect the cleaned Global Characteristic coding for the Major Brands

Section: Purpose of Explicit Pairing

Purpose

The **Explicit Pairing (EP)** functionality in OGRDS is designed to:

- **Ensure correct values are identified on new items**
This helps maintain data accuracy and consistency during onboarding or updates.
- **Protect cleaned Global Characteristic coding for Major Brands**
Safeguards the integrity of standardized coding, especially for high-value or widely used brand data.

What is Explicit Pairing?

Explicit Pairing refers to a **precise linking mechanism** between characteristic values. Key aspects include:

- **Specific Characteristic Value Pairing**
EP allows pairing of one characteristic value with another, either:
 - **1-to-1:** One value linked to one other value.
 - **1-to-many:** One value linked to multiple other values.

- **Value-Specific Setup**

Unlike general pairing tools (e.g., Value Admin Pairing), EP requires **manual specification** of exact values involved in the pairing.

- **Controlled Relationships**

These pairings are created within **OGRDS** and apply only to **specific values** within a characteristic, offering fine-grained control.

Key Concepts and Keywords

- **Explicit Pairing (EP):** Direct, value-specific linkage between characteristic values.
- **OGRDS:** Likely a reference data system used for governance and standardization.
- **Characteristic Values:** Attributes or coded elements used to define items.
- **1-to-1 / 1-to-many:** Types of pairing relationships.
- **Global Characteristic Coding:** Standardized coding system for global data consistency.
- **Value Admin Pairing:** A broader, less specific pairing functionality.

Explicit pairing – Things to know

Note - There could be automatic updates to the Child Characteristics within 1-to-1 explicit pairing links.

Section: Things to Know

Key Concepts

- **Dictionary-Level Construction**

Explicit Pairings are created at the **dictionary level**, meaning they are not specific to any **module** or **country**. This ensures consistency and global applicability.

- **Parent Value**

Typically, the **parent** in an explicit pairing is a **Global Brand Extension**, although other characteristics may also be used depending on the context.

- **Initial Scope**

The current implementation is focused **only on Global Characteristics**, indicating a controlled rollout or limited scope for now.

- **Child Value Associations**

Child values can be linked to parent values in two ways:

- **1-to-1 Association**

Example:

- *GLOBAL BRAND EXTENSION*: Coca Cola Light
- *GLOBAL IF WITH DIET/LIGHT CLAIM*: With Diet Claim
- **1-to-Many Association**

Example:

- *GLOBAL BRAND EXTENSION*: Coca Cola Light
- *GLOBAL PACKAGING*: Bottle or Can

Keywords

- Explicit Pairing
- Dictionary Level
- Global Brand Extension
- Global Characteristics
- 1-to-1 Association
- 1-to-Many Association
- Parent and Child Values
- Packaging
- Diet/Light Claim

Explanation

This section clarifies the **structural logic** behind explicit pairings in OGRDS. By defining pairings at the dictionary level, the system ensures that relationships between data elements are standardized and not influenced by regional or modular variations. The examples provided help illustrate how specific brand extensions can be paired with claims or packaging types, reinforcing the importance of accurate and meaningful data relationships.

Explicit pairing – Set up

BRAND EXT	GLOBAL IF WITH DIET/LIGHT CLAIM	GLOBAL PACKAGING	GLOBAL FLAVOUR
COCA COLA	WITHOUT DIET CLAIM	BOTTLE CAN	COLA COLA & CHERRY COLA & LIME COLA & LEMON COLA & VANILLA
COCA COLA LIGHT	WITH DIET CLAIM	BOTTLE CAN	COLA COLA & CHERRY COLA & LIME COLA & LEMON COLA & VANILLA
COCA COLA ZERO	WITH DIET CLAIM	BOTTLE CAN	COLA COLA & LIME
PEPSI	WITHOUT DIET CLAIM	BOTTLE CAN	COLA
PEPSI MAX	WITH DIET CLAIM	BOTTLE CAN	COLA

Section: Set Up

Setting Up Explicit Pairings

To implement **Explicit Pairings** in OGRDS, the process involves:

1. Creating Separate Characteristic Pairings

These are the foundational links between brand extensions and other characteristics:

- BRAND EXTENSION ↔ GLOBAL IF WITH DIET/LIGHT CLAIM
- BRAND EXTENSION ↔ GLOBAL PACKAGING
- BRAND EXTENSION ↔ FLAVOUR

2. Defining Specific Rules for Each Pairing

Each pairing must be configured with precise value-to-value relationships.

For example:

BRAND EXTENSION ↔ GLOBAL IF WITH DIET/LIGHT CLAIM

- COCA COLA → WITHOUT DIET CLAIM
- COCA COLA LIGHT → WITH DIET CLAIM
- COCA COLA ZERO → WITH DIET CLAIM
- PEPSI → WITHOUT DIET CLAIM
- PEPSI MAX → WITH DIET CLAIM

Additional Characteristic Values

- GLOBAL PACKAGING

- BOTTLE
- CAN
- GLOBAL FLAVOUR
 - Cola
 - Cola & Cherry
 - Cola & Lime
 - Cola & Vanilla

Keywords

- Explicit Pairing
- Characteristic Pairing
- Brand Extension
- Diet/Light Claim
- Packaging
- Flavour
- Rule-Based Mapping
- OGRDS Configuration

Explanation

This section outlines the **technical setup** required to implement explicit pairings in OGRDS. By defining characteristic pairings and assigning specific rules, the system ensures that brand extensions are consistently and accurately linked to relevant claims, packaging types, and flavors. This structured approach supports data governance, improves onboarding accuracy, and protects brand integrity.

Functionality - Explicit Pairing Rule creation

Explicit Pairing

ALL values specified in the rules for the Explicit Pairing **MUST** be **authorised at Dictionary Channel**

The exact value pairings are specified at time of creation

There is no connection to the values already used on items. **The user creating the pairing needs to identify items not meeting the criteria**

Functionality - Workspace/Item View

Section: Functionality – Explicit Pairing Rule Creation

Core Functionality

This section outlines how Explicit Pairing Rules are created and managed within the OGRDS system:

1. Authorization Requirement

- All values used in explicit pairing rules must be authorized at the Dictionary Channel level.
- This ensures that only validated and approved data elements are used in pairings.

2. Exact Value Specification

- Pairings are created by specifying exact values at the time of rule creation.
- This differs from dynamic or inferred pairings, emphasizing precision and control.

3. No Automatic Link to Existing Items

- The pairing rules are not automatically connected to values already used on items.
- Users must manually identify items that do not meet the criteria and take corrective action.


Keywords

- Explicit Pairing
- Rule Creation
- Dictionary Channel
- Authorized Values
- Exact Value Specification
- Manual Validation
- Item Compliance

Explanation

This functionality ensures that explicit pairings are governed by strict rules and validations. By requiring authorization and manual specification, OGRDS maintains high data integrity and governance standards. The lack of automatic linkage to existing items means users must actively monitor and manage compliance, reinforcing the importance of data stewardship.

Explicit Pairing

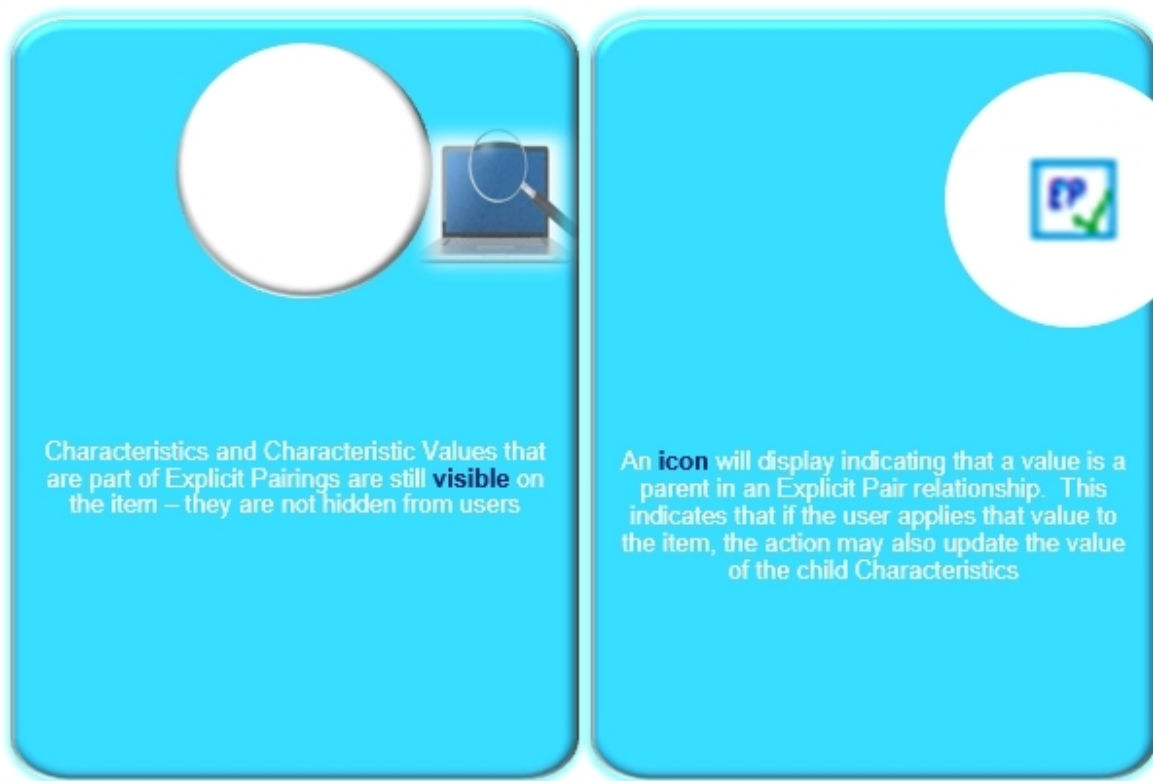

Section: Functionality – Item Behavior

Behavior of Explicit Pairings on Items

This section explains how **Explicit Pairings** behave when applied to items in OGRDS:

1. Visibility of Characteristics and Values

- All characteristics and characteristic values involved in explicit pairings **remain visible** on the item.
- They are **not hidden** from users, ensuring transparency and traceability.

2. Parent Value Indicator

- An **icon** is displayed next to a value that acts as a **parent** in an explicit pairing.
- This icon serves as a **visual cue** to users that applying this value may **automatically update** the associated **child characteristic values**.

Keywords

- Explicit Pairing
- Characteristic Values
- Item Visibility
- Parent-Child Relationship

- Icon Indicator
- Automatic Update
- User Interface Behavior

Explanation

This functionality ensures that users are aware of the relationships between characteristic values when working with items. By keeping all values visible and using icons to indicate parent roles, OGRDS promotes informed decision-making and prevents unintended data changes. The automatic update of child values based on parent selection enhances efficiency while maintaining governance.

Functionality - New Item Coding & Coding Amendments

Explicit Pairing

*(unless there are other dictionary Management flags in place that do not allow this)

 If the Parent value for an Explicit Pairing is changed to another value that is <u>not</u> in an Explicit Pairing then the change is allowed* and there is no impact for the other characteristics on the item	 If the Parent value for an Explicit Pairing is changed to another value that is part of an Explicit Pairing then the change is allowed*. There could also be automatic updates for other characteristics on the item that have 1-to-1 links in the new Explicit Pairing
 If the Parent value for an Explicit Pairing is being updated to another value that is part of an Explicit Pairing having a 1-to-many link and the current child value is not one of the paired values, the value is changed to NULL and recoded by the coder	 A Child value that is part of <u>an</u> 1-to-1- Explicit Pairing (and where the parent value of the Explicit Pairing is present) cannot be changed on an item

Section: Functionality – New Item Coding & Amendments

Explicit Pairing Behavior During Coding Changes

This section outlines how **Explicit Pairings** behave when coding changes are made to items in OGRDS. It describes four key scenarios:

1. Parent Value Changed to a Non-Paired Value

- **Allowed:** The change is permitted.
- **Impact:** No effect on other characteristics.
- **Condition:** The new parent value is **not part of any explicit pairing**.

2. Parent Value Changed to Another Paired Value

- **Allowed:** The change is permitted.
- **Impact:** May trigger **automatic updates** to child characteristics if they are part of **1-to-1 pairings** in the new explicit pairing.

3. Parent Value Changed in a 1-to-Many Pairing

- **Impact:** If the current child value is **not among the paired values**, it is:
 - Set to **NULL**
 - Requires **manual recoding** by the coder

4. Child Value in a 1-to-1 Pairing

- **Restriction:** Cannot be changed if the **parent value is present** on the item.
- This enforces strict consistency in 1-to-1 relationships.

Keywords


- Explicit Pairing
- Parent Value
- Child Value
- 1-to-1 Pairing
- 1-to-Many Pairing
- Coding Amendments
- Automatic Update
- NULL Value
- Dictionary Management Flags

Explanation

This functionality ensures that changes to item coding respect the rules of explicit pairings. It provides a structured approach to managing data integrity, especially when dealing with tightly coupled characteristic values. The system allows flexibility where appropriate but enforces strict rules to prevent inconsistencies in 1-to-1 relationships and ensures proper recoding in 1-to-many scenarios.

Functionality - Coding Amendments via surgery

Explicit Pairing

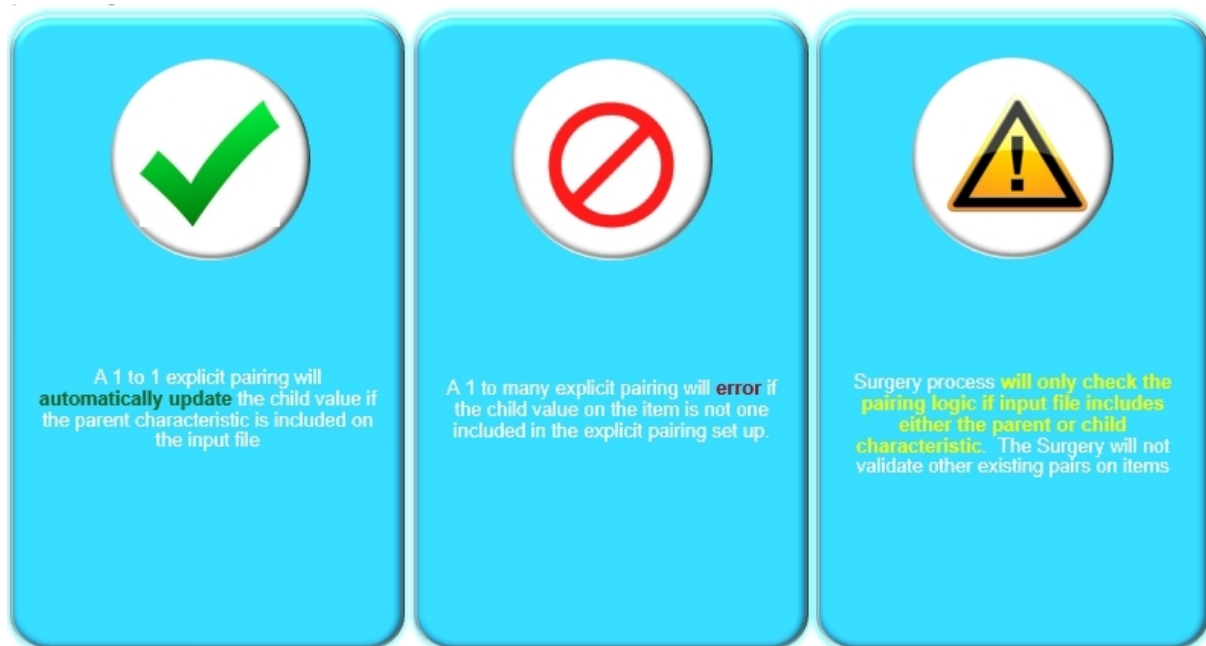

Section: Functionality – Coding Amendments via Surgery

Key Functional Behaviors During Surgery Process

This section outlines how **Explicit Pairings** behave when coding amendments are made through the **Surgery process** in OGRDS:

1. Automatic Update for 1-to-1 Pairing

- If the **parent characteristic** is present in the input file:
 - The **child value** is **automatically updated** based on the explicit pairing rule.
- This ensures consistency and reduces manual intervention.

2. Error Handling for 1-to-Many Pairing

- If the **child value** on the item is **not part of the defined pairing set**:

- The system will **throw an error**.
- This prevents invalid data combinations and enforces pairing integrity.

3. Limited Validation Scope

- The **Surgery process** only checks pairing logic if:
 - The input file includes **either the parent or child characteristic**.
- It does **not validate other existing pairings** on the item.
- This means some inconsistencies may go unnoticed unless explicitly included in the input.


Keywords

- Explicit Pairing
- Surgery Process
- 1-to-1 Pairing
- 1-to-Many Pairing
- Automatic Update
- Error Handling
- Input File Validation
- Parent/Child Characteristics

Explanation

This functionality ensures that the Surgery process in OGRDS respects explicit pairing rules during bulk coding amendments. It automates updates for 1-to-1 relationships, enforces strict validation for 1-to-many pairings, and limits checks to characteristics present in the input file. This design balances automation with control, helping maintain data integrity while streamlining operations.

Functionality - Proposal Management

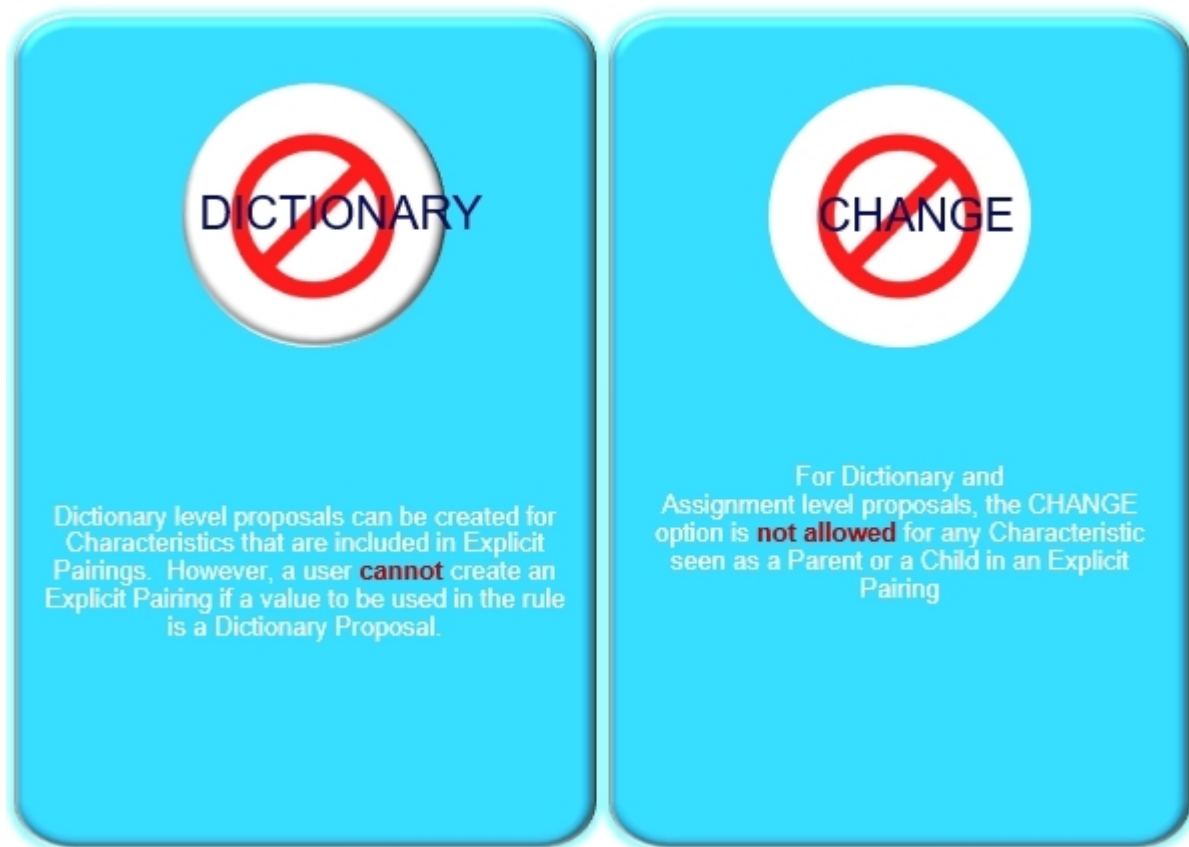

Section: Functionality – Proposal Management

Key Rules for Managing Proposals with Explicit Pairings

This section outlines how **Explicit Pairings** interact with **proposal management** in OGRDS, focusing on dictionary and assignment-level proposals:

1. Dictionary-Level Proposals

- Users **can create proposals** for characteristics that are part of explicit pairings.
- However, **explicit pairings cannot be created** if any value involved in the pairing is itself a **dictionary proposal**.
- This ensures that only **approved and stable values** are used in pairing rules.

2. Change Restrictions

- For both **dictionary-level** and **assignment-level** proposals:
 - The **CHANGE** option is **not allowed** for any characteristic that is:
 - A **Parent** in an explicit pairing
 - A **Child** in an explicit pairing

- This restriction protects the integrity of established pairings and prevents unintended disruptions.


Keywords

- Explicit Pairing
- Proposal Management
- Dictionary Proposal
- Assignment Proposal
- Parent/Child Characteristics
- Change Restrictions
- Governance Rules

Explanation

This functionality enforces strict governance around proposal management in OGRDS. By restricting changes to characteristics involved in explicit pairings and disallowing pairings with proposed values, the system maintains data consistency and prevents conflicts. These rules are essential for ensuring that explicit pairings remain reliable and aligned with approved data standards.

Scenario 1 – ‘1 to 1’ Explicit Pairing

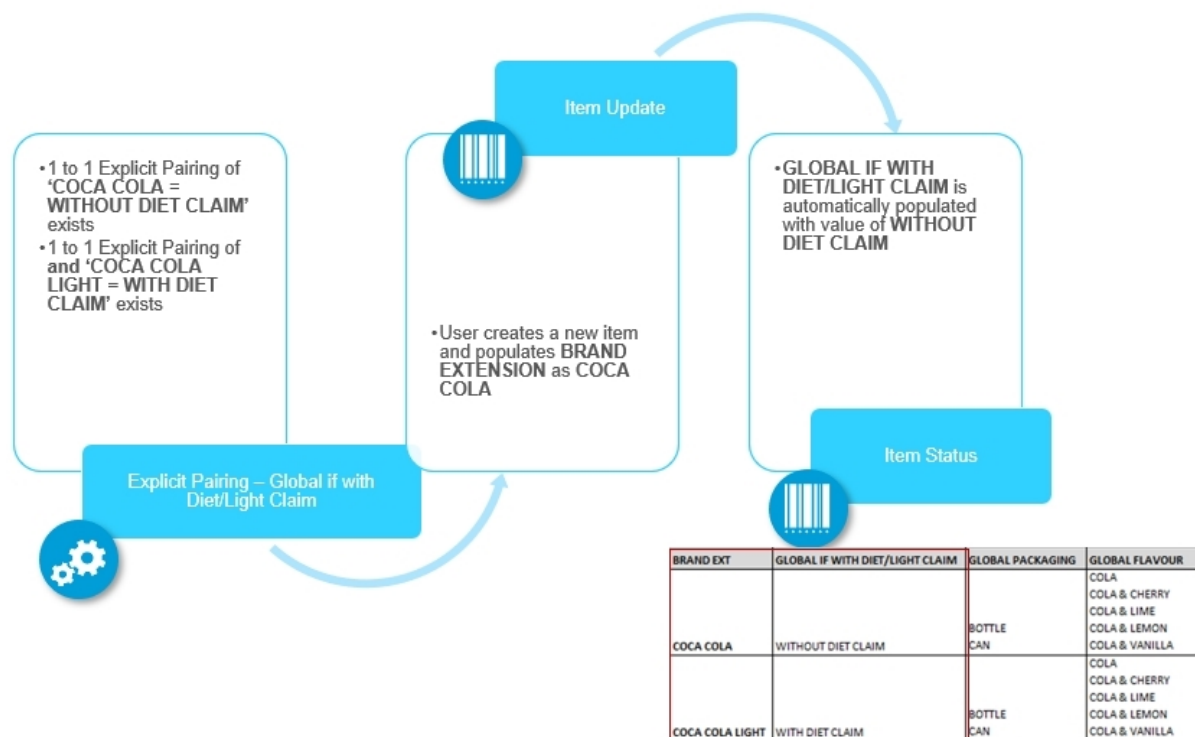

Section: Scenario 1 – 1-to-1 Explicit Pairing

Scenario Description

This scenario demonstrates how **1-to-1 explicit pairings** function in OGRDS when creating or updating items:

- **Explicit Pairing Rules:**
 - COCA COLA is explicitly paired with WITHOUT DIET CLAIM
 - COCA COLA LIGHT is explicitly paired with WITH DIET CLAIM
- **Item Creation Behavior:**
 - When a user creates a new item and selects BRAND EXTENSION = COCA COLA, the system **automatically populates:**
 - GLOBAL IF WITH DIET/LIGHT CLAIM = WITHOUT DIET CLAIM


Keywords

- Explicit Pairing
- 1-to-1 Relationship
- Automatic Population
- Brand Extension
- Diet/Light Claim
- Item Creation
- Global Packaging
- Global Flavour

Explanation

This scenario illustrates the **automation and precision** of explicit pairings in OGRDS. By defining clear 1-to-1 relationships between brand extensions and diet/light claims, the system ensures consistent and accurate data entry. The automatic population of child characteristics based on parent values reduces manual effort and enforces governance rules.

Scenario 1a – '1 to 1'Explicit Pairing

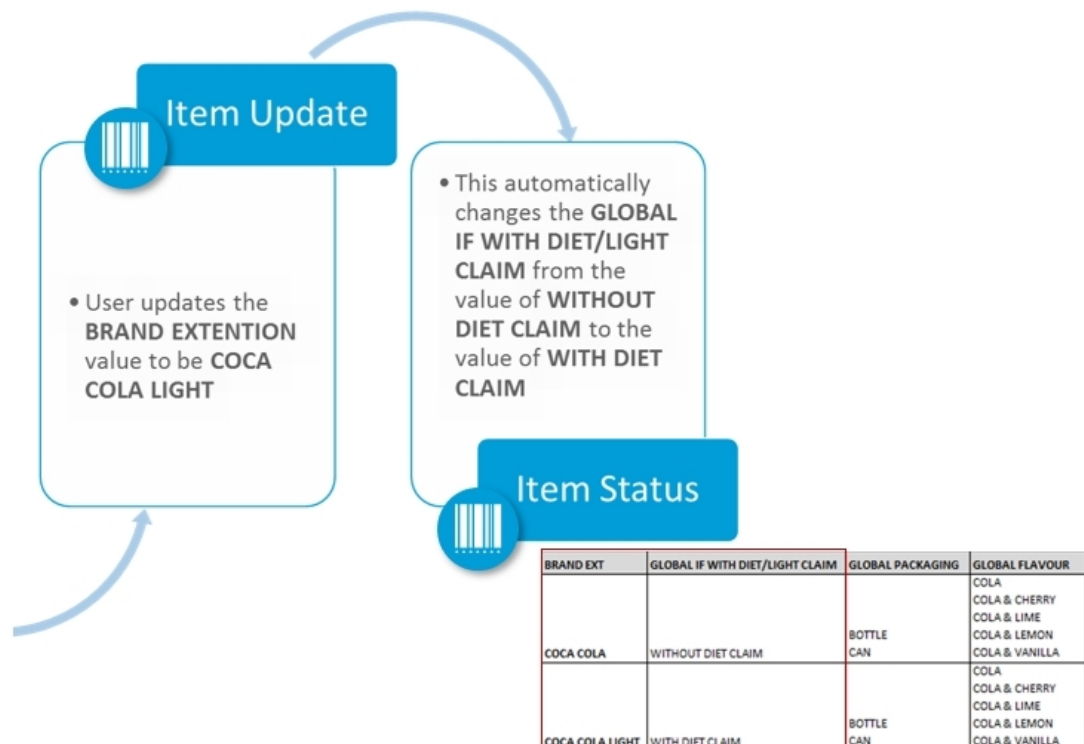

Section: Scenario 1a – 1-to-1 Explicit Pairing

Scenario Description

This scenario demonstrates how a **1-to-1 explicit pairing** behaves when an item is updated in OGRDS:

- **Item Update:**
 - The user changes the **BRAND EXTENSION** to **COCA COLA LIGHT**.
- **System Behavior:**
 - The system **automatically updates** the **GLOBAL IF WITH DIET/LIGHT CLAIM** from **WITHOUT DIET CLAIM** to **WITH DIET CLAIM**.


Keywords

- Explicit Pairing
- 1-to-1 Relationship
- Automatic Attribute Update
- Brand Extension
- Diet/Light Claim
- Global Packaging
- Global Flavour
- Item Update Behavior

Explanation

This scenario highlights the **automation and consistency** enforced by explicit pairings in OGRDS. When a user updates a parent characteristic (like brand extension), the system automatically adjusts the related child characteristic (diet/light claim) based on predefined 1-to-1 rules. This ensures data integrity and reduces manual errors, especially in complex product hierarchies involving multiple attributes like packaging and flavor.

Scenario 2 – ‘1 to many’ Explicit Pairing

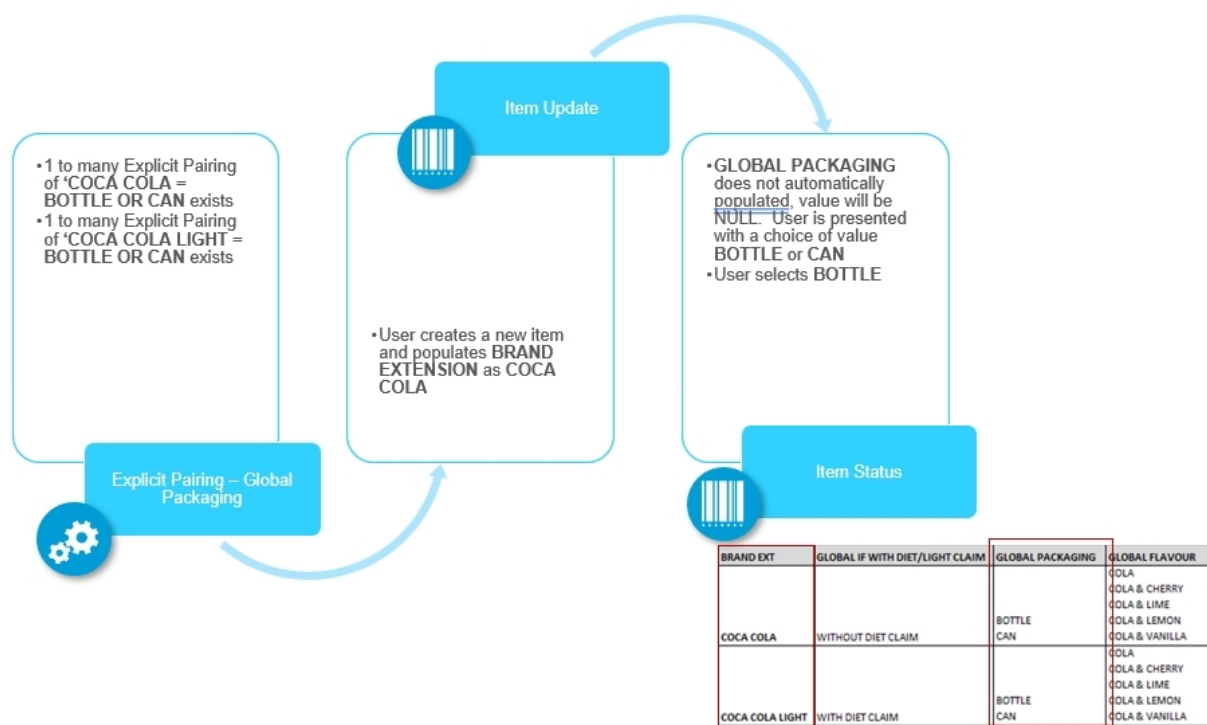

Section: Scenario 2 – 1-to-Many Explicit Pairing

Scenario Description

This scenario illustrates how **1-to-many explicit pairings** function in OGRDS when creating or updating items:

- **Explicit Pairing Rules:**
 - COCA COLA is paired with BOTTLE or CAN
 - COCA COLA LIGHT is also paired with BOTTLE or CAN
- **Item Update Behavior:**
 - When a user creates a new item and selects BRAND EXTENSION = COCA COLA, the system:
 - Does **not automatically populate** the GLOBAL PACKAGING field
 - Sets the packaging value to NULL

- Prompts the user to **select** from the valid options: BOTTLE or CAN


Keywords

- Explicit Pairing
- 1-to-Many Relationship
- Manual Selection
- Brand Extension
- Global Packaging
- Global Flavour
- Item Creation
- NULL Value

Explanation

This scenario highlights the **flexibility and user control** in 1-to-many explicit pairings within OGRDS. Unlike 1-to-1 pairings, the system does not auto-populate child values. Instead, it presents valid options for the user to choose from, ensuring that only permissible combinations are selected while maintaining governance standards.

Scenario 2a – ‘1 to many’ Explicit Pairing

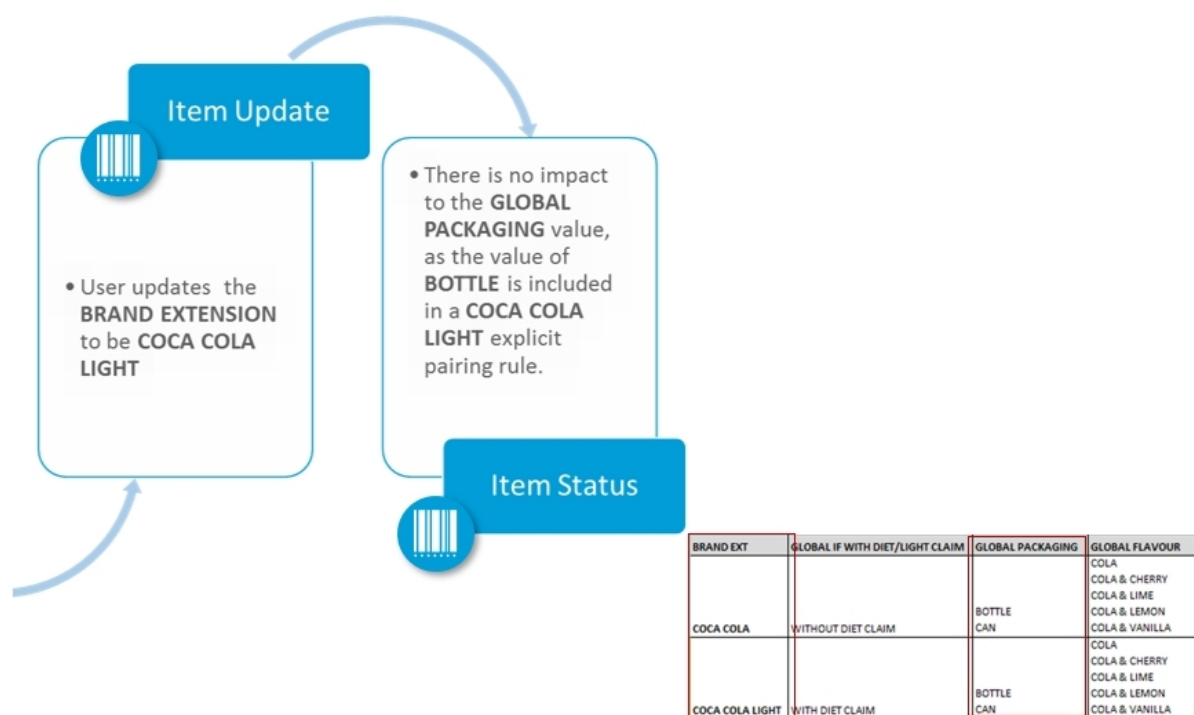

Section: Scenario 2a – 1-to-Many Explicit Pairing

Scenario Description

This scenario illustrates how **1-to-many explicit pairings** behave when an item is updated in OGRDS:

- **Item Update:**
 - The user changes the **BRAND EXTENSION** to **COCA COLA LIGHT**.
- **System Behavior:**
 - The **GLOBAL PACKAGING** value remains unchanged.
 - Reason: The current packaging value (**BOTTLE**) is already part of the **explicit pairing rule** for **COCA COLA LIGHT**.


Keywords

- Explicit Pairing
- 1-to-Many Relationship
- Brand Extension
- Global Packaging
- Global Flavour
- Item Update
- Rule-Based Validation

Explanation

This scenario demonstrates the **flexibility and validation logic** of 1-to-many explicit pairings in OGRDS. When a brand extension is updated, the system checks whether the existing child values (like packaging) are valid under the new pairing rules. If they are, no changes are made—preserving data integrity and reducing unnecessary recoding.

Scenario 2b – ‘1 to many’ Explicit Pairing

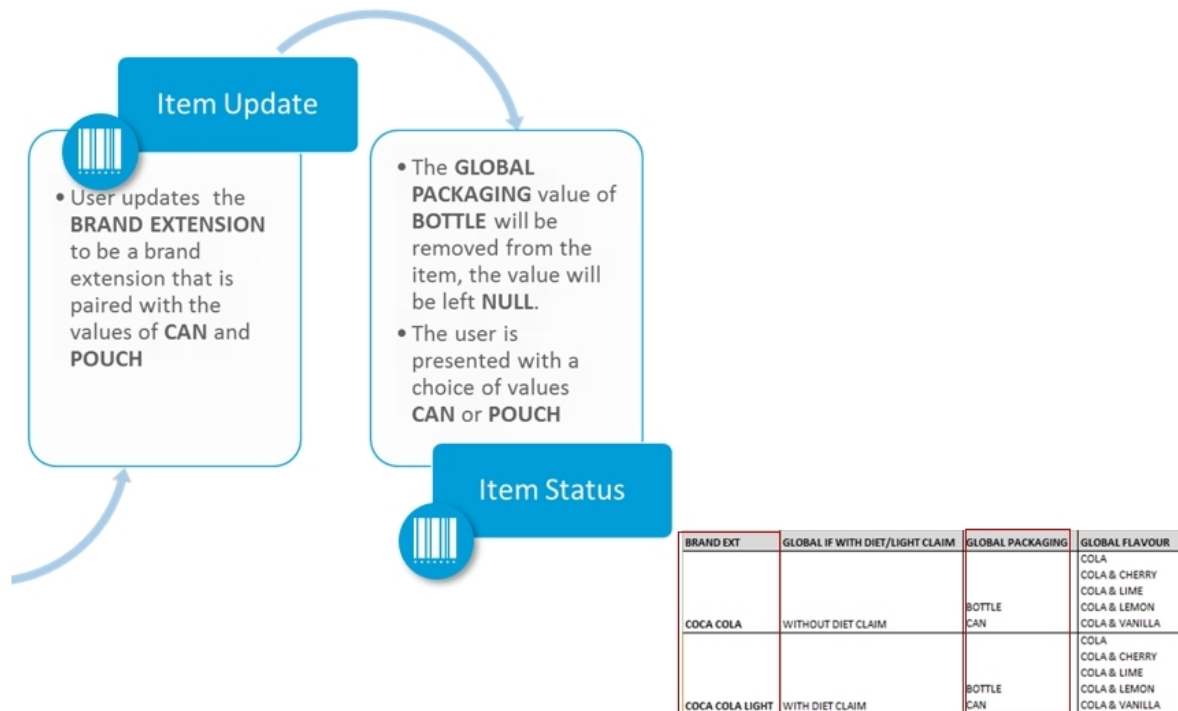

Section: Scenario 2b – 1-to-Many Explicit Pairing

Scenario Description

This scenario demonstrates how **1-to-many explicit pairings** behave when a brand extension is updated in OGRDS:

- **Item Update:**
 - The user changes the **BRAND EXTENSION** to one that is explicitly paired with **CAN** and **POUCH**.
- **System Behavior:**
 - If the current **GLOBAL PACKAGING** value is **BOTTLE**, it is **removed** and set to **NULL**.
 - The user is then prompted to **select** a valid packaging option: **CAN** or **POUCH**.

Keywords

- Explicit Pairing
- 1-to-Many Relationship
- Brand Extension
- Global Packaging
- Packaging Options
- Item Update
- NULL Value

- User Prompt

Explanation

This scenario highlights the **validation and enforcement logic** of 1-to-many explicit pairings in OGRDS. When a brand extension is updated, the system checks if the existing packaging value is valid under the new pairing rules. If not, it removes the invalid value and prompts the user to select from the allowed options. This ensures that only compliant data combinations are maintained, supporting governance and data quality.

Other points to mention

Explicit Pairing functionality will need to be reviewed if any of the following are used

Global to Global Mapping.

Explicit Pairings using Local characteristics.

Do's and Don'ts

✓ Do's:

- Ensure correct values are identified for new items.
- Use explicit pairings to maintain data consistency.
- Review functionality when using global-to-global mapping.

✗ Don'ts:

- Do not override explicit pairings without proper validation.
- Avoid using local characteristics without reviewing pairing rules.

Summary

Explicit Pairings play a crucial role in ensuring accurate and consistent data coding within the Global RD Transformation framework.

By defining clear relationships between parent and child characteristics, the system maintains integrity across item creation and amendments.

This document has outlined the purpose, setup, and functionality of explicit pairings, supported by practical scenarios and guidance. Adhering to the practices outlined will help maintain high standards in data.

Schema mapping Rule Set

Schema Mapping Rule Set

Process:	Global RD Transformation
Country / Scope:	All Bau Countries
Workstream:	Global RD Transformation
Created Date	01/01/202
Last revision Date	01/07/2023
Document Owner	-
Document Owner Backup	-
Document Approver	Global RD Transformation

Overview

- It outlines the purpose, functionality, and procedures for creating, maintaining, and committing schema mapping rules, including both standard and multi-country mappings.
- The document is structured to reflect the original presentation format, with expanded explanations and professional tone suitable for formal documentation.


Schema Mapping Rule Set

The purpose of the tool is to align Scanning and Omni schema content by making Omni specific characteristic being available on Scanning items

Initially mapping rules are created in xls files by Local RD team and then the rules are to be uploaded for each target characteristic into OGRDS Schema Mapping. Mapping is maintained within OGRDS when there are updates required, e.g. new modules.

Mapped Omni characteristics are independent from the assignment to the Scanning Schema Product classes.

Scope of the Rule Sets is limited to the Standard Items with selected external codes cross coding's in the Scanning Schema.

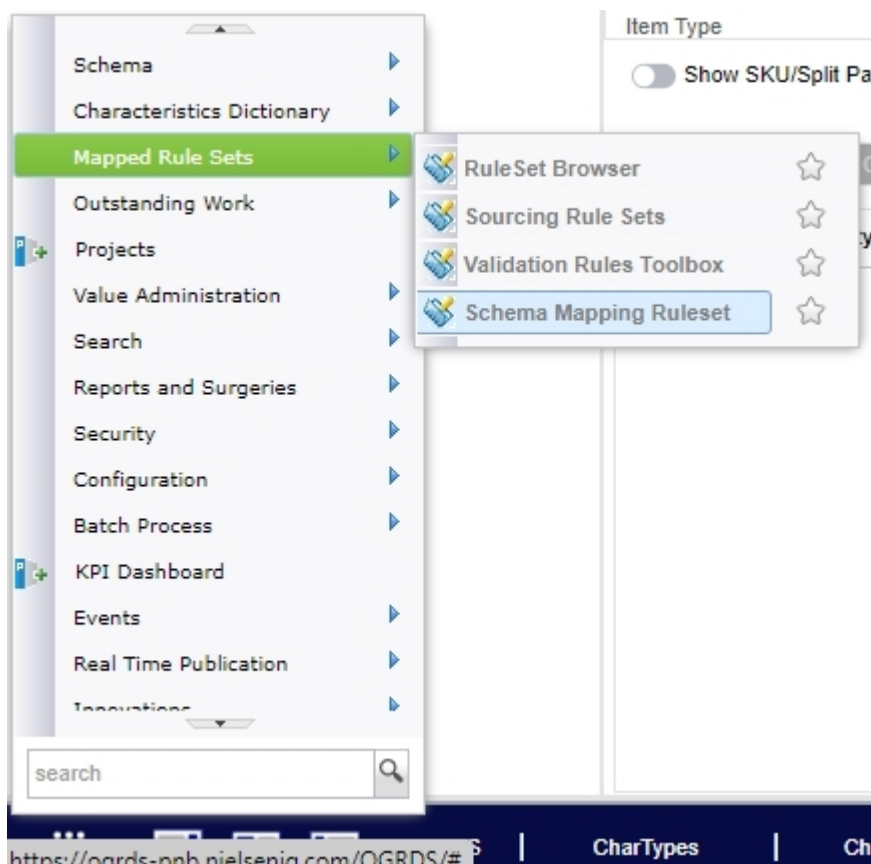

SOP Purpose & Supporting documents

Purpose:

Explain the Schema mapping rule set functionality.

Rules creation

Rules maintenance

Supporting documents:

Schema mapping rule set – terminology

A mapping tool that allows to populate Omni specific characteristics on Scanning items when the RCT code gets cross coded to it.

TERMINOLOGY:

- **Rule Set:** A set of rules where the Country, Target Characteristic, Scope are applied
- **Scope:** “All Items” by default; by selected External Codes where the rule set applies
- **Target:** Characteristic to be mapped - characteristic where the values will be populated based on created rule.
- **Source:** Characteristic to be mapped from – based on which the target characteristic will be mapped. This includes Control Property Characteristic (PC or Module)
- **Subset:** A set of rules within a Mapped Rule Set that specify the Source (“From) characteristic(s)
- Multiple subset for a Rule Set can be created if it is needed to utilize different source characteristic to populate the Target characteristic values.
- **Save:** Enables system to save the updates on the rule. Does not have any impact on real, production items.

Test: To test and find the count of records in total, changed and exceptions

Commit: triggers population of the received data based on created rule set for the existing data as well as a daily basis jobs.

Exceptions / All other subset - list of items that could not be mapped - items within the scope that do not meet a specified rule.


Process flow

- | | | | |
|---|--|---|---|
| 1 | Create required rules in xls
Identify source and target chars | 5 | Update rules in the file and Upload |
| 2 | Create Rule Set – Wizard set up | 6 | Test & validate if there are any exceptions |
| 3 | Create Subset | 7 | Commit |
| 4 | Download file for rules creation | | |

Schema mapping rule set - accessing & main screen

Schema mapping rule set main screen displays mappings available for the Country that the user has permission to view/maintain.

- Required permissions: Maintain schema mapping rules and View schema mapping rules at Country object

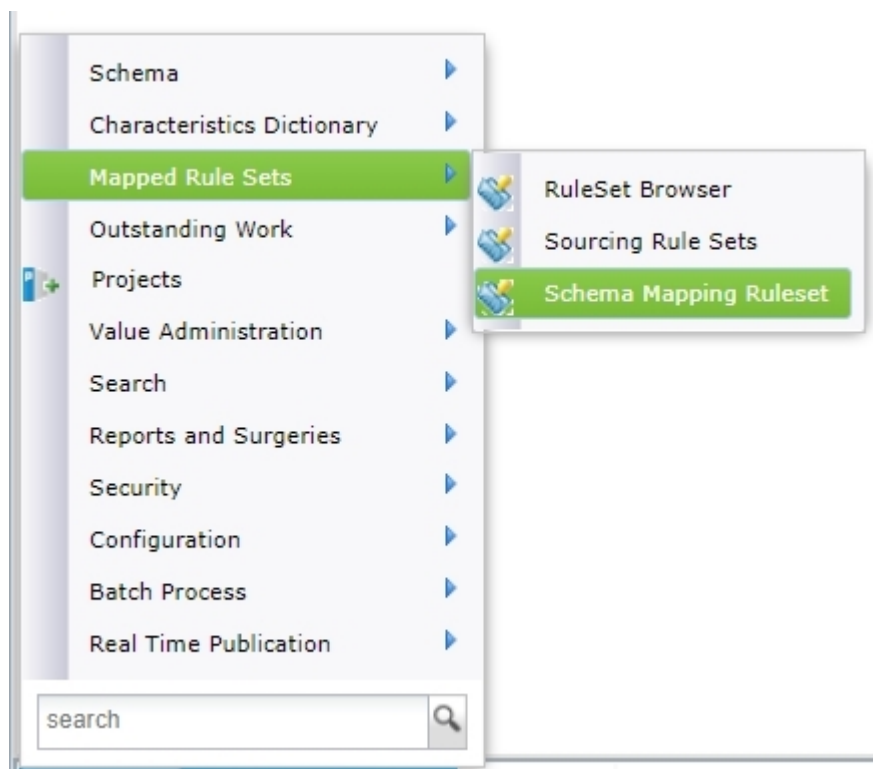

User can create a **New** mapping, **Open** or **Delete** an existing one


Schema Mapping Ruleset									
New Open Delete All Columns									
Code	Name	Method	Country	State	Target	Exceptions	Last Run	Last Changed	Updated By
8185	#US LOC OMNI CATEGORY MASTER	Mapped	US	Committed	#US LOC OMNI CATEGORY MASTER			01/23/2022 0...	OGRDS SYSTEM
8184	#US LOC OMNI DEPARTMENT MASTER	Mapped	US	Committed	#US LOC OMNI DEPARTMENT MASTER			01/23/2022 0...	OGRDS SYSTEM
8186	#US LOC OMNI SUPER CATEGORY MASTER	Mapped	US	Committed	#US LOC OMNI SUPER CATEGORY MASTER			01/23/2022 0...	OGRDS SYSTEM

Creating a new rule set

Rule Set Wizard

Schema mapping rule set wizard – Country


Once **New** button is clicked, the Rule Set Wizard box opens prompting user to specify Country (for which that user has permission to ‘Maintain schema mapping rules’), Target, Scope and name within Summary.

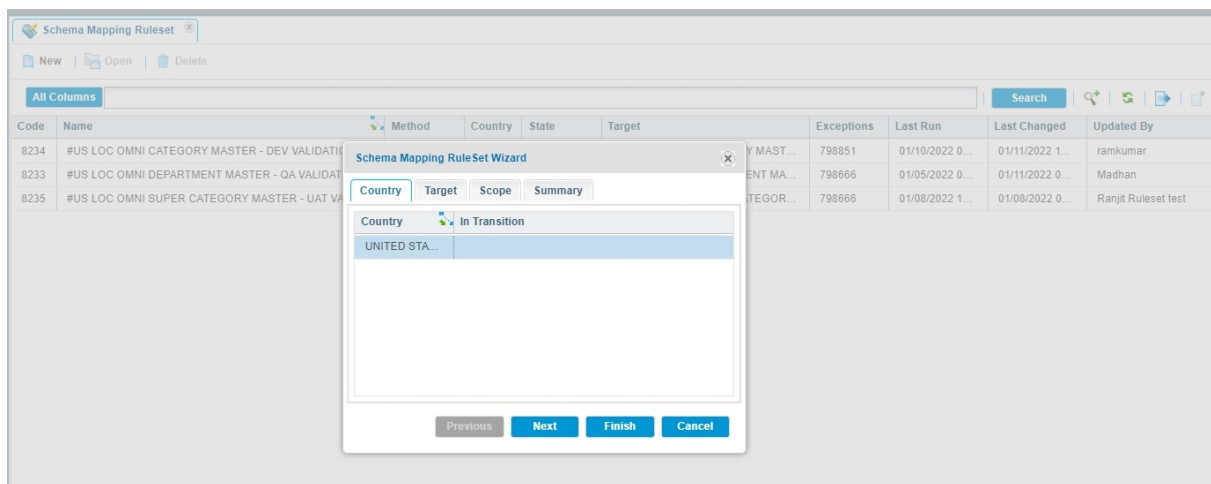

Schema mapping rule set wizard – Target

A Rule Set **Target** is identifying the “To” characteristic of the mapping.

Only one Rule Set containing the same Target within the same Scope is allowed.

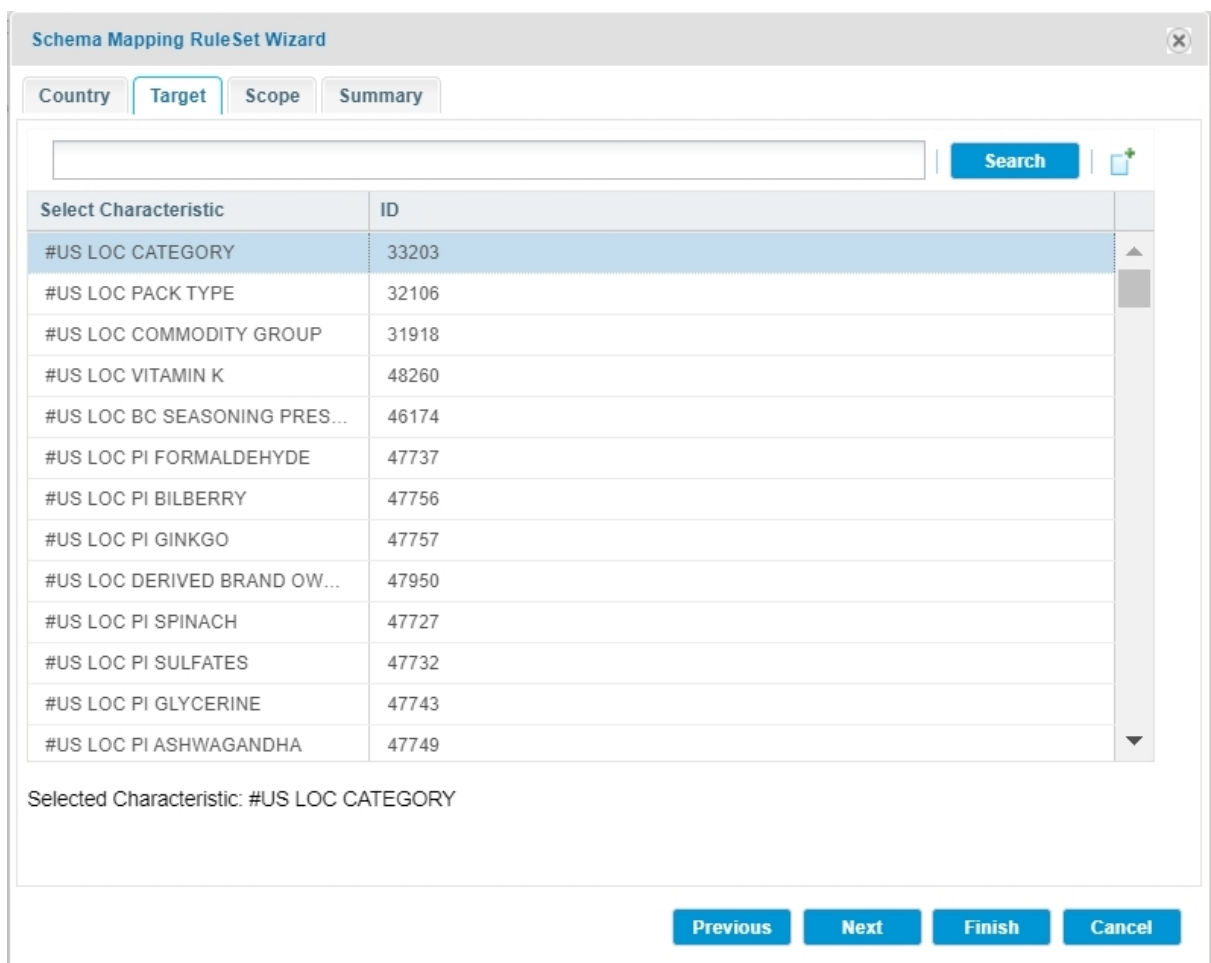

Target characteristic cannot be edited on the saved/committed rules.

Schema mapping rule set wizard – Scope

Scope includes All items by default.

User selects an External Code at this stage as well - RCT External code type should only be selected.

The screenshot shows the 'Schema Mapping RuleSet Wizard' window, specifically the 'Scope' tab. The window has a title bar and a close button. Below the title bar are four tabs: 'Country', 'Target', 'Scope' (selected), and 'Summary'. The 'Scope' tab contains a radio button labeled 'All Items' which is selected. Below this is a search bar with a 'Search' button. A list of 'External Code Type' is shown with the following items: NPC, PPC, CIP, EAN, UPC, REC, and APO. To the right of this list is a table with two columns: 'Selected External Code Type' and 'ID'. The table is currently empty. At the bottom of the window are four buttons: 'Previous', 'Next', 'Finish', and 'Cancel'.

External Code selection can be maintained on the saved/committed rules.

Summary displays:

Name: to be specified by the user

Country

Method (mapped by default)

Scope

Target

External Code types

Target Destination: to be specified by the user.

Determines if ICV's will be created in Core table or in Enrichment table (cannot be edited on saved/committed rules)

- Core should be selected by default as a target destination
- **Enrichment** is to be selected when the Target char category is set as Enriched (for the future needs)

External Code Types

Schema mapping rule set wizard – Summary

The screenshot shows the 'Summary' tab of the 'Schema Mapping RuleSet Wizard'. The fields are as follows:

Field	Value
Name:	Test
Country:	UNITED STATES OF AMERICA
Method:	Mapped
Scope:	All Items
Target:	#US LOC CATEGORY 33203
Target Destination:	☒ Core ☐ Enriched
External Code Types:	RCT 16

At the bottom are buttons for 'Previous', 'Next', 'Finish', and 'Cancel'.

Summary displays:

Name: to be specified by the user

Country

Method (mapped by default)

Scope

Target

External Code types

Target Destination: to be specified by the user.
Determines if ICV's will be created in Core table or in Enrichment table (cannot be edited on saved/committed rules)

- Core should be selected by default as a target destination
- **Enrichment** is to be selected when the Target char category is set as Enriched (for the future needs)

External Code Types

Items with specific Target value can be identified via IDE and searched for via ISS. Characteristic and values are not displayed on the items as there is no Target characteristic assignment.

Schema Mapping

When Wizard set up is complete, the Schema Mapping Rule Set will open within the workspace. It can also be searched within browser and opened. Schema Mapping Rule Set Browser will show State as **Edit**.

test_K

Save Wizard New SubSet Commit Export Rules Export Exception Download Upload Output

Name: test_K Code: 8298 State: EDIT

Target: #US LOC EGG INGREDIENT Method: MAPPED Last Run:

Scope: All Items Country: UNITED STATES OF AMERICA Last Edit: 01/11/2022 15:57:14

External Code: RCT Target Destination: Core

Types:

All Other

Id	#US LOC EGG INGREDIENT	#Items	#Exc
	EXCEPTION		

Creating a subset within rule set

Rule Set Subset

Schema mapping – creating SubSet

A Subset is a set of rules within a Rule Set that identifies the Source (From) characteristic/characteristics.

test_K

Save Wizard New SubSet Commit Export Rules Export Exception Download Upload Output

Name: test_K Code: 8298 State: EDIT

Target: #US LOC EGG INGREDIENT Method: MAPPED Last Run:

Scope: All Items Country: UNITED STATES OF AMERICA Last Edit: 01/11/2022 15:57:14

External Code: RCT Target Destination: Core

Types:

All Other

Rule Subset Dialog

Subset Name: #US LOC COMMODITY GROUP

Search

Available Characteristics	Code
#US LOC COMMON CONSUMER NAME	3291
#US LOC DECA COMMODITY CODE	3328
#US LOC EAN COMMODITY GROUP	3187
#US LOC INNER PROD COMM CONSMR ...	3230
#US LOC INNER PROD COMM CONSMR ...	3240
#US LOC INNER PROD COMM CONSMR ...	3250
#US LOC INNER PROD COMM CONSMR ...	3260
#US LOC INNER PROD COMM CONSMR ...	3269
#US LOC INNER PROD COMM CONSMR ...	3279
#US LOC INNER PROD COMM CONSMR ...	3288
#US LOC INNER PROD COMM CONSMR ...	3290

Selected Characteristics	Code
#US LOC COMMODITY ...	31918

OK Cancel

The screenshot shows a web application interface for a subset named 'test_K'. At the top, there's a toolbar with buttons: Save, Wizard, New SubSet, Commit, Export Rules, Export Exception, Download, Upload, and Output. Below this, a form contains the following fields:

- Name: test_K
- Code: 8298
- State: EDIT
- Target: #US LOC EGG INGREDIENT
- Method: MAPPED
- Last Run:
- Scope: All Items
- Country: UNITED STATES OF AMERICA
- Last Edit: 01/11/2022 15:59:26
- External Code Types: RCT
- Target Destination: Core

Below the form, there are two tabs: '#US LOC COMMODITY GROUP' (selected) and 'All Other'. Under the selected tab, there's another toolbar with: Insert Row, Delete Row, Edit SubSet, Delete SubSet, Tidy, Show%, and Hide Stat. Below this is a search bar with a 'Search' button and a table with the following columns: Rule Id, Op, #US LOC COMMODITY ..., #US LOC EGG INGREDI..., #Items, and #Exc.

Click on **New Subset** to display SubSet dialog box.

Source Characteristic selection – Maximum 6 source characteristics can be selected

Created subset

Schema mapping – creating rules within SubSet

Schema rules are inserted into Schema mapping rule set based on rules/mapping defined by RD Team in advance. Therefore, they will typically be uploaded to the subset rather than created manually by inserting rows and specifying source and target values.

Source and target values will be defined in downloaded subset xls file.

This screenshot is similar to the one above but includes two annotations. A red box highlights the 'Insert Row' button in the toolbar, with a callout box stating: **Insert Row = to create first rule (select operator(s), source and target value)** and **Save a rule set = to generate Rule Id**. Another red box highlights the first row of the table, with a callout box stating: **Double click on the cell to select operator, source and target value**.

Insert Row = to create first rule (select operator(s), source and target value)
Save a rule set = to generate Rule Id

Available operators:
 = equals
 <> does not equal
 In - equals multiple source values
 No in = does not equal multiple source values

Select Operator

=
 <>
 In
 Not in

Schema mapping – downloading file for rules upload

Download option is enabled when:

- Ruleset contains at least one Subset
- Subset has at least one Rule
- Ruleset is saved (Rule Id for the existing rows generated)

Rule ID	Op	#US LOC COMMODITY GROUP	#US LOC EGG INGREDIENT	#Items	#Exc
3747669	=	EGG SUBSTITUTE AND DRY EGG MIX	BARN EGGS	0	0

Download appropriate file format with the rule id to start creating remaining rules

Schema mapping – rules creation in downloaded file

To begin working with file user must insert new column (FIRST) with header **Change Type** (case sensitive)

	A	B	C	D	E	F	G	H
1	Change Type	Rule Set ID	Rule Sub Set Name	Rule ID	Source Char ID	Operator	Source Char Value	Target Char Value
2		8298	#US LOC COMMODITY GROUP	3747669	31918	=	EGG SUBSTITUTE AND DRY EGG MIX	BARN EGGS
3								
4								

Possible actions / Change Types

- Insert rules
- Update rules
- Delete rules

Refer to [Rule Set browser – Mapped Rule Set – Download & Upload Rules](#) for the details on the functionality

	A	B	C	D	E	F	G	H
1	Change Type	Rule Set ID	Rule Sub Set Name	Rule ID	Source Char ID	Operator	Source Char Value	Target Char Value
2	UPDATE	8298	#US LOC COMMODITY GROUP	3747669	31918	=	EGG SUBSTITUTE AND DRY EGG MIX	BARN EGGS
3	INSERT	8298	#US LOC COMMODITY GROUP	NEW 1	31918	=	EGG	EGG
4	INSERT	8298	#US LOC COMMODITY GROUP	NEW 2	31918	=	EGG AND FOOD COLORING KIT	EGG

If the row/rule created by the user in the Subset is to stay in the mapping, it must be either removed from the file for upload or a Change Type = UPDATE needs to be given. If that row is to be deleted (e.g. It was a dummy row), a Change Type = DELETE needs to be given.

Schema mapping – rules creation in downloaded file

In case of Subsets with multiple source characteristics, each source characteristic and value should be listed as a separate row with the single target value assigned.

	A	B	C	D	E	F	G	H
1	Change Type	Rule Set ID	Rule Sub Set Name	Rule ID	Source Char ID	Operator	Source Char Value	Target Char Value
2	UPDATE	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	3584109	46118	=	PRODUCE	FRUIT
3	UPDATE	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	3584109	46121	=	FRUIT	FRUIT
4	UPDATE	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	3584109	46117	=	KIWI	FRUIT
5	UPDATE	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	3584109	46120	=	DRIED	FRUIT
6	UPDATE	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	3584109	46119	=	REMAINING FORM	FRUIT
7	INSERT	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	NEW 1	46118	=	DELI	CHEESE
8	INSERT	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	NEW 1	46121	=	CHEESE	CHEESE
9	INSERT	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	NEW 1	46117	=	SPECIALTY	CHEESE
10	INSERT	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	NEW 1	46120	=	SWISS	CHEESE
11	INSERT	8235	BC CATEGORY MASTERBC DEPARTMENT MASTERB	NEW 1	46119	=	GRATED	CHEESE

Application Interface Fields:

- Name: #US LOC OMNI SUPER CATEGORY MASTER - UAT VALIDATION
- Code: 8235
- State: COMMITTED
- Target: #US LOC OMNI SUPER CATEGORY MASTER
- Method: MAPPED
- Last Run: 01/29/2022 19:37:11
- Scope: All Items
- Country: UNITED STATES OF AMERICA
- Last Edit: 01/29/2022 08:18:34
- External Code: RCT
- Target Destination: Core

Subset Configuration:

Rule ID	Op	#US LOC BC DEPARTM...	Op	#US LOC BC SUPER CA...	Op	#US LOC BC CATEGOR...	Op	#US LOC BC SUB CATE...	Op	#US LOC BC SEGMENT...	#US LOC OMNI SUPER...	#Items	PERC
3584109	=	PRODUCE	=	FRUIT	=	KIWI	=	DRIED	=	REMAINING FORM	FRUIT	0	0

Schema mapping – upload file

Once the rules are inserted into xls file, they can be uploaded into the Subset.

Input file rules:

- Only XLSX format will be supported for upload
- 1st column is for Change Type - insert, update and deletion of rules ONLY (should not be blank)
- The rest of the columns are same as the downloaded format
- There should be no blank/null rows

test_K

Save

Wizard

New SubSet

Commit

Export Rules

Export Exception

Download

Upload

Output

Name:

test_K

Code:

8298

Target:

#US LOC EGG INGREDIENT

Method:

MAPPED

Scope:

All Items

Country:

UNITED STATES OF AMERICA

External Code

RCT

Target Destination:

Core

Types:

#US LOC COMMODITY GROUP

Insert Row

Rule Id

3747669

Search

+

+

+

#Exc

0

Upload Rules

Job Type:

Rules Upload

Submitted By:

KAMILA SOBIECKA GLOBAL CONTENT ADMINISTRATOR

Title:

test 2

Input File:

schema rule set test1.xlsx

Browse

Upload

Language:

Central Language

Submit

Cancel

test_K

Save

Wizard

New SubSet

Commit

Export Rules

Export Exception

Download

Upload

Output

Name:

test_K

Code:

8298

Target:

#US LOC EGG INGREDIENT

Method:

MAPPED

Scope:

All Items

Country:

UNITED STATES OF AMERICA

External Code

RCT

Target Destination:

Core

Types:

#US LOC COMMODITY GROUP

All Other

Insert Row

Delete Row

Edit SubSet

Delete SubSet

Tidy

Show%

Hide Stat

Search

+

+

+

Rule Id	Op	#US LOC COMMODITY ...	#US LOC EGG INGREDI...	#Items	#Exc
3747669	=	EGG SUBSTITUTE AN...	Batch Job is in Progress...		0

User Message


!

Batch Job created successfully with Job Id: 38491431 Job Name: test 2_8298_Upload

OK


Page 1 of 1

GO

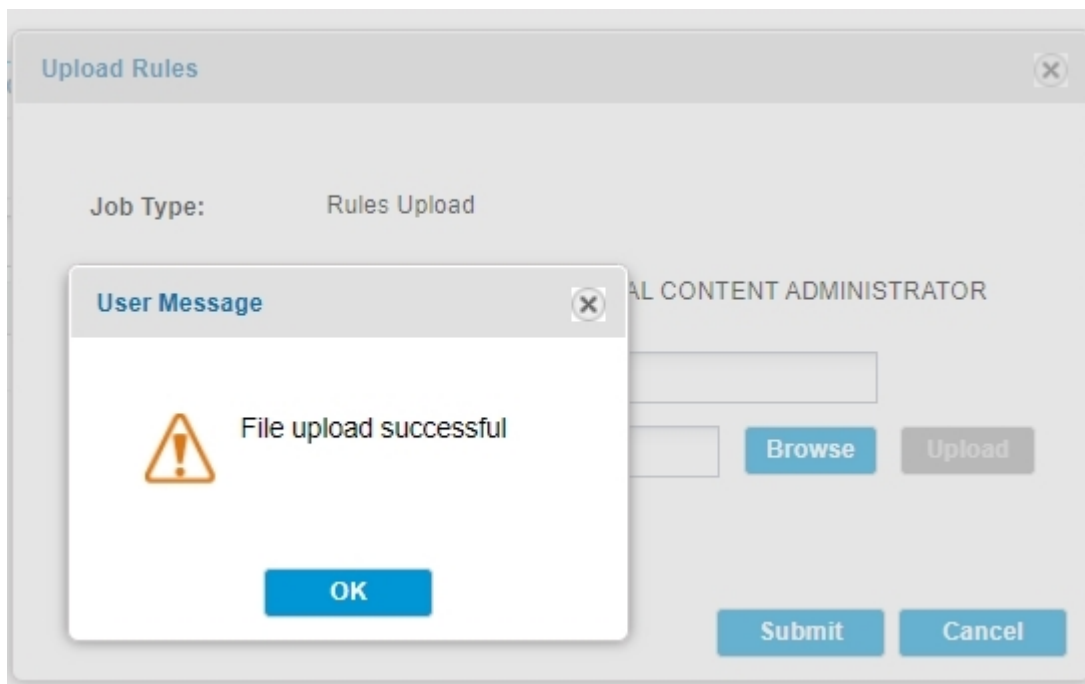

Schema mapping – batch job completion

After user selects the Upload function, the system will perform specified validations on the input file and will output details of rules uploaded in an output file

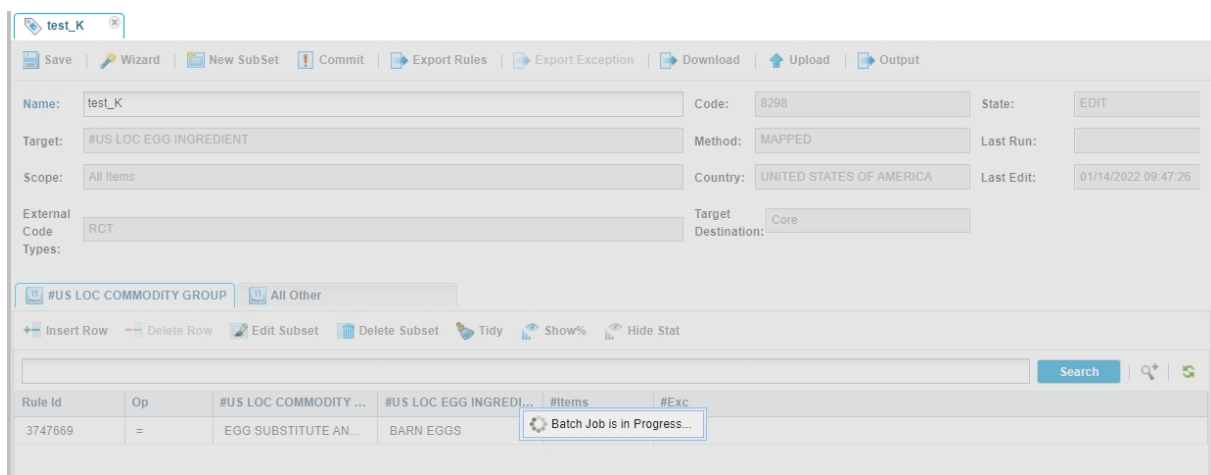

User will be notified via email on the Batch job completion. Output file can be accessed either from the link in the email or by pressing Output button on an open rule set

Schema mapping – output file and upload results

	A	B	C	D	E	F	G	H	I
1	Change Type	Rule Set ID	Rule Sub Set Name	Rule ID	Source Char ID	Operator	Source Char Value	Target Char Value	Message
2	UPDATE	8298	#US LOC COMMODITY GROUP	3747669	31918	=	EGG SUBSTITUTE AND DRY EGG MIX	BARN EGGS	SUCCESS
3	INSERT	8298	#US LOC COMMODITY GROUP	NEW 1	31918	=	EGG	EGG	SUCCESS
4	INSERT	8298	#US LOC COMMODITY GROUP	NEW 2	31918	=	EGG AND FOOD COLORING KIT	EGG	SUCCESS
5									

Rule ID	Op	RUS LOC COMMODITY ...	RUS LOC EGG INGREDI...	#Items	#Exc
3747669	=	EGG SUBSTITUTE AN...	BARN EGGS	0	0
3760353	=	EGG	EGG	0	0
3760354	=	EGG AND FOOD COL...	EGG	0	0

If the job is Successful:

- System will upload the rules and create rule by rule subsets as specified in the file
- The rule set is saved with the changes and the state will remain as **Edit**

If the job failed for any row:

- System will not proceed with the upload of rules
- Refer to [Rule Set browser – Mapped Rule Set – Download & Upload Rules](#) for the details on validations & error messages

Schema mapping - test

A Rule Set should be tested prior to committing to identify any potential exceptions.


Rule ID	Op	RUS LOC COMMODITY ...	RUS LOC EGG INGREDI...	#Items	#Chng	#Exc
3760353	=	EGG	EGG	0	0	0
3760354	=	EGG AND FOOD COL...	EGG	0	0	0
3747669	=	EGG SUBSTITUTE AN...	BARN EGGS	0	0	0

- Test can only be run if there are items qualified for the rule sets (e.g. items with RCT code in the scanning schema)
- Rule Set will continue to show State as Edit after Testing.

Schema mapping - commit

Once all Target Values are assigned, the Rule Set is Committed.

Committing a rule is the final step in rule creation. Once committed, a batch job will run and apply the rules to the items.

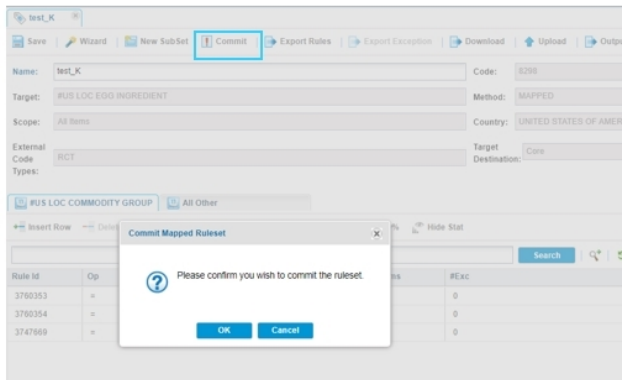

The system notifies the user that commit run has started, along with batch job id number. After clicking OK, the system shows that a batch job is in execution for the rule. User can close tab and proceed with other functions. Batch job can be monitored via the Batch Console Browser

- Rule set can be committed if there are items qualified for the rule sets (e.g. items with RCT code)

Once batch job is completed, the Rule Set Browser will show State as **Committed**. **Committed rules can be edited over time to handle any exceptions that may occur or any Scope changes.**

Target Characteristic values are not applied in a real time when the item is coded or changed. Population of derived/mapped chars is done via DC process that evaluates the rules and applies the value on the Target Char is an asynchronous job.


Rule Set maintenance

Committed rule sets

Rule Set Maintenance

Anytime an item is coded that meets the criteria of Committed Rule Set it will run against the committed rule set and apply the mapped value to the Target Characteristic.

There may be a need to update rules by e.g. adding a new source value(s) or new source values combinations when they appear. There is no notification sent/displayed to the User informing that the New Item falls outside of specified rule. In order to identify such items / missing rules, user needs to Test the rule set and check if there are any exceptions.

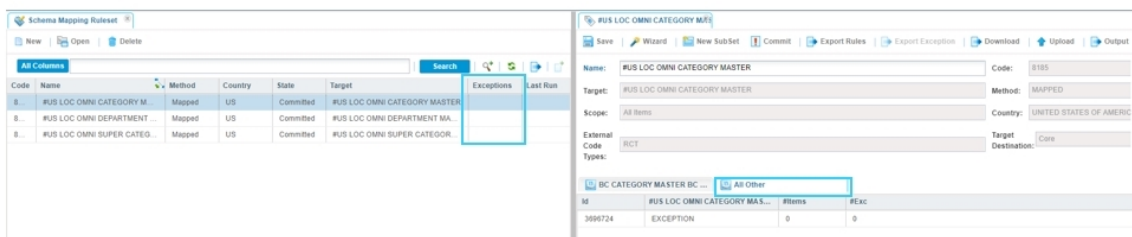

Once the exceptions are resolved and required rules created, Rule Set must be committed. If the Rule Set has been edited and remains in the Edit State, the values of Target characteristic will not be applied to the new Items.

Schema mapping rule set – Global characteristics

Multi Country mapping

Rule Set for Global target characteristics

Schema mapping rule set can be created for Global target characteristics.

One mapping will be created for a single Global characteristic and multiple countries in scope.

Multi Country Schema mappings are managed centrally by **Schema Team**.

Any change/update raise ticket to Schema queue.

Mapping creation or update is initiated following a decision of Omni Schema Board that work on the project.

The activities on Schema mapping rule set includes:

- Mapping creation for Global target characteristic
- Country addition to the existing multi country mapping
- Existing rules updates
- Additional rules creation in existing mapping
- External codes selection update

Required permission @ system object - **Maintain Global Schema Mapping Rules + Country level permission**

Multi Country schema mapping set up

Rule Set wizard:

- > Country -> Multi Country: relevant Country/Countries Selection
- > Target: Global Characteristic selection (the list of chars includes all Multi Country chars)

Schema Mapping RuleSet Wizard

Country Target Scope Summary

☒ Multi-Country ☐ Country

Country	In Transition
ICELAND	✓
ISRAEL	✓
SOUTH AFRI...	✓
ALGERIA	
ANGOLA	
ARGENTINA	
AUSTRALIA	
AUSTRIA	
BELARUS	
BELGIUM	
BOLIVIA	
BOSNIA AND...	

Selected Country

Add Country

Previous Next Finish Cancel

Schema Mapping RuleSet Wizard

Country Target Scope Summary

☒ Multi-Country Characteristic ☐ Local Characteristic

omni Search

Select Characteristic	ID
GLOBAL EUROPEAN OMNISALES MODULE	103972
GLOBAL EUROPEAN OMNISALES SUPER GROUP	104008
GLOBAL EUROPEAN OMNISALES PRODUCT GROUP	104007

Selected Characteristic: GLOBAL EUROPEAN OMNISALES MODULE

Previous Next Finish Cancel

Multi Country schema mapping set up

Rule Set wizard:

> Scope -> All Items (default) -> External codes selection

> Summary:

- specify name of the rule set
- Target destination: Core

Schema Mapping RuleSet Wizard

Country Target **Scope** Summary

☒ All Items

Search

External Code Type

Selected External Code Type	ID
APO	7
BVW	9
CEC	15
CIP	3
EAN	4
FPC	10
G14	13
LAC	12
MIR	19
NAI	18
NPC	1
OPC	20
PPC	2
PZN	14
RAC	8

Previous Next Finish Cancel

Schema Mapping RuleSet Wizard

Country Target Scope **Summary**

Name: GLOBAL EUROPEAN OMNISALES MODULE

Country: Multi-Country

Method: Mapped

Scope: All Items

Target: GLOBAL EUROPEAN OMNISALES MODULE 103972

Target Destination: ☒ Core ☐ Enriched

External Code Types:

APO	7
BVW	9
CEC	15
CIP	3

Previous Next Finish Cancel

Multi Country schema mapping – subset

Source characteristic selection is limited to Multi Country characteristic.

- Typically, MODULE will be used as a Source characteristic

GLOBAL EUROPEAN OMNISALES

Save | Wizard | New SubSet | Test | Commit | Export Rules | Export Exception | Download | Upload

Name: GLOBAL EUROPEAN OMNISALES MODULE Code: 9223

Target: GLOBAL EUROPEAN OMNISALES MODULE Method: MAPPED

Scope: All Items Country: MULTI-COUNTRY

External Code: APO, BVW, CEC, CIP, EAN, FPC, G14, LAC, MIR, NAI, NPC, OPC, PPC, PZN, RAC, RAI, RCT, REC, RVW, L Target Destination: Core

Types:

MODULE | All Other

Insert Row | Delete Row | Edit Subset | Delete Subset | Tidy | Show% | Hide Stat

Search

Rule Id	Op	MODULE	GLOBAL EUROPEAN O...	#Items	#Chng	#Exc
3895941	=	BEER/WINE/SPIRIT M...	HOME BREWING AND ...	340	0	0
3895942	=	BISCUITS - SWEET - B...	SWEET BISCUITS	63	0	0
3895943	=	ALCOHOL FLAVOURIN...	HOME BREWING AND ...	2	0	0
3895944	=	ALCOHOL MAKING AC...	HOME BREWING AND ...	307	0	0
3895945	=	BISCUITS - SWEET - A...	SWEET BISCUITS	7965	0	0
3895946	=	BISCUITS - SWEET - B...	SWEET BISCUITS	4918	0	0
3895947	=	BISCUITS - SWEET D...	SWEET BISCUITS DO...	0	0	0
3895948	=	ALCOHOL OPTIC/PIPE...	HOME BREWING AND ...	10	0	0
3895949	=	ETHYL/INDUSTRIAL A...	HOME BREWING AND ...	311	0	0
3895950	=	BISCUITS - SWEET D...	SWEET BISCUITS DO...	2	0	0
3895951	=	BISCUITS - SWEET - A...	SWEET BISCUITS	0	0	0
3895952	=	BISCUITS - SWEET D...	SWEET BISCUITS DO...	77	0	0
3895953	=	BASE ALCOHOL DISTI...	HOME BREWING AND ...	3	0	0
3895954	=	BEER BREWING CER...	HOME BREWING AND ...	3	0	0
3895955	=	BISCUITS - SWEET - H...	SWEET BISCUITS	96474	0	0

Multi Country schema mapping - maintenance

Existing rule set may need to be updated.

Depending on the need, different areas of the rule set will be updated.

- New Country addition: Country tab in Wizard -> Finish -> Commit
- External code addition: Scope tab in Wizard -> Finish -> Commit
- New rule/source value addition: Rule set subset -> Save -> Commit
- Existing rule update: Rule set subset -> Save -> Commit
- Exception is in case of target char value description change is done in dictionary char type – change value description

All the above activities result in ICV's creation – item updates.

- Ensure that the ICV update does not exceed 1 - 1.5 M for each commit. In case more items need to be updated, this must be aligned with Tech team.
- Do not commit all rule sets at once. The next rule set should be committed when the previous crossed the ICV commit step. This can be monitored in Batch Console browser- 'commitICVMPDSchema'
- In case of existing rule update, after commit it will change char coding for in scope items

Do's and Don'ts

✓ Do's:

- Ensure rules are tested before committing.
- Use the correct format for uploading rule files.
- Maintain permissions for schema mapping access.

✗ Don'ts:

- Do not commit all rule sets at once.
- Avoid using incorrect external code types.
- Do not leave blank rows in upload files.

Summary

The Schema Mapping Rule Set document outlines the structured approach to aligning Scanning and Omni schema content.

It details the creation, testing, and committing of rule sets, including the handling of exceptions and updates.

The document also covers multi-country schema mapping and the necessary permissions and validations required.

Following the outlined procedures ensures accurate and efficient schema mapping across systems.

SOP update history

Change Date	Author(s)	Changes
Jan'22	Kamila Sobiecka	SOP creation
Jan'23	Kamila Sobiecka	Ability to create Multi Country Schema mappings

SOP_Cross coding

Standard Operating Procedure

RD - Cross coding Activity

Title:	Cross coding Activity
Country:	All OGRDS Countries
Workstream:	Reference Data
Last revision Date	August'23
Document Owner	Global RD Process Governance
Document Owner Backup	Global RD Process Governance
Document Approver	RD Governance Team (RDGovernance@nielseniq.com)

Table of contents:

Level of knowledge required	BAU	Setup
1. Process Definition	L1	n/a
• 1. Purpose of the process	L1	n/a
• 1. Process inputs	L1	n/a
• • 1. Best Received External Description	L1	n/a

• • 1. Department Code	L1	n/a
• • 1. Department Description	L1	n/a
• • 1. Etailer Item Code	L1	n/a
• • 1. External Code	L1	n/a
• 1. Process outputs	L1	n/a
• • 1. Standard Item	L1	n/a
• • 1. Consolidated Item	L1	n/a
• • 1. Bucket Consolidated Item (BCI)	L1	n/a
• • 1. Product Group Item	L1	n/a
• • 1. Super Group Item / Uncodeable	L1	n/a
• 1. Outcome of the process	L1	n/a
• 1. Use of the process	L2	n/a
• • 1. Situations when process should be used	L2	n/a

• 1. Situations in which process should not be used	L2	n/a
• 1. Process map	L1	n/a
1. Process Setup	n/a	L3
• 1. System parameters	n/a	L2
• 1. Pre-Requisites	n/a	L3
• 1. Compliance	n/a	L3
1. Maintenance & execution	L1	L2
• 1. General process flow	L1	L2
• • 1. Workflow for EAN/UPC	L1	L2
• • 1. Workflow for LAC	L1	L2
• 1. Maintenance	L1	L2
1. Process Metrics	L1	L3
• 1. Reports	L1	L3

• 1. KPIs	L1	L3
1. Appendix	L1	n/a
1. Contact Us	L1	n/a

1 Process Definition

The association of an exception or cross coding to an item. This item has a unique code assigned to it that is used by other interfaces.

- Exceptions obtained from the input source (IV, DB8, etc.) after adhering to the OGRDS Autocoding criteria are available for manual examination in the Outstanding Work Browser. The exceptions are changed to Cross coding as soon as the user selects the OGRDS Destination (Standard Item/Product Group/Consolidated Item/Super Group/Uncodeable) because they are connected to the data set.
- Cross-coding Browser: Primarily used for Cross coding activity. As per the country coding model, user must move the items at respective schema destinations.
- **Input validation** is used to connect the data to the item.
- **Reference Data** - Retailer input (exception), to be categorized according to category standards and coding model
- **Client Instructions** - Use instructions to put items together for reporting in client databases
- **Output** - Take the input from the upstream processes and report to the customer

1.1 Purpose of the process:

[Cross Coding Overview.pptx \(sharepoint.com\)](#)

- The primary goal of this document is to ensure that all countries have a standard method of handling cross-coding activity
- To make users aware of the Cross-coding destinations available in OGRDS

- To demonstrate the significance of the Cross-coding activity
- Assist in understanding how cross-coding activity is linked to upstream and downstream processes

1.2 Process input

These input column are used by Sirval to send the exceptions to the OGRDS through SI01. There are several fields available as an input in the Outstanding Work Browser

OGRDS Field	Details
1.2.1 Best Received External Description	• This is the best description received in the last exception load. In case of exception type “IC Prioritise” this description would be the one that is sent from NIMS via the SI02 interface in the IC prioritise notification
1.2.2 Department Code	• Department Codes are those that were received on the same exception record as the Best External Description
1.2.3 Department Description	• Department Descriptions are those that were received on the same exception record as the Best External Description
1.2.4 Etailer Item Code	• An internal item code that may be supplied incrementally or in addition to UPC. Ecomm retailers often do not operate by barcode so the e-tailer code may be found here and in External Item code.

1.2.4 Etailer Item Code	An internal item code that may be supplied incrementally or in addition to UPC. Ecomm retailers often do not operate by barcode so the e-tailer code may be found here and in External Item code.
1.2.5 External Code	An external code is a numeric or alphanumeric code that retailers assign to products within their systems for product identification, price recognition, managing sales trends and stock ordering

*to have more details on the column/input receive from Sirval please kindly go to the OGRDS Cross Coding Fields E2E training material. Include in the appendix.

1.3 Process Output

#	Destination
1.3.1	Standard Item
1.3.2	Consolidate Item
1.3.3	Bucket Consolidated Item (BCI)
1.3.4	Product Group Item
1.3.5	Super Group Item /Uncodeable

Details

Details

- Contains one unique GTIN only + Multiple LACs (Non algorithmic codes). It matched based on the description similarity.
- Retailers used to report LAC code type for the manufacturer's product item, contains EAN/UPC
- In one standard item there is a combination of unique algorithmic code and multiple non algorithmic codes
- Has a full set of characteristics as per global and/or local requirements

- Locally defined "bucket" for markets not required to be coded with a full set of characteristics.
- Limited characteristics may be coded vary by country

- IN and OUT market BUCKET CI (BCI) are created for the country
- Known as BCI Workflow country

- Global "bucket" for OUT market cross coding or IN Market Barcodes waiting for prioritization before coding from images/characteristics

- Global "bucket" for OUT market cross coding or
- Barcodes waiting for prioritization before coding from images/characteristics
- Insufficient or no description to identify the category

What's next?

- TSR + Item level reporting

• TSR + Item level reporting
• TSR Reporting • Out Market category → Can be used in future when it becomes an IN MARKET
• TSR Reporting • Prioritization if its retailer description-based countries • Prioritization for Image collection if its IN MARKET
• TSR Reporting • Prioritization if its retailer description-based countries • Prioritization for Image collection if its IN MARKET
• If the same barcode reported again either by the same retailer with description change or by a different retailer, reload in OWB for the manual review • These destinations are not ideal

1.4 Outcome of the process

Cross coding activity is one of the first and most important sub process of Reference Data and critical to quality.

1. Through cross-coding, an exception is sent to the appropriate NAN key, and the system begins gathering data on sales value and volume to send on to upstream and downstream processes.
2. An exception is relocated to the appropriate NAN key by cross-coding activity, and the system then begins gathering data on sales value and volume and passes it on to upstream and downstream operations.
3. Incorrect categorization (IN Market item shifted to OUT Market) of the item increases the risk of quality escapes
4. Item will not be prioritized, resulting in low coverage and quality escapes

5. The impact on TSR coverage
6. Wrong categorization results in incorrect reporting of the manufacturer's market share.

1.5 Use of the process

[SOP_Cross Coding.pptx \(sharepoint.com\)](#)

1.5.1 Situations when process should be used

1. Browser to be use à CROSS CODING BROWSER
2. Exceptions received from IV gone through OGRDS Autocoding rules and records not autocoded under any of the rule, are available in Cross coding Browser for Manual Review:
3. RD teams received the SI01 INPUT from the retailer post Auto coding steps completed. Country teams need to make sure that input received as an exceptions should be move to respective destinations with accuracy and as per production cycle
4. During the process of Cross coding country should use the relevant functionalities to improve the efficiency.
5. LAC linking to SI, Movement to PGI, CI, SGI, U can be done from Cross coding browser


Subjective to Country Coding Model i.e. In/Out Market categories:

1. **IN MARKET with sufficient input to decide category** à Moved to Product Group or Consolidated Item. In market category flagged at Country Level Workflow at Configuration
2. **OUT Market Items (Irrespective of sufficiency)** à Moved to Product Group or Consolidated Item. In market category flagged at Country Level Workflow at Configuration **Insufficient Input** à There are two cases, either user can able to take a category decision
3. **Insufficient Input** Some examples if the input contains only name of the fruit or vegetable like “APPLE”, its not possible to defined the category level as well, in that case the user selects “*Uncodeable*” level and in case if the description say “APPLE JUICE” at least user can able to move it to JUICE CATEGORY “*Super Group*”

1.5.2 Situations in which process should not be used

- New Item creation process
- Exceptional case: With reference to LAC Code type, depends upon the country coding model, county may create a NEW Item with LAC ONLY input. This is the case where there is no prioritization to LAC Code types

1.6 Process Map

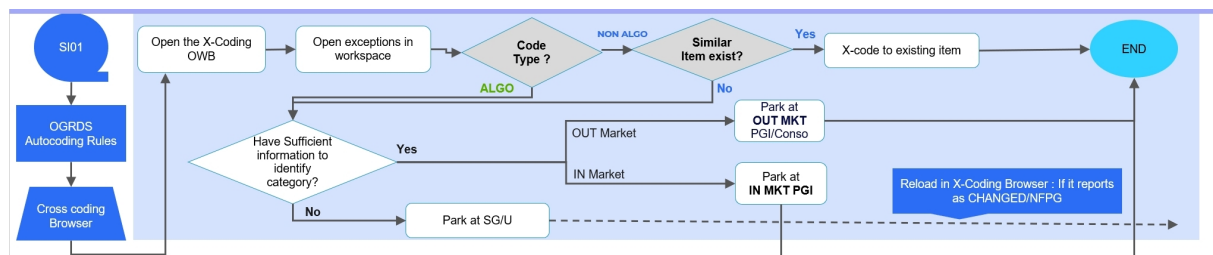

2 Process Setup

2.1 System Parameters

2.1.1 Compliance parameters

- Consider configuring the parameters below to control the manual workload with the help of Governance Team. For configuration set up, please reach out to RD Governance team. Overall Country Configuration Parameters must be reviewed every 6 months or per quarter, subjective to country.

[AutoCross Coding Overview.pptx \(sharepoint.com\)](#)

[SOP_RMS Scanning - Coding Flow.pptx \(sharepoint.com\)](#)

- Predictive model configuration.
 - To get the predictions in OWB
 - For any country coding model, the Cross-coding activity must be managed from the Cross-coding Browser only. In case of any exception to this, Governance team needs to review
 - This is the first Browser for manual review of the exceptions received after following OGRDS Autocoding rules
 - To get the least manual work, country must set up Autocoding Configuration based on:

- IN Market categories v/s OUT Market Categories
- Uncodeable Descriptions
- Retailer specific destinations. For e.g. - specific Processing Group records must be directly moved to Item Coding Browser
- Data Source specific destination etc. For e.g. - any Ecomm records are to be moved to specific CI
- NIMS parameters to be reviewed quarterly (including for new retailer onboarding and shop addition/deletion)
- Auto Coding Rules → To get the least manual work in OWB
- Profile Set up → To perform the right job
- Set EIM Rules with DO NOT AUTOCODE flag to get the predictions in OWB and opportunity to bulk park
- Code Type wise configuration (Please get in touch with Governance team in case of any further details on this)
- LAC Autocoding rules (LAC Matching, Changed LAC, Extended LAC Matching)
- RAC specific Autocoding rules
- RAI/NAI specific Autocoding rules

2.2 System Flags

2.2.1. Mandatory

OWB Set up (Improve efficiency)

[SOP_OGRDS Cross Coding Fields E2E.pptx \(sharepoint.com\)](#)

- “Set Default” criteria in Advance Search → To help with the user/category specific workload
- OWB Grid Management should be organized, such that:
 1. Columns where user needs to do a comparison should be together. For instance, Best Received description and Best Existing Description.
Country current assignment & Current assignment
 2. Columns which are Not required/Not applicable to the country, should be **hidden**
 3. Apply Sorting order to the respective columns to get the similar items together

4. Use DEFAULT Functionality à That would help to clear the Items in bulk

2.3 Compliance

- Xcoding/hour SI: Monthly - Shows the productivity for manual x-coding done at Standard Item level. For the month what is the average number of manual x- codings that were being worked per hour.

Threshold - GREEN ≤ 30 ,AMBER Between 20-30 ,RED ≥ 20


- Xcoding/ hour PGI/Consolidated/Unicodeable: Monthly - Shows the productivity for manual x-coding done at GI/CI/SG/Unicodeable. For the month what is the average number of manual x-codings that were being worked per hour.

Threshold - GREEN ≤ 150 , AMBER Between 60-150, RED ≥ 60


3 Maintenance & Execution

3.1 General Process Flow

3.1.1 Workflow for EAN/UPC

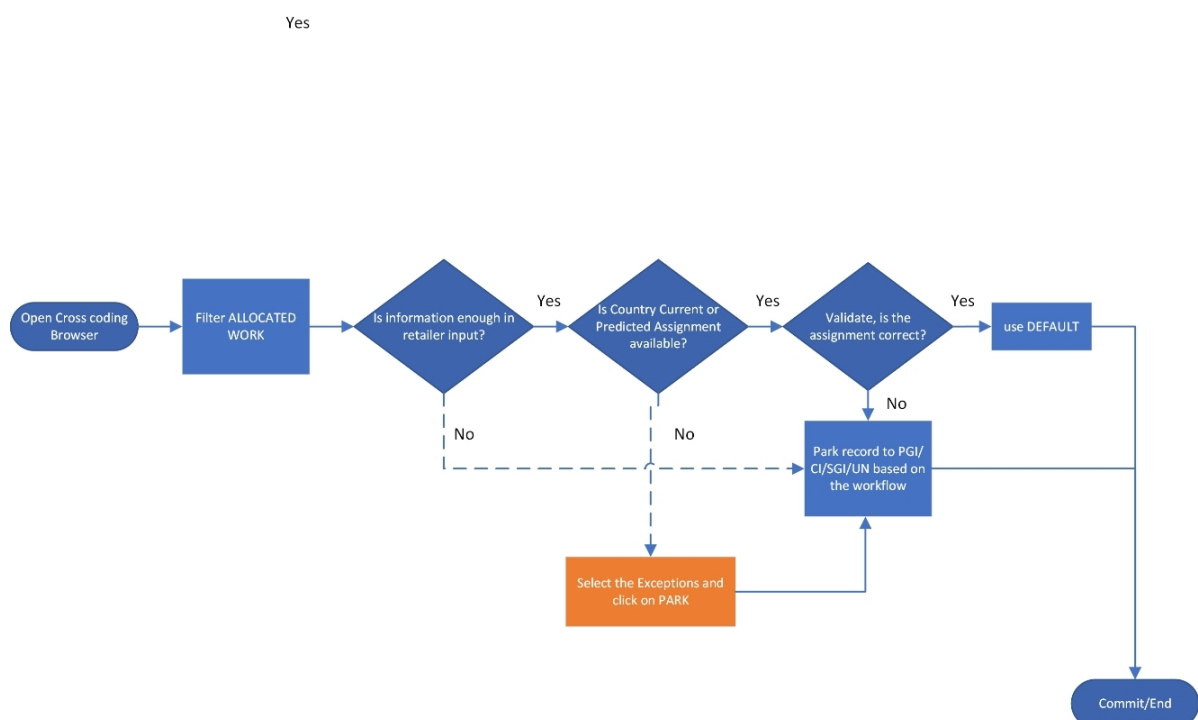

3.1.2 Workflow for LAC

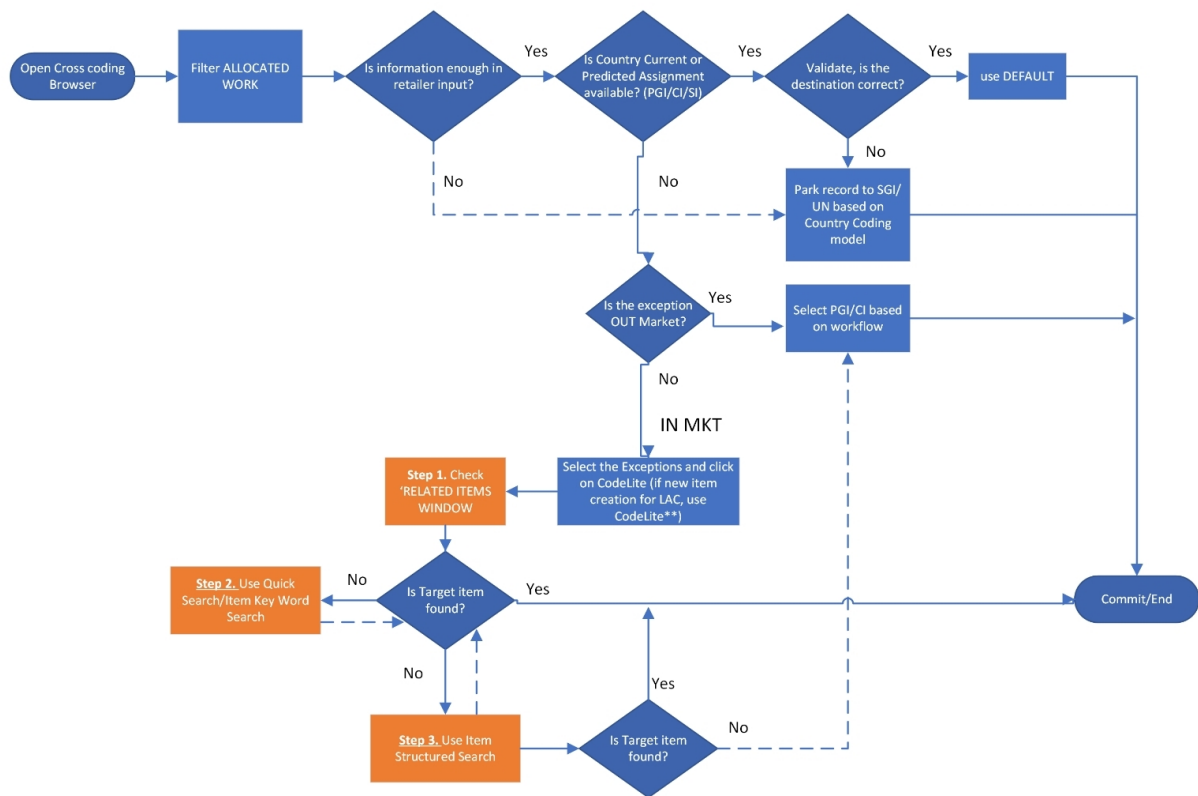

3.2 Maintenance

- User must follow below given steps before cross coding any exception/record to SI/CI/PGI/SGI/UN
 - User is unable to identify characteristic level information based on current retailer input, then he should follow – Internet search (to know about the product category)
 - Ensure that user has checked all search engines in order
 - Quick Search
 - Key word search
 - ISS (Manual search)
- In case of LAC Linking to Standard Item, user needs to search for the correct item based on the available retailer input.
 - If no Standard Item is found in step 3; then move the LAC at respective destination (PGI/CI) based on country coding model.
- If the exception is IN MARKET; and information is enough to decide the product group/CI and the records will be sent for NIMS prioritization or image collection or field char collection for detailed item coding OR if the exception is OUT MARKET

- SGI/UN or equivalent local 'Bucket/CI' – when information is poor, and user wants to wait for input from another retailer. Also, country does not have DA team for image or field char collection.

4. Process Metrics

This relates to compliance metrics available for this topic

1. **Cross coding productivity compliance** – Updated in first week of each month for the previous month
2. **OWB backlog compliance** – Updated on every 11th day of the month for the previous month (example – on 11th June, data will be updated for month of May)

4.1 Reports

We have several reports available in OGRDS under report templates for cross coding activity. We can classify the report based on

1. Cross Coding Details
2. Cross Coding Extracts
3. Cross Coding Movement

4.2 KPI

- **Xcoding/ hour SI**

Monthly number - shows the productivity for manual x-coding done at **Standard Item level**. For the month what is the average number of manual x-codings that were being worked per hour.

Threshold - GREEN <= 30 ,AMBER Between 20-30 ,RED >= 20

- **Xcoding/ hour PGI/Conso/Uncodeable**

Monthly number - shows the productivity for manual x-coding done at **PGI/CI/SG/Uncodeable**. For the month what is the average number of manual x-codings that were being worked per hour.

Threshold - GREEN <= 150 , AMBER Between 60-150, RED >= 60

5 Appendix

This table contains list of all documents related to this activity and provides further details to the process mentioned in this document

Topic	Document	Additional Comment
Cross coding Overview	SOP_Cross Coding Overview	
Cross coding	SOP_Cross Coding.pptx (sharepoint.com)	
Auto coding overview	SOP_Auto Cross coding overview	
OWB – Preparing browser view	Preparing the Browser view	Check slide 18 & 19
Coding flows	SOP_Coding Flow.pptx	
OGRDS Cross Coding Fields E2E	SOP_OGRDS Cross Coding Fields E2E	Check slide 7,8,9

L0	Onboarding	Unable to perform tasks without support	-
L1	Basic Knowledge	Execution only, limited understanding	- Associate is able to operate within one assigned function's platform and conduct BAU task without help. - Associate has limited, high level understanding of the E2E production process flow, knows basic KPIs, able to name the CIP components and share the basic dependencies between them
L2	Intermediate Knowledge	Effective execution & Understanding the process and dependencies	- Associate is able to effectively operate and understand the purpose of the processes within the BAU process flow as well as the dependencies and consequences within the assigned function application - Able to setup simple processes
L3	Expert Knowledge	Full understanding of dependencies, additional entitlements & ability to setup	- Associates has full knowledge of majority of options in his platform - Able to perform non-standard task (e.g. setup) also requiring additional permissions/entitlements - Understand all dependencies between platforms - Able to suggest workarounds or solve problems in case of issues

6 Contact us

Have any query or suggestions? Please check below details to contact us

—

- In case of any questions

Raise a Dynamics ticket for:

Sub Type 1: RD: OGRDS PnB

Sub Type 2: SOP/Training

Sub Type 3: Cross & Characteristic Coding & Security

Sub Type 4: All Questions

This will be assigned to GBS-RD-OGRDS SOP Coding (Queue); so, RD Process Governance team will check the query.

- If you have any change/enhancement request -->

RDGovernance@nielseniq.com