

Table of contents

RMS RD - NIMS

NIMS SV Dashboard_SOP v1.1	3
NIMS OCL_SOP v1.1	15

New Retailer Onboarding

SOP_New Retailer Onboarding	25
eDive Reference Data	47

Generic Grid

Generic Grid	73
------------------------------	----

Epics

BeMyEye Overview	122
ePics Rename	124
Global ePics	131
BrandBank - Coding BrandBank Input	139
LHHT and OGRDS	144
NPP	146

Configuration

NIQ_GfK_Coding_Integration NAX_LAX	150
Clustering Tool	154

EIM Rule Generator	156
Automatic Work Allocation	160
Priority Factors	162
Country and Data Source	164
Distribution Time Out	166
Surprisal Scoring Validation	168
Validation Rules Toolbox	170
External Code Conversion Process	174
Reprioritization Flow	176
Processing Groups & Sets	179
Predictive Model	183
Exception Workflow	185

NIMS SV Dashboard_SOP v1.1

NIMS Sales Value Dashboard

What it does?

New capability in NIMS calculates Sales Value (SV) coverage by OGRDS Product Group, by calculating the total uncoded Sales Value and coded sales value within Product Group/total Sales Value of that Product Group.

The objective of the functionality is to enable countries to measure sales value coverage at country and product group level ensuring, it meets the NIQ recommended ~98.5% sales coverage.

Why is it required?

The recommended global standard is ~98.5% of sales value coverage for NIQ clients and prioritization of these items are controlled by NIMS parameter and THS. However, due to seasonal volume sales value coverage may be impacted and via NIMS dashboard we want to secure that the country can measure the SV coverage at country and at PGI level. And by UNCODED ITEMS dashboard country can see run up of the high sales value uncoded items to avoid missing item query.

When to use?

NIQ delivers the data to their clients on a weekly or monthly basis and receives the raw data from retailers on a weekly/monthly basis, so every week new data is published from QBRIK for more accurate barcode prioritization. This dashboard calculates the uncoded coverage data, sourced from QBRIK and for the same week, NIMS uncoded data is sourced from the Sales Value in the NIMS Dispatch report. So, it is recommended for countries to check PGs with coverage below 98.5% every week and resolve the uncoded barcodes to improve coverage before weekly and Monthly data is reported to the clients.

Pre-requisites

- Revise the **structure of Uncoded buckets + placement under PGs.**
- If the country is a BCI country => there should be **NO Xcodings in SG/UNC/PG level**

- All countries must have the **proper workflow** set up either at PG level or BCI level or PG/LPC level
- For countries coding from **retailer descriptions** and for IN MARKET only PGs or BCIs, the workflow should be
 - **CHARACTERISTIC à ICP à DISPATCH**
- For countries coding from **images** and for IN MK only PGs or BCIs, the workflow should be
 - **DISPATCH à DISPATCH**
- Countries should **NOT** use **USER SPECIFY**
 - *because they should not MIX in one single PRODUCT GROUP/CI both IN MK and OUT MK Xcodings, which would impact the proper calculation of coverage*

IN MKT & coverage target level proper setup

- i.e. all PRODUCT GROUPS which have standard items should be flagged as IN Market and the proper coverage level should be setup (98.5% by default)
- Countries should clean their schema so that not to have PGs with SI only, but with no IN MK uncoded Xcodings in PGI/BCI of the same PG
- **All records of the IN MK PGs** and which are active on the MARKET should have the Dispatch flag = **Dispatch**
- NIMS implementation: proper NIMS TSH & parameters in place – by proper service – according to the country's capacity to code per day/week/month

How is coverage calculated?

For IN MK PGs (the ones that have SI coded underneath):

IN MKT (Coded) – It is the total SV that are coded at SI/SKU..

IN MKT (Uncoded) - is the total SV of all the items which are parked either at PGI or IN MKT CI level.

FORMULA to calculate coverage

1. PG level (IN MK PGs, based on the OGRDS flag)- sum of SV of all **Coded items** within PG/(sum of **coded + uncoded** of items within PG)
2. PG Contribution - sum of SV (coded + Uncoded) of PG/Sum of total SV of all PGs
3. Total SV – Sum of all the coded + Uncoded items across all IN MKT PGI.

For OUT MK PGs:

- **CODED** – the SV of OUT MK CI in the PG
- **Uncoded** – no uncoded SV (OUT MK CI cannot have “uncoded” items going to NIMS)
- **Coverage** = Coded SV/Uncoded SV+Coded SV => always 100% if the OGRDS flags are properly setup

OUT MKT – Out Market CI items are not considered as coded and not considered into the calculation of the total coverage. For PGI countries, country must have CI for out market items.

Other FACTS:

- **Total country Sales Value** = sum of CODED (of all PGs, OUT MK and/or IN MKT) + sum of uncoded of all PGs (IN MK ones) + **sum of the OUT MK CI in the IN MK PGs.**
- That is the reason why the TOTAL COUNTRY SV does not match the sum of the IN MKT and OUT MK PGs total value => because the OUT MK CI of IN MK PGs are added.
- **Total country coverage** – there is no total country coverage. The coverage is calculated only based on the IN MK PGs, summing up the SV of all coded vs. Uncoded and then calculating the coverage as the SV of Coded/SV of Coded+ Uncoded at total country level.

How to activate/set up NIMS Dashboard?

- Identify all Product GROUPS to be considered as IN Market for your country as per the below screenshot

(*How to identify/judge **IN Market** PGI – Need to read WORKFLOW

OGRDS->Configuration->Country->Product Group Setting

The screenshot displays the OGRDS application interface. The top section shows a list of countries with columns: Code, Description, Group, Factory, Default Language, Mnemonic, In Transition, Audit, SKU Backend Processing, and AutoCode Image Resupplied With. A sidebar on the left contains a navigation menu with options like Countries, Data Sources, Languages, Lookup Browser, Processing Groups, External Code Groups, Customers, Descriptive Headings, Reporting Bases, Units, Autocoding Steps, Predictive Model, External Information Mappings, Priority Factors, Related Cross Coding Parameters, and Validation Toolbox. The bottom section shows the 'Product Group Settings' for 'AFRICA AUDIT BEVERAGES - ...' with columns: Code, Description, Level, Parent, In Market, Target Cove..., and AutoCode CI. The 'In Market' column is highlighted in yellow. On the right, there are 'General Settings' and 'Enhance Multi-Country Characteristics' sections with checkboxes and an 'Apply' button.

- Flag Product Groups as IN MK & define % coverage.

OGRDS->Configuration->Country->Product Group Setting

Parent	Workflow	IC-Prioritise	Dispatch	Target Cove...	In Mark
AUTOMOTIVE	Characterised		Dispatch	98.5	✓
AUTOMOTIVE	Characterised		Dispatch	98.5	✓
AUTOMOTIVE	Characterised		Dispatch	98.5	✓
BABY CARE	Characterised		Dispatch	98.5	✓
BABY CARE	Characterised		Dispatch	98.5	✓

General Settings:

☒ In Market

Target Coverage: 98.5 %

☐ Autocode to Predicted Consolidated Item

☒ Exclude from LAC Only Validation

Enhance Multi-Country Characteristics:

MM/dd/yyyy

Apply

- Ask permission to access KPI dashboard + NIMS KPIs (Raise MSD for the access under Profile & Security)
- Ask App Dev to add country to the dashboard (provide IN MK PGs list)

Record Type	*	GO Enabling
Sub Type 1	*	RD: OGRDS PnB
Sub Type 2	*	Application/Functionality/Tools
Sub Type 3	*	OGRDS Support CIP
Sub Type 4	*	All Questions


How to navigate NIMS Dashboard?

- Go to **OGRDS/KPI** – with Country Admin – (will be visible only to the users who have the above-mentioned permissions.)

The screenshot displays the OGRDS application interface. On the left, a list of countries is shown, with Austria selected. The main area displays the 'Product Group Settings' for Austria, including a table of product groups and their associated settings. The table has columns for Level, Parent, Workflow, IC-Prioritise, Dispatch, In Market, Target Cove..., AutoCode C3, and Enhanc... The right sidebar contains a 'Workflow' section with various settings and a 'General Settings' section with a 'Target Coverage' field set to 98.5%.

- Select NIMS KPI

The screenshot shows the 'OGRDS KPI' dashboard. The header bar includes navigation links for NIQ, Imported, Imported From IE, LIVE_OGRDS, YOU BRD, OGRDS_dashboard, Project_RUN, MSDynamic, and Linked_in_learning. The main content area is titled 'OGRDS KPI'.

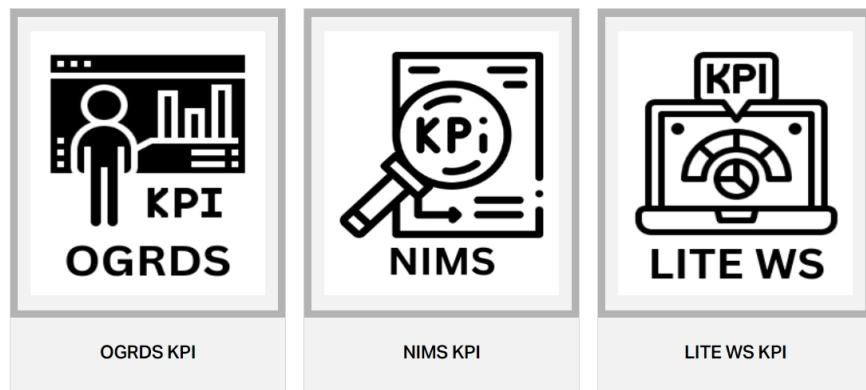

- Types of Dashboards
- PG Dashboard to see the coverage at Product Group level.
- COUNTRY Dashboard to see country level coverage.
- LPC Dashboard to see the coverage at LPC/Category level (Only for US)
- Uncoded Item Report to get the uncoded item by external code to make the target level coverage.

OGRDS KPI

PG Dashboard

Country Dashboard

LPC Dashboard

Uncoded Item Report

Page Size : 150

Product Group

PG Type

Workflow

Target Coverag

Reading the Dashboard

- To Filter
- COUNTRY (Mandatory), then:
- Period /Product Group/Processing Group Set/Processing Group/Service Names (if not selected – all will be applied)
- Then APPLY

OGRDS KPI

PG Dashboard Country Dashboard

Page Size: 150

Total Sales Value : 14079008210.37

Product Group	PG Type	Target Coverage	SV(%):Coded	SV(%): Uncoded	PG Contribution	SV:Coded Value	SV:Uncoded Value	Total Value
ACTIVITY CRAFTS & HOBBIES	OUT MARKET		100.00	0.00	0.00	0.00		0.00
ACTIVITY TOYS	OUT MARKET		100.00	0.00	0.00	0.00		0.00
AIR TREATMENTS - ELECTRIC	OUT MARKET	98.50	100.00	0.00	0.02	2,720,867.77		2,720,867.77
AIR TREATMENTS - NON ELEC...	IN MARKET	98.50	99.85	0.15	0.02	3,321,064.89	5,049.19	3,326,114.09
ALCOHOLIC MIXES/COOLERS	IN MARKET	98.50	99.59	0.41	0.11	15,138,390.63	62,511.95	15,200,902.57
ANTIBIOTICS - GENERAL PURP...	IN MARKET	98.50	100.00	0.00	0.00	23,222.36	0.00	23,222.36
ANTINEOPLASTIC & IMMUNO...	IN MARKET	98.50	100.00	0.00	0.00	972.69	0.00	972.69
APPORTIONMENT PARENT ITE...	IN MARKET	98.50	100.00	0.00	0.09	13,169,129.72	0.00	13,169,129.72
ARTIST MATERIALS & ACCESS...	OUT MARKET		0.00	0.00	0.00	0.00		0.00
AUDIO/MUSIC TOYS	OUT MARKET		0.00	0.00	0.00	0.00		0.00
AUTOMOTIVE CLEANERS	IN MARKET	98.50	77.23	22.77	0.01	722,012.07	212,828.67	934,840.74
AUTOMOTIVE COMBUSTIBLE/E...	IN MARKET	98.50	93.71	6.29	0.01	1,470,076.70	98,673.01	1,568,749.70
AUTOMOTIVE ENTERTAINMENT	OUT MARKET		0.00	0.00	0.00	0.00		0.00
AUTOMOTIVE FRESHENERS/D...	IN MARKET	98.50	97.78	2.22	0.02	3,225,279.02	73,130.80	3,298,409.82
AUTOMOTIVE OILS/LUBRICAN...	IN MARKET	98.50	68.64	31.36	0.02	2,363,998.88	1,079,805.21	3,443,804.09
AUTOMOTIVE PARTS	IN MARKET	98.50	99.99	0.01	0.01	1,572,846.48	140.80	1,572,987.28
AUTOMOTIVE REPAIR	OUT MARKET		0.00	0.00	0.00	0.00		0.00

Version 0.0.1 Copyright © 2023 Nielsen Consumer LLC. All Rights Reserved. Privacy Policy, Terms of Use.

6:08 PM 1/30/2023

- From the header => Data can be SORTED for ANY given column

OGRDS KPI

PG Dashboard Country Dashboard

Page Size: 150

Product Group	PG Type	Target Coverage	SV(%):Coded ↓
AIR TREATMENTS - ELECTRIC	OUT MARKET	98.50	100.00

- Icons and Interpretation.

OGRDS KPI

PG Dashboard Country Dashboard

Page Size: 150

Total Sales Value : 13763170990.95

Product Group	PG Type	Target Coverage	SV(%):Coded	SV(%): Uncoded	PG Contribution	SV:Coded Value	SV:Uncoded Value	Total Value
ACTIVITY CRAFTS & HOBBIES	OUT MARKET		0.00	0.00	0.00	0.00		0.00
ACTIVITY TOYS	OUT MARKET		0.00	0.00	0.00	0.00		0.00
AIR TREATMENTS - ELECTRIC	OUT MARKET	98.50	100.00	0.00	0.02	2,703,098.78		2,703,098.78
AIR TREATMENTS - NON ELEC...	IN MARKET	98.50	99.85	0.15	0.02	3,320,474.42	4,954.69	3,325,429.12
ALCOHOLIC MIXES/COOLERS	IN MARKET	98.50	99.62	0.38	0.11	15,085,775.24	57,416.33	15,143,191.56
ANTIBIOTICS - GENERAL PURP...	IN MARKET	98.50	100.00	0.00	0.00	402.64	0.00	402.64
ANTINEOPLASTIC & IMMUNO...	IN MARKET	98.50	100.00	0.00	0.00	287.37	0.00	287.37
APPORTIONMENT PARENT ITE...	IN MARKET	98.50	100.00	0.00	0.10	13,169,129.72	0.00	13,169,129.72
ARTIST MATERIALS & ACCESS...	OUT MARKET		0.00	0.00	0.00	0.00		0.00
AUDIO/MUSIC TOYS	OUT MARKET		0.00	0.00	0.00	0.00		0.00
AUTOMOTIVE CLEANERS	IN MARKET	98.50	77.51	22.49	0.01	719,131.10	208,690.96	927,822.06
AUTOMOTIVE COMBUSTIBLE/E...	IN MARKET	98.50	93.71	6.29	0.01	1,470,076.70	98,673.01	1,568,749.70
AUTOMOTIVE ENTERTAINMENT	OUT MARKET		0.00	0.00	0.00	0.00		0.00
AUTOMOTIVE FRESHENERS/D...	IN MARKET	98.50	98.85	1.15	0.02	3,213,569.08	37,402.53	3,250,971.61
AUTOMOTIVE OILS/LUBRICAN...	IN MARKET	98.50	68.65	31.35	0.03	2,363,998.88	1,079,701.02	3,443,699.90
AUTOMOTIVE PARTS	IN MARKET	98.50	99.99	0.01	0.01	1,572,846.48	140.80	1,572,987.28
AUTOMOTIVE REPAIR	OUT MARKET		0.00	0.00	0.00	0.00		0.00

1 to 150 of 375

1. Home; 2. Filter; 3. Reset; 4. Export



- How to get & read the Uncoded Item Report?

Using FILTER, select the COUNTRY and PRODUCT GROUP à APPLY.

**The UNCODED Item Report is NOT available based on the selection defined to see the total country coverage or PG coverage, because it shows a STATIC image of the list of UNCODED items, at the moment when the QBRK table was refreshed, comparing with the NIMS uncoded items using the SAME gpub.

Country NEW SOUTH AFRICA	▼
Product Group CHEESE - FRESH FIXED WEIGHT	▼

- Report Output:
- **Barcode info** - (Barcode/code type/retailer/sequence/description) - all BARCODES in NIMS linked to the PGI/IN MK Uncoded conso item that makes up the Uncoded within the selected PG
- **Sales Value** - based on NIMS *item period value* (sales value)
- **Status** - if ICP or Dispatch
- **Running%*** - by adding the SV of the single barcode to the total Coded % at PG level – included only the records sent to NIMS in that PG
- **Item info**** - GIC/nan key/item type/item description – based on the current status of that item in OGRDS, for the barcodes “uncoded” within that PG (in NIMS at the moment when the report is run)

External Code	Sequence Number	Code Type	Description	Retailer Code	Sales Value	Status	Running %	Item Id	Nan Key	Item Type	Item Description
6001008832932	1	EAN	SPAR SC CHEESE SLICES 1'S 6001008832...	RA004	68325.12	Dispatch to DA	98.88638	9645056	4422776	PG	CHEESE - FRESH FIXE...
0000003068159		LAC	PARMALAT CHEESE WEDGES 15KG 0000...		58559.06		98.89184	9645056	4422776	PG	CHEESE - FRESH FIXE...
6009624520493		EAN	M/D LOCAL FETA CUBES P/KG 60096245...		34694.50		98.89508	9645056	4422776	PG	CHEESE - FRESH FIXE...
6009617226258		EAN			30311.84		98.89791	582747928	109362...	I	LANCEWOOD.LANCE...
6008356000198		EAN	MAAS LOW FAT CRMY EMASI EMNDENI...		19976.03		98.89978	9645056	4422776	PG	CHEESE - FRESH FIXE...
6009637130337		EAN	CHEESE PLATTER BOX FOR 2 DALEWOO...		18212.11	Dispatch to OCI	98.90148	9645056	4422776	PG	CHEESE - FRESH FIXE...
6008000035361		EAN	CHEESECAKE SLICE		17543.04	Dispatch to OCI	98.90311	9645056	4422776	PG	CHEESE - FRESH FIXE...
6009679020498		EAN	INDEZI RIVER PARTY PLATTER 1KG EA		16476.00	Dispatch to OCI	98.90465	9645056	4422776	PG	CHEESE - FRESH FIXE...
0663593513465		UPC	SEBOANA NTLATLAWANE 5 KG		15408.86	Dispatch to OCI	98.90609	9645056	4422776	PG	CHEESE - FRESH FIXE...
6009801481876		EAN	CHEDDAR GRATED P/PACK 500G		14879.43	Dispatch to OCI	98.90748	9645056	4422776	PG	CHEESE - FRESH FIXE...
6001008776953		EAN	SPAR SC GRTD CHSE MIX 1KG 60010087...		12812.33	Dispatch to OCI	98.90868	9645056	4422776	PG	CHEESE - FRESH FIXE...
6007287002110		EAN	CHEESE HARD PARMESAN KLEIN RIVER ...		12508.07		98.90984	9645056	4422776	PG	CHEESE - FRESH FIXE...
6009223777748		EAN	FP FRZN Macaroni Cheese 1 kg		11705.34		98.91094	9645056	4422776	PG	CHEESE - FRESH FIXE...
6001224183511		EAN	CHEESE SOFT RICOTTA FORAGE&FEAST ...	RA192	11033.78	Dispatch to DA	98.91197	9645056	4422776	PG	CHEESE - FRESH FIXE...
96001180234...		RAC	DAIRYBELLE CHEESE COLCHESTER		10222.73	Dispatch to OCI	98.91292	9645056	4422776	PG	CHEESE - FRESH FIXE...
6009617223912		EAN			9184.58		98.91378	9645056	4422776	PG	CHEESE - FRESH FIXE...
6007251006298		EAN	CHEESE SLICES GRL CHIC200g		9122.95		98.91463	9645056	4422776	PG	CHEESE - FRESH FIXE...
6009226331978		EAN	Camembert Duo with Spicy African Plu...		8927.32		98.91546	9645056	4422776	PG	CHEESE - FRESH FIXE...
0658325578720		UPC	PIZZA PEPPERONI/CHORIZO AND PARS...		8542.58	Dispatch to OCI	98.91626	9645056	4422776	PG	CHEESE - FRESH FIXE...
0663593513458		UPC	SEBOANA NTLATLAWANE 2.5 KG		8110.43	Dispatch to OCI	98.91702	9645056	4422776	PG	CHEESE - FRESH FIXE...

*If the running total is not 100% => check if there are records in that PGI/CI not dispatched to NIMS!

**In a next enhancement to have the ability to send items still coded to uncodeable PGI/CI as ICP to OGRDS

Scenarios when the dashboard will not give the correct picture:

In case a country follows any of the below structures for parking of IN MKT items, the dashboard will not reflect the right coverage analysis. In these cases, country needs to take up a cleanup to place the IN MKT uncoded items in the right schema (PGI/LPC)

- Single bucket for In Mkt & Out Market (eg. Egypt, Jordan)
- In mkt uncoded and out market in one PGI (eg. France)
- In mkt uncoded at Super Group level (eg. Thailand, Hongkong)
- One PGI / bucket used for representing multiple categories (eg. Argentina)
- One single value of PC within multiple PGIs (applicable for BCI countries) (eg. Malaysia, Vietnam)
- Backlog in the crosscoding browser (meaning records not coded at all => will NOT go to NIMS, not be in the prioritization process, not be part of coverage calculations)

NIMS OCI_SOP v1.1

NIMS OCI

What is OCI?


OCI stands for **Other Country Images** and this new functionality is useful for countries that refer to other markets images for coding. This helps the country to check images of the same item they are coding, from different countries before allocating them to store (for dispatch to field)

The objective of the functionality is to help countries to find the image first in Epics if it is available for some other country before sending it to DA for image collection. The system will check images reported within a defined period (number of days configured in OGRDS)

Scope of OCI?

- All countries having workflow either:
 - • DISPATCH à DISPATCH or
 - CHARACTERISTIC à ICP à DISPATCH
- Only Algorithmic codes.

How it works?

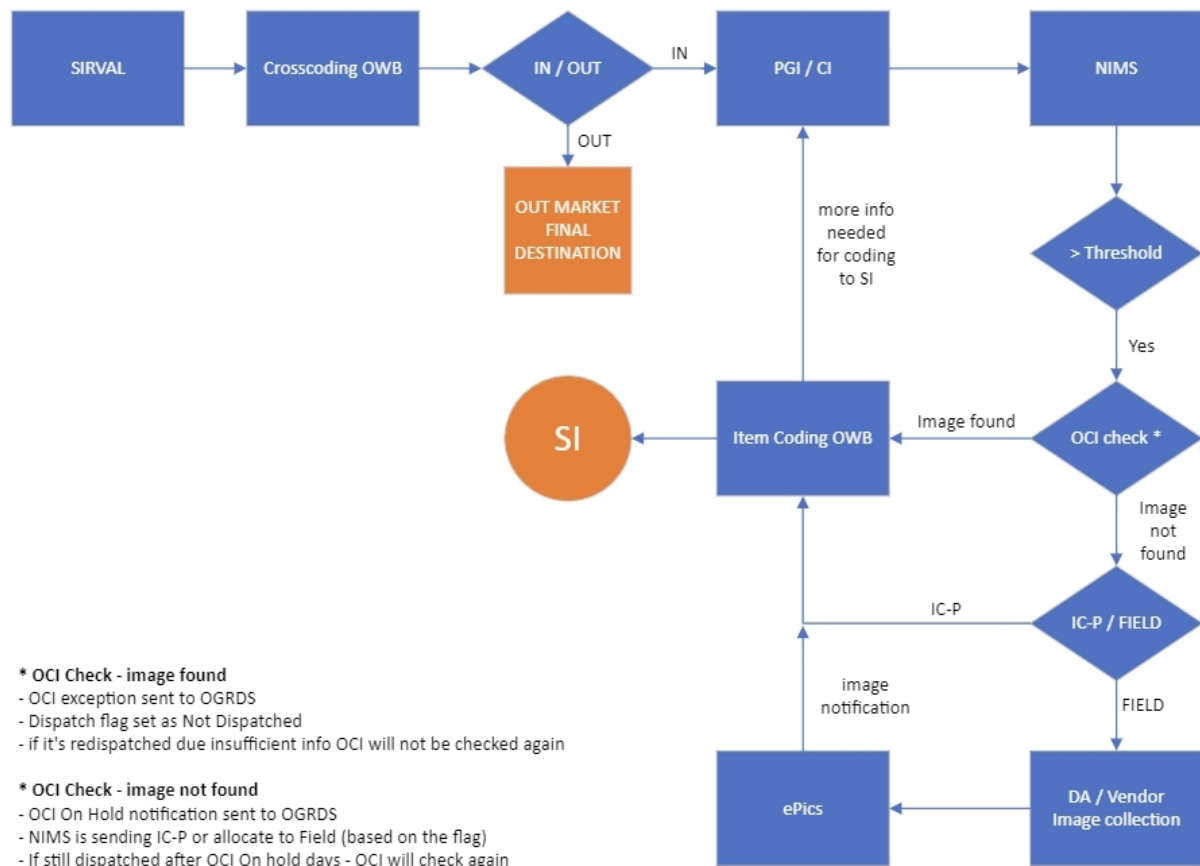

Pre-requisites to activate OCI?

- In OGRDS
 - Country must have proper workflow either
 - DISPATCH à DISPATCH or
 - CHARACTERSTIC à ICP à DISPATCH
- In NIMS
 - THS Configuration - THS should not be configured at minimum level like 1,2,3 etc. It should be set at proper level to get ~80% sales coverage by coding of ~20% of items.

Steps to activate OCI

- In OGRDS
 - Raise a ticket to create OCI processing group in OGRDS (same setup as ePics PG) + link it to the SAME PGSet as ePics
 - Activate the OCI flag in OGRDS
 - Define the OCI Period in OGRDS – It should be in number of days for which country wants to check for the OCI
 - Define the OCI ON HOLD EXPIRY days – It will reactivate the OCI after this period to check OCI again.

- Define countries whose images can be used for coding
 - Maximum number of countries = 25
 - Top 5 countries are priority countries to be listed first if image found
- In NIMS
 - Create the destination in NIMS
- To Support team
 - Raise ticket to flag the OCI Processing Group as default for OCI exceptions
 - Ticket to be logged to RD: OGRDS PnB /AppDev/Funct/Tools
 - Ticket should be resolved before activating the OCI
 - Raise ticket to flag all existing Dispatch records with OCI
 - Ticket to be logged to RD: OGRDS PnB /AppDev/Funct/Tools
 - OCI should be activated before Data Fix is applied

HOW To Activate OCI?

- In OGRDS
- Raise an [Intake](#) Request under the below area providing all the details need to be configured to create an OCI processing group in OGRDS :
 - Type of initiative: Enablement Support Request
 - Type of Enablement Support: Enablement Support - Process Question
- Activate the OCI flag in OGRDS. (By click on box below)

It is available in COUNTRY CONFIGURATIONàDETAIL tab.

OCI Dispatch:	☐				
OCI Period Inclusion:	[Days]				
OCI On-Hold Expiry Days:	[Days]				
OCI Countries:	<table border="1"> <thead> <tr> <th>OCI Country</th> <th>Priority</th> </tr> </thead> <tbody> <tr> <td colspan="2"> </td> </tr> </tbody> </table> Search	OCI Country	Priority		
OCI Country	Priority				

- Define the OCI Period in OGRDS – It should be in number of days to check for the OCI

NIMS will check the OCI which have LDD within these days in ePIC library. If any configured countries have image available but the days is not within OCI Period inclusion à It will not generate OCI exception but will follow the configured workflow for the country.

OCI Dispatch: ☒

OCI Period Inclusion: [Days]

 If 'OCI Dispatch' is set, a positive integer greater than 0 should be entered into 'OCI Period Inclusion' field.

OCI On-Hold Expiry Days: [Days]

- Define the OCI ON HOLD EXPIRY days

Once NIMS check the External code on ePics and image not found based on the setup criteria the next time the same external code will be checked after the completion of ON HOLD EXPIRY period (recommended minimum period is 7 days)

OCI Dispatch: ☒

OCI Period Inclusion: [Days]

OCI On-Hold Expiry Days: [Days]

 If 'OCI Dispatch' is set, a positive integer greater than 0 should be entered into 'OCI On-Hold Expiry Days' field.

OCI Countries:

OCI Country	Priority

- Define countries whose images can be used for coding

1. Here country must add neighbor/sister countries by “SEARCH” button, so NIMS will check the OCI within the list of countries are configured.
2. NIMS will check the image and generate OCI exception if that barcode meets the criteria of OCI PERIOD INCLUSION and OCI configured countries
3. OGRDS will apply the FAVORITE icon for first 5 countries, so NIMS will first priorities these countries to check the OCI.

OCI On-Hold Expiry Days: [Days]

OCI Countries:

OCI Country	Priority
AUSTRIA	
CROATIA	
CZECH REPUBLIC	
GERMANY	
FRANCE	
HUNGARY	
UNITED KINGDOM	
POLAND	

- OCI exception:

Once OCI exception is generated and received into IC OWB for item coding, but the image is not matching with input description, then the exception will be again re-parked to IN MKT PGI/CI. As it is already reviewed for OCI once, NIMS will not re-check the images on ePics again.


If OCI exception is not cleared from IC OWB and ePics notification is received in OGRDS the OCI exception will be removed from IC OWB.

- OGRDS Item:

Item created using the OCI exception will NOT display the image while checking the View Image.

But since the item is coded using image for other country, image icon will appear on the saved item but when trying to VIEW IMAGE, it will not appear as the image is not for the same country.

It is ideal to add in the comment what OCI image was used for country (mention the country + date of the image)

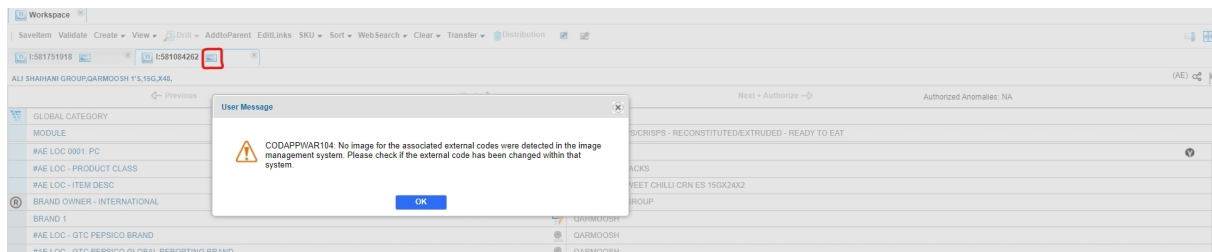

- In NIMS
- Create the destination in NIMS

HOME

Country Details

Service Details

Add a Service

Manufacturers

PG Factor

Retailers

Destinations

Sales Value Weights

Sales Volume Weights

Shop Weights

Shops for CAEPICS

HouseKeeping Rules

Users

Batch Monitor

Shop Pref

Validation

Sirval Service ID	Sir Ser Tag
N/A	CA
	ALI
	SEI

HOME

Country Details

Service Details

Manufacturers

PG Factor

Retailers

Destinations

Add a Destination

Sales Value Weights

Sales Volume Weights

Shop Weights

Shops for CAEPICS

HouseKeeping Rules

Users

Batch Monitor

1. NAME: It should be like COUNTRY CODE_OCI e.g for VENEZUELA it should be VE_OCI

 Record Type	*	GO Enabling
Sub Type 1	*	 RD: OGRDS PnB
Sub Type 2	*	 Application/Functionality/Tools
Sub Type 3	*	 OGRDS Support CIP
Sub Type 4	*	 All Questions

Note: It is important to apply data fix. If all the records qualifying for OCI are flagged, user can rely on the image for coding. If ICP exception is received that means there is no image on ePics as per the defined criteria.

If data fix is not applied, there might be an ICP exception available in the browser for which an image is available for other country, but the system will not check for it as it is back data.

- Task, Ownership & Expected time to activate OCI.

Task	Who	Where
1. Create OCI processing group in OGRDS (same setup as epics PG) +link it to the SAME PGSet as ePics	Country to raise INTAKE Request	PTO Intake Form
2. Raise ticket to flag the OCI Proc.Group as default for OCI exceptions	Local RD/Tech	MSD ticket to RD: OGRD AppDev/Funct/Tools
3. Flag country as OCI	Country ADMIN	OGRDS/Country configu

4. Define number of days to check for OCI (from today – e.g. 365 days back) and On Hold Expiry days (min 7 days)	Country ADMIN	OGRDS/Country configu
5. Define countries whose images can be used for coding (MAX 25) Top 5 are priority countries	Country ADMIN	OGRDS/Country configu
6. Raise ticket to flag all existing Dispatch records with OCI (Data fix)	Local RD/Tech	MSD ticket to RD: OGRD AppDev/Funct/Tools
7. NIMS enable OCI Destination	NIMS Counry Admin	NIMS/ Administration/D

Execution time
1 week
1 week
5 min
5min
5min
1 week
5 min

- SAME DAY PRIORITIZATION vs OCI

NIMS will also check the OCI for all the records which are prioritized through Adhoc prioritization job. So, if image is available as per the configured countries and the record is prioritized on same day then it will also appear as OCI exception in IC OWB.

SOP_New Retailer Onboarding

Standard Operating Procedure

RD – New Retailer Onboarding Activity - RMS

Process:	New Retailer Onboarding Activity
Country:	All OGRDS Countries
Workstream:	Reference Data
Last revision Date	26 th March 2024
Document Owner	Reference Data Process Governance Team
Document Owner Backup	
Document Approver	Reference Data Transformation Team

Table of contents:

Level of knowledge required	BAU	Setup	
1. PROCESS DEFINITION	L0/L1	n/a	
1.1. Purpose of the process	L0	n/a	
1.2. Process inputs	L1	n/a	
1.3. Process outputs	L1	n/a	
1.4. Outcome of the process	L1	n/a	
1.5. Use of the process	L1	n/a	
1.6. Process map (High Level)	L1	L1	

2. PROCESS SETUP	L2	L2	
2.1. Initial Sizing of AIM	N/A	L2	
2.1.1. Definition/Purpose of Process	N/A	L2	
2.1.2. Process Input	N/A	L2	
2.1.3. Process Output	N/A	L2	
2.2. Acid Test / eDive Testing and its outcome	L2	L2	
2.2.1. Definition of the Process	L2	L2	
2.2.2. Purpose of the Process	L2	L2	
2.2.3. Process Input	L2	L2	
2.2.4. Process Output	L2	L2	
2.2.5. Outcome of the Process	L2	L2	
2.3. RAP Scoring (Retail Accreditation Protocol)	L2	L2	
2.3.1. Definition of the Process	L2	L2	
2.3.2. Purpose of the Process	L2	L2	
2.3.3. Process Input	L2	L2	
2.3.4. Outcome of the Process	L2	L2	
2.3.5. Process Map	L2	L2	
2.4. OGRDS System Configuration & Data Preparation	L2	L2	
2.4.1. Definition of the Process	L2	L2	
2.4.2. Purpose of the Process	L2	L2	
2.4.3. Process Input	L2	L2	

2.4.4. Outcome of the Process	L2	L2	
2.4.5. Use of the process (When & Why)	L2	L2	
2.4.6. Process Map	L2	L2	
2.4.7. Actions in case of change in cooperation (Non-Coop to Coop)		L2	L2
2.5. Back Data Loading	L2	L2	
2.5.1. Definition of the Process	L2	L2	
2.5.2. Purpose of the Process	L2	L2	
2.5.3. Process Input	L2	L2	
2.5.4. Process Output	L2	L2	
2.6. Cross coding & Item coding	L1	L1	
2.6.1. Definition of the Process	L1	L1	
2.6.2. Purpose of the Process	L1	L1	
2.6.3. Process Input	L1	L1	
2.6.4. Process Output	L1	L1	
2.6.5. Outcome of the Process	L1	L1	
2.6.6. Use of the process (When & Why)	L1	L1	
2.6.7. Process Map	L1	L1	
2.7. Post Retailer Onboarding	L2	L2	
2.7.1. Definition of the Process	L2	L2	
2.7.2. Purpose of the Process	L2	L2	
2.7.3. Process Input	L2	L2	

2.7.4. Process Output	L2	L2	
2.7.5. Outcome of the Process	L2	L2	
2.7.7. Process Map or Detailed process document	L2	L2	
3. PROCESS METRICS – REPORTS & KPIs	L2	L2	
3.1. Reports	L2	L2	
3.2. KPIs	L2	L2	
4. VALIDATION	L2	L2	
5. APPENDIX	n/a	n/a	
6. GLOSSARY	n/a	n/a	
7. CONTACT US	n/a	n/a	

1. Process Definition

The onboarding of a new processing group / retailer due to the new contract or as a win back (cooperator) of any retailer engagement with NIQ. This includes analyzing and validating the input received from retailer or vendor, checking against the NIQ standards using various tests across the streams and sharing the feedback with respective NIQ stakeholders & product leadership to design contract/agreement for ongoing delivery and maintenance. This also includes initial sizing for onboarding retailer and working for the back data.

1.1 Purpose of the process

- The primary goal of this document is to ensure that all country users are aware of the study to be done while onboarding a new retailer.

- To empower data analysts/SMEs with relevant information about the data provided by vendors/retailers, to check if data provided is as per NIQ Standard for RD to process.
- To summarize what all system configuration and data preparation is needed for during the onboarding process.
- To provide guidelines on the back data maintenance, and BAU item coding/cross coding activities.

1.2 Process Inputs:

- Inputs available to the country RD SME will be the results of eDive tool with flagging as to which team needs to review what output.
- Sample of an eDive output - [Sample output eDive.xlsx](#)

1.3 Process Outputs:

Output will be the detailed analysis of the Raw data files as per NIQ standard data fields and retailer scoring to determine the retailer quality which will be further discussed with the eDD team/RV teams to identify if there is any requirement / scope of improvement on the data input/format/content quality.

Based on the feedback and further discussions, the RV team will go ahead signing off the contract with the retailer to onboard.

1.4 Outcome of the process:

Main output of New Retailer Onboarding process is to determine the quality of retailer/vendor data for RD process.


- The output will note the quality of retailer data and highlight any quality risks.
- Details on the high-level sizing required for AIM approval.
- Provide all test results done on the Raw data files; to decide how much effort is needed from each stream (specially RD), what will be the timelines/cost and critical details w.r.t. delivery contract (coverage/quality etc.)
- Define any OGRDS system configuration and data preparation needed for the retailer onboarding and maintenance.
- Coding completion of the exceptions loaded and new items, allowing Sales Coverage Measurement through the dashboard and to ensure that the retailer / processing group has been successfully onboarded.

- Determine the compliance measurements post onboarding is complete.

1.5 Use of the process:

- For all new retailer onboarding
- For change in data feeds for any existing retailer
 - In case of change in the data feed, the country can review with the RD Governance team on the nature of changes and what could be the steps required case by case.
- Also please refer to the actions required in case where the retailer input type has changed from a non- cooperator to a cooperator in **point # 2.5.8**

1.6 Process Map: (High level)

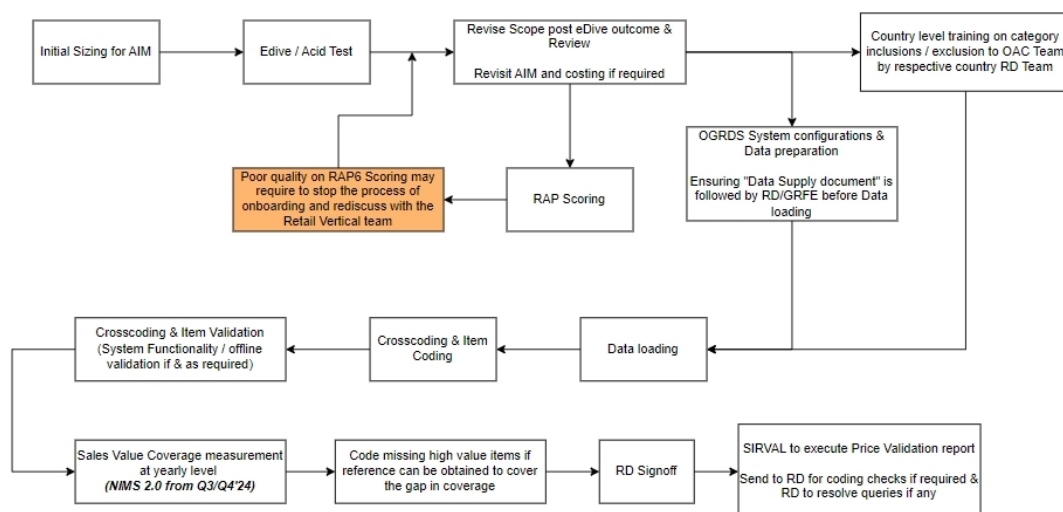

2. Process Setup

2.1 Initial Sizing of AIM

2.1.1. Definition/Purpose of Process

For any new onboarding, an initial sizing is requested from all the processes of the country team to build an end-to-end cost and raise an AIM looking at multiple factors impacting workload for each of the teams.

For RD team, predominant factors impacting the efforts of coding/crosscoding will be the number of records, Algorithmic / Non algorithmic codes ratio & New items for Algorithmic codes.

Hence countries should be attentive to the output for these checks if they already have the eDive report for review.

2.1.2. Process Input

The input available to the team when the costing is requested depends on the stage, when the costing is requested.

- At times the team is expected to provide the costing before even the sample data is received. In that case, RD team can consider similar another existing retailer which is supposed to be confirmed by the eDD/RV team.
- If the sample data is already received by the eDD team and RD team is having access to it, the same can be used for deriving the costing for RD activities. Below suggested effort estimation template to be used.
- The FTEs are available – either from the BAU team or from the OAC team.
- The expected duration of the project.

[Retailer Onboarding_RD effort estimation template](#)

2.1.3. Process Output

As an output, the country RD team will have the effort estimation and costing to be shared as a part of the overall costing from all other teams (SIRVAL, CI, GRFE, etc.)

The number of FTE required for the defined project period also needs to be provided to the OAC team 2 months prior to block the resources accordingly.

2.2 Acid Test / eDive Testing and its outcome.

2.2.1. Definition/ Details of Process

One of the critical steps in retailer onboarding is understanding the quality of data received from the retailers. Earlier (and still in some regions currently) ACID test / Scorecard assessment is performed for the purpose. But recently, a new tool named - **eDive** has been developed keeping ACID TEST in foundation.

Details regarding the tool are explained in detail here :

Overview : [eDIVE_Overview](#)

This tool will be run by the eDD team the output of which will be available for different teams to validate and provide their feedback.

The [output](#) of the eDive team is a summary sheet with explaining the KPIs against each parameter and a link to the sample of the given parameter for the respective teams to validate and feed back to the eDD team.

Specific to Reference data – there are 13 validations which respective country representative for RD needs to validate. A detailed explanation of the parameters, scope, impact and action on the same is available here - [eDive Reference Data](#)

2.2.2. Purpose of the Process

To understand the quality of raw data received and arrive at a decision of GO / NO-GO basis inputs from all the operations teams.

In case of NO-GO, the Retailer Vertical team needs to approach the retailer to resolve the issues identified. On resolution of the issues identified, the entire process is to be reinitiated.

2.2.3. Process Input :

Normally the input provided to the eDive tool is the 12 weeks of sample data (or as agreed with the retailer).

2.2.4. Process Output

This tool will be run by the eDD team, the output of which will be available for different teams to validate and provide their feedback.

2.2.5. Outcome of the Process

Feedback from all the teams (IV / RD / SO) will be compiled and shared with RV / PL to come to an alignment whether it is advisable to onboard the retailer, also what could be the watch points when we are agreeing to onboard the retailer irrespective of some alarming results on few of the validation checks.

2.3 RAP Scoring

2.3.1. Definition of Process

RAP (Retailer Accreditation Protocol) – is a kind of risk management system that helps determine retailers at risk for supplying data with quality issues. It is a structured way to identify and track improvement areas with the retailer.

2.3.2. Purpose of the Process

The purpose of RAP is to ensure we receive good quality data through verifications, prior to inclusion in NIQ services. This is applicable to new retailers as well as reviewing existing retailers if any concerns are raised by clients / observed internally and identifying opportunities for improvement by engaging more with the retailers.

The RAP Assessment consists of several questions that are considered important for NIQ data processing and are split between the below and scored as 4, 3, 2, 1 à 4 being the highest and 1 being the lowest.

The most critical are the RAP6 à 6 RAP questions that are automatically RED if response score is 1.

- Each question provides different answers relating to the question. i
- The answers have scores, with the highest score corresponding to the ideal content or format we want to receive.
- Each question is weighted.
- Each answer is given a percentage contribution.
- The weight and contribution is calculated for each question summing up to a total score.

2.3.3. Process Input

The input to be provided to different teams for their respective assessment is the raw data file received from the retailer.

2.3.4. Outcome of the Process

- As an outcome RAP Assessment identifies gaps between Nielsen data expectations and retailer capabilities or provisions to prioritize retailers that have opportunities for improvement.

2.3.5. Process Map or Detailed process document.

- To be added by end of Mar'24.

2.4 OGRDS System Configurations & Data Preparation

2.4.1. Definition of Process

- This step is one of the crucial steps once the retailer onboarding decision is made. This will need the full attention of the local RD SMEs to decide the necessary system configuration.

2.4.2. Purpose of the Process

- Ensuring the proper steps are followed and accurate configuration is done to optimize the available functionality in OGRDS.
- This will define some of the configuration needed in OGRDS before the GRFE and Sirval set up.
- The checks defined in this process will help the best data preparation and management once the data loading starts by Input Validation team.

- Proper configuration of the Processing group is required to reduce the volume of exceptions when it moves into BAU.

2.4.3. Process Input

- Processing Group Name – to be created within OGRDS.
- Details from the retailer if they have specific codes assigned which need to be interpreted as RAC codes and setup before data loading.
- If the retailer has private label brands or exclusively owned brands – information on the brands which are to be treated as either Sensitive or Exclusive.
- 12 weeks of data as a unique list of records containing the external codes, retailer descriptions, departmental information, supplier information and any other information which will be helpful for EIM rules setup.

2.4.4. Outcome of the Process

- As an outcome of this process country team should achieve –
 1. Processing group created in OGRDS and assigned to relevant processing group set.
 2. Sign off on GRFE specifications/ set up provided by Local RD on email and the agreed mapping file in excel format stored centrally by IV team for future reference. This is a critical step to validate that RD instructions in mapping file have been implemented.
 3. Precise OGRDS configuration set up done as per the requirements that best fit the retailer data, which includes –
 - a. EIM Rules set up.
 - b. RAC match expression set up & link to EPICs and NIMS
 - c. Auto-coding rules set up.
 - d. Addition of new sensitivity BOI
 - e. NIMS configuration set up including Private label prefix.

2.4.5. Use of the Process

- This is the first and mandatory step as a part of the new retailer onboarding.
- Coders cannot proceed or will not be efficient with crosscoding and coding activities unless the setup and configuration is completed.

2.4.6. Process Map or Detailed process document.

- This step is divided into below sub steps.
 1. **Processing Group creation**
 - a. The local RD team needs to submit the intake to RD Governance to create a new processing group and set if needed. Follow PGID document to submit the intake.
 - b. While sharing the requirements in intake, local RD must refer to the Processing Group set document for the guidance. [Process Group Sets Configuration](#)
 - c. The most important flags to consider is “Follow History seq for NfPG & NfPGS” for the chain which will load Back Data and ‘New Set up’.
 - d. If EAN/UPC are loaded as Predicted Barcode; country must mention the requirement of PG Pairing for Autocoding in the same PGID intake. [SOP_PGID Control](#)
 2. **Specifications for GRFE set up & sign off.**
 - a. This is a critical step to ensure the correct mapping is done between the retailer input and OGRDS fields.
 - b. This will ensure that the available & relevant product information & description is captured; to enable optimal auto-coding.
 - c. Review 12wk sample data & comparison against OGRDS fields, should be done by local IV and RD together using the standard template.

[OGRDS_GRFE_Configuration_Mapping.xlsx](#)

- •
 1. Local IV should define rules to combine retailer fields to respective OGRDS fields.
 2. Local RD should review the rules with GRFE team prior to their set up.
 3. Once done, local RD must provide the sign off over email.
 1. **OGRDS configuration**
 - a. Check if retailer is providing RACs as the input (Retailer Algorithmic codes) for the own label items. [Configuration - RAC Implementation Steps.pptx](#)
 - b. If RACs are provided, country must follow below steps:

- i. Identify RAC matching expressions and list of private label codes.
- ii. Raise ticket to get the RAC expressions created in OGRDS.
- iii. Link the New RAC expressions to EPICs processing group.
- iv. NIMS country prefixes to be updated to include RACs.
- c. Review the list of unique records by Barcode – Description – Department fields. Once done, analyze the fields below to create the EIM rules in OGRDS. [SOP - EIM Rule Generator.pptx](#)
 - i. Retailer department structure and compare to country PGI/BCI schema to map IN vs. OUT market categories.
 - ii. Analyze external descriptions to create 'key word based' EIM rules and reduce manual workload.
 - iii. Ensure all the identified EIM rules are loaded in OGRDS before the data loading.
- d. Check if the retailer is providing any 'Private label' items and if Sensitivity flag is needed on any BOI values. PS: Country must use BRAND OWNER INTERNATIONAL characteristic for Sensitivity flag. [SOP - Sensitivity Management E2E](#)
 - i. Country can create BOI values in advance and raise MSD to Schema team for flagging those BOI values as Sensitive.
 - ii. Country can code the items and then request the Sensitivity flag for specific BOIs.

2.4.7 Actions in case of change in cooperation : (Non – Coop to Coop).

SCENARIO	EXISTING PROCESSING GROUP(S)	PROCESSING GROUP TO USE FOR ACTUAL DATA FROM RETAILER	NOTE
1	CASHSLIP	Create new Processing Group and follow New Retailer Onboarding Process	
2	CASHSLIP & LIDL STORE VISIT (Receipts data source)	- Use existing Processing Group to be changed to B&M PG (eg. "LIDL STORE VISIT" ->> LIDL (Country Code)) - Change PG Set and Channel Type as that of B&M - Change Processing Group configuration as for B&M PG	If existing PG (eg. "LIDL STORE VISIT") is used for other purpose than just store visit, create new processing group as per scenario#1 and follow New Onboarding Process
3	CASHSLIP & LIDL STORE VISIT & CROWDSOURCE	- Use existing Processing Group to be changed to B&M PG (eg. "LIDL STORE VISIT" ->> LIDL (Country Code)) - Change PG Set and Channel Type as that of B&M - Change Processing Group configuration as for B&M PG	If existing PG (eg. "LIDL STORE VISIT") is used for other purpose than just store visit, create new processing group as per scenario#1 and follow New Onboarding Process
4	CASHSLIP & LIDL STORE VISIT & CROWDSOURCE & CPS	- Use existing Processing Group to be changed to B&M PG (eg. "LIDL STORE VISIT" ->> LIDL (Country Code)) - Change PG Set and Channel Type as that of B&M - Change Processing Group configuration as for B&M PG	If existing PG (eg. "LIDL STORE VISIT") is used for other purpose than just store visit, create new processing group as per scenario#1 and follow New Onboarding Process
5	CPS	Create new Processing Group and follow New Retailer Onboarding Process	

2.5 Data Loading

2.5.1. Definition of Process

Post system configurations are completed, and country level category training is completed to the OAC team, this process refers to the data loading. It could be 12 weeks of data or the entire back data if it has been already received before the rest of the activities are completed.

It is advisable to start loading the back data **starting with latest period first and going backwards** to ensure capturing new items more efficiently and correctly.

2.5.2. Purpose of the Process

The RD team/OAC team can start working on crosscoding and Item coding activities.

2.5.3. Process Input

- 12 weeks of data / entire back data reformatted by GRFE and SIRPAIR files created.

2.5.4. Process Output

- Data for the new retailer to be onboarded is available in the Crosscoding Browser for crosscoding and in Item coding browser if the barcode is already prioritized due to Threshold met based on other retailers' data.

2.6 Cross Coding & Item Coding

2.6.1. Definition of Process

- The association of an exception or cross coding to an item. Also, population of the characteristic that describes what the product is. This is covered by Cross coding and Item coding process. This item has unique code assigned to it which is used by other interfaces like Input validation & Output.

- Here this process will ensure that the retailer is ready to be reported to clients.

2.6.2. Purpose of the Process

- Cross coding and Item coding are the main processes of Reference Data. Here, the purpose of this process is to ensure that exceptions received from the newly onboarded retailer are placed as per defined quality standards.

2.6.3. Process Input

- The overall process will be done in multiple stages. Which are –
 1. Once the approval to onboard the retailer is received, local RD to ensure that OAC team is aware of the workload planned from RD point of view while Input validation team is working on the Back data loading.
 2. Back data loading and Offline Back data prioritization must be completed (via ranking sales). This will be replaced by the new capability in NIMS tentatively by end of 2024.
 3. Exceptions available in OWB for OAC team to start working on the Cross coding/ Item coding activities.
 4. Item coding Test#1 and Test#2 will be done respectively to ensure that predefined quality standards are met.

2.6.4. Process Output

- Consider the steps below to be completed as an output of this process.
 1. Upskilling or Training is completed for the OAC team on the Country and Categories covered by this retailer. Also address any market/product details provided by this retailer in a specific manner, either in retailer description or in department description etc.
 2. OAC team should be able to perform the manual coding of items not auto-cross coded by OGRDS auto-coding configurations.
 3. Ensure all the exceptions received are cross coded to in- market, out-market bucket as per the country workflow.
 4. Prioritize IN market items by sales and code them at the Standard item level (offline or in Sirval currently, and NIMS in future)

5. Follow the coding model based on country - i.e.. send items to DA, code using retailer descriptions, hybrid of both.

2.6.5. Outcome of the Process

- Here, the outcome should be that all exceptions received from the retailer are coded to respective placement without any backlog. Local RD has performed the validation of the Test#1 and Test#2 records to provide the signed off on the coding quality.
- Signed off as the retailer data is ready for production.

2.6.6. Use of the Process

- Once this process is complete and RD team has provided signoff to SIRVAL for completion of coding, below activities will be performed –
 1. Coverage Check – Local RD team will be able to perform the Retailer Sales Coverage analysis and determine the NIMS set up. This must be done by
 - a. Check and update the NIMS parameters.
 - b. NIMS Sales Coverage Dashboard to review at granular level - Processing Group * PG level granularity that is available currently.
 - c. Back data coverage at year level - measure by back data prioritization tool, - [Item prioritization tool](#) (enhancement expected end of Q3 / Q4 - 2024)
 2. Price Validation – Local IV team should be able to execute Price Validation and coding of exceptions (Single pack vs multipack) and send the queries to RD team to investigate and resolve if needed.

2.6.7. Process Map or Detailed process document.

- [SOP_Item Coding.docx](#)
- [SOP_Cross coding.docx](#)
- New NIMS backdata coverage document. (to be added once ready – Q3/Q4'24)

2.7 Post Retailer Onboarding

2.7.1. Definition of Process

- The onboarding task is considered as completed once the back data loading and item coding/ Cross coding for the back data is completed. Country should have only latest period exceptions in the browser. And the RD team should now clear the exceptions as per their BAU closure. This is when a country needs to take care of certain BAU activities w.r.to the newly onboarded retailer.

2.7.2. Purpose of the Process

- This is necessary to ensure that once the onboarding is completed, the country maintains the retailer as BAU and observes all the KPIs populated against this retailer. This includes analysis of key metrics like #records received on weekly basis, %Auto-coding on monthly basis, Sales coverage analysis etc.

2.7.3. Process Input

- Sign off provided by local IV about 12 latest weeks data and most recent weeks are loaded in OGRDS.
- Sign off provided by local RD about the back data Cross coding & Item coding completion.
- Sign off as retailer data is ready for production.

2.7.4. Process Output

- Revision of the flag setting & KPIs –
 1. Remove 'NEW Set Up' flag & 'Follow History cross coding' flag at Processing Group Configuration screen - which is ticked during the onboarding phase.
 2. Check the auto coding Parameters if the % similarity needs to be revised (if country has set up the threshold towards lower side to get the maximum auto coding for the back data)
 3. Predictive Module is refreshed.
 4. Analyze the key metrics as per country practice for BAU retailers.

2.7.5. Outcome of the Process

- Maintenance & inclusion of this retailer in the BAU KPIs/Compliance like other BAU retailers.

2.7.6. Process Map or Detailed process document.

- [NIMS Compliance Maintenance](#)
- [Process Group_Sets Configuration](#)
- [OGRDS Configuration - Predictive Model](#)

3. Process Metrics – Reports & KPIs

3.1 Reports – Countries can use the below mentioned reports for Autocoding %, Volume tracking, Item coding KPIs, Utilization, productivity tracking.

1. **RR23 : Source Load and Auto-Coding Breakdown** - Number of external codes that were autocoded by each of the autocoding functionalities, the number of exceptions received post autocoding by code types for the given retailer.
2. **RR81: New Nielsen Item Details by Country** – Outputs new Nielsen items created by country during a specific time.
3. **RR84: New/Changed Local CPV by Country** – Outputs new/changed local CPV by country during a specific time.
4. **RR167 : Coder Utilization Report** – Helps to identify activities and time spent by Country and by Users with item coder, cross coder, item & cross coder assigned Functions.
5. **RR131: Productivity Report** – enables user to export productivity report by country either Global or Local, for multiple profile groups & user profiles, daily/weekly for a specific period.

3.2 KPIs

This relates to compliance metrics available for this topic which the country needs to review monthly along with the Governance team.

1. Currently the KPIs reported as a part of monthly compliance excludes retailers flagged as NEW SETUP. But apart from Monthly compliance tracking, Governance team tracks whether the retailers are turned to BAU within 3 months of PG creation and the communication for the same is sent to countries applicable.
2. Sales Value Coverage for back data – (Will be a part of NIMS from Q3/Q4'24)
 - Till we have the back data coverage measurement function in NIMS 2.0 à RD Team can request the sales value for all the external codes and all periods for the given retailer.
 - Flag EANs as Coded / Uncoded / Outmarket and arrive at the coding coverage.
 - If the Coded % is too low, RD team needs to identify the EANs which are uncoded and sort them by highest value and try to code them as per the country coding flow.
 - Example attached: [Coverage Example](#)
3. With the fact that the back data coding for the retailer is expected to be completed within 5 weeks (could vary based on country specific scope) and the PG is unflagged as NEW SETUP, it will already be a part of the monthly compliance KPIs. Till then, the above suggested reports should be monitored for at least 3 months till GO Live.

4. Validation

[Validation SOP.docx](#)

- Use the new validation functionality only identify the outliers which need to be validated.
- Any outside of the system validation should be reviewed with Governance team as a part of Standardization.
- Please get in touch with Governance team through query management process

Go to – OGRDS à START à MAPPED

RULE SETS à VALIDATION RULES

TOOLBOX

All validations performed by RD must be:

- Targeted & Focused
- Simple & Easy to Understand
- Following Global Guidelines

There are below mentioned validations available related to item coding.

1. Dictionary Value Validation
2. Consistency Check – Surprisal Score Validation (SSV) (on hold at the moment)
3. Rule Based Item Characteristic Value Coding Validation
4. Key Word-Based Item Characteristic Value Coding Validation
5. Optical Character Recognized (OCR) Images Based Validation

There are below 3 mandatory validations available related to Cross coding, which are activated by Tech team for a country.

1. Multilink within Country – which validates multilink within processing group set which are without misused flag.
2. Cross coding movement – from SI to another SI – without History applied.
3. Cross coding movement – from SI to a higher destination (SGI/PGI/CI/ Uncodeable) – without History applied.

5. Appendix

This table contains list of all documents related to this activity and provides further details to the process mentioned in this document.

Topic	Document	Additional Comment
Item coding Overview	Item Coding Overview	

Item Coding; OWBs, Workspace, Pending Area, Inspector Panel and Related Items	SOP_Item Coding; OWBs, Workspace, Pending Area, Inspector Panel and Related Items	
NIMS & IC-P	SOP_NIMS	
OWB – Preparing browser view	Preparing the Browser view	Check slide 18 & 19
Coding flows	Coding Flow.pptx	
Validation	Validation SOP	
Related Items Window	SOP_Item Coding; OWBs, Workspace, Pending Area, Inspector Panel and Related Items	Check slide 59 onwards
Copy item	SOP_Item Coding; Copy Item	
Proactive Item coding/Pack-In-Hand	SOP_OGRDS Surgery - Manual Exceptions Load	The document is on how to load items in OWB. Once done 'Item coding steps' remain the same as any Standard item coding.
RACs Item coding	SOP_OGRDS Coding - Coding RACs in Char browser	
SKU Item Coding	SKU Backend Process.pptx	If you need more details about SKU item; please check different documents from RD Learning Site

OCI Set up	SOP - NIMS OCI	Check slide 15-18, CR1403
Partial Item Coding	SOP_OGRDS Item Coding _ Partial Items.pptx	Only with limited country and Ecomm source data

6. Glossary This covers the list of key words used in this document – [Glossary Master](#)

7. Contact Us

- In case of any questions

Raise a Dynamics ticket for:

Sub Type 1: RD: OGRDS PnB

Sub Type 2: SOP/Training

Sub Type 3: Cross & Characteristic Coding & Security

Sub Type 4: All Questions

This will be assigned to GBS-RD-OGRDS SOP Coding (Queue); so, RD Process Governance team will check the query.

User Level skill Set Metrics for onboarding new user/other activities.

L0	Onboarding	Unable to perform tasks without support	-
L1	Basic Knowledge	Execution only, limited understanding	- Associate is able to operate within one assigned function's platform and conduct BAU task without help. - Associate has limited, high level understanding of the E2E production process flow, knows basic KPIs, able to name the CIP components and share the basic dependencies between them
L2	Intermediate Knowledge	Effective execution & Understanding the process and dependencies	- Associate is able to effectively operate and understand the purpose of the processes within the BAU process flow as well as the dependencies and consequences within the assigned function application - Able to setup simple processes
L3	Expert Knowledge	Full understanding of dependencies, additional entitlements & ability to setup	- Associates has full knowledge of majority of options in his platform - Able to perform non-standard task (e.g. setup) also requiring additional permissions/entitlements - Understand all dependencies between platforms - Able to suggest workarounds or solve problems in case of issues

eDive Reference Data

eDive validations

Reference Data

Objective : 4

Integrity / Layout check 5

Deep Dive module 6

Output Report Validations Breakdown (Starting with Reference Data checks) : 10

19) Null Descriptions 10

20) Description Special Chars 10

32) Valid Barcodes 11

33) Lacs Barcodes 12

34) Invalid Digit Barcodes 12

35) Valid Distinct Barcodes 12

36) Lac Distinct Barcodes 12

37) Invalid Digit Distinct Barcodes 13

38) New Items - Valid Barcodes 13

39) Multiple item-codes for the same description 13

40) Multiple descriptions for the same item-code 13

41) Period consistency of description and code among all stores 14

42) Description similarity vs OGRDS < threshold 14

43) Generic Descriptions 14

1) Total Records 15

2) Displaced Lines 15

3) Duplicated Rows 15

- 4) Unique Stores 15
- 5) Total Records/Store 16
- 6) First Date 16
- 7) Last Date 16
- 8) Total Periods Possible 16
- 9) Qty Available Periods 16
- 10) Null Period 16
- 11) Date Special Chars 16
- 12) Null TicketID 16
- 13) Inconsistent transactions 17
- 14) Possible duplicate Ticked Id's 17
- 15) Total Distinct Tickets 17
- 16) Total distinct tickets/store (avg) 17
- 17) Total Distinct Items 17
- 18) Total Distinct Items/Store (avg) 17
- 21) Null Sales unit 17
- 22) Non-Numeric Sales Unit 17
- 23) Negative Sales Unit 18
- 24) Null Total Sales 18
- 25) Non-Numeric Total Sales 18
- 26) Negative Sales 18
- 27) Null Price 18
- 28) Non-Numeric Price 18
- 29) Negative Price 18

30) Total sales by store and period	18
31) Missing days for each store	18
44) Unmatching prices: price deviations (high and low)	19
45) Unmatching prices: prices equal or less than threshold	19
46) Unmatching prices: Multipack x Single pack validation	19
47) Unmatching prices: different items and price	19
48) Prices Between Stores	19
49) Price validations for LAC categories - TTR using prediction for LACs	20
50) Outlier Items	20
51) Items perishables (reports) - bulk products (EAN + LAC)	20
52) Sales value by Category (OGRDS) - total level	20
53) Sales value by Category (OGRDS) - store level	20

Objective :

This document explains in detail the scope, objective and application of the **eDive tool** for the reference of RD teams, to analyse the output of **tool** assessment and based on the analysis provide detailed feedback to the eDD team.

[eDIVE Tool.pptx](#)

Overall, the **eDive tool** provides :

- Agility in validating data received.
- Flexibility to execute all kinds of NIQ data expected (TTR, Retailer, eTailers) in various levels (tlog, daily, weekly, monthly);
- Friendly and intuitive output to discuss with supplier and share with Operations.
- Identify and anticipate suspicious cases and practices to discuss internally and externally with our collaborators.
- Covers validations not contained today in AcidTest (RAP for retailers) and Scorecard Assessment Tool (for Vendors).

eDive brings to the user two different perspectives related to the data:

Data integrity:

- Check the compliance of all fields
- Identify the number of stores received
- Identify the period received and possible gaps
- Valid/Invalid barcodes check - quantity and % sales value
- Workload items to code (EAN,LAC,Invalid,New item)
- Special characters in description data

Data Quality:

- Validations in store, item and sales level;
- Description quality;
- Description comparison against OGRDS;
- Same description for same barcode (vice versa)
- Price validations (multipack,, single items, etc)
- Store sales trend;
- Bad practices of product catalog;
- Top sales for category and items

Integrity / Layout check

Full check in whole in a data received to validate if it is according to the data expected and required, as example: check the compliance of all fields, identify inconsistencies in numeric fields, and check the number of stores received and periods received and possible gaps.

More than format and layout checks, theses metrics are important to understand and sizing the retailer in terms of sales, number of items and records.

Bellow you can find the list of validation and the current definition for each one:

FIELD	ID	
ALL	<i>1</i>	
	<i>2</i>	Displaced lines
	<i>3</i>	Duplicated Rows
STORE	<i>4</i>	
	<i>5</i>	Total Records/Store
PERIOD	<i>6</i>	
	<i>7</i>	Last Date
	<i>8</i>	Total Periods Possible
	<i>9</i>	Qty Available Periods
	<i>10</i>	Null Periods
	<i>11</i>	Date Special Chars
TICKET	<i>12</i>	
	<i>13</i>	Inconsistent Transactions
	<i>14</i>	Possible duplicated ticketids
	<i>15</i>	Total Distinct Tickets
	<i>16</i>	Total distinct tickets/store (avg)
BARCODE	<i>17</i>	
	<i>18</i>	Total Distinct Items/Store (avg)
DESCRIPTION	<i>19</i>	
	<i>20</i>	Description Special Chars

SALES UNIT	21	
	22	Non Numeric Sales Unit
	23	Negative Sales Unit
SALES VALUE	24	
	25	Non Numeric Sales Value
	26	Negative Sales Value
PRICE	27	
	28	Non Numeric Price
	29	Negative Prices

VALIDATION	DEFINITION	
Total Records	Lists the total amount of records, be it individual barcodes composing all the tickets in a tlog file, the records in an aggregated file, or count of rows present in TTR/RMS/eRMS/eBit according to their specific Layout.	
???		
Checking all the mandatory fields, counts the amount of “identical rows” and outputs them in the respective sample. Currently in progress for differentiating for aggregated data, since with the current mandatory fields we can have false-positive indications for this validation.		

Unique Stores	Count of unique establishment identifiers for the given file(s).	
Records per store (mean).		
First Date	First day of the period identified in the given file(s), or first week/iso value if aggregated.	
Last day of the period identified in the given file(s), or first week/iso value if aggregated.		
Total possible days in a given period, as in the sum of periods/days in between the earliest and latest record according to the date column value.		
Quantity of days within the given period that have records.		
Blank or Null values found in the Periods/date column, given total number of records.		
Quantity of special chars identified in the date/period column, given a specific dictionary of characters that will raise this flag (might vary per country).		
Null TicketID	Blank or Null values found in the ticket identifier column, given total number of records.	

Check if "total ticket price" differs from the sum of items that composes the ticket, and appends the possible occurrences in the final report output. This validation doesn't take discounts into account, if possibly the store doesn't automatically discount the promotion price from ticket value.		
Validates the uniqueness aspect of the ticket ID's, flagging when stores may have the same ID's for different transactions timestamps.		
If the files being analyzed are t-log data, counts the amount of distinct tickets present in the total data.		
Given information from validations 11) and 3), gets an average of records per store.		
Total Distinct Items	Given the total data, gets the counting of unique items in relation to each store and given description, getting a "unique" count of items through the analyzed files.	
Given information from validation 9), gets an average of items per store.		
Null Descriptions	Checks for null values in the field DESCRIPTION	
Checks for special characters that are not properly read/understood given configuration and expected values for the field DESCRIPTION		

Null Sales unit		Checks for null values in the field SALES UNIT
Checks for non-numeric values in the field SALES UNIT		
Checks for negative numeric values in the field SALES UNIT		
Null Sales value		Checks for null values in the field TOTAL SALES
Checks for non-numeric values in the field TOTAL SALES		
Checks for negative numeric values in the field TOTAL SALES		
Null Price		Checks for null values in the field ITEM PRICE or TOTAL SALE

Checks for non-numeric values in the field ITEM PRICE or TOTAL SALES	
Checks for negative numeric values in the field ITEM PRICE	

Deep Dive module

Validations in detail for store, item, descriptions, and price level in terms of analysis. Here starts the comparisons between Sirval and OGRDS informations as a parameters to validate the supplier data:

FIELD	ID	
STORE	30	
	31	Missing days for each store
BARCODE	32	
	33	Lacs Barcodes
	34	Invalid Digit Barcodes
	35	Valid Distinct Barcodes
	36	Lac Distinct Barcodes
	37	Invalid Distinct Barcodes
	38	new items
DESCRIPTION	39	

	40	Multiple descriptions for the same item-code
	41	Period consistency of description and code among all stores
	42	Description similarity vs OGRDS < 0.1
	43	Generic Descriptions
PRICE	44	
	45	Unmatching prices: prices equal or less than \$0.01
	46	Unmatching prices: Multipack x Singlepack validation - 80.0%
	47	Unmatching prices: different items and price - 80.0%
	48	Prices Between Stores
	49	Price validations for LAC categories - TTR using prediction for LACs
	50	Outlier Items
	51	Variable Weight (EAN)
	52	Variable Weight (LAC)
	53	
SALES VALUE	54	Sales value by Category (OGRDS) - store level
	55	Top Sold Items
	56	Top Sold Categories
	57	
PRICE	58	Pack Descriptions Unmatch

VALIDATION

Total sales by store and period

The stores that for the total possible days (9), we read any day/week with no transactions.

Valid Barcodes

The function identifies LACs based on the length of the barcode, if its length is not valid (7,8,11,12,13,14) then it is considered as LAC.

If the barcode has a valid length, the function validates the last digit of barcode based on the algorithm of last digit calculation:
<https://www.gs1.org/services/how-calculate-check-digit-manually>

If the barcode has a valid length, the function validates the last digit of barcode based on the algorithm of last digit calculation:
<https://www.gs1.org/services/how-calculate-check-digit-manually>

The function identifies LACs based on the length of the barcode, if its length is not valid (7,8,11,12,13,14) then it is considered as LAC.

If the barcode has a valid length, the function validates the last digit of barcode based on the algorithm of last digit calculation:
<https://www.gs1.org/services/how-calculate-check-digit-manually>

Using an OGRDS Cloud Extraction, gets the total barcodes for the country and merge with the data being analyzed, if any barcode read from the files being analyzed is missing on the OGRDS input, counts as a New Item.

Multiple item-codes for the same description

Cases of various distinct descriptions for the same barcode.

Cases of various distinct descriptions for the same barcode by store and date.

Compares received description and measures a similarity coefficient between the OGRDS EAN corresponding item. Given the threshold input by the user for this matching, poor quality or way different descriptions will be flagged for future analysis/understanding of items.

Lists occurrences of generic descriptions among the raw data validated, flagging descriptions that are too short (below 5 characters or if the description contains any words of the list:
<https://nielsenenterprise.sharepoint.com/:x:/s/eDiveTool/EYuGQBGd-2FMr-yuS9hhVOIB19N-LThUa6RGUzzlOssYbQ?e=iAmrNn>).

Unmatching prices: price deviations (high and low) - 80.0%

Possible occurrences of unlisted promotions
+ Inconsistent prices of $\leq$ user threshold price.

Occurrence results of the analysis of the difference between received data prices and SIRVAL ones, taking into account description similarity and a possible match between a rounded division factor, to understand if maybe an item was supposed to be a 6, 12, 24, (...) pack and either it was sent incorrectly, or we might have different items/wrong information inside the database.

Using description similarity values and the “Unmatching prices” validations above, flags items that could be having the same barcode despite being completely different.

For all the barcodes x stores, gets the mode value for a barcode and validates all stores that negotiated it, flagging stores in which that specific barcode deviated from the mode.

Takes all barcodes that were identified as LAC's and lists description, sales info and store ID's for price analysis.

Flags items as outliers according to the following statistic definition, looking at median prices for an item and checking if the one that's being analyzed is within the interquartile range.

Flags and reports information by barcodes with items that are identified as bulk items, with common indicators from description (Country dependent) and that have as common sales unit values float values.

Flags and reports information by barcodes with items that are identified as bulk items, with common indicators from description (Country dependent) and that have as common sales unit values float values.

Sales value by Category (OGRDS) - total level

Outputs sales by category, cross matching sales value of each item through an aggregation of stores with its corresponding category in OGRDS, if found (matching by barcode)

Identical Prices by store

DEFINITION

The average sales by store, considering the unique store ID's and sales value.

If the barcode has a valid length, the function validates the last digit of barcode based on the algorithm of last digit calculation:
<https://www.gs1.org/services/how-calculate-check-digit-manually>

Cases of various distinct barcodes for a same description.

Verifies for possible outlier price values, taking into account a pre-defined threshold, appending flagged values to a sample on the final report.

Current fixed threshold is outlier if:

- Higher: Received price is $> 1 + \text{user threshold \% the price we have for the item in SIRVAL}$.

- Lower: Received price is $< 1 - \text{user threshold \% the price we have for the item in SIRVAL}$

For the total files analyzed, outputs sales by category, cross matching sales value of each item with its corresponding category in OGRDS, if found (matching by barcode)

Store level analysis / functionality: TTR stores have independent practices and product management between stores. PreRAP has a functionality to measure the % of total stores and impacted based the occurrences/issues for prices and descriptions items. It brings the correct view of vendor or store vs your total. It is like a score of quality for each store.

- establishment_identifier = store id
- total_unique_barcode = distinct items
- total_records = total records (lines)
- total_sales = total of sales value
- description_score_mean = average of description similarity vs OGRDS description
- unmatching_pces_barcode = distinct items raised out of prices parameters
- unmatching_pces_records = records raised out of prices parameters
- unmatching_pces_sales = importance of sales in items raised out of prices parameters
- lac_barcode_total = records with LAC (Locally Assigned Code) barcode
- lac_unique_barcode = distinct LAC items
- invalid_barcode_total = items/records failed in final digit verification
- invalid_unique_barcode = distinct items failed in final digit verification
- valid_barcode_total = valid barcodes in total records
- valid_unique_barcode = valid distinct barcodes in total
- %_unmatching_prices_records = % of occurrences in prices vs the total
- %_unmatching_prices_sales = % of importance in sales in items raised in price validations in a total sale
- %_invalid_unique_barcode = % of invalid barcodes vs the total

Output Report Validations Breakdown (Starting with Reference Data checks) :

Out of all the validations listed above, there are specific outputs that **Reference data** teams need to validate and provide their inputs to the eDD team for further decision making. To start with the list please refer to Check#19, 20, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 43 for more details.

The rest of the outputs are also explained post the RD checks below.

19) Null Descriptions

Check for null values in the field *DESCRIPTION*. EAN/LAC where the description provided by the retailer is blank.

If reported as :

EAN : Already existing in OGRDS with current destination as SI/CI/PGL + not multilinked à they will get autocoded.

EAN (New) / LAC and EIM created if any NULL desc send to U à Autocode.

EAN (New) / LAC (New or Changed) and no EIM created à sent to OWB.


Coders will have to put them to Uncodeable irrespective of the sales value.

If the number is considerable, RD teams should call out to the eDD team while providing feedback as these items will not be coded to any destination and will be required to be parked to Uncodeable resulting in loss of coverage.

20) Description Special Chars

Checks for special characters that are not properly read/understood given configuration and expected values for the field DESCRIPTION.

Country can add these special characters as exclusion under Autocode Change LAC

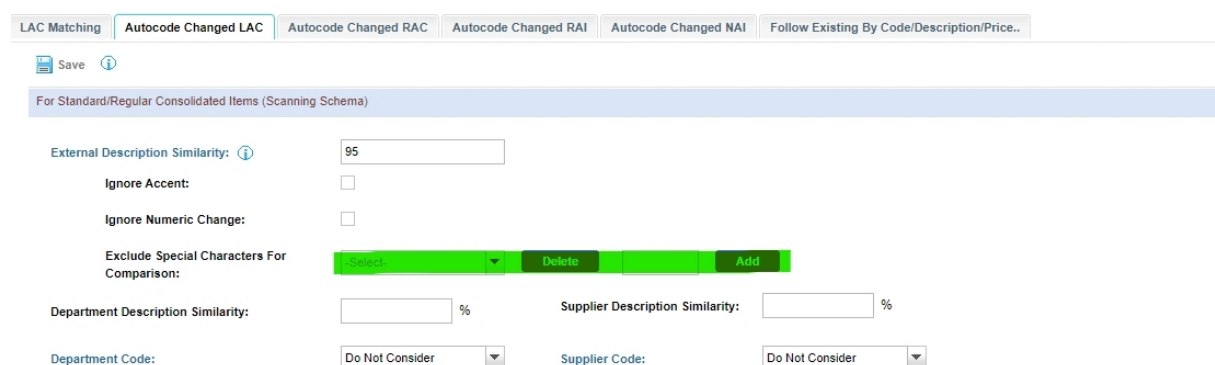

Change LAC and Extended Changed LAC configured with EXCLUSION of Special characters while generating the %match description threshold : High chances of description with special characters will be AUTOCODED.

But still if there are more special characters reported, countries should be vigilant and add the same in the exclusion list.


32) Valid Barcodes

The count of barcodes that matched expected length (8, 11, 12, 13 & 14) and have a valid check digit.

The logic behind

If the barcode has a valid length, the function validates the last digit of barcode based on the algorithm of last digit calculation:

<https://www.gs1.org/services/how-calculate-check-digit-manually>.

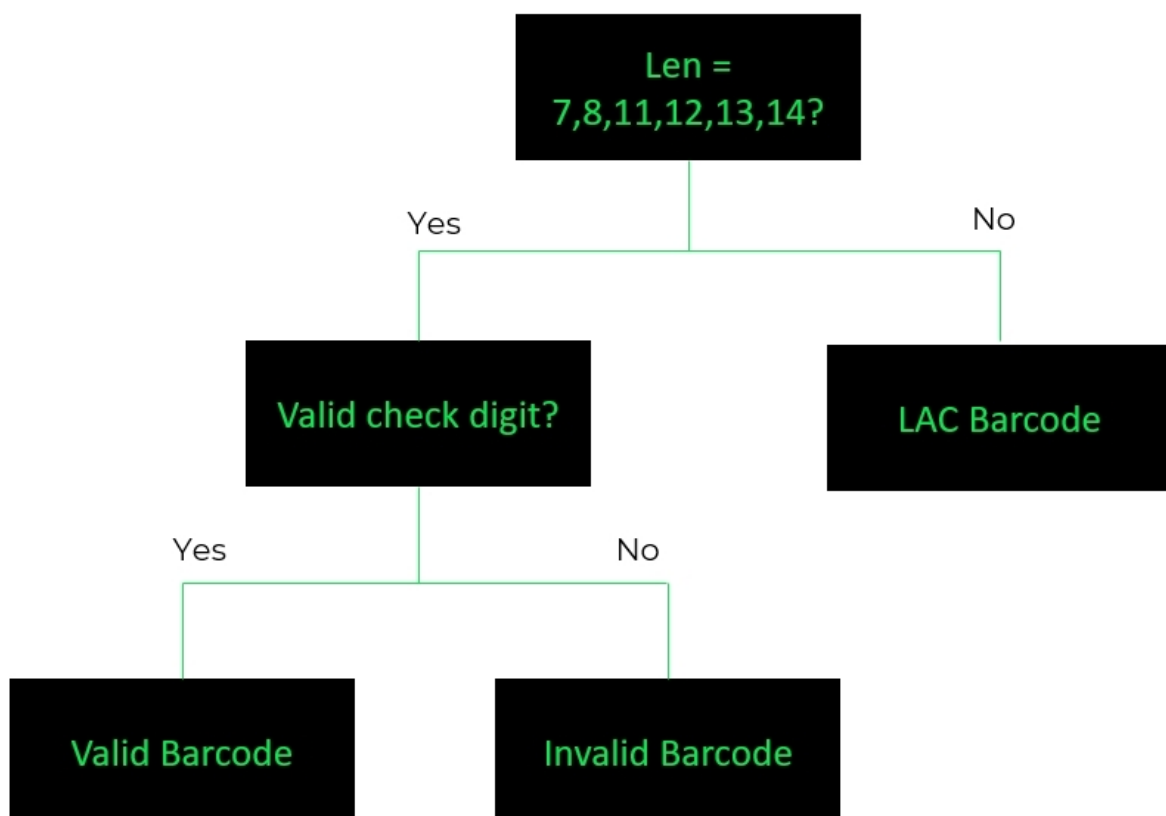

The eDive tool will also have an added logic of matching the OGRDS Match expressions as available in OGRDS, which identifies the EANs / UPCs / LACs, which will give more accurate information on the EAN/LAC % for countries to estimate the workload accordingly.

EANs will follow standard autocoding steps, so more the better.

33) Lacs Barcodes

Barcodes with unexpected/short length.

The function identifies LACs based on the length of the barcode, if its length is not valid (7,8,11,12,13,14) then it is considered as LAC.

Also if it is not matching with the OGRDS Match Expressions it will be classified as LAC.

For LACs, the primary source of information for coding will be item description, so if the descriptions reported under LACs are not enough, this should be raised to the eDD Team. Incomplete descriptions for LACs will impact the coding and hence the coding coverage for the retailer.

34) Invalid Digit Barcodes

The count of barcodes that matched the expected length, but don't have a valid check digit as validated in check#32.

The country team should check if the barcodes provided by the retailer are valid barcodes or just that it is missing on the check digit. If so, to be raised to the retailer in alignment with eDD Team, as it will be loaded as a LAC code and will impact the onboarding initial cost.

35) Valid Distinct Barcodes

From validation 32, given the total data, gets the counting of unique items (EANs) in the analyzed files. Unique barcodes across all stores of the retailer.

36) Lac Distinct Barcodes

From validation 33, shows the count of unique LAC barcodes.

LAC Distinct should be by LAC Code + Retailer Description, rather than only LAC External code.

37) Invalid Digit Distinct Barcodes

From the validation 34, shows the unique count for these occurrences.

38) New Items – Valid Distinct Barcodes

Using an OGRDS Cloud Extraction, gets the total barcodes for the country and merge with the data being analyzed, if any unique barcode read from the files being analyzed is missing on the OGRDS input, counts as a *New Item*.

Possible list of unique EAN/UPC (algo codes) items which will be reported as New / NFC and if IN MARKET and prioritized will be candidate for new items.

39) Multiple item-codes for the same description

Cases of various distinct barcodes for the same description. Examples below :

item_description	barcode_column
ACE CHOCO MUNCH 30gx10s	4800092110474
ACE CHOCO MUNCH 30gx10s	4800092113499

If there are high instances, check randomly if there are genuine cases of barcode change and the product remaining same or if there is a misuse of barcode by the retailer.

40) Multiple descriptions for the same item-code

Cases of various distinct descriptions for the same barcode. Examples below :

barcode_column	item_description
0300055556201	CALRATE ADVANCE TAB
0300055556201	CALRATE ADVANCE TAB 100'

Here there could be chances that the product description is different for the same barcode and could trigger cases of misused barcode across the retailer. Check the output thoroughly to ensure the retailer is not having many cases of misused barcode and description.

41) Period consistency of description and code among all stores

Cases of various distinct descriptions for the same barcode by store and date.

Mainly to identify the description stability and highlight instances - if for the same barcode the descriptions vary by store or across months and so on. This could be cases where the barcode is misused, so the country should highlight this while providing their feedback.

Example :

barcode_column	store_id	item_description
4806506319631	BGBCBCNA02	LAMPEIN BUDGET PACK LARGE 12X16'
4806506319631	BGBCBCNA02	LAMPEIN BUDGET PACK MEDIUM 12X16'
4806506319631	BGBCBCNA06	LAMPEIN BUDGET PACK LARGE 12X16'
4806506319631	BGBCBCNA06	LAMPEIN BUDGET PACK MEDIUM 12X16'
4806506319631	BGBCBCNA07	LAMPEIN BUDGET PACK LARGE 12X16'
4806506319631	BGBCBCNA07	LAMPEIN BUDGET PACK MEDIUM 12X16'
4806506319631	BGBCBCNA10	LAMPEIN BUDGET PACK LARGE 12X16'
4806506319631	BGBCBCNA10	LAMPEIN BUDGET PACK MEDIUM 12X16'

barcode_column	store_id	item_description
4800888150202	BGBCBCOR01	PONDS SERUM DAY CREAM 7G
4800888150202	BGBCBCOR01	PONSTAN 500MG TAB

42) Description similarity vs OGRDS < threshold

Compares received description and measures a similarity coefficient between the OGRDS EAN corresponding item. Given the threshold inputted by the user for this matching, poor quality or way different descriptions will be flagged for future analysis/understanding of items.

43) Generic Descriptions

Lists occurrences of generic descriptions among the raw data validated, flagging descriptions that are too short (below 5 characters or if the description contains any words of the list:

<https://nielsenenterprise.sharepoint.com/:x/s/eDiveTool/EYuGQBGd-2FMr-yuS9hhVOIB19N-LThUa6RGUzzlOssYbQ?e=iAmrNn>

store_id	barcode_column	item_description	date_column
BGCHZONE02	599	KOI	2023-12-07
BGCHZONE02	599	KOI	2023-12-08
BGCHZONE02	599	KOI	2023-12-09
BGCHZONE02	599	KOI	2023-12-10
BGCJMP01	1001592	KOYO	2023-12-07
BGCJMP01	ven	VENUS	2023-12-04
BGCJMP01	ven	VENUS	2023-12-05
BGCJMP01	ven	VENUS	2023-12-08
BGCJRBB03	007632		2023-12-06
BGCMLS02	000058	10	2023-12-03
BGCMLS02	000058	10	2023-12-05
BGCMLS02	000058	10	2023-12-09

Output for other checks :

1) Total Records

Reads the files being analyzed for a counting of records in the current data frame, *which is equivalent to the total data*, and append the count information to the final report.

2) Displaced Lines

Checks for displaced lines within the files being analyzed, counting the occurrences of lines that are not correctly show in the raw data.

3) Duplicated Rows

Verify duplicate rows in the file data frame, currently functional for t-log data, given that some aggregate data for specific stores' method of registering sales can cause ambiguity in this classification.

4) Unique Stores

Given the total data and records count, evaluates the number of unique stores, records per store for tendency understanding.

5) Total Records/Store

Given information from validations 1) and 3), gets an average of records per store.

6) First Date

Looking at the period of transactions in the files being analyzed, gets the minimum date values to understand the total possible period of the current set of data.

7) Last Date

Looking at the period of transactions in the files being analyzed, gets the maximum date values to understand the total possible period of the current set of data.

8) Total Periods Possible

Given minimum (6) and maximum (7) date for the analysis, calculates the total period in the given data.

9) Qty Available Periods

For the total periods possible (8), given the type of data (*t-log/weekly aggregate*), informs the days, or weeks, with transactions. This validation is flexible with the tlog/aggregate data, correctly outputting for the type of periods selected in the configuration, whether it's the amount of the days in the week present in the file being analyzed or the weeks and etc.

10) Null Period

Checks for null values in the field *DATE*

11) Date Special Chars

Checks for special characters that are not properly read/understood given configuration and expected values for the field *DATE*

12) Null TicketID

When running for tlog data, checks for null values in the field *TICKET ID*

13) Inconsistent transactions

Check if "total ticket price" differs from the sum of items that composes the ticket, and appends the possible occurrences in the final report output. *This validation doesn't take discounts into account*, if possibly the store doesn't automatically discount the promotion price from ticket value.

14) Possible duplicate Ticked Id's

Validates the uniqueness aspect of the ticket ID's, flagging when stores may have the same ID's for different transactions timestamps.

15) Total Distinct Tickets

If the files being analyzed are *t-log* data, counts the amount of distinct tickets present in the total data.

16) Total distinct tickets/store (avg)

Given information from validations 11) and 3), gets an average of records per store.

17) Total Distinct Items

Given the total data, gets the counting of unique items in relation to each store and given description, getting a “unique” count of items through the analyzed files.

18) Total Distinct Items/Store (avg)

Given information from validation 9), gets an average of items per store.

21) Null Sales unit

Checks for null values in the field *SALES UNIT*

22) Non-Numeric Sales Unit

Checks for non-numeric values in the field *SALES UNIT*

23) Negative Sales Unit

Checks for negative numeric values in the field *SALES UNIT*

24) Null Total Sales

Checks for null values in the field *TOTAL SALES*

25) Non-Numeric Total Sales

Checks for non-numeric values in the field *TOTAL SALES*

26) Negative Sales

Checks for negative numeric values in the field *TOTAL SALES*

27) Null Price

Checks for null values in the field *ITEM PRICE or TOTAL SALE*

28) Non-Numeric Price

Checks for non-numeric values in the field *ITEM PRICE or TOTAL SALES*

29) Negative Price

Checks for negative numeric values in the field *ITEM PRICE*

30) Total sales by store and period

The average sales by store, considering the unique store ID's and sales value.

31) Missing days for each store

The stores that for the total possible days (9), we read any day/week with no transactions.

44) Unmatching prices: price deviations (high and low)

Verifies for possible outlier price values, taking into account a pre-defined threshold, appending flagged values to a sample on the final report.

Current fixed threshold is outlier if:

-Higher: Received price is $> 1 + \text{user threshold \% the price we have for the item in SIRVAL}$.

-Lower: Received price is $< 1 - \text{user threshold \% the price we have for the item in SIRVAL}$

45) Unmatching prices: prices equal or less than threshold

Possible occurrences of unlisted promotions
+ Inconsistent prices of $\leq \text{user threshold price}$.

46) Unmatching prices: Multipack x Single pack validation

Occurrence results of the analysis of the difference between received data prices and SIRVAL ones, taking into account description similarity and a possible match between a rounded division factor, to understand if maybe an item was supposed to be a 6, 12, 24, (...) pack and either it was sent incorrectly, or we might have different items/wrong information inside the database.

47) Unmatching prices: different items and price

Using description similarity values and the "Unmatching prices" validations above, flags items that could be having the same barcode despite being completely different.

48) Prices Between Stores

For all the barcodes x stores, gets the mode value for a barcode and validates all stores that negotiated it, flagging stores in which that specific barcode deviated from the mode.

49) Price validations for LAC categories - TTR using prediction for LACs

Takes all barcodes that were identified as LAC's and lists description, sales info and store ID's for price analysis.

50) Outlier Items

Flags items as outliers according to the following statistic definition, looking at median prices for an item and checking if the one that's being analyzed is within the interquartile range.

51) Items perishables (reports) - bulk products (EAN + LAC)

Flags and reports information by barcodes with items that are identified as bulk items, with common indicators from description (Country dependent) and that have as common sales unit values float values.

52) Sales value by Category (OGRDS) - total level

For the total files analyzed, outputs sales by category, cross matching sales value of each item with its corresponding category in OGRDS, if found (*matching by barcode*)

Summary	
local_category	total_sales_sum
ABSORVENTES	5986,07
ACAI	401,39
ACUCAR	5028,64
AGUA DE COCO	2201,38
AGUA MINERAL	6765,8
AGUA SANITARIA	4924,31
AGUARDENTE DE CANA	10136,69
ALCOOL	1935,93
ALGODAO	1117,69
ALIMENTO P/ CAES	80198,37

53) Sales value by Category (OGRDS) - store level

Outputs sales by category, cross matching sales value of each item through an aggregation of stores with its corresponding category in OGRDS, if found (matching by barcode)

store_id	local_category	total_sales_sum	sales_unit_sum	distinct_items
1003410	ABSORVENTES	47,05	7	5
1003410	ALGODAO	41,45	5	5
1003410	ANTIESPASMÓDICOS	35,1	3	2
1003410	ANTISSEPTICOS PARA MAOS	7,5	1	1
1003410	AZEITE	36,99	3	3
1003410	BRONZEADORES	41,9	1	1
1003410	COLAS	2	1	1
1003410	DEPILATORIOS	197,69	10	10
1003410	DESODORANTES	340,46	29	29
1003410	ESCOVAS PARA DENTES	27,75	3	3
1003410	ESMAILTES PARA UNHAS	236,99	52	51

Generic Grid

Standard Operating Procedure

Generic Grid Functionality

Process:	Generic Grid
Country / Scope:	All Countries
Last revision Date	31/07/2023
Document Owner	Pooja Tiwari
Document Approver	Global RD Transformation Team

SOP Update History

Change Date	Author(s)	Changes
July 2023		Content updates
July 2024	Pooja	M24.7 release Advanced Search UI Improvements

Overview

This document provides a comprehensive overview of the Generic Grid functionality available in OGRDS browsers. It is intended to guide users in optimizing their use of the grid features, including search capabilities, data export, and customization options. The content is derived from a presentation prepared by Pooja Tiwari, last updated in July 2023.

Target Audience/Objective

Audience

- All users of OGRDS - view and maintain

Objective

- Explain the Generic Grid and its functionalities
- Understand the 'Right Click' menu

Audience

- All users of OGRDS – for viewing and maintaining data.

Objective

- Explain the Generic Grid and its functionalities
- Understand the 'Right Click' menu

Explanation:

The SOP (Standard Operating Procedure) for **Generic Grid functionality** is designed to guide **all users of OGRDS**—a system likely used for data management or governance—on how to **view and maintain** data effectively using the **Generic Grid** interface.

- The **Generic Grid** is a flexible, tabular interface within OGRDS that allows users to interact with data.
- It supports various functionalities such as sorting, filtering, editing, and possibly exporting data.

- A key feature highlighted is the **'Right Click' menu**, which typically provides quick access to context-specific actions like:
 - Adding or removing rows
 - Editing entries
 - Navigating to related records
 - Performing bulk actions

This SOP aims to ensure users are familiar with these tools to maintain data integrity and streamline operations.

Objective

To provide users with information on Generic Grid available in OGRDS Browsers in order to optimize the functionality usage and customise the content that one can view

- Generic Grid
- Search - Simple & Advanced
- Other Generic Grid Options
- 'Right Click' Menu

Objective

To provide users with information on **Generic Grid** available in OGRDS **Browsers** in order to:

- **Optimize functionality usage**
- **Customize the content** that one can view

Key Functional Areas:

1. Generic Grid
2. Search – Simple & Advanced
3. Other Generic Grid Options
4. 'Right Click' Menu

Explanation:

The SOP outlines how users can effectively use the **Generic Grid** within **OGRDS Browsers** to manage and interact with data. The goal is to help users **optimize their experience** and **customize the data view** according to their needs.

- **Generic Grid:** A dynamic interface that displays data in rows and columns, allowing users to interact with datasets.
- **Search – Simple & Advanced:** Enables users to locate specific data quickly. Simple search is for basic queries, while advanced search allows for more refined filtering using multiple criteria.
- **Other Generic Grid Options:** These may include sorting, filtering, exporting, column customization, and layout saving.
- **'Right Click' Menu:** Provides quick access to context-sensitive actions such as editing, deleting, or navigating to related records.

Generic Grid

Generic Grid is group of functionalities that enables user to filter, sort and/or find the content within outstanding work browser. Generic Grid is common to many of the browsers and available for all OGRDS users.

Global Super Group Description	Global Product Group Description	External Item/Predicted PG/CI	Excepts...	Code ...	External Code	Seq	Processing Group	Best Received External Description	Best Ex
BEVERAGES - NON ALCOHO...	DAIRY BASED DRINKS & DRINK...	DAIRY BASED DRINKS & ...	New	LAC	PSCPTLIAAWNP	1	PT MT LIDL CROWDSOURCE	100. LIQUIDO MORANGO [0.66]	
HOME DO IT YOURSELF	HARDWARE/TOOLS/ACCESSORI...	HARDWARE/TOOLS/ACCE...	New	LAC	PSCPTLIAAWUD	1	PT MT LIDL CROWDSOURCE	3 M FITA ADESIVA PRETO '039046...	
FOOD - AMBIENT	DAIRY/MILK/CREAM/MODIFIERS ...	DAIRY/MILK/CREAM/MODI...	New	LAC	PSCPTLIAAWNQ	1	PT MT LIDL CROWDSOURCE	AGROS LEITE MEIO GOR [0.80]	
FOOD - PERISHABLE	CHEESE - FRESH FIXED WEIGHT	CHEESE - FRESH FIXED ...	New	LAC	PSCPTLIAAWUG	1	PT MT LIDL CROWDSOURCE	AGROS QUEIJO FLAMENGO FATI...	
BEVERAGES - NON ALCOHO...	WATER	WATER	New	LAC	PSCPTLIAAWUH	1	PT MT LIDL CROWDSOURCE	AGUA [0.55]	
BEVERAGES - NON ALCOHO...	WATER	WATER	New	LAC	PSCPTLIAAWUJ	1	PT MT LIDL CROWDSOURCE	AGUA MINERAL COM CAS [3.49]	
BEVERAGES - NON ALCOHO...	WATER	WATER	New	LAC	PSCPTLIAAWNS	1	PT MT LIDL CROWDSOURCE	AGUA MINERAL COM GAS C 49 X ...	
BEVERAGES - NON ALCOHO...	WATER	WATER	New	LAC	PSCPTLIAAWUK	1	PT MT LIDL CROWDSOURCE	AGUA MINERAL COM GAS HO AL [...]	
HOME CARE	FRESHENERS/DEODORIZERS	FRESHENERS/DEODORIZ...	New	LAC	PSCPTLIAAW...	1	PT MT LIDL CROWDSOURCE	AIRWICK AMB ELEC REC VERAQ [...]	
HOME CARE	HOUSEHOLD CLEANERS	HOUSEHOLD CLEANERS	New	LAC	PSCPTLIAAWUN	1	PT MT LIDL CROWDSOURCE	AJAX LIMPA VIDROS CR [1.97]	
HOME CARE	HOUSEHOLD CLEANERS	HOUSEHOLD CLEANERS	New	LAC	PSCPTLIAAWUO	1	PT MT LIDL CROWDSOURCE	AJAX SPRAY CASA DE B [1.99]	
PET FOOD	DOG FOOD	DOG FOOD	New	LAC	PSCPTLIAAWUS	1	PT MT LIDL CROWDSOURCE	AL HUMIDO CAO FRANG [3.75]	
PET FOOD	CAT FOOD	CAT FOOD	New	LAC	PSCPTLIAAW...	1	PT MT LIDL CROWDSOURCE	AL HUMIDO GATO PATE 0.39' X 3/...	
FOOD - PERISHABLE	VEGETABLES/SALAD VEGETABL...	VEGETABLES/SALAD VEG...	New	LAC	PSCPTLIAAWUQ	1	PT MT LIDL CROWDSOURCE	ALHO [1.49]	
FOOD - PERISHABLE	VEGETABLES/SALAD VEGETABL...	VEGETABLES/SALAD VEG...	New	LAC	PSCPTLIAAWNV	1	PT MT LIDL CROWDSOURCE	ALHO SECO NACIONAL 0.198KGX...	
STATIONERY & PRINTED MA...	PRINTED MATERIALS	PRINTED MATERIALS	New	LAC	PSCPTLIAAWUT	1	PT MT LIDL CROWDSOURCE	ALICATE' ""041995G [4.99]	
FOOD - PERISHABLE	FRUIT/NUTS - FRESH VARIABLE ...	FRUIT/NUTS - FRESH VAR...	New	LAC	PSCPTLIAAW...	1	PT MT LIDL CROWDSOURCE	ALPERCE [0.85]	

Definition:

Generic Grid is a group of functionalities that enables users to:

- Filter
- Sort
- Find content

These actions are performed within the Outstanding Work Browser.

The Generic Grid is a common feature across many browsers and is available to all OGRDS users.

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Filter
- Sort
- Find
- Outstanding Work Browser
- OGRDS
- Common Functionality
- User Access

Explanation:


The **Generic Grid** is a core component of the **OGRDS system**, designed to enhance user interaction with data across various browsers. It provides a standardized interface that allows users to:

- **Filter** data to narrow down results based on specific criteria.
- **Sort** data to organize it in ascending or descending order.
- **Find** specific content quickly within the **Outstanding Work Browser**.

This functionality is **universally accessible** to all users of OGRDS and is implemented across multiple browser interfaces, ensuring consistency and ease of use.

Generic Grid

Main functions are –

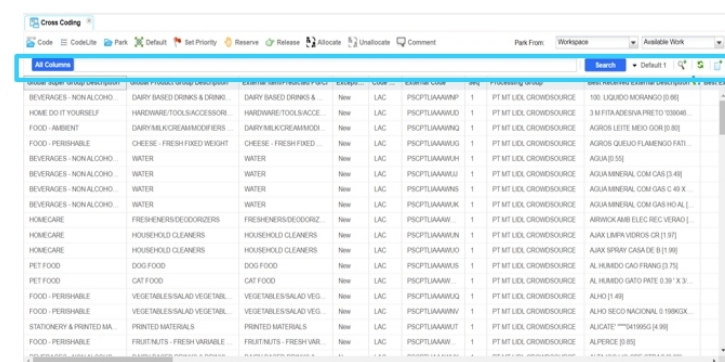

The screenshot displays the 'Generic Grid' interface. At the top, there's a navigation bar with tabs like 'Code', 'CookLife', 'Park', 'Default', 'Set Priority', 'Reserve', 'Release', 'Allocate', 'Unallocate', and 'Comment'. Below this is a table with multiple columns, including 'Category', 'Code', 'Status', 'Location', 'Date', 'Time', 'Location', 'Date', 'Time', 'Location', 'Date', 'Time'. The table contains various entries related to food and beverages, such as 'BEVERAGES - NONALCOHOLIC', 'FOOD - PERISHABLE', 'HOME CARE', 'PET FOOD', etc. To the right of the table, there are several callout boxes with icons and text:

- Search**: Search within the data displayed in the grid
- Refresh**: Refresh the data
- Advanced Search**: Set view preferences, Save Default view
- More records**: At a time 200 records are displayed; to view more use this function
- Export to**: download the records displayed in .CSV or .XLSX format

Below the table, there's a caption: 'The grid looks like as below' and a small inset showing a search bar with the text 'All Columns' and a 'Search' button.

The image illustrates the **Generic Grid interface** used in OGRDS, highlighting key functionalities that support efficient data handling and customization.

Highlighted Functionalities:

1.  **Search** (*Orange Highlight*)
 - Allows users to search within the data displayed in the grid.
2.  **Refresh** (*Purple Highlight*)
 - Updates the grid to reflect the latest data.
3.  **Advanced Search** (*Red Highlight*)
 - Enables users to:
 - Set view preferences
 - Save default views for future use
4.  **More Records** (*Red Highlight*)
 - Displays up to **200 records at a time**
 - Users can load more records as needed
5.  **Export** (*Blue Highlight*)
 - Allows exporting the displayed records in **.CSV** or **.XLSX** format
6.  **Column Selection**
 - Users can choose which columns to display for a customized view

Explanation:

The **Generic Grid** in OGRDS is a powerful tool designed to help users manage and interact with large datasets efficiently. It provides a **customizable interface** with several key features:


- **Search and Advanced Search** help users locate specific data quickly and tailor their view.
- **Refresh** ensures the data is up-to-date.
- **More Records** functionality supports pagination, allowing users to load additional data beyond the default 200 records.
- **Export** enables users to download data for offline analysis or reporting.
- **Column Selection** allows users to personalize the grid layout based on their needs.

These features collectively enhance usability, data accessibility, and operational efficiency for all OGRDS users.


Search (Simple)

Functionality to quickly search for ...

Codes;
 Enter a String of Numbers
 An exact match will be returned

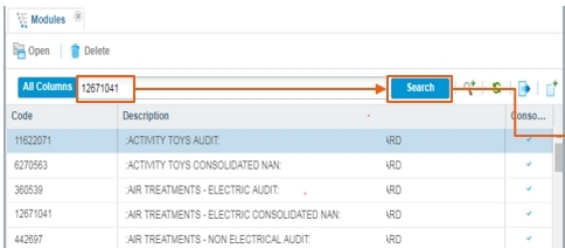

Descriptions;
 A match on a set of alphanumeric
 characters
 Results can be exact or partial match
 No case sensitive

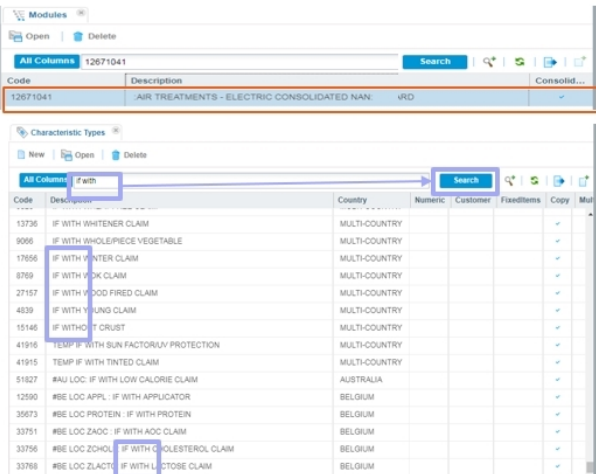

Search (Simple) – Functionality Overview

This section of the SOP focuses on the **Simple Search** feature within the **Generic Grid** interface in OGRDS.

Key Functionalities:

- **Quick Search Capability**
 Enables users to search for items using either:
 - **Codes:** Enter a string of numbers for an **exact match**
 - **Descriptions:** Enter alphanumeric characters for **exact or partial matches** (case-insensitive)
- **Modules Section**
 - Options to **Open** or **Delete** modules
- **All Columns Display**
 - Example shown: Code: 12671041
- **Search Results Displayed**
 - Examples include:
 - 11622071 ACTIVITY TOYS AUDIT :RD
 - 6270653 ACTIVITY TOYS CONSOLIDATED NAN :RD
 - AIR TREATMENTS - ELECTRIC AUDIT :RD
 - AIR TREATMENTS - NON ELECTRICAL AUDIT :RD

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Simple Search
- Code Search
- Description Search
- Exact Match
- Partial Match
- Case Insensitive
- OGRDS
- Modules
- Search Results

Explanation:

The Simple Search functionality in the Generic Grid allows users to **quickly locate records** using either numeric codes or descriptive text. This feature is designed for speed and ease of use:

- **Code Search** is precise and returns only exact matches.
- **Description Search** is flexible, supporting both exact and partial matches without case sensitivity.

This enhances user efficiency by enabling fast access to relevant data across modules, making it a vital part of the Generic Grid SOP.

Simple Search

When click on 'All Columns' ...

The left screenshot shows the Generic Grid interface with the 'All Columns' button highlighted. The right screenshot shows the search results for '12671041'.

Descriptions;
A match on a set of alphanumeric characters
Results can be exact or partial match
No case sensitive

Code	Description	Country	Numeric	Customer	Filepaths	Copy	Mult
11622071	:ACTIVITY TOYS AUDIT:	VRD					
6270563	:ACTIVITY TOYS CONSOLIDATED NAN:	VRD					
360539	:AIR TREATMENTS - ELECTRIC AUDIT:	VRD					
12671041	:AIR TREATMENTS - ELECTRIC CONSOLIDATED NAN:	VRD					
442697	:AIR TREATMENTS - NON ELECTRICAL AUDIT:	VRD					

Code	Description	Country	Numeric	Customer	Filepaths	Copy	Mult
13736	IF WITH WHITENER CLAIM	MULTI-COUNTRY					
9066	IF WITH WHOLEPIECE VEGETABLE	MULTI-COUNTRY					
17656	IF WITH WINTER CLAIM	MULTI-COUNTRY					
8769	IF WITH WOK CLAIM	MULTI-COUNTRY					
27157	IF WITH WOOD FIRED CLAIM	MULTI-COUNTRY					
4339	IF WITH YOUNG CLAIM	MULTI-COUNTRY					
15146	IF WITHOUT CRUST	MULTI-COUNTRY					
41916	TEMP IF WITH SUN FACTOR/UV PROTECTION	MULTI-COUNTRY					
41915	TEMP IF WITH TINTED CLAIM	MULTI-COUNTRY					
51827	#AU LOC IF WITH LOW CALORIE CLAIM	AUSTRALIA					
12590	#BE LOC APPL IF WITH APPLICATOR	BELGIUM					
35673	#BE LOC PROTEIN IF WITH PROTEIN	BELGIUM					
33751	#BE LOC ZAOO IF WITH AOC CLAIM	BELGIUM					
33756	#BE LOC ZHOLU IF WITH CHOLESTEROL CLAIM	BELGIUM					
33768	#BE LOC ZLACTO IF WITH LACTOSE CLAIM	BELGIUM					

Search (Simple) – Functionality Details This section expands on the **Simple Search** feature within the **Generic Grid** in **OGRDS**, focusing on how users interact with data using the "All Columns" option.

Key Functionalities:

All Columns View

Clicking on 'All Columns' displays detailed data including:

- **Code:** 12671041
- **Description:** AIR TREATMENTS - ELECTRIC CONSOLIDATED NAN
- **Currency:** USD

Description Search Behavior

- Accepts alphanumeric characters
- Supports exact or partial matches
- Not case sensitive

Explanation:

The Simple Search in the Generic Grid allows users to explore data across all columns, offering a comprehensive view of each record. When users click 'All Columns', they can see detailed attributes such as code, description, and currency.

The description search is designed to be flexible:

It accepts a wide range of input formats.

It returns results even if only part of the description matches.

It ignores case sensitivity, making it user-friendly and efficient.

This functionality is essential for users who need to quickly locate and analyze specific records within the OGRDS system.

Search (Simple)

Messages

Note: not all columns in a browser are searchable using “simple” search

If no records are found for searchable or unsearchable columns, a user will be presented with info as shown below



Search (Simple) – Messages and Limitations

This section highlights important **user messages and limitations** associated with the **Simple Search** functionality in the **Generic Grid** within OGRDS.

Key Points:

- Searchable Columns Limitation

- Not all columns in a browser are searchable using the Simple Search feature.
- System Message
 - If no records are found—whether the column is searchable or not—the system displays:
 - "No Records Found!"

Explanation:

The **Simple Search** in the Generic Grid is a quick and user-friendly tool, but it has limitations. Users should be aware that:

- Not all columns in the grid support simple search queries.
- When a search yields no results—either due to unsearchable columns or unmatched data—the system provides a clear message: **"No Records Found!"**


This helps users understand the scope of the search and adjust their queries or use **Advanced Search** if needed.

Search (Simple)

Clearing the “Simple” Search

Clear the criteria in the Search box and click on Search (or enter)

System will refresh the data in the grid to show everything

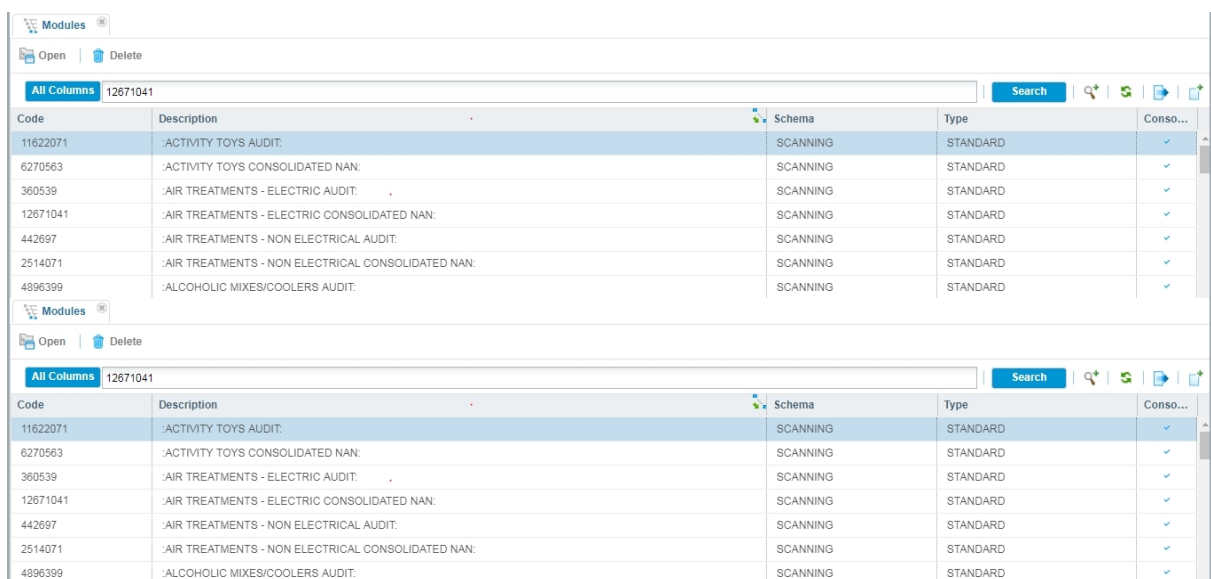

Code	Description	Schema	Type	Conso...
11622071	:ACTIVITY TOYS AUDIT:	SCANNING	STANDARD	✓
6270563	:ACTIVITY TOYS CONSOLIDATED NAN:	SCANNING	STANDARD	✓
360539	:AIR TREATMENTS - ELECTRIC AUDIT:	SCANNING	STANDARD	✓
12671041	:AIR TREATMENTS - ELECTRIC CONSOLIDATED NAN:	SCANNING	STANDARD	✓
442697	:AIR TREATMENTS - NON ELECTRICAL AUDIT:	SCANNING	STANDARD	✓
2514071	:AIR TREATMENTS - NON ELECTRICAL CONSOLIDATED NAN:	SCANNING	STANDARD	✓
4896399	:ALCOHOLIC MIXES/COOLERS AUDIT:	SCANNING	STANDARD	✓

Search (Simple) – Clearing Search Criteria

This section explains how users can **reset** the Simple Search within the Generic Grid in OGRDS.

Key Functionality:

- Clearing the Search
 - Clear the criteria in the search box
 - Click on **Search** or press **Enter**
 - The system will **refresh the data grid** to display **all available records**

Explanation:

The **Simple Search** feature in the Generic Grid allows users to quickly filter data. When users want to **remove filters** and view the full dataset again, they can:


- Clear the text from the search box
- Click the **Search** button or press **Enter**

This action triggers the system to **refresh the grid**, restoring the full view of records. It's a simple yet essential feature for navigating and managing data efficiently.

Advanced Search

Generic Toolbar

The screenshot displays the OGRDS application interface. At the top, there's a browser window with the URL 'ogrdspnb.com/OGRDS/'. Below the browser, the application window has a title bar 'Cross Coding' and a menu bar with options like 'Code', 'Park', 'Default', 'Set Priority', 'Reserve', 'Release', 'Allocate', 'Unallocate', and 'Comment'. A toolbar is visible with icons for these actions. The main area is a data grid with columns: 'Global Super Group D...', 'Global Product Group...', 'External Item/Predicted PG/CI', 'Excepti...', 'Cod...', 'External Code', 'Best Received External Description', and 'Best Existing Extern'. The grid contains multiple rows of data, including items like 'HAIR CARE', 'PET GENERAL ACCESSORIES', and 'BABY CARE'. A search bar is located at the top right of the grid area. At the bottom, there's a status bar showing 'count : 3390' and '1 record(s) selected'. The Windows taskbar is visible at the very bottom, showing the time as 6:32 AM on 7/26/2023.

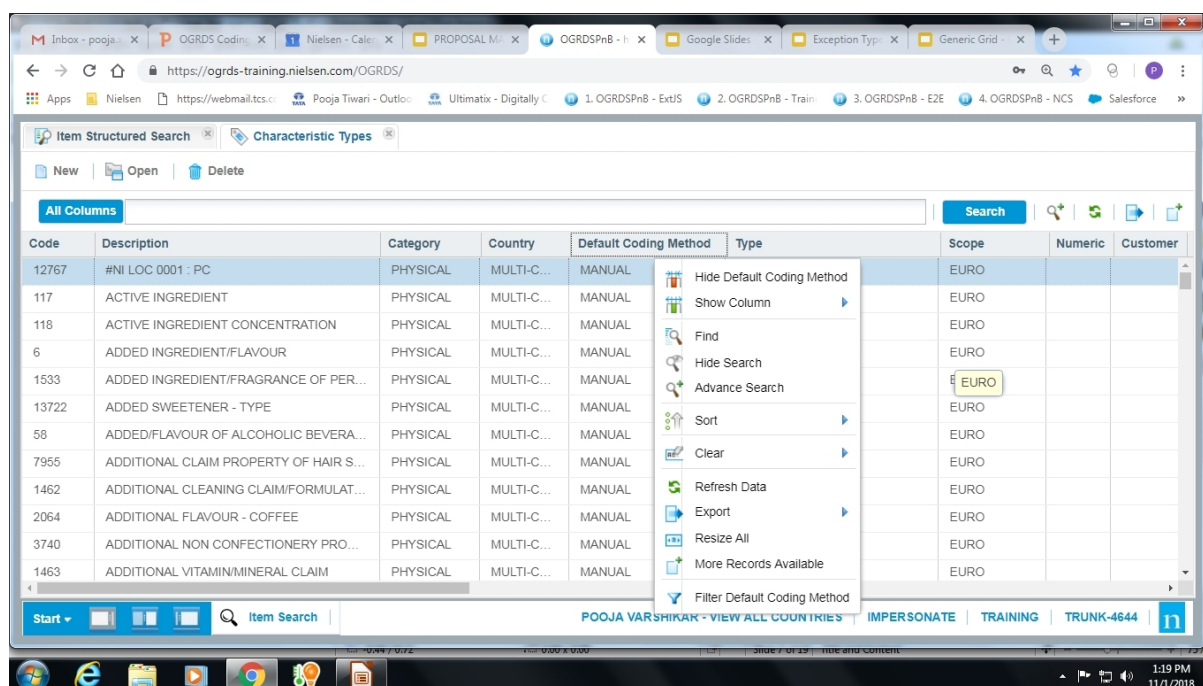

'Right Click Menu' explained later

Advanced Search – Toolbar Functions

This section outlines the **Advanced Search** capabilities and toolbar options available in the **Generic Grid** within OGRDS, as part of the **NIQ Standard Operating Procedure (SOP)**.

Toolbar Options:

- Hide Default Coding Method
- Show Column
- Find
- Hide Search
- Advance Search
- Sort
- Clear
- Refresh Data
- Export
- Resize All
- More Records Available
- Filter Default Coding Method

Note: The 'Right Click Menu' is explained in a later section.

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Advanced Search
- Toolbar
- Find
- Sort
- Clear
- Refresh
- Export
- Resize
- Show/Hide Column
- Filter
- OGRDS
- NIQ SOP

Explanation:

The **Advanced Search** functionality in the Generic Grid provides users with a **comprehensive set of tools** to manage and customize their data view.

These toolbar options allow users to:

- **Filter and sort data** based on specific coding methods or column values
- **Show or hide columns** to tailor the grid layout
- **Find specific entries** using advanced criteria
- **Clear filters and refresh data** to reset the view
- **Export data** for offline use in formats like CSV or XLSX
- **Resize columns** for better readability
- **Access more records** beyond the default display limit

These features are essential for users who need **precision, flexibility, and efficiency** in handling large datasets within OGRDS.


CR1608 - Advanced Search UI Improvements

CR1608 - Advanced Search UI Improvements

Pooja/Bartek

n

Redesign Advanced Search dialog for better utilization of window space and better user experience.

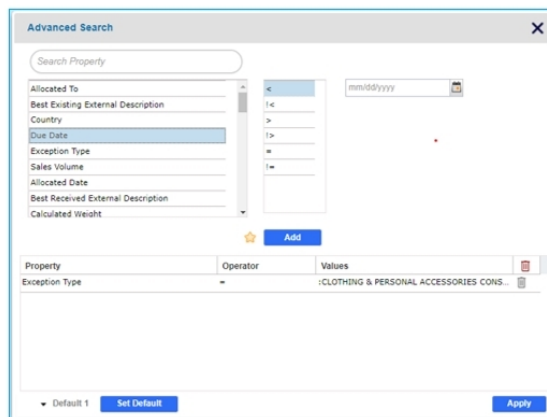

- Added real time, client-side search for Property (as user types in system filters through values)
 - search triggered after second character input
 - System follows sorting rules displaying results
- cache Properties, Operators and Values locally
- add favorites in Property
- display Properties in following order
 - Favorites alphabetically
 - Remaining alphabetically
- change label on 'Ok' button to 'Apply'

Advanced Search UI Improvements – CR1608

This section describes enhancements made to the **Advanced Search** interface in the **Generic Grid** within **OGRDS**, aimed at improving usability and performance.

Key Improvements:

- **Redesigned Advanced Search Dialog**
 - Optimized window space for a better user experience
- **Real-Time Client-Side Search for Property**
 - Search begins after the **second character** is typed
 - System filters values dynamically and follows **sorting rules**
- **Local Caching**
 - **Properties, Operators, and Values** are cached locally for faster access
- **Favorites Feature**
 - Users can **add favorites** in the Property list
 - Properties are displayed in the following order:
 - **Favorites (alphabetically)**
 - **Remaining (alphabetically)**
- **UI Label Update**
 - The '**OK**' button is renamed to '**Apply**' for clarity

Content Summary with Keywords and Explanation

- Generic Grid
- Advanced Search
- UI Improvements

- Real-Time Search
- Client-Side Filtering
- Local Caching
- Favorites
- Property Sorting
- Apply Button

Explanation:


The **Advanced Search** functionality in the Generic Grid has been significantly enhanced under **Change Request CR1608**. These updates aim to:

- Improve **search efficiency** with real-time filtering
- Enhance **performance** through local caching
- Provide a more **intuitive interface** with favorites and better sorting
- Clarify user actions by renaming buttons for better understanding

These improvements make the Generic Grid more responsive and user-friendly, supporting faster and more accurate data exploration.

What is Advanced Search

Ability to specify a structured search within the grid and apply search defaults;

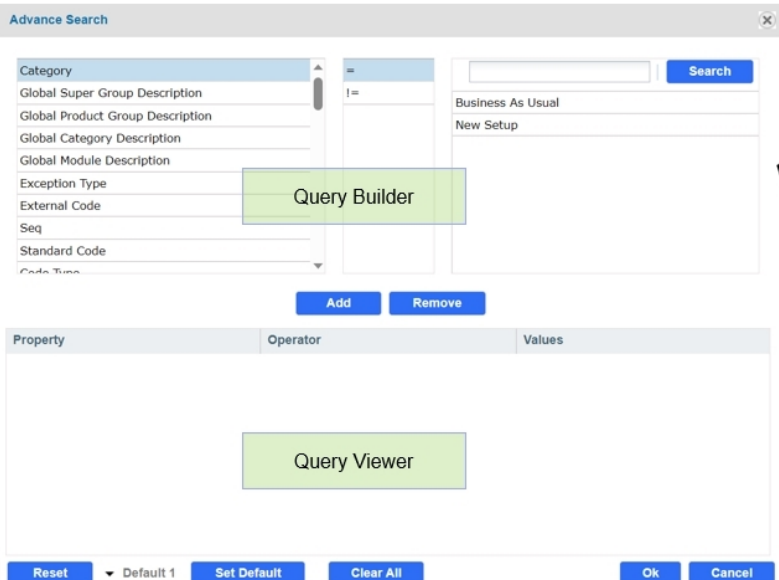

Cannot be used to further refine a set of "Simple" Search results

Advanced Search in the Generic Grid provides users with the ability to perform **structured and detailed searches** within the grid, including the option to **apply search defaults**.

Key Functionalities:

Search Filters Include:

- Category
- Global Super Group Description
- Global Product Group Description
- Global Category Description
- Global Module Description
- Exception Type
- External Code
- Seq
- Standard Code
- Code Type

Query Builder Options:

Advanced Search in the Generic Grid provides users with the ability to perform structured and detailed searches within the grid, including the option to apply search defaults.

Key Functionalities:

Search Filters Include:

- Category
- Global Super Group Description
- Global Product Group Description
- Global Category Description
- Global Module Description
- Exception Type
- External Code
- Seq
- Standard Code
- Code Type

Query Builder Options:

- Business As Usual
- New Setup

Search Controls:

- Search
- Add / Remove
- Query Viewer

- Property / Operator / Values
- Reset / Set Default / Clear All / Ok / Cancel

⚠️Note: Advanced Search cannot be used to further refine results obtained from a Simple Search.

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Advanced Search
- Structured Search
- Query Builder
- Search Filters
- Search Defaults
- Property / Operator / Values
- OGRDS
- Search Controls
- Simple vs Advanced Search

Explanation:

The Advanced Search feature in the Generic Grid allows users to define complex search criteria using multiple filters and logical conditions. It supports:

- Granular filtering across various metadata fields
- Query building for different operational contexts (e.g., Business As Usual, New Setup)
- Search customization through default settings and control buttons

This functionality is ideal for users who need precision and flexibility in data retrieval, especially when working with large or complex datasets. However, it is not designed to refine results from a Simple Search, emphasizing its role as a standalone search tool.

Search Controls:

- Search
- Add / Remove
- Query Viewer
- Property / Operator / Values

- Reset / Set Default / Clear All / Ok / Cancel

⚠️Note: Advanced Search **cannot be used to further refine** results obtained from a **Simple Search**.

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Advanced Search
- Structured Search
- Query Builder
- Search Filters
- Search Defaults
- Property / Operator / Values
- OGRDS
- Search Controls
- Simple vs Advanced Search

Explanation:

The **Advanced Search** feature in the Generic Grid allows users to define **complex search criteria** using multiple filters and logical conditions. It supports:

- **Granular filtering** across various metadata fields
- **Query building** for different operational contexts (e.g., Business As Usual, New Setup)
- **Search customization** through default settings and control buttons

This functionality is ideal for users who need **precision and flexibility** in data retrieval, especially when working with large or complex datasets. However, it is **not designed to refine** results from a **Simple Search**, emphasizing its role as a **standalone search tool**.

Query Builder

Build a query to filter the results displayed in the browser

Advance Search

Category

Global Super Group Description

Global Product Group Description

Global Category Description

Global Module Description

Exception Type

External Code

Seq

Standard Code

Code Type

=

!=

Business As Usual

New Setup

Search

Add Remove

Property

All the headers in the browser grid is listed

Operator

List of conditions that can be used to build the query, eg =, contains, <>, != does not

Value to search

View is dependant on the Property selected – can be; Empty (for code) Pre-populated from the database (maximum of 200 visible)

Query Builder – Advanced Search

This section explains how to use the **Query Builder** within the **Advanced Search** feature of the **Generic Grid** in **OGRDS** to filter results displayed in the browser.

Key Functionalities:

Search Filters Include:

- Category
- Global Super Group Description
- Global Product Group Description
- Global Category Description
- Global Module Description
- Exception Type
- External Code
- Seq
- Standard Code
- Code Type

Operators Available:

- = (Equals)
- != (Not Equals)

- <> (Does Not Equal)
- Contains

Controls and Options:

- Add / Remove filters
- Search to apply the query
- Business As Usual / New Setup modes
- Property / Operator / Value to search

Behavior Notes:

- All headers in the browser grid are listed as searchable properties.
- The view is dependent on the selected property:
 - May be **empty** (e.g., for code fields)
 - May be **pre-populated** from the database (up to 200 visible values)

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Advanced Search
- Query Builder
- Search Filters
- Operators
- Property / Operator / Value
- Business As Usual
- New Setup
- OGRDS
- Pre-populated Values

Explanation:


The **Query Builder** in the Generic Grid's Advanced Search allows users to construct **custom queries** using a combination of properties, operators, and values. This enables:

- **Precise filtering** of grid data
- **Flexible search logic** using multiple conditions
- **Dynamic views** based on selected properties

Users can toggle between **Business As Usual** and **New Setup** modes to tailor their search context. The system supports both **manual input** and **pre-populated values**, making it adaptable for various data types and user needs.


Example

MODULES browser – searching for all scanning Modules containing the word MILK

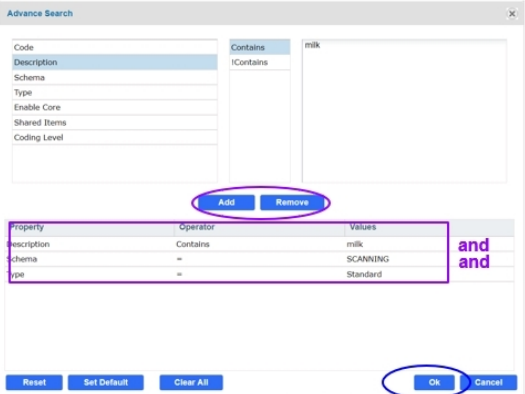

1. Select a property, operator and value
2. Click on **Add** to populate in the Query Viewer grid
3. Click on **OK** to launch the query

Returns all **standard** Modules in the scanning **schema** that have the word **Milk** in them

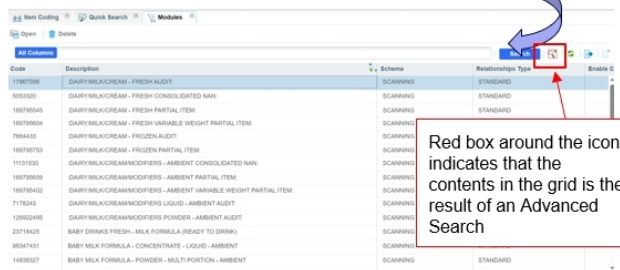

Red box around the icon indicates that the contents in the grid is the result of an Advanced Search

Advanced Search Example – MODULES Browser

This image demonstrates how to use **Advanced Search** in the **MODULES browser** to find all scanning modules containing the word "MILK".

Search Setup:

Search Fields Used:

- Description → Contains → milk
- Schema → = → SCANNING
- Type → = → Standard

Steps to Execute the Search:

1. Select a property, operator, and value.
2. Click "Add" to populate the query in the Query Viewer grid.
3. Click "OK" to launch the query.

✓ The result will return all **standard** modules in the **scanning** **schema** that contain the word "Milk".

● A red box around the icon indicates that the grid content is the result of an **Advanced Search**.

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Advanced Search
- MODULES Browser
- Query Viewer
- Property / Operator / Value
- Contains
- Schema
- Standard Type
- OGRDS
- Search Execution
- Search Indicator

Explanation:


This example illustrates the **practical use** of Advanced Search in the Generic Grid. By combining multiple filters—such as **description**, **schema**, and **type**—users can perform **targeted searches** to retrieve specific records.

The **Query Viewer** allows users to build and visualize their search logic before executing it. The **red box indicator** helps users recognize when the grid is displaying filtered results from an advanced query.

This functionality is essential for users who need to **drill down into specific datasets** with precision and clarity.

Other Options

Other Options

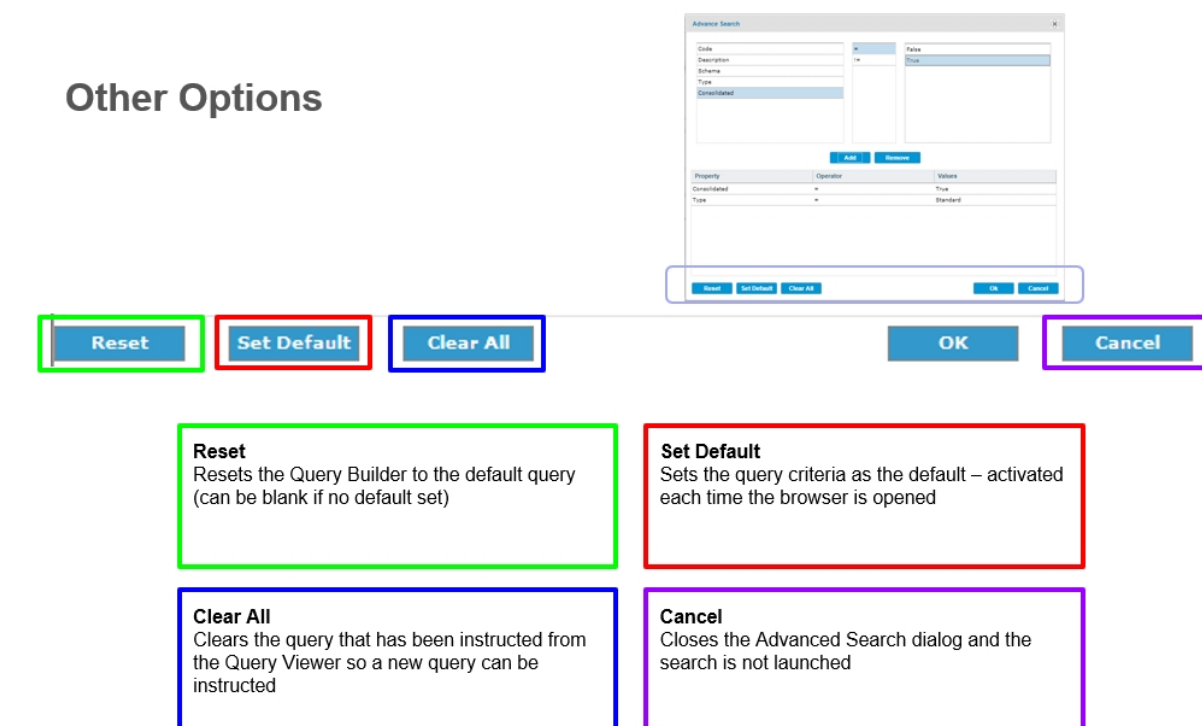

Other Options – Advanced Search Controls

This section outlines the **additional control buttons** available in the **Advanced Search dialog** of the **Generic Grid** within **OGRDS**.

Control Buttons and Their Functions:

-  **Reset**
 - Resets the **Query Builder** to the **default query**
 - If no default is set, it resets to a **blank state**
- ★ **Set Default**
 - Saves the current **query criteria** as the **default**
 - This default query is **automatically activated** each time the browser is opened
-  **Clear All**
 - Clears the current query from the **Query Viewer**
 - Allows users to **start fresh** with a new query
- ✕ **Cancel**
 - Closes the **Advanced Search dialog**
 - The search is **not launched**

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid

- Advanced Search
- Query Builder
- Reset
- Set Default
- Clear All
- Cancel
- Query Viewer
- OGRDS
- Search Controls

Explanation:

These **control options** enhance the usability of the **Advanced Search** feature in the Generic Grid by allowing users to manage their search setup efficiently:

- **Reset** and **Clear All** help users quickly revert or remove existing queries.
- **Set Default** improves workflow by saving frequently used queries.
- **Cancel** provides an exit without executing the search.


Together, these options support a **flexible and user-friendly search experience**, especially when working with complex datasets in OGRDS.

Default Query

Why set a Default query? Each time the browser is opened only the results of that query are returned eg; all Items for Personal Care in the Cross Coding Browser

 No default set so there are 90 Items loaded into the browser from all the Super Groups

 Default set for Personal Care-Grooming SG; only the 4 Items for that SG are displayed in the browser

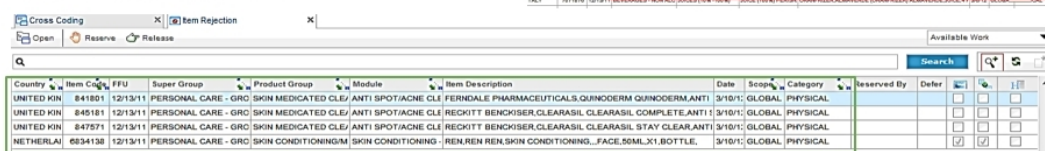

Country	Item Code	FFU	Super Group	Product Group	Module	Item Description	Date	Scope	Category	Reserved By	Defer		
UNITED KIN	841801	12/13/11	PERSONAL CARE - GRC	SKIN MEDICATED CLE/ ANTI SPOT/ACNE CLE	PERIDALE PHARMACEUTICALS QUINODERM ANTI	3/18/11	GLOBAL	PHYSICAL					
UNITED KIN	847571	12/13/11	PERSONAL CARE - GRC	SKIN MEDICATED CLE/ ANTI SPOT/ACNE CLE	RECHITT BENCHOISER CLEARASIL CLEARASIL STAY CLEAR ANTI	3/18/11	GLOBAL	PHYSICAL					
UNITED KIN	847571	12/13/11	PERSONAL CARE - GRC	SKIN MEDICATED CLE/ ANTI SPOT/ACNE CLE	RECHITT BENCHOISER CLEARASIL CLEARASIL STAY CLEAR ANTI	3/18/11	GLOBAL	PHYSICAL					
NETHERLAND	6534138	12/13/11	PERSONAL CARE - GRC	SKIN CONDITIONING/M SKIN CONDITIONING	REN REN REN SKIN CONDITIONING_FACE 50ML X1 BOTTLE	3/18/11	GLOBAL	PHYSICAL					

Default Query – Purpose and Impact

This section explains the importance of setting a Default Query in the **Generic Grid** within OGRDS, using the **Cross Coding Browser** as an example.

Key Points:

- **Why Set a Default Query?**
 - When a default query is set, **only the results matching that query** are displayed each time the browser is opened.
 - Example: A default query for **Personal Care** in the Cross Coding Browser will return only items related to that category.
- **Without Default Query:**
 - The browser loads **all items** (e.g., 90 items from all Super Groups).
- **With Default Query Set:**
 - The browser displays **only the relevant items** (e.g., 4 items for the **Personal Care-Grooming Super Group**).

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Default Query
- Cross Coding Browser
- Super Groups
- Personal Care
- Query Filtering
- OGRDS
- Browser Load Optimization

Explanation:


Setting a **Default Query** in the Generic Grid allows users to **automatically filter data** upon opening a browser. This improves efficiency by:

- Reducing the volume of data loaded
- Focusing the view on **relevant categories or groups**
- Enhancing performance and usability

This feature is especially useful for users who frequently work with specific datasets, such as items from a particular **Super Group** like **Personal Care-Grooming**.

Cancelling Default Query

Steps to remove or cancel the default query –

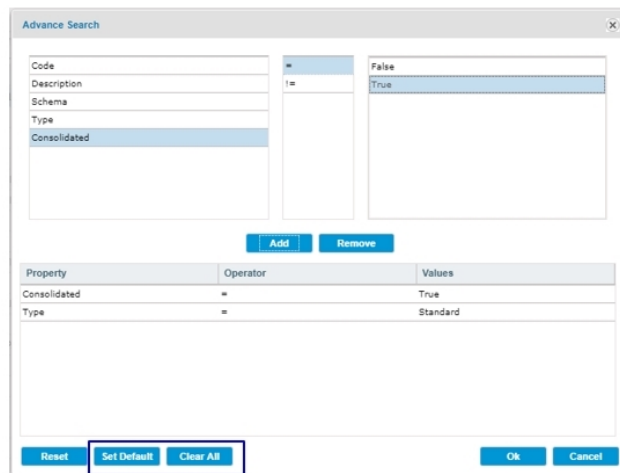

The screenshot shows the 'Advance Search' window. On the left, there's a list of properties: Code, Description, Schema, Type, and Consolidated. The 'Consolidated' property is selected. In the center, there's a table with two columns: 'Property' and 'Operator'. The 'Property' column contains 'Consolidated' and 'Type', and the 'Operator' column contains '=' for both. On the right, there's a table with two columns: 'Values' and 'True'. The 'Values' column contains 'True' and 'Standard'. At the bottom, there are buttons for 'Reset', 'Set Default', 'Clear All', 'Ok', and 'Cancel'. The 'Set Default' button is highlighted with a red box.



Cancelling a Default Query;
Open Advanced Search – default query is shown in the Query Viewer
1. Select **Clear All**
2. Select **Set Default** (saves an "empty" search criteria)

Cancelling a Default Query – Steps and Functionality

This section explains how to **remove** or **cancel** a default query in the **Generic Grid** within OGRDS, using the **Advanced Search** interface.

Steps to Cancel a Default Query:

1. Open Advanced Search
 - The current **default query** will be visible in the **Query Viewer**
2. Click "Clear All"
 - This removes all existing query criteria
3. Click "Set Default"
 - This action saves an **empty search criteria** as the new default

Example Query Setup (Before Clearing):

- Properties Used:
 - Consolidated → = → True
 - Type → = → Standard
- Controls Available:
 - Reset, Set Default, Clear All, OK, Cancel

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Advanced Search

- Default Query
- Cancel Default
- Clear All
- Set Default
- Query Viewer
- OGRDS
- Search Criteria

Explanation:

The **Default Query** feature in the Generic Grid allows users to predefine filters that automatically apply when a browser is opened. However, users may need to **cancel or reset** this default for broader data access or new workflows.

By using **Clear All** followed by **Set Default**, users effectively replace the existing default with an **empty query**, ensuring that no filters are applied by default. This process is simple and ensures flexibility in data exploration.

Other Generic Grid Options; Refresh, Export and More Records

Refresh & More Records Available


Two methods to refresh the contents of the grid (toolbar and right hand click)

Refreshes the data in the grid applying any existing search or sort criteria
Previously selected rows (shaded grey) are set to un-shaded



Grid default is to display 200 records only; if required **More records** can be added to the grid

When all records are displayed the function is disabled

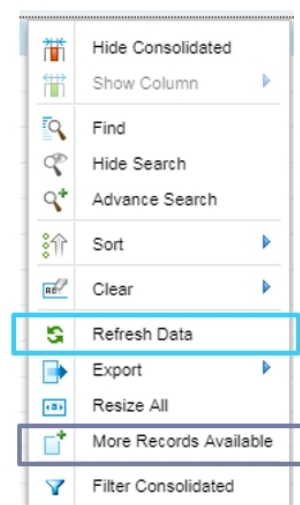

Other Generic Grid Options – Refresh, Export, and More Records

This section highlights additional features in the **Generic Grid** within OGRDS, focusing on **data refresh** and **record display management**.

Key Functionalities:

Refresh

- Can be triggered via:
 - **Toolbar**
 - **Right-click menu**
- Refreshes the grid while **retaining existing search or sort criteria**
- Previously selected rows (shaded grey) are **reset to un-shaded**

More Records

- By default, the grid displays **200 records**
- Users can **add more records** if needed
- Once **all records are displayed**, the **More Records** function is **disabled**

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Refresh
- More Records
- Toolbar
- Right-Click Menu
- OGRDS
- Record Limit
- Search Criteria
- Sort Criteria
- Grid Display

Explanation:

The **Refresh** and **More Records** options in the Generic Grid enhance user control over data visibility and interaction:

- **Refresh** ensures that the grid reflects the most current data while preserving any filters or sorting applied.
- The **More Records** feature allows users to go beyond the default 200-record limit, supporting deeper data exploration.

- These options are accessible via both the **toolbar** and **right-click menu**, offering flexibility in user interaction.

These functionalities are essential for maintaining **data accuracy**, **workflow continuity**, and **efficient navigation** within large datasets.

Export

Export All Columns Search

Exports the data in the grid to Excel in .xlsx or .csv format

Click on the icon to export as as per the configuration in the user's Profile Preference

Right hand click and select Export to override the Profile Preference setting; prevents the need to use My Profile to change the setting which may result in losing any searches

What is downloaded?

If a search has been applied only the records satisfying the search are downloaded
 All columns visible in the grid
 All rows in the grid are downloaded including those that are not displayed in the grid (eg, 200 displayed out of 1000 available)
 Sort order is as per the browser

Hidden columns are not downloaded

Export – Functionality Overview

This section explains how the **Export** feature works in the **Generic Grid** within OGRDS, including options, behavior, and what data is included in the exported file.

Key Functionalities:

- **Export Formats Supported:**
 - .xlsx
 - .csv
- **Export Methods:**
 - Clicking the Export icon uses the configuration set in the user's **Profile Preference**
 - **Right-click → Export** overrides the Profile Preference without needing to change settings in **My Profile**, which could otherwise result in losing active searches

Export Behavior – What Gets Downloaded:

- ✓ **Filtered Data:** Only records that match the applied search criteria

- ✓ **Visible Columns:** All columns currently visible in the grid
- ✓ **All Rows:** Even rows not currently displayed (e.g., 200 shown out of 1000 total)
- ✓ **Sort Order:** Maintained as per the browser's current sorting
- ✗ **Hidden Columns:** These are **not included** in the export

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Export
- Excel
- CSV
- Profile Preference
- Right-Click Export
- Visible Columns
- Hidden Columns
- OGRDS
- Search Criteria
- Sort Order

Explanation:


The **Export** feature in the Generic Grid allows users to download grid data for offline use or reporting. It supports both **Excel (.xlsx)** and **CSV (.csv)** formats and offers flexibility in how the export is triggered:

- Users can rely on their **Profile Preferences** or override them via the **right-click menu**.
- The export includes **all matching records, visible columns, and sorted data**, even if not all rows are currently displayed.
- **Hidden columns** are excluded to maintain clarity and relevance.

This functionality is essential for users who need to **analyze, share, or archive data** outside the OGRDS system.

'Right Click' Menu

Hover the mouse over a column and “right hand” click to view the set of functions that can be used

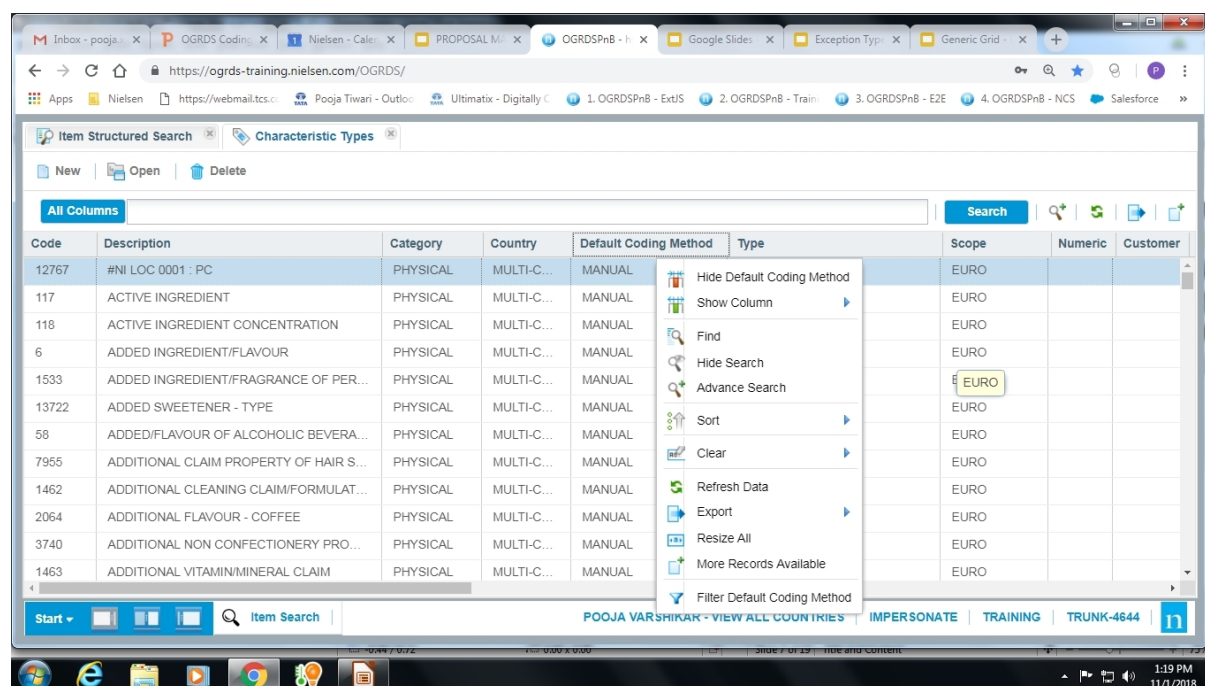

‘Right Click’ Menu – Functional Overview

This section describes the ‘Right Click’ menu in the Generic Grid within OGRDS, which provides quick access to essential grid functions.

How to Access:

- Hover over a column
- Right-click to open the menu with available actions

Available Functions:

- Hide Default Coding Method
- Show Column
- Find
- Hide Search
- Advance Search
- Sort
- Clear
- Refresh Data

- Export
- Resize All
- More Records Available
- Filter Default Coding Method

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Right Click Menu
- OGRDS
- Column Actions
- Search
- Sort
- Export
- Refresh
- Resize
- Filter
- Coding Method

Explanation:

The **Right Click Menu** in the Generic Grid offers a **context-sensitive set of tools** that streamline user interaction with data. By simply right-clicking on a column, users can:

- **Modify the grid layout** (e.g., show/hide columns, resize)
- **Perform data operations** (e.g., sort, search, filter)
- **Manage coding methods and refresh or export data**

This menu enhances **efficiency and accessibility**, allowing users to perform common tasks without navigating away from the grid interface.

Hide



& Show Columns





Explanation:

The **Hide & Show Columns** feature in the Generic Grid empowers users to **customize their data view** based on task relevance. This improves clarity and efficiency by:


- Allowing users to **focus only on necessary data**
- Preventing clutter from irrelevant columns
- Providing flexibility to **restore hidden columns** as needed

This functionality is particularly useful in workflows that require **streamlined data presentation** or **task-specific views**.

Find



Search for specific words in the grid for the selected column

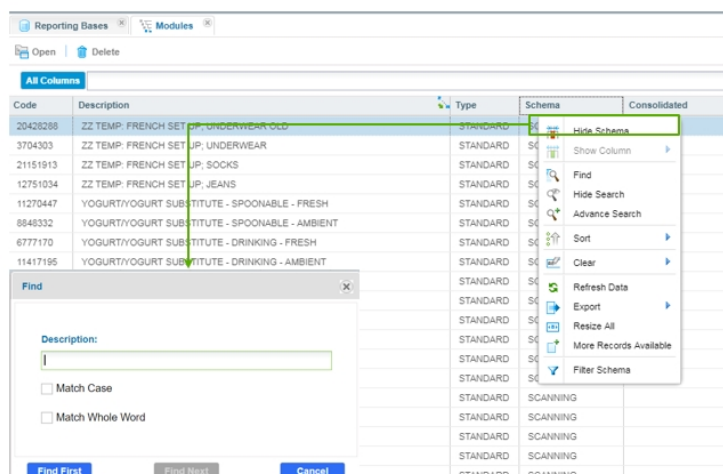

Description

- The column that Find is being applied to

Search for?

- Key in the search criteria; for example 'dog'

Match requirement

- Check the box to return matches on the case (Upper/Lower) or the whole word

Find first

- Highlights the first match found

Find next

- Activated after Find First; disabled when last record found

Find – Column-Specific Search Functionality

This section explains how to use the **Find** feature in the **Generic Grid** within OGRDS, which allows users to search for specific words within a selected column.

Key Functionalities:

-  **Description**
 - Indicates the **column** where the Find function is being applied
-  **Search for?**
 - Users can **enter a keyword** (e.g., "dog") to search within the selected column

- ✓ Match Requirement
 - Option to:
 - Match **case sensitivity** (upper/lower case)
 - Match the **whole word**
- ➡ ☐ Find First
 - Highlights the **first match** found in the column
- ➡ ☐ Find Next
 - Activated after **Find First**
 - Allows navigation to the **next match**
 - Disabled when the **last record** is reached

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Find
- Search Criteria
- Column Search
- Match Requirement
- Find First
- Find Next
- OGRDS
- Case Sensitivity
- Whole Word Match

Explanation:


The **Find** functionality in the Generic Grid is a **targeted search tool** that helps users locate specific entries within a **single column**. It supports:

- **Flexible search input** with keyword matching
- **Case-sensitive and whole-word filtering**
- **Step-by-step navigation** through matching records

This feature is particularly useful for **quick lookups** and **data validation** within large datasets, enhancing precision and user control.

Hide/Show Search

This is related to the main toolbar

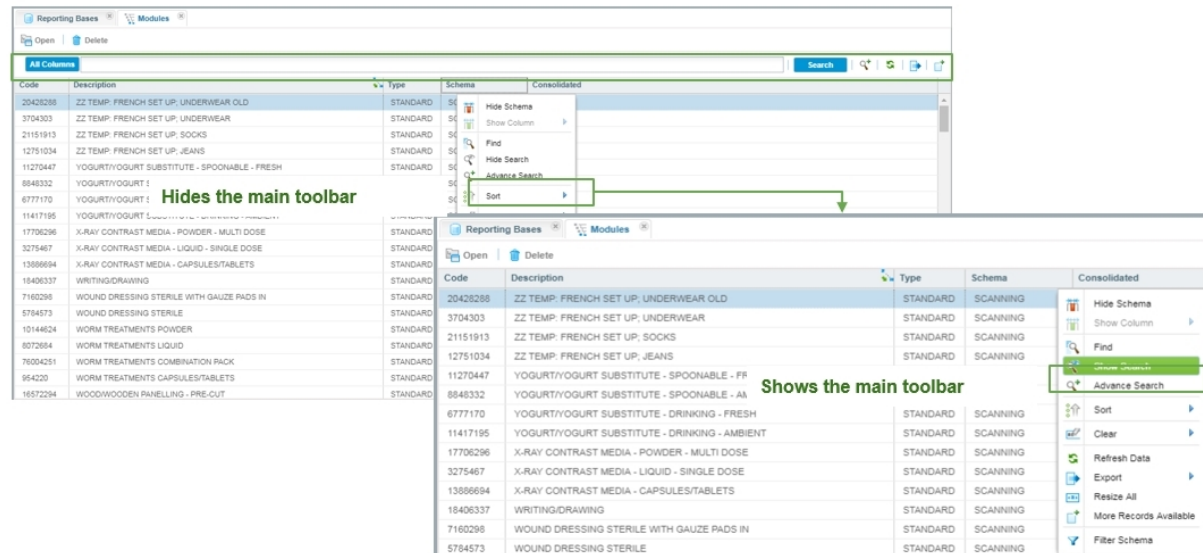

Hide/Show Search – Toolbar Visibility Control

This section describes the **Hide/Show Search** functionality in the **Generic Grid** within **OGRDS**, which allows users to toggle the visibility of the **main toolbar**.

Key Functionalities:

- **Hide Search**
 - **Hides** the main toolbar from the grid interface
 - Useful for **decluttering** the view when the toolbar is not needed
- **Show Search**
 - **Displays** the main toolbar again
 - Allows access to search and other toolbar functions

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Hide Search
- Show Search
- Main Toolbar
- Toolbar Visibility
- OGRDS
- Interface Customization

Explanation:


The **Hide/Show Search** feature provides users with control over the **interface layout** in the Generic Grid. By toggling the toolbar visibility, users can:

- **Streamline their workspace** for focused tasks
- **Access or hide search tools** as needed
- **Improve usability and personalization** of the grid view

This functionality is especially helpful when working with limited screen space or when the toolbar is not actively being used.

Sort

Sorts the data in the grid on the column selected

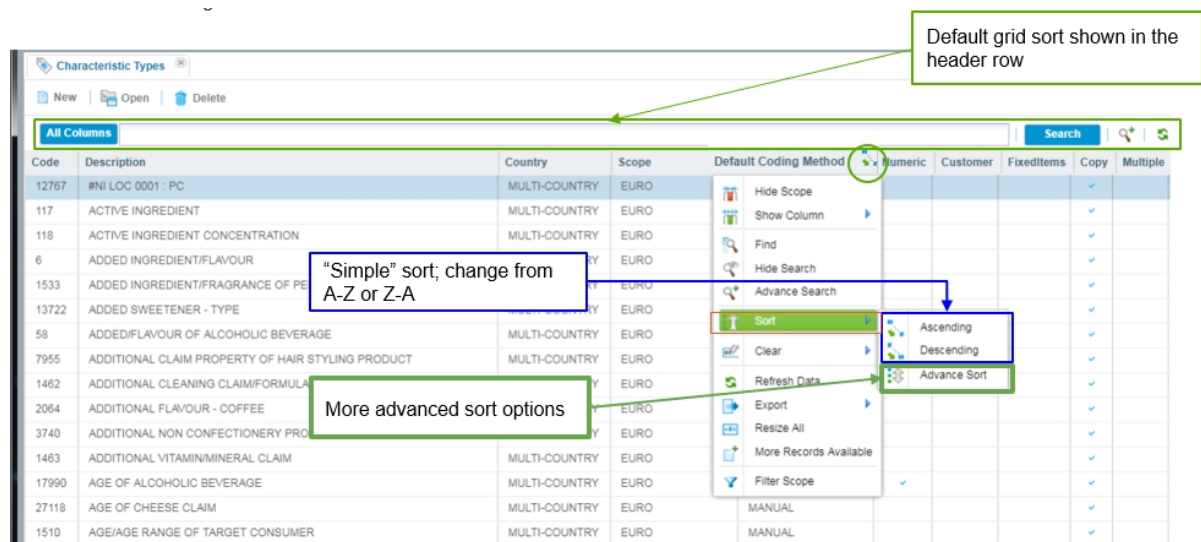

Sort – Data Organization in the Grid

This section explains how the **Sort** functionality works in the **Generic Grid** within **OGRDS**, helping users organize data efficiently.

Key Functionalities:

- **Sort**
 - Sorts the data in the grid based on the **selected column**
- **Default Grid Sort**
 - The default sorting order is **displayed in the header row**
- **Simple Sort**
 - Allows users to toggle between **A-Z** and **Z-A** sorting
- **Advanced Sort Options**
 - Offers **additional sorting capabilities** beyond basic alphabetical order

🔍 Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Sort
- Simple Sort
- Advanced Sort
- Header Row
- Column Sorting
- OGRDS
- Data Organization

Explanation:


The **Sort** feature in the Generic Grid enables users to **organize data** by column values, making it easier to analyze and navigate large datasets. Users can:

- Apply **basic alphabetical** sorting
- Access **advanced sorting tools** for more complex data arrangements
- View the **current sort order** directly in the grid's header


This functionality is essential for maintaining **clarity, structure, and efficiency** in data handling within OGRDS.

Sort – Advanced

Multiple sorting conditions can be applied using the Sort Grid dialog; Useful for sorting outstanding work, eg, by Supergroup and Dept Description, etc

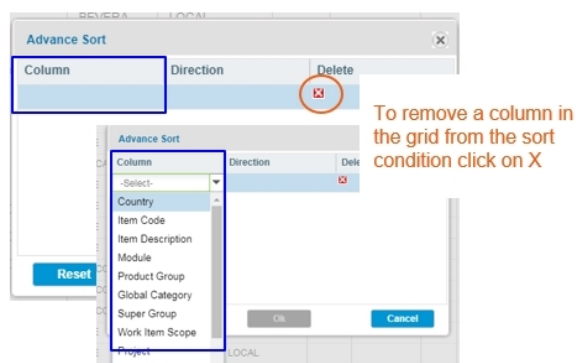

Click on the "blank" cell to reveal the dropdown & Select a column

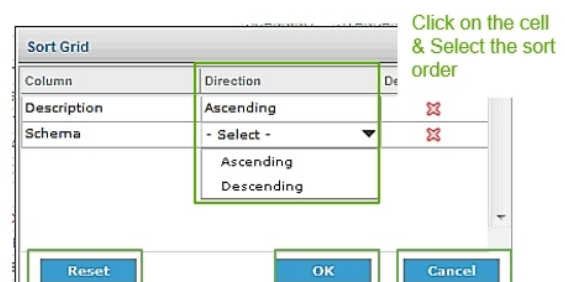

Reset reverts to back to the default settings
Click on **OK** to apply the sort condition
Cancel Closes the dialog box

- Only one sort can be applied to the grid, applying a new sort ("simple" or advanced) will override a previously set sort
- If any sort applied, application will remember and default to that sort when the browser is opened again

Sort – Advanced Sorting in the Grid

This section explains how to use the **Advanced Sort** feature in the **Generic Grid** within **OGRDS**, allowing users to apply **multiple sorting conditions** for better data organization.

Key Functionalities:

- **Multiple Sorting Conditions**
 - Users can sort data by more than one column (e.g., **Supergroup**, **Dept Description**)
- **Sort Grid Dialog Controls:**
 - Click on “**blank**” cell to reveal dropdown and **select a column**
 - Click on cell to **select sort order** (e.g., ascending or descending)
 - Click “**X**” to remove a column from the sort condition
 - **Reset** reverts to default sort settings
 - **OK** applies the sort condition
 - **Cancel** closes the dialog without applying changes
- **Sort Behavior:**
 - Only **one sort** (simple or advanced) can be active at a time
 - Applying a new sort **overrides** the previous one
 - If a sort is applied, the system **remembers and defaults** to it when the browser is reopened

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Advanced Sort
- Sort Grid Dialog
- Multiple Conditions
- Sort Order
- Reset
- Override
- Persistent Sort
- OGRDS
- Browser Default

Explanation:


The **Advanced Sort** feature in the **Generic Grid** provides users with **greater control** over how data is displayed. By allowing **multi-column sorting**, users can organize complex datasets more effectively.

This functionality is particularly useful for managing **outstanding work** or filtering by **hierarchical categories**. The system's ability to **remember the last applied sort** ensures consistency and saves time during repeated tasks.

Clear



Clears any sort or search applied to the data in the grid

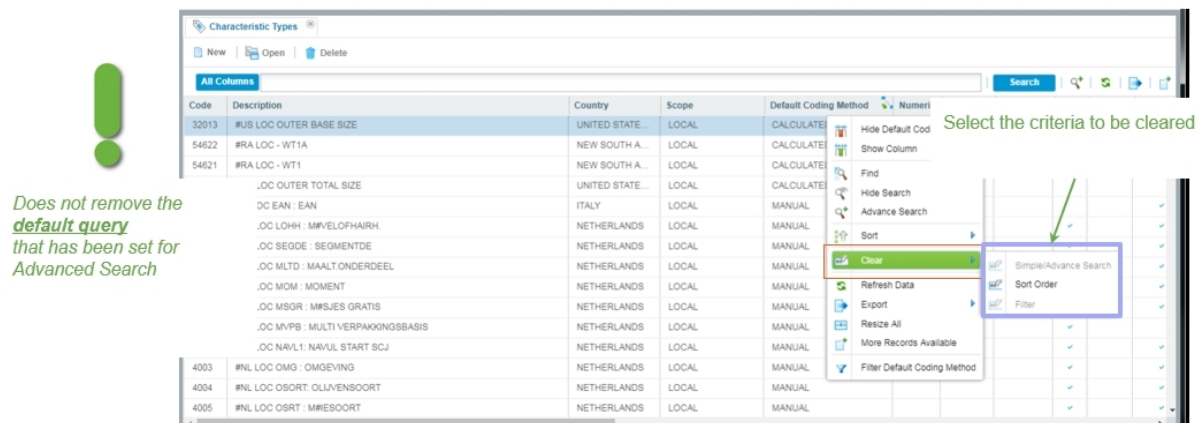

Clear – Resetting Grid Filters and Sorts

This section explains the **Clear** functionality in the **Generic Grid** within **OGRDS**, which allows users to reset applied filters and sorts without affecting default settings.

Key Functionalities:

- Clear
 - Removes any **sort** or **search** criteria currently applied to the grid data
- Preserves Default Query
 - Does **not** remove the **default query** set via Advanced Search
- Selective Clearing
 - Users can choose which criteria to clear:
 - Simple Search
 - Advanced Search
 - Sort Order
 - Filter

 Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Clear
- Sort
- Search
- Advanced Search
- Default Query
- Filter
- OGRDS
- Reset Criteria

Explanation:

The **Clear** function in the Generic Grid is a **reset tool** that helps users remove temporary filters and sorts without disrupting their saved default queries.

This ensures:

- **Flexibility** in switching between different views
- **Efficiency** in managing data without losing preferred configurations
- **Control** over which elements of the grid are reset

This feature is particularly useful when users need to **start fresh** with a new query or sort while maintaining their **default setup** for consistency.

Resize individual columns

Resizes the selected column in the grid to display the complete contents of the cells

The screenshot shows a software window titled 'Characteristic Types' with a 'Modules' tab. It contains a data grid with columns: Code, Description, Schema, Type, and Consolidated. A green box highlights the right edge of the 'Description' column, and a tooltip provides instructions for resizing.

Position the mouse on the right hand edge of the column;
 - Double click the mouse to "best fit"
 - Click>drag>release for custom fit

Code	Description	Schema	Type	Consolidated
6108519	:DAIRY/MILK/CREAM - FRESH CONSOLIDATED NAN:	SCANNING	STANDARD	☒
9787510	:DAIRY/MILK/CREAM/MODIFIERS - AMBIENT CONSOLIDATED NAN:	SCANNING	STANDARD	☒
2147926	BABY DRINKS AMBIENT - MILK FORMULA (POWDERED) - MULTI PORTION	SCANNING	STANDARD	☐
1614447	BABY DRINKS AMBIENT - MILK FORMULA (POWDERED) - SINGLE PORTION	SCANNING	STANDARD	☐
11205010	BABY DRINKS AMBIENT - MILK FORMULA (READY TO DRINK)	SCANNING	STANDARD	☐
14944038	BABY DRINKS AMBIENT - MILK FORMULA WITH FLAVOUR/INGREDIENTS (READY TO DRINK)	SCANNING	STANDARD	☐
6908407	CAT MILK/DRINKS - LIQUID	SCANNING	STANDARD	☐

Resize Individual Columns – Grid Display Optimization

This section explains how to use the **Resize** functionality in the **Generic Grid** within **OGRDS**, allowing users to adjust column widths for better visibility of cell contents.

Key Functionalities:

- **Purpose:**
 - Resizes the **selected column** to display the **complete contents** of its cells
- **Steps to Resize:**
 - Position the mouse on the **right-hand edge** of the column
 - Double-click to auto-adjust to **best fit**
 - Click, drag, and release for a custom fit
- **Applicable Columns:**
 - Examples shown include: **Code, Description, Schema, Type, Consolidated**

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Resize Columns
- Best Fit
- Custom Fit
- Column Width
- OGRDS
- Grid Optimization
- Mouse Interaction

Explanation:

The **Resize** feature in the Generic Grid enhances **data readability** by allowing users to adjust column widths based on content length. This is especially useful when:


- Cell content is **truncated or hidden**
- Users need to **compare values across columns**
- A **clean and organized layout** is required for analysis or presentation

The ability to **auto-fit** or **manually adjust** columns ensures flexibility and improves the overall **user experience** within OGRDS.

Resize All columns



Resizes all the columns in the grid to display the complete contents of the cells

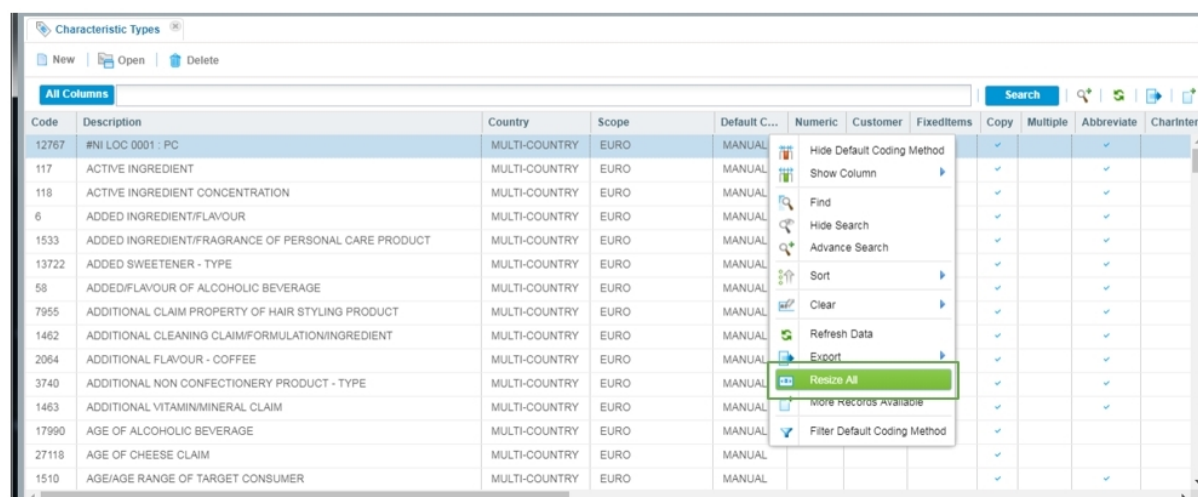

Resize All – Grid Column Optimization

This section describes the **Resize All** functionality in the **Generic Grid** within OGRDS, which allows users to automatically adjust all columns for optimal visibility.

Key Functionalities:

- **Resize All Columns**
 - Automatically resizes **every column** in the grid to display the **complete contents** of each cell
 - Ensures that no data is truncated or hidden due to narrow column widths
- **Context of Use:**
 - Applied in views such as **Characteristic Types** or **All Columns** display
 - Useful when working with **multi-country**, **manual**, or **automatic** coded data entries
- **Toolbar Integration:**
 - Appears alongside other grid functions like:
 - Search
 - Find
 - Sort

- Clear
- Export
- Refresh
- Hide/Show Column
- More Records Available
- Filter Default Coding Method

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Resize All
- Column Width
- Grid Optimization
- OGRDS
- Toolbar Functions
- Data Visibility
- Multi-Country Manual
- Automatic Coding


Explanation:

The **Resize All** feature in the Generic Grid is designed to enhance **data readability** by ensuring that all columns are wide enough to show their full content. This is especially useful when:


- Working with **long descriptions** or **complex codes**
- Viewing **multi-country datasets**
- Preparing data for **review** or **export**

By integrating this function into the toolbar, users can quickly optimize their grid layout without manually adjusting each column, improving **efficiency** and **clarity** in data handling.

Filter by Column

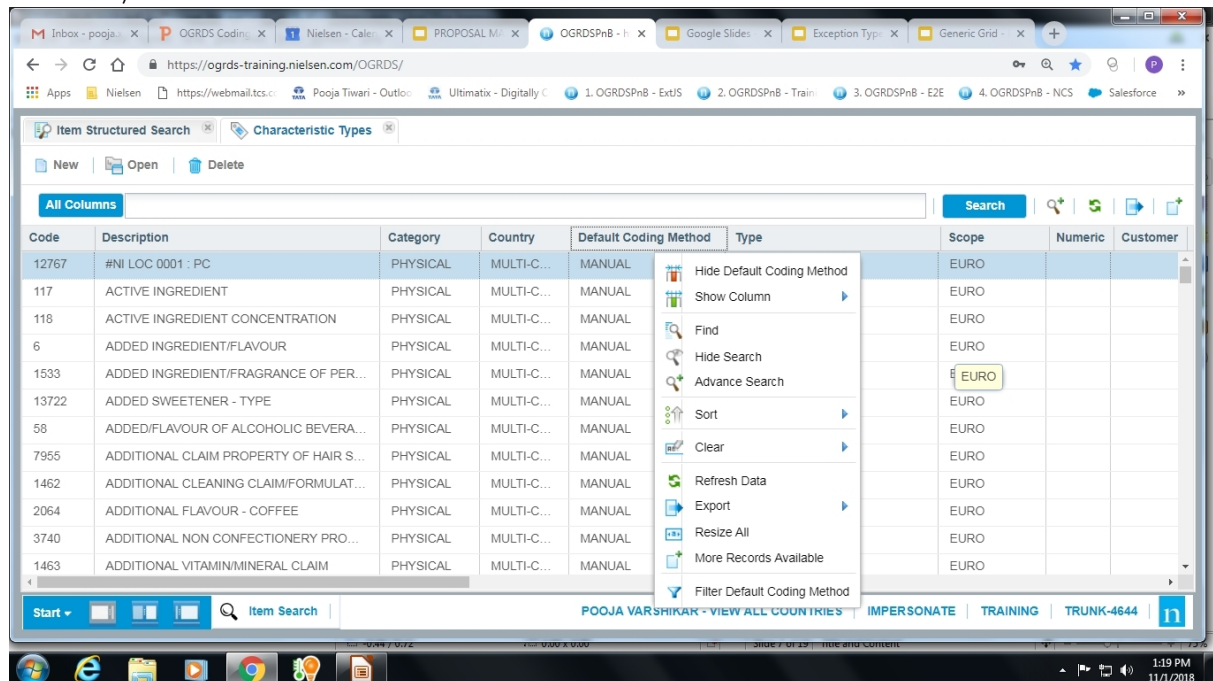

To refine the only records available on screen, this function allows to filter the column by selecting the available values in that column

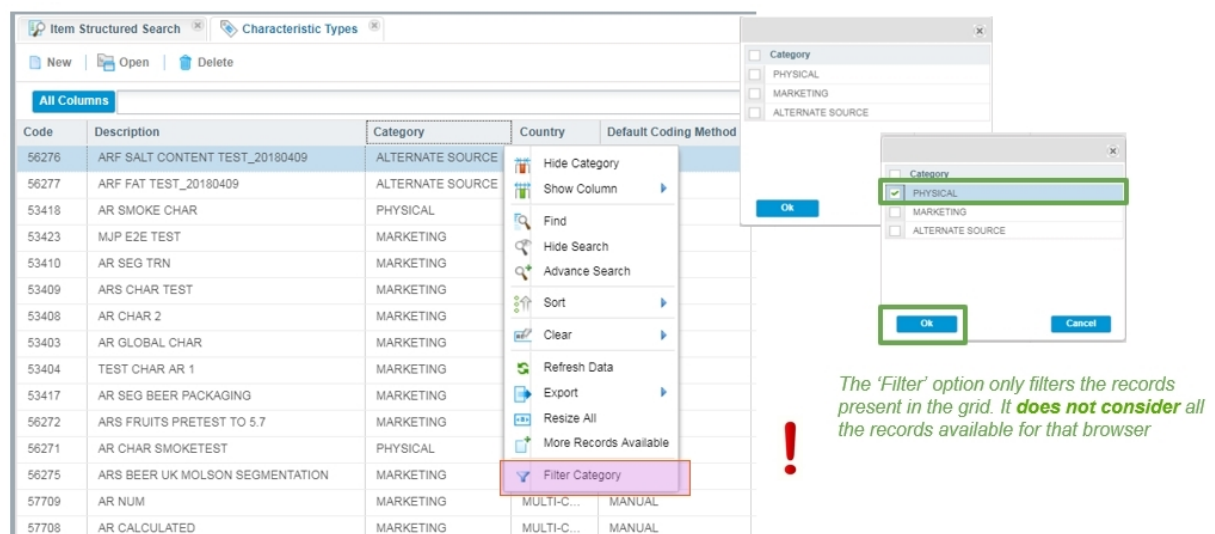

Filter by Column – On-Screen Data Refinement

This section explains the **Filter by Column** functionality in the **Generic Grid** within **OGRDS**, which allows users to narrow down visible data based on selected column values.

Key Functionalities:

- Purpose:
 - Filters records **already present** in the grid by selecting values from a specific column

- **Scope Limitation:**
 - The filter applies **only to the records currently loaded** in the grid
 - It does **not access or consider all records** available in the browser

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Filter by Column
- On-Screen Records
- Grid Filtering
- OGRDS
- Visible Data
- Browser Records
- Column Values

Explanation:


The **Filter by Column** feature in the Generic Grid is a **quick filtering tool** that helps users refine the **visible dataset** based on specific column values. It is ideal for:

- **Focusing on relevant entries** within a limited data view
- **Quick comparisons** or validations
- **Reducing clutter** when working with large grids

However, users should be aware that this filter does **not apply to the full dataset** in the browser—only to the records currently displayed. For broader filtering, **Advanced Search** should be used.

Column ordering

Customise the column order

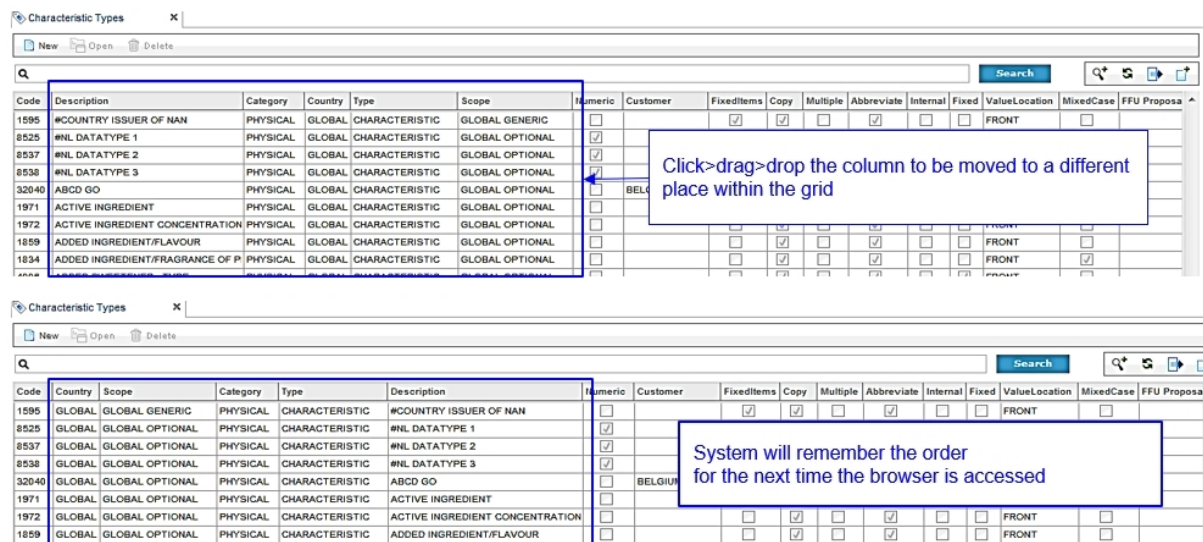

Column Ordering – Customizing Grid Layout

This section explains how users can **reorder columns** in the **Generic Grid** within **OGRDS** to personalize their data view.

Key Functionalities:

- **Custom Column Order**
 - Users can **click, drag, and drop** columns to rearrange their position within the grid
- **Persistent Layout**
 - The system **remembers the customized column order** the next time the browser is accessed
- **Applicable Contexts:**
 - Example shown in **Characteristic Types** browser
 - Columns include: **Code, Description, Category, Country, Type, Scope**

Content Summary with Keywords and Explanation

Keywords:

- Generic Grid
- Column Ordering
- Drag and Drop
- Custom Layout
- Persistent Settings
- OGRDS
- Characteristic Types
- Grid Customization

Explanation:

The **Column Ordering** feature in the Generic Grid allows users to **personalize their workspace** by rearranging columns to suit their workflow. This improves:

- **Efficiency** in data review and entry
- **Clarity** by placing frequently used columns in prominent positions
- **User experience** through persistent layout memory

This functionality is especially useful in complex datasets where column relevance varies by task or user preference.

Do's and Don'ts

✓ Do's:

- Use the advanced search to filter data effectively.
- Set default queries to streamline browser usage.
- Utilize export options to download relevant data.

✗ Don'ts:

- Do not rely solely on simple search for complex queries.
- Avoid changing profile settings unnecessarily for export preferences.

Summary

The Generic Grid in OGRDS browsers offers powerful tools for data management, including search, sort, export, and customization.

Understanding and utilizing these features can significantly enhance user productivity and data handling efficiency. This document serves as a formal guide to these functionalities, ensuring users can make the most of the available tools.

BeMyEye Overview

Standard Operating Procedure

BeMyEye

Introduction

This document provides a formal overview of the BeMyEye process based on the original PowerPoint presentation. BeMyEye is a crowdsourcing company that collaborates with Nielsen to collect product images and information from retail stores.

Overview

BeMyEye enables individuals with smartphones to earn money by completing localized tasks such as capturing product images, prices, and availability. These images are validated and sent to Nielsen for integration into the ePics system, supporting item coding and characterization workflows.

Key Bullet Points

- BeMyEye is a crowdsourcing platform for collecting product data.
- Images are captured by mobile users and validated before submission.
- Validated images are uploaded to Nielsen's ePics system via FTP.
- Images must follow a specific naming convention for compatibility.
- Configuration in OGRDS ensures proper data source setup.
- Images are used in the Characterization Browser for item coding.

Do's and Don'ts

Do's:

- Ensure images follow the correct naming convention.
- Use the FTP process to upload images to ePics.

- Validate and classify images using PQR functionality.
- Flag the front-of-pack image with the Vignette indicator.

Don'ts:

- Do not upload images without the 'complete' file in the folder.
- Avoid using incorrect file formats or naming structures.
- Do not skip validation and classification steps in ePics.

Summary

BeMyEye provides a scalable and efficient method for collecting product images and data. By integrating with Nielsen's ePics system, it supports accurate item coding and enhances data quality. Following the outlined procedures ensures compliance and operational consistency across countries.

A reference to the original PowerPoint for visual context:

[BeMyEye.pptx](#)

ePics Rename

Standard Operating Procedure

ePics Renamer Release 3.0 Overview

Introduction

This document provides a formal overview of the ePics Renamer Release 3.0. It consolidates the content from the original PowerPoint presentation into a structured and professional format suitable for documentation and internal distribution. The document includes an overview, key bullet points, do's and don'ts, and a summary.

Overview

The ePics Renamer Release 3.0 introduces a completely new version of the Renamer application. It includes enhancements to installation procedures, image processing capabilities, and user interface features. This release aims to improve the efficiency and accuracy of image handling within the ePics system.

Key Bullet Points

- Installation must be done on the Local Shared Network Drive of a Remote Desktop owned by the Local Country.
- Users must set the correct ISO Country Code upon first access.
- Work directory should point to the epics\image\in folder.
- ImageMagick directory must be correctly configured.
- Renamer includes tabs for Jobs, Folder Contents, Image Detail, and Report Detail.
- Image manipulation features include Zoom, Rotate, Vignette Flag, Crop, Delete, and Comment.
- Best practices include rotating and saving images, using vignette flags, cropping only when instructed, and avoiding irrelevant image uploads.

Do's and Don'ts

Do's:

- Rotate and save images into the correct position.
- Use the Vignette Flag to identify the best image per item.
- Crop images only if instructed by the local country.
- Delete images only if they are duplicates or irrelevant.
- Ensure EAN is coded before navigating through images.
- Generate weekly reports of images processed and sent.

Don'ts:

- Do not retain images with barcode '00000000000000' after renaming.
- Do not crop images without proper instruction.
- Do not delete images unless necessary and justified.

Summary

The ePics Renamer Release 3.0 provides a robust and user-friendly interface for managing product images. With improved installation procedures, enhanced image processing tools, and clear operational guidelines, this release supports efficient and compliant image handling across Nielsen's global operations. Adhering to the documented best practices ensures consistency, traceability, and quality in image management workflows.

A reference to the original PowerPoint for visual context:

[ePics Renamer Release 3.0 Overview.pptx](#)

Standard Operating Procedure

ePics Image Transfer, Renaming, and Uploading – Formal User Guide

Introduction

This document provides a comprehensive and professional overview of the ePics image transfer, renaming, and uploading process. It is intended for users involved in image management within the Global Reference Data Governance framework. The guide outlines the procedures, best practices, and responsibilities associated with the use of the Renamer tool and ePics platform.

Overview

The ePics system is designed to facilitate the efficient management of product images, including their transfer from cameras, renaming using the Renamer tool, and uploading to the ePics platform. This guide walks through each step of the process, ensuring users understand the workflow and adhere to governance standards.

Key Bullet Points

- Ensure all images are transferred to the local shared network before processing.
- Verify image formats and quality prior to renaming.
- Use the Renamer tool to standardize image filenames based on barcode data.
- Manually correct unidentified barcodes to maintain data integrity.
- Upload renamed images to ePics using the automated FTP process.
- Archive completed batches for future reference and compliance.

Do's and Don'ts

Do's:

- Do ensure image clarity and completeness before processing.
- Do follow the standardized naming conventions strictly.
- Do validate barcode accuracy during renaming.
- Do archive all processed images appropriately.

Don'ts:

- Don't upload images without proper renaming.
- Don't delete images without proper justification.
- Don't bypass the Renamer tool for manual uploads.
- Don't store images on personal devices without backup.

Summary

This guide outlines the essential steps and best practices for managing product images using the ePics system. By adhering to the procedures detailed herein, users contribute to data accuracy, operational efficiency, and compliance with governance standards.

A reference to the original document for visual context:

[ePics Image Transfer Renaming and Uploading User Guide New Release.docx](#)

Standard Operating Procedure

ePics Installing Renamer and Image Loading Requirements

Introduction

This document provides a comprehensive and professional guide for installing the Renamer application and understanding the image loading requirements. It is intended for users involved in image processing and management within the Global Reference Data Governance framework.

Overview

The Renamer application is a critical tool used for processing and managing product images. This guide outlines the installation and uninstallation procedures, configuration settings, and image loading requirements. It ensures that users follow standardized practices for optimal performance and compliance.

Key Bullet Points

- Install the Renamer application on the designated local shared network drive.
- Uninstall any previous versions before installing the new release.
- Set the correct ISO Country Code upon first access.
- Configure the work directory to point to the image collection folder.
- Ensure the ImageMagick directory is correctly set for image processing.
- Follow the specified format and requirements for image loading.

Do's and Don'ts

Do's:

- Ensure the Renamer application is installed in the correct directory.
- Verify all configuration settings before starting image processing.
- Use the correct file formats and naming conventions for image uploads.
- Follow the guidelines for setting up ImageMagick directories.

Don'ts:

- Do not install the Renamer application without uninstalling previous versions.
- Avoid incorrect country code settings as they may affect processing.
- Do not use unsupported image formats or incorrect file structures.
- Do not skip configuration steps during setup.

Summary

This guide serves as a formal reference for installing and configuring the Renamer application and managing image loading requirements. By adhering to the outlined procedures and best practices, users can ensure efficient and compliant image processing operations. For further assistance, refer to the original documentation or contact the Global Reference Data Governance team.

A reference to the original document for visual context:

[ePics Installing Renamer and Image Loading Requirements New Release.docx](#)

Standard Operating Procedure

ePics Naming Convention

Introduction

This document provides a comprehensive and formal overview of the naming conventions and image loading procedures for the ePics system. It is intended to guide users in correctly naming image files and uploading them to the ePics FTP server in a standardized and traceable manner.

Overview

The ePics system requires image files to follow a specific naming convention to ensure consistency and traceability. This document outlines the structure of the filename, the purpose of each component, and the procedures for uploading images to the ePics FTP server. It also includes guidelines for handling PDF files and the integration with OGRDS through the SI02 interface.

Key Bullet Points

- Use underscores to separate fields in the filename.
- Ensure each image is in JPEG format.
- Include a unique timestamp in the filename to avoid duplication.
- Upload images to the correct country-specific directory on the FTP server.
- Use 'COMPLETE' or 'COMPLETE_PDF' token files to trigger processing.

Do's and Don'ts

Do's:

- Follow the naming convention strictly.
- Use JPEG format for all image files.
- Include a timestamp to ensure filename uniqueness.
- Use the correct FTP credentials and directory structure.
- Use the appropriate token file to signal completion.

Don'ts:

- Do not use unsupported file formats.
- Do not omit the timestamp in filenames.
- Do not include sub-directories within the upload folder.
- Do not forget to create the 'COMPLETE' or 'COMPLETE_PDF' token file.

Summary

Adhering to the ePics naming convention and image upload procedures is essential for maintaining data integrity and ensuring seamless integration with downstream systems such as OGRDS. This document serves as a formal guide to help users understand and implement the required standards effectively.

A reference to the original document for visual context:

[ePics naming convention.docx](#)

Global ePics

Standard Operating Procedure

Global ePics – User Account Maintenance

Introduction

This document provides a formal overview of the user account maintenance procedures within the Global ePics 7 application. It is based on the original presentation created by the Content Enablement Team and outlines the roles, responsibilities, and access levels associated with user accounts. The document is intended to guide administrators and users in understanding the account management process and ensure proper governance and support.

Overview

User account maintenance in ePics 7 is managed directly within the application. Only users with administrative privileges are authorized to edit the user account table. There are five distinct account levels, each granting access to specific functionalities. All changes to user accounts—including creation, modification, and deletion, must be submitted to the OGRDS Support Team via Salesforce. Users must authenticate using their Nielsen Answers credentials to access the system. Once logged in, users are restricted to the functionalities permitted by their account level. For example, a user with 'Coder' access will not be able to view reporting features.

Key Bullet Points

- User account maintenance is performed within the ePics 7 application.
- Only administrators can edit the user account table.
- There are five distinct account levels with varying access rights.
- Account changes must be requested via Salesforce to the OGRDS Support Team.
- Users must log in using Nielsen Answers credentials.
- Access to functionality is restricted based on user level.

Do's and Don'ts

Do's

- Use Nielsen Answers credentials to log in.
- Submit account change requests through Salesforce.
- Ensure users are assigned the correct account level.
- Restrict access to functionalities based on user roles.

Don'ts

- Do not attempt to edit user accounts without admin privileges.
- Do not assign inappropriate access levels to users.
- Do not bypass Salesforce for account requests.
- Do not share login credentials with unauthorized users.

Summary

This document outlines the essential procedures for maintaining user accounts within the Global ePics 7 application. By adhering to the defined roles, access levels, and request protocols, organizations can ensure secure and efficient account management. Proper governance of user accounts is critical to maintaining data integrity and operational effectiveness across the platform.

A reference to the original PowerPoint for visual context:

[ePics 7 - User Account Maintenance.pptx](#)

Standard Operating Procedure

Global ePics - User Guide

Introduction

This document provides a comprehensive and professionally structured guide based on the 'Global ePics - User Guide' PowerPoint presentation. It includes an introduction, overview, expanded content from each slide, key bullet points, do's and don'ts, and a summary. The content has been reformatted into coherent paragraphs to ensure clarity and maintain the original intent and logical flow of the presentation.

Overview

Global ePics is an image management system designed to capture product images and make them accessible to various user types. It serves as the primary source of image data for Nielsen's item-coding processes, with data stored in OGRDS. This guide outlines the functionalities of Global ePics, including login procedures, image search and management, reporting capabilities, and configuration standards.

Key Bullet Points

- Global ePics is used for managing and accessing product images for item coding.
- Users must have an authenticated profile and appropriate access levels.
- The system supports image search, reporting, and metadata editing.
- Reports include CSV and PDF outputs, Picture Quality Ratings, and job logs.
- Images can be uploaded individually or in bulk with specific naming conventions.

Do's and Don'ts

Do's:

- Ensure user profiles are properly created and authenticated.
- Use correct file formats and naming conventions when uploading images.
- Provide Picture Quality Ratings and Vignette flags for images.
- Use the 'Surgery' page to pass coding instructions to the coding team.
- Review job logs to identify and resolve image upload issues.

Don'ts:

- Do not delete images without proper verification, as recovery is complex.
- Avoid using promotional or descriptive characteristics for CIG definitions.
- Do not upload files with incorrect formats or naming structures.

Summary

This guide provides a detailed walkthrough of the Global ePics system, highlighting its role in image management and item coding. By following the outlined procedures and best practices, users can effectively utilize the platform to manage product images, generate reports, and support coding operations. Proper configuration and adherence to guidelines ensure data integrity and operational efficiency.

A reference to the original PowerPoint for visual context:

[Global ePics - User Guide.pptx](#)

Standard Operating Procedure

ePics 7 - Bulk Images Extract

Introduction

This document provides a formal overview of 'ePics 7 - Bulk Images Extract' functionality. It is intended to guide users through the process of extracting bulk images using the ePics 7 platform. The content has been derived from the original PowerPoint presentation and expanded into a structured format for clarity and professional documentation.

Overview

Bulk image extraction in ePics 7 enables users to schedule and retrieve large volumes of product images for a specific country. Due to the resource-intensive nature of these operations, access is restricted to users with a 'Superuser' role. The tool operates asynchronously, ensuring that image extraction tasks do not disrupt regular business operations.

Key Bullet Points

Bulk image extraction is available only to Superusers via the Admin area.

The tool supports asynchronous scheduling of image extraction tasks.

Input files must be in CSV format with two columns: 'external_code' and 'vignette_flag'.

A maximum of 5000 external codes can be submitted per file.

The system validates input and provides status updates upon completion.

Do's and Don'ts

Do's:

Use valid CSV files with correct headers and format.

Ensure you have Superuser access before attempting to use the tool.

Follow the correct naming conventions and file structure.

Don'ts:

Do not exceed the 5000 external code limit per file.

Avoid using incorrect file formats or missing headers.

Do not attempt to use the tool without proper authorization.

Summary

The ePics 7 Bulk Images Extract tool is a robust solution for retrieving large sets of product images. Proper usage and adherence to guidelines are essential to ensure efficient operation and avoid disruptions. This document serves as a comprehensive guide for authorized users to understand and utilize the tool effectively.

A reference to the original PowerPoint for visual context:

[ePics 7 - Bulk Images Extract.pptx](#)

Standard Operating Procedure

Pre-Movement Image Input SOP

Introduction

This document provides a formal overview of the Standard Operating Procedure (SOP) for managing pre-movement images shared by clients, Global Solutions (GS), or Client Liaison (CL) teams. It outlines the structured approach for ensuring traceability and compliance when handling product images prior to market launch or post item coding. The SOP aims to standardize image management across countries and mitigate risks associated with untracked image references in OGRDS.

Overview

SOP addresses current gaps in image management, particularly for pre-movement items and updates based on client-shared images. It introduces enhancements in the ePics application to facilitate direct uploads, coding instructions, and traceable workflows. The document emphasizes the importance of using standardized platforms and processes to ensure data integrity and operational efficiency.

Key Bullet Points

- Images received from clients should be uploaded to ePics using the CLNPC source tag.
- Coding instructions must be added via the Surgery feature in ePics.
- Use the 'PQR by Country' report to track image uploads by source.
- Ensure all pre-movement images are stored in OGRDS for traceability.
- Follow the naming convention and file format guidelines for image uploads.
- Use the 'Defer' parameter to manage future-dated work items in OGRDS.

Do's and Don'ts

Do's:

- Upload all client-shared images to ePics with proper source tagging.
- Add coding instructions using the Surgery feature.
- Use standardized naming conventions for image files.
- Ensure images are in JPEG format and under the size limit.
- Use the 'Defer' field to manage pre-launch items appropriately.

Don't:

- Do not leave images in emails or MSD tickets without uploading to ePics.
- Avoid using non-compliant formats or oversized files.
- Do not skip adding coding instructions for pre-movement items.
- Do not delete images from ePics without proper justification.

Summary

This SOP provides a comprehensive framework for managing pre-movement images in a compliant and traceable manner. By leveraging the ePics application and adhering to standardized processes, teams can ensure accurate item coding and maintain data integrity. The enhancements introduced in this SOP aim to streamline workflows and support future coding initiatives effectively.

A reference to the original PowerPoint for visual context:

[Pre-Movement Image Input SOP.pptx](#)

BrandBank - Coding BrandBank Input

Standard Operating Procedure

Brandbank - Coding Input Process

Introduction

This document provides a comprehensive overview of the Coding Brandbank Input process. It is intended for internal use and outlines the procedures, configurations, and validations required for effective image-based product coding using Brandbank feeds. The content has been structured to reflect the original presentation slides for clarity and professional documentation.

Overview

The Coding Brandbank Input process integrates Brandbank feeds into the OGRDS system to facilitate efficient and accurate product coding. Description feeds support auto-coding through mapped categories, while image feeds provide visual references for coding exceptions. Proper configuration, validation, and adherence to guidelines are essential to maintain data quality and compliance.

Key Bullet Points

- Brandbank provides two feeds: description and image feed.
- Description feed enables auto-coding through External Information Mapping (EIM) rules.
- Image feed supports coding via ePics exceptions and includes various image types.
- Auto-coding validation is performed using Cross Code Details Report (RR28).
- Images must be carefully reviewed to avoid coding errors due to mismatches or missing information.

Do's and Don'ts

Do's:

- Use Brandbank pre-movement images strictly for coding purposes.
- Validate auto-coding weekly using RR28 report.
- Use the Brandbank product library to verify barcode and product details.
- Follow standard coding procedures for image exceptions.
- Raise queries to Brandbank via Nielsen Integration Support portal when discrepancies are found.

Don'ts:

- Do not share Brandbank images with clients or third parties.
- Avoid coding items based on incorrect or mismatched images.
- Do not rely solely on artwork images without verifying product details.
- Do not auto-cross code client images.
- Avoid coding multipacks as single items or vice versa without proper validation.

Summary

This document outlines the end-to-end process of using Brandbank inputs for product coding. It emphasizes the importance of validating auto-coding, correctly interpreting image types, and following standard procedures to ensure accurate and compliant data handling. By adhering to the outlined do's and don'ts, users can effectively manage coding exceptions and maintain high data integrity.

A reference to the original PowerPoint Presentation for visual context:

[Coding Brandbank Input.pptx](#)

Standard Operating Procedure Brandbank – Introducing (movie)

A reference to the original document for visual context:

[Introducing Brandbank_English on Vimeo](#)

Standard Operating Procedure Brandbank – New Feed

Introduction

This document provides a comprehensive overview of the BrandBank New Feed presentation. It consolidates the content of the original slides into a formal and structured format, expanding on bullet points into coherent paragraphs and maintaining the logical flow and intent of the original presentation. The document includes an overview, key bullet points, do's and don'ts, and a summary to ensure clarity and professional communication.

Overview

The BrandBank New Feed initiative aims to streamline the process of receiving and processing product data from BrandBank. The redesigned feed addresses inefficiencies in the previous system by implementing changes that reduce redundant data submissions, enhance data quality, and improve operational efficiency. This document outlines the key changes introduced in the new feed, their rationale, and the expected impact on the data processing workflow.

Key Bullet Points

- Items are now sent only when they reach 'Awaiting Approval' or 'Live' status on BrandBank.
- T0 images (comprehensive product views) are prioritized over T1 images (front pack only).

- Consolidated item categories are excluded from the image input feed.
- Revision logic is refined to exclude non-critical characteristic changes.
- Only items targeted for the GB market are included.
- Brand comparison is based on standardized brand names.
- Target usage filtering excludes non-essential image types.
- Revision logic now considers characteristic changes rather than subscriber codes.
- Black or placeholder images and logos are excluded from the feed.

Do's and Don'ts

Do's:

- Ensure only items with 'Live', 'Pending Release', or 'Awaiting Approval' status are included.
- Prioritize T0 images for comprehensive product information.
- Use standardized brand names for accurate comparison.
- Validate revision logic based on actual characteristic changes.

Don'ts:

- Do not include items with 'Rejected' or 'Delist' status.
- Avoid sending T1 images before T0 images.
- Do not include out-of-market or consolidated items.
- Exclude black, blue, or placeholder images and logos.

Summary

The redesigned BrandBank New Feed introduces several improvements aimed at reducing redundant data submissions, enhancing the quality of product information, and streamlining the data processing workflow. By implementing stricter inclusion criteria, prioritizing comprehensive images, and refining revision logic, the new feed significantly reduces manual workload and improves the accuracy of product data integration. These changes are expected to deliver a 30% reduction in workload and enhance the overall efficiency of the data acquisition process.

A reference to the original PowerPoint Presentation for visual context:

[BrandBank new feed .pptx](#)

LHHT and OGRDS

Standard Operating Procedure

LHHT and OGRDS Process

Introduction

This document provides a comprehensive overview of the LHHT/CDAR and OGRDS end-to-end process. It is based on the original PowerPoint. The document includes an overview, key bullet points, do's and don'ts, and a summary.

Overview

The LHHT and OGRDS process involves data acquisition through CDAR and LHHT devices, input operations via SIRVAL, and reference data management using ePics and OGRDS. The workflow ensures accurate collection, transformation, and integration of product data and images into the global repository and characterization systems.

Key Bullet Points

- Data acquisition is performed using CDAR and LHHT devices.
- Input operations are managed through SIRVAL.
- Reference data is maintained in ePics and OGRDS.
- Images must follow a specific naming convention and be uploaded to the ePics FTP server.
- CDAR acts as a bridge between LHHT devices and OGRDS.
- SI02 interface is used for characterized input and image feed.
- CDAR transforms collected data and shares it with SIRVAL, OGRDS, and ePics.
- CIP CatGen is used to build country catalogs and transform data from OGRDS to CDAR.

Do's and Don'ts

Do:

- Ensure all images are named correctly and uploaded with a COMPLETE token file.
- Use SI02 interface for characterized input and image feed.
- Configure LPC/MODULE headings appropriately for each country.
- Publish all descriptions from Manual Audit Processing group to the IMDB_PUB_F_XCD_ALL_DESCS_V table.
- Activate the IMDB_PUB_F_NAN_ACTIVITY_CITY_V table for item activity in CDAR.

Don't:

- Upload images without following the naming convention.
- Send external codes with less than 13 digits.
- Include sub-directories in the image upload folder.
- Ignore mandatory fields such as External Code, Supplier Code, and Item Description.
- Receive more than 50 images per barcode.

Summary

This document outlines the structured process for managing product data and images using LHHT and OGRDS systems. It highlights the roles of CDAR, SIRVAL, ePics, and OGRDS in ensuring accurate data collection, transformation, and integration. By following the defined procedures and configurations, teams can maintain data integrity and streamline operations across various countries and devices.

A reference to the original PowerPoint for visual context:

[LHHT and OGRDS.pptx](#)

NPP

Standard Operating Procedure

NPP – NielsenIQ Product Pictures

Introduction

This document provides a comprehensive overview of the NielsenIQ Product Pictures (NPP) tool, originally presented in a PowerPoint format. The content has a formal document, maintaining the original order and structure of the slides. Bullet points have been expanded into full sentences and coherent paragraphs. The document includes an overview, key bullet points, do's and don'ts, and a summary to facilitate understanding and implementation.

Overview

NPP is a smartphone application developed by NielsenIQ that enables data acquisition teams, clients, and employees to capture product images. These images are directly uploaded to the ePics7 system for further processing and analysis. The tool supports barcode recognition, image validation, and seamless integration with backend systems such as OGRDS and NIMS.

Key Bullet Points

- NPP is a mobile application for capturing product images.
- Images are uploaded directly to ePics7 for processing.
- Supports barcode recognition and image validation.
- Images can be sourced from field collectors, clients, employees, and panelists.
- Configuration settings determine image source and processing rules.
- Image filenames must follow a specific naming convention.
- Available for Android and iOS platforms.

Do's and Don'ts

Do's:

- Ensure a valid login and activation code before using the app.
- Capture at least four images per product.
- Send images immediately after capture to avoid duplication.
- Maintain proper distance while scanning barcodes for better recognition.
- Use the correct filename format when uploading images to ePics7.

Don'ts:

- Do not start scanning too close to the barcode.
- Do not store images in the pending list for extended periods.
- Do not use client images for auto-cross coding.
- Do not forget to check configuration flags for image sources.

Summary

The NPP tool streamlines the process of capturing and uploading product images for NielsenIQ's data acquisition and analysis. By adhering to the guidelines and configurations outlined in this document, users can ensure accurate and efficient image processing. Proper usage of the app, including barcode scanning, image naming conventions, and timely uploads, is essential for maintaining data quality and operational efficiency.

A reference to the original PowerPoint for visual context:

[NPP.pptx](#)

Standard Operating Procedure

NPP Advanced Options Guide

Introduction

This document provides a formal overview and detailed explanation of the Nielsen Product Pics (NPP) Advanced Options Guide. It is intended to support users in understanding the various profiles, configurations, and operational modes available within the NPP application. The guide expands upon the original presentation content, offering coherent paragraphs and structured insights for professional use.

Overview

The Nielsen Product Pics (NPP) application is designed to facilitate the collection of product images by various user groups including Nielsen customers, employees, and panel members. The application supports multiple operational profiles tailored to different usage scenarios, such as online and offline modes, catalog updates, and image collection protocols. This guide elaborates on the capabilities and configurations associated with each profile, ensuring users can operate the application effectively and in compliance with organizational standards.

Key Bullet Points

- NPP supports three main profiles: Standard, Simple Field, and Advanced Field.
- Standard profile operates in full online mode and is suitable for occasional users.
- Simple Field profile allows offline mode and optional bypass functionality.
- Advanced Field profile includes a daily updated product catalog for offline barcode control.
- Offline mode is useful in areas with poor cellular coverage but should be used cautiously.
- Catalog updates can be full, incremental, or real-time depending on login and usage patterns.
- The application includes features to prevent duplicate image submissions and manage cellular data usage.

Do's and Don'ts

Do's:

- Use the Standard profile for occasional image collection tasks.
- Enable sounds and scan response pop-ups for better feedback during barcode scanning.
- Perform daily catalog updates when using the Advanced Field profile.
- Use Wi-Fi for catalog updates exceeding cellular data thresholds.
- Send images immediately after collection to avoid duplicates.

Don'ts:

- Avoid using offline mode unless necessary due to poor connectivity.
- Do not bypass scan responses unless explicitly authorized.
- Do not disable scan response pop-ups if sounds are turned off.
- Avoid working with outdated catalogs; update regularly.
- Do not distribute this document without proper authorization.

Summary

This guide has outlined the advanced options available in the NPP application, detailing the operational profiles, configuration settings, and best practices for effective usage. By adhering to the recommended do's and avoiding the don'ts, users can ensure accurate and efficient product image collection, contributing to the overall data quality and operational success of Nielsen's initiatives.

A reference to the original pdf document for visual context:

[NPP Advanced options guide 2018 \(1\)](#)

NPP

NiQ_GfK_Coding_Integration NAX_LAX

Standard Operating Procedure

NiQ_GfK Coding Integration NAX_LAX & OGRDS - GfK NAX LAX - Tech and Durables SOP

Introduction

This document provides a comprehensive overview of the NiQ-GfK Coding Integration process, as outlined in the PowerPoint presentation titled 'NiQ_GfK_Coding_Integration_NAX_LAX'. The integration aims to streamline the end-to-end (E2E) coding workflow between NielsenIQ (NiQ) and GfK, enhancing data accuracy, operational efficiency, and alignment across global teams. The process has been signed off by key stakeholders including representatives from SirVal, GfK, OGRDS, and local leadership teams.

Overview

The NiQ-GfK Coding Integration process encompasses multiple stages including data export from NiQ to GfK, GfK's internal data flow and coding operations, ingestion of coded data back into NiQ systems, and the implementation of soft and full launches. The integration also includes configuration steps within OGRDS, validation procedures, handling of banded packs, onboarding of new retailers, and output activities. This document expands upon each slide from the presentation to provide a detailed narrative suitable for formal documentation.

Do's and Don'ts

Do's:

- Ensure all relevant stakeholders are aligned before initiating the integration process.
- Use the SirVal Export Tracker to maintain visibility of data sent to GfK.

- Configure OGRDS parameters accurately to support daily exports and ingestion.
- Perform regular validations to ensure data integrity and correct item mapping.
- Update LPC assignments and schema characteristics as new categories are added.

Don'ts:

- Do not proceed with weekly exports until GfK confirms backdata coding is complete.
- Avoid using real LPCs during the soft launch phase to prevent incomplete item creation.
- Do not overlook the need for dummy retailers and modules in OGRDS setup.
- Avoid manual coding of banded packs without referencing GfK classifications.
- Do not ignore conflicting rules or mapping errors during configuration.

Summary

The NiQ-GfK Coding Integration process represents a significant advancement in harmonizing coding workflows across organizations. By leveraging automated exports, structured ingestion, and collaborative validation, the integration ensures high-quality data delivery and operational efficiency. This document has outlined the key components, configurations, and best practices necessary for successful implementation. For further visual reference and detailed explanations, please refer to the original PowerPoint presentation.

For more details and visual explanations, refer to the PowerPoint presentation: [NiQ_GfK_Coding_Integration_NAX_LAX.pptx.pptx](#)

A reference to the original PowerPoint for visual context:

[NiQ GfK Coding Integration - NAX LAX.pptx](#)

Introduction

This document outlines the Standard Operating Procedure (SOP) for the integration and management of Tech & Durables item coding and cross coding between NIQ and GFK systems. It covers the configuration setup in OGRDS, data dispatch and ingestion processes, item merge workflows, and BAU category handling. The SOP ensures a structured and synchronized approach to maintain data integrity and operational efficiency across both platforms.

Overview

The SOP includes the following key components:

- OGRDS Configuration for Tech & Durables
- GFK Data Dispatch and Ingestion
- Item Merge Process for In Transition and BAU Categories
- Exception Handling and Workspace Operations
- Use of Surgeries for Bulk Updates
- Summary of Merge Scenarios and Validation Steps

Do's and Don'ts

Do's:

- Ensure Tech & Durables configuration is correctly set before initiating item merge.
- Use accurate mapping files for category and characteristic alignment.
- Validate all items thoroughly before committing changes in the workspace.
- Follow GFK guidelines when merging MAD Pack items and handling exceptions.

Don'ts:

- Do not proceed with item merge if validation errors are present.
- Avoid using incorrect LPC values during merge operations.
- Do not modify mappings without proper authorization and review.

Summary

The GFK NAX & LAX Tech & Durables SOP provides a comprehensive framework for managing item coding and cross coding between NIQ and GFK systems. By adhering to the outlined procedures, countries can ensure accurate data synchronization, efficient item merge operations, and compliance with global standards. This documentation serves as a reference for country administrators, item coders, and technical teams involved in the integration process. For further visual context and detailed explanations, refer to the original PowerPoint presentation 'OGRDS - GFK NAX LAX - Tech and Durables SOP.pptx'.

A reference to the original PowerPoint for visual context:

[OGRDS - GFK NAX LAX - Tech and Durables SOP.pptx](#)

Clustering Tool

Standard Operating Procedure

RD Clustering Tool

Introduction

The RD Clustering Tool is designed to streamline the data validation process by grouping similar items into clusters. This functionality significantly reduces the volume of data requiring manual review, allowing operators to validate only one item per cluster. The tool operates in two main steps: clustering the data and assigning labels to external codes. This document provides a comprehensive overview of the tool, its business justification, access instructions, navigation steps, and operational guidance.

Overview

The RD Clustering Tool simplifies exception handling by clustering items with similar descriptions. Users can access the tool via VPN and NIQ credentials, and the tool supports input from various OGRDS reports. It includes features such as stopword filtering, numeric clustering, and label assignment, all aimed at improving efficiency and accuracy.

Do's and Don'ts

Do's

- Use the tool to reduce manual validation workload by clustering similar items.
- Ensure input files contain required columns such as External Code, Sequence Code, and Product Description.
- Assign new destinations accurately after clustering.
- Use stop words to exclude irrelevant terms from clustering logic.
- Download and review output files for accuracy before finalizing.

Don'ts

- Do not use input files missing mandatory columns.
- Avoid skipping the label assignment step after clustering.
- Do not ignore unassigned exceptions in the output.
- Avoid using non-ASCII character replacement for languages like Russian unless necessary.
- Do not upload files exceeding the 200 MB limit.

Summary

The RD Clustering Tool is a powerful solution for reducing manual effort in data validation. By clustering similar items and enabling efficient label assignment, it enhances productivity and accuracy. Proper configuration and adherence to best practices ensure optimal use of the tool. Users are encouraged to follow the documented steps and recommendations to fully leverage its capabilities.

A reference to the original PowerPoint for visual context:

[SOP - RD Clustering Tool.pptx](#)

EIM Rule Generator

Standard Operating Procedure

SOP – EIM Rule Generator, EIM Generator v2 Parameters Documentation, EMI Generator tool

Introduction

The EIM Rule Generator is a specialized tool developed to automate the manual process of creating External Information Mapping (EIM) rules. Owned by Dmitry Vynushev and created by Piotr Kowalski, this tool streamlines the generation of EIM rules by analyzing historical cross coding data and identifying unique word combinations. It then produces a surgery file ready for upload into OGRDS, significantly reducing manual effort and improving accuracy.

Overview

This document outlines the functionality, access procedures, navigation steps, configuration parameters, and quality assurance practices associated with the EIM Rule Generator. It is intended to guide users through the complete process of using the tool, from accessing the application to generating and validating EIM rules.

Do's and Don'ts

Do's

- Use fresh data (preferably from the last year) when generating reports.
- Ensure all required columns are present in RR28 and RR29 reports.
- Run quality checks on generated rules before uploading.
- Use the 'Autocode' flag appropriately to control prediction behavior.
- Report bugs directly through the application for timely resolution.

Don'ts

- Do not upload rules without validating their applicability.
- Avoid using non-ASCII character replacement for languages like Russian.
- Do not ignore conflicting rules; use RR104 to detect and resolve them.
- Avoid mapping departments based on too small a sample size.
- Do not forget to set the correct output filename before downloading.

Summary

The EIM Rule Generator is a powerful tool designed to automate the creation of EIM rules based on historical cross coding data. By following the outlined steps and recommendations, users can efficiently generate accurate rules and reduce manual workload. Proper configuration, validation, and adherence to best practices are essential to ensure the effectiveness of the tool and maintain data integrity.

A reference to the original PowerPoint for visual context:

[SOP - EIM Rule Generator.pptx](#)

EIM Generator v2 Parameters Documentation

Introduction

This document provides a formal overview and detailed explanation of the parameters used in the EIM Generator v2. The EIM Generator is a tool designed to automate the creation of External Information Mapping (EIM) rules based on historical cross-coding data. Understanding the configuration and behavior of its parameters is essential for ensuring accurate rule generation and effective deployment within OGRDS environments.

Overview

The EIM Generator v2 simplifies the process of rule creation by analyzing patterns in retailer data and generating mapping rules that can be uploaded via surgery files. It supports various configuration options including precision thresholds, regular expression logic, and rule filtering mechanisms. This documentation outlines the key parameters and their intended use.

Do's and Don'ts

Do's

Ensure the following best practices are followed when using the EIM Generator v2:

- Use fresh and relevant data from OGRDS reports to generate rules.
- Set appropriate precision thresholds to avoid incorrect rule creation.
- Review generated rules for quality before uploading to OGRDS.
- Use regular expressions carefully to avoid unintended matches.

Don'ts

Avoid the following common mistakes:

- Uploading rules without validation or quality checks.
- Using outdated or irrelevant data sources.
- Ignoring the impact of stopwords and banned rules on regex generation.

Summary

The EIM Generator v2 is a powerful tool that streamlines the creation of mapping rules for external information. By configuring its parameters effectively and adhering to best practices, users can significantly reduce manual effort and improve rule accuracy. This documentation serves as a foundational reference for understanding and applying the generator's capabilities.

A reference to the original PowerPoint for visual context:

[EIM generator v2 parameters description.docx](#)

EMI Generator tool

A reference to the original PowerPoint for visual context:

[All Content Apps](#)

Automatic Work Allocation

Standard Operating Procedure

Automatic Work Allocation

Introduction

The Automatic Work Allocation functionality is designed to streamline the assignment of records to users by automating the process from the backend. This system allows for customized allocation jobs using various parameters, thereby improving efficiency and reducing manual workload. Only Country Administrators with the appropriate role assignments ('View Work Allocation' and 'Maintain Work Allocation') can access the Outstanding Work Assignment feature.

Overview

Automatic Work Allocation enables the configuration of workgroups, scheduling of allocation jobs, and assignment of tasks based on user profiles and productivity metrics. It supports multiple browsers and allows for granular control over how exceptions are distributed among users. The system includes features such as skill type selection, scheduling frequency, and custom rule integration to meet specific business needs.

Do's and Don'ts

Do's

- Ensure workgroups are properly configured before scheduling allocation jobs.
- Use the 'Run Now' option for immediate allocation when necessary.
- Assign appropriate profiles and percentages based on actual productivity data.
- Utilize the KPI platform to monitor user performance.
- Use the 'ALL' option for users who can handle unassigned work items.

Don'ts

- Do not assign allocation percentages to users who are not actively coding items.
- Avoid scheduling jobs without saving the workgroup configuration.
- Do not use past dates when scheduling one-time jobs with 'None' recurrence.
- Avoid creating conflicting rules without proper validation.
- Do not overlook the need for backend configuration when using custom assignment rules.

Summary

Automatic Work Allocation is a powerful tool that enhances operational efficiency by automating the distribution of work items. With configurable parameters, scheduled jobs, and integration with user productivity metrics, it ensures that tasks are assigned effectively and fairly. The system supports various browsers and includes enhancements for audit tracking and advanced filtering. Proper setup and adherence to best practices are essential for maximizing the benefits of this functionality.

A reference to the original PowerPoint for visual context:

[Automatic Work Allocation.pptx](#)

Priority Factors

Standard Operating Procedure

OGRDS Priority Factors - Configuration

Introduction

The OGRDS Priority Factors Configuration document outlines the setup and utilization of the prioritization tool within the OGRDS system. This tool is essential for managing exceptions loaded into browsers by calculating their priority based on various country-specific parameters. The configuration ensures that exceptions are addressed efficiently, focusing on those with higher business impact.

Overview

OGRDS Priority Factors is a country-configured tool that assigns priority to exceptions based on predefined criteria. Unlike NIMS, which includes current sales data across all stores, OGRDS calculates priority at the point of load for individual Processing Groups. This configuration is maintained by country SMEs with the appropriate permissions.

Do's and Don'ts

Do's

- Configure priority factors based on country-specific business needs.
- Use the 'Assign Using' parameter to prioritize exceptions effectively.
- Utilize the 'Run Now' and 'Schedule' options to manage allocation jobs.
- Consult with Client Service and Retailer Services to identify important barcode prefixes.
- Regularly review and update priority configurations to reflect changing business requirements.

Don'ts

- Do not assign zero allocation percentage to active users.
- Avoid using outdated barcode prefixes without validation.
- Do not overlook the impact of data sources when configuring priority.
- Avoid assigning high priority to all exceptions indiscriminately.
- Do not ignore the importance of retailer-specific configurations.

Summary

The OGRDS Priority Factors Configuration is a vital component in managing exception workflows efficiently. By leveraging country-specific parameters such as store count, sales impact, and data sources, the system ensures that high-priority exceptions are addressed promptly. Proper configuration and regular updates are essential to maintain the effectiveness of the prioritization tool and support business operations.

For visual reference and further explanation, please refer to the original PowerPoint presentation: OGRDS Priority Factors - Configuration.pptx

A reference to the original PowerPoint for visual context:

[OGRDS Priority Factors - Configuration.pptx](#)

Country and Data Source

Standard Operating Procedure

Country Data Source - Configuration

Introduction

This document provides a comprehensive overview of the Country and Data Sources configuration module within the OGRDS system. It is intended to guide users through the structure, functionality, and operational considerations associated with country setup and data source management. The content has been derived from the original PowerPoint presentation and expanded into formal documentation for reference and training purposes.

Overview

The Country and Data Sources configuration module in OGRDS is a foundational component that governs how countries are created, managed, and linked to data sources. It includes browser interfaces, flags, tabs, and settings that determine language support, workflow behavior, global characteristic mapping, fit-for-use criteria, and access control. Additionally, it outlines how data sources are defined and used to classify item movement and reporting behavior.

Do's and Don'ts

Do's

- Use the Countries Browser to view and manage country configurations.
- Ensure the 'Map Global Characteristics' flag is correctly set before enabling item sharing.
- Configure language settings to support multilingual characteristic values.
- Use the FFU tab to enforce quality standards for item release.
- Maintain access control through the ACL tab to ensure secure configuration.

Don'ts

- Do not reset modules once unchecked in the Global Characteristics tab.
- Avoid creating countries outside the transition roadmap process.
- Do not overlook the impact of data source flags on item classification.
- Avoid unauthorized changes to security permissions in the ACL tab.

Summary

The Country and Data Sources configuration module in OGRDS is essential for managing country-specific settings and data source behavior. Proper configuration ensures accurate item classification, secure access, and effective workflow management. This documentation serves as a reference for understanding the structure and operational logic of the module, supporting consistent and compliant usage across teams.

A reference to the original PowerPoint for visual context:

[OGRDS Configuration 1 - Country_Data Source.pptx](#)

Distribution Time Out

Standard Operating Procedure

Distribution Time Out - Configuration

Introduction

This document provides a comprehensive introduction to the Distribution Time Out (DTO) configuration within the OGRDS system. It outlines the purpose, configuration steps, process flow, and implications of DTO settings for country-specific item distribution. The content is derived from the PowerPoint presentation titled 'OGRDS Configuration - Distribution Time Out' and is structured to maintain the original flow and intent.

Overview

Distribution Time Out (DTO) is a configurable parameter in OGRDS that determines the number of days after which local characteristics associated with a country are removed from an item if it no longer has cross codings for that country. This functionality is essential for maintaining data accuracy and ensuring that outdated or irrelevant item characteristics do not persist in the system.

Do's and Don'ts

Do's

- Configure DTO settings appropriately for each country using the COUNTRY browser > DETAILS tab.
- Monitor items that lose distribution and ensure timely removal from publication.
- Use the Distribution view and Search screen results to verify item status.

Don'ts

- Do not overlook the impact of DTO on item publication and local characteristics.
- Avoid setting DTO values without understanding the business implications.

Summary

Distribution Time Out is a critical configuration in OGRDS that helps manage item lifecycle and data relevance. By removing local characteristics after a defined period of inactivity, DTO ensures that only active and valid data is retained. Proper configuration and monitoring of DTO settings are essential for maintaining system integrity and supporting accurate reporting.

A reference to the original PowerPoint for visual context:

[OGRDS Configuration - Distribution Time Out.pptx](#)

Surprisal Scoring Validation

Standard Operating Procedure

Surprisal Scoring Validation Characteristic Dictionary

Introduction

This document outlines the Standard Operating Procedure (SOP) for creating and maintaining Surprisal Scoring Validation (SSV) Dictionary files used in the DMLE tool. These files are essential for validating newly coded items across OGRDS countries. The SOP details the structure and purpose of the SSV Characteristic Dictionary and Categories files, and describes the tools and processes for validating and updating them.

Overview

The SSV process requires three input files: the Characteristic Dictionary file, the Categories file, and the Countries file. While the Countries file is managed externally, the local RD team is responsible for generating and maintaining the Dictionary and Categories files. These files enable the DMLE tool to detect anomalies and predict characteristic values based on historical data. A validation tool is also available to ensure the accuracy and consistency of these files before submission.

Do's and Don'ts

Do's:

- Use Source IDs for all characteristics and LPCs in dictionary files.
- Validate file structure and convert skip values using the designated tool.
- Include relevant characteristics for anomaly detection and prediction.
- Save validated files for future BAU maintenance.
- Refer to the dashboard for country-specific availability of categories and characteristics.

Don'ts:

- Avoid using text descriptions instead of Source IDs.
- Do not include outdated or irrelevant characteristics.
- Never skip validation before submitting files to DMLE.
- Avoid special characters or spaces in category names.
- Do not update files more than once per week.

Summary

This SOP provides a structured approach for creating and maintaining Surprisal Scoring Validation Dictionary and Categories files. It emphasizes the importance of accurate data representation, proper formatting, and validation using the designated tool. By following these guidelines, RD teams can ensure effective integration with the DMLE tool and uphold high standards in item coding validation.

A reference to the original PowerPoint for visual context:

[Surprisal Scoring Validation Dictionary SOP.pptx](#)

Validation Rules Toolbox

Standard Operating Procedure

Configuration - Validation Rules Toolbox

Introduction

This document provides a comprehensive introduction to the Validation Rules Toolbox functionality within the OGRDS framework. It outlines the structure, access protocols, rule creation guidelines, and operational procedures for configuring and managing validation rules. The content is derived from the original PowerPoint presentation and has been expanded into coherent paragraphs to ensure clarity and professional tone.

Overview

The Validation Rules Toolbox is a browser-based interface used to define and manage validation rules for item coding. These rules are applied to new or modified items to ensure consistency and accuracy in data entry. The toolbox supports rule creation, testing, deployment, and modification, and is accessible only to authorized users such as Country Administrators or LDC Users.

Do's and Don'ts

Do's

- Ensure validation rules are targeted, focused, and easy to understand.
- Follow global guidelines during rule creation.
- Test validation rules on a sample dataset before enabling.
- Use appropriate operators and value types based on the property selected.
- Use the Rule Test functionality to validate rule logic before deployment.
- Ensure all mandatory parameters are completed before enabling a rule.

Don'ts

- Do not create rules without proper scope and target characteristic selection.
- Avoid using more than six properties in a single validation rule.
- Do not enable rules without testing them first.
- Do not use both 'Item Created Date' and 'Last Data Date' simultaneously.
- Avoid using unsupported operators or properties without proper training.

Summary

The Validation Rules Toolbox is a critical component of the OGRDS framework, enabling precise and controlled validation of item coding. By following structured guidelines and leveraging the available tools, users can ensure data integrity and compliance with global standards. This document has outlined the key functionalities, access protocols, rule creation steps, and operational best practices to support effective use of the toolbox.

A reference to the original PowerPoint for visual context:

[Configuration - Validation Rules Toolbox.pptx](#)

Standard Operating Procedure

Validation Rule Query Creation – Extended Introduction

Introduction

This document provides a comprehensive introduction to the process of creating Validation Rule Queries within the OGRDS system. It outlines the purpose, definitions, structure, and examples necessary for understanding and implementing validation rules effectively. The content is derived from the standard operating procedure and is intended to guide users through the creation and application of validation rules.

Overview

Validation Rules are essential for ensuring the accuracy and consistency of item coding within the OGRDS system. These rules are defined using SQL-like WHERE clauses that identify items requiring manual review. The process involves specifying target and reference characteristics, applying logical and comparison operators, and optionally using SQL functions or image-based validations. This document elaborates on the structure, syntax, and examples of such rules, providing a foundational understanding for users involved in bulk rule creation or advanced query editing.

Do's and Don'ts

Do's

- Use the correct suffix (`_num`, `_dscr`, `_sen`) based on the characteristic type.
- Ensure the rule starts and ends with parentheses.
- Use `REGEXP_LIKE` for pattern matching when needed.
- Test rules using the Rule Preview before committing.
- Use Advanced Query Editor for complex rule definitions.

Don'ts

- Do not use unsupported operators or syntax.
- Avoid using both `IMG_VIG` and `IMG_ALL` in the same rule.
- Do not forget to assign the correct target characteristic.
- Avoid creating rules without validating the presence of all referenced characteristics.
- Do not use more than 6 properties in a single rule.

Summary

This document has outlined the foundational elements of creating Validation Rule Queries in OGRDS. By understanding the structure, syntax, and logic behind these rules, users can effectively implement validations that ensure data integrity. The examples and definitions provided serve as a reference for constructing accurate and efficient rules. Following the outlined do's and don'ts will help maintain consistency and avoid common pitfalls during rule creation.

A reference to the original PowerPoint for visual context:

[SOP - Creation of Validation Rules Query.docx](#)

External Code Conversion Process

Standard Operating Procedure

NCPS DV Active Items Extraction

External Code Conversion Process and SOP

Introduction

This document provides a comprehensive overview of the External Code Conversion process within the Ref Data Enablement framework. It outlines the types of external codes, their classification, and the steps involved in converting Locally Assigned Codes (LACs) to standardized formats such as EAN, UPC, and RAC. The content is derived from the PowerPoint presentation created by Preeti Panigrahi and updated by Nainil Shah in July 2023.

Overview

External codes are identifiers used across various interfaces within the end-to-end (EtE) platforms. These codes can be algorithmic or non-algorithmic and are classified by OGRDS based on a set of business rules. Common types include EAN, UPC, G14, APO, BVW, CIP, FPC, NPC, PPC, PZN, RAC, LAC, RCT, REC, and RVW. The conversion of LACs to standardized formats is essential to ensure consistency and reduce exceptions in item coding across countries and retailers.

Do's and Don'ts

Do's

- Engage with all relevant teams across the factory before initiating LAC conversion.
- Verify external codes using GS1 to confirm EAN/UPC classification.
- Resolve all exceptions in the browser labeled as LAC before conversion.

- Use the provided tools and reports to validate and implement conversions accurately.

Don'ts

- Do not proceed with conversion without resolving multi-linked cases within or across countries.
- Avoid using unsupported external code types without proper interface enhancements.
- Do not skip communication post-implementation to ensure all stakeholders are informed.

Summary

The External Code Conversion SOP is a critical process to standardize item coding across platforms. By converting LACs to recognized formats like EAN and UPC, organizations can eliminate inconsistencies and improve data integrity. This document outlines the necessary steps, tools, and best practices to ensure successful implementation. For further details and visual references, please refer to the original PowerPoint presentation titled 'External Code Conversion Process and SOP.pptx'.

A reference to the original PowerPoint for visual context:

[External Code Conversion Process and SOP.pptx](#)

Reprioritization Flow

Standard Operating Procedure

Configuration - Reprioritization Flow

Introduction

The Reprioritization Flow SOP outlines the structured process within the OGRDS system for managing item coding exceptions more efficiently. In standard business-as-usual (BAU) operations, exceptions are loaded into OGRDS via SI02 feeds, which may include both prioritized and non-prioritized sources. To help countries streamline exception handling and reduce backlog, the Reprioritization Flow enables the movement of exceptions from the Item Coding Browser to the Prioritization Browser based on configurable thresholds and prioritization logic.

The SOP provides detailed guidance on when and how to activate the Reprioritization Flow, configure exception thresholds, exclude specific data sources, and utilize the Prioritization Browser effectively. It also introduces a specialized flow for client image exceptions, ensuring that items are only moved to coding once relevant sales data is available. By implementing this process, countries can align exception handling with NIMS prioritization criteria, optimize resource allocation, and maintain data quality across platforms.

Overview

The Reprioritization Flow in OGRDS is designed to manage exceptions loaded via SI02, allowing countries to filter out non-prioritized sources and streamline item coding workflows. This process is particularly useful when facing backlogs, over-coverage in sales reporting, or excessive proactive exceptions. Configuration options include enabling the flow, setting thresholds, excluding specific data sources, and activating deletion of old work items. A special flow for client images is also available to park exceptions until sales data is received.

Do's and Don'ts

Do's

- Enable Reprioritize Flow if your country faces backlog or over-coverage issues.
- Configure appropriate thresholds based on production cycles and team capacity.
- Use the Prioritization Browser to assign destinations and manage exceptions.
- Activate 'Delete Old Work Items' to clean up outdated exceptions.
- Use the Special Reprioritize Flow for Client Images if applicable.

Don'ts

- Do not configure exceptions exclusion without understanding your country's NIMS setup.
- Avoid setting thresholds too low, which may prematurely move exceptions.
- Do not ignore exceptions in the Prioritization Browser; they require user action.
- Avoid using globally excluded data sources and code types for prioritization.

Summary

The Reprioritization Flow SOP provides a structured approach to managing item coding exceptions in OGRDS. By configuring the flow appropriately, countries can ensure efficient handling of exceptions, reduce backlog, and maintain prioritization integrity. The use of Prioritization Browser and optional client image workflows enhances flexibility and control. Proper setup and adherence to guidelines are essential for successful implementation.

A reference to the original PowerPoint for visual context:

[Configuration - Reprioritization Flow.pptx](#)

Processing Groups & Sets

Standard Operating Procedure

PGID Control

Introduction

This document outlines the PGID Control Process. It aims to provide a structured and formal overview of the process steps, governance, and implementation details for managing Processing Group IDs (PGIDs) and Processing Group Sets. The content has been expanded from the original presentation to ensure clarity and coherence for documentation purposes.

Overview

The PGID Control Process is designed to ensure tighter control over the creation and management of Processing Groups and Sets. It introduces a structured intake and review mechanism involving governance and transformation teams to validate and implement requests efficiently. The process includes intake submission, ownership assignment, board review, implementation, and closure.

Key Bullet Points

- All PGID and PG Set creation requests must go through a formal intake process.
- Requests with more than 10 items require escalation to the AppDev team via a Dynamics ticket.
- Governance team reviews and implements requests with up to 10 items.
- Transformation team approval is required for complex or new data source requests.
- Weekly board calls are organized to review and approve specific requests.
- Templates must be filled accurately to ensure successful request processing.

Do's and Don'ts

Do's

- Use the Enablement Support Request form to submit intake requests.
- Include all required details in the intake template.
- Coordinate with governance and transformation teams for approvals.
- Raise Dynamics tickets for large requests after approval.

Don'ts

- Do not create PGIDs or PG Sets directly using Local Country Admin permissions.
- Do not submit incomplete or inaccurate intake forms.
- Do not bypass the board review process for complex requests.

Summary

The PGID Control Process ensures a robust and controlled mechanism for managing Processing Groups and Sets. By following the structured intake and review process, organizations can avoid errors and ensure optimal setup for various data sources. Collaboration between governance, transformation, and AppDev teams is essential for successful implementation.

A reference to the original PowerPoint for visual context:

[SOP_PGID Control.pptx](#)

Standard Operating Procedure

Processing Groups and Sets

Introduction

This document provides a comprehensive overview of the Processing Groups and Sets as outlined in the presentation. It elaborates on the business need, definitions, setup procedures, governance, and relevant configurations. The content is structured to maintain the logical flow of the original presentation, with expanded explanations, clarified bullet points, and detailed descriptions of processes and configurations. This document serves as a formal reference for stakeholders involved in the management and implementation of Processing Groups and Sets.

Overview

Processing Groups and Sets are essential components in managing data flows from various sources such as retailers, eCommerce platforms, and audit data. They enable structured auto-cross coding, workflow management, and validation rules tailored to specific data sources. This document outlines the setup, governance, and configuration of these entities to ensure optimal data processing and compliance.

Key Bullet Points

- Processing Groups associate external codes and product descriptions with data sources.
- Processing Group Sets Group Processing Groups for differentiated business rule application.
- Intake tickets are required for creation or modification of Processing Groups and Sets.
- Governance Team manages key fields and oversees intake approvals.
- Auto-cross coding and validation rules are configurable at both group and set levels.

Do's and Don'ts

Do's

- Submit complete and justified intake tickets for any changes.
- Ensure correct assignment of Processing Groups to appropriate Sets.
- Use the correct templates for intake submissions.
- Consult Governance Team for changes to key fields.
- Utilize the Processing Group and Set browsers for visibility and management.

Don'ts

- Do not modify key fields without proper authorization.
- Avoid creating Processing Groups or Sets without intake approval.
- Do not assign Processing Groups to incorrect Sets.
- Avoid using outdated templates for intake submissions.
- Do not bypass governance protocols for urgent requests.

Summary

This document has detailed the structure, purpose, and governance of Processing Groups and Sets. By adhering to the outlined procedures and configurations, stakeholders can ensure accurate and efficient data processing. The governance framework and intake process are critical to maintaining data integrity and operational consistency across all countries and data sources.

A reference to the original PowerPoint for visual context:

[Processing Groups_Sets.pptx](#)

Predictive Model

Standard Operating Procedure

Predictive Model – Configuration

Introduction

This document provides a comprehensive overview of the Predictive Model configuration within the OGRDS system. It is based on the original PowerPoint presentation. The Predictive Model leverages machine learning to enhance auto-cross coding and exception management processes, enabling efficient workload allocation and improved data accuracy.

Overview

The Predictive Model in OGRDS is designed to learn from historical user actions and predict product groups or consolidated items. It facilitates auto-cross coding, displays predictions in Outstanding Work Browsers (OWBs), and supports copy item identification. This document outlines the setup process, configuration steps, and best practices for implementing and maintaining the Predictive Model.

Key Bullet Points

- Predictive Model uses machine learning to learn from historical user actions.
- It predicts product groups and consolidated items for auto-cross coding.
- Supports copy item identification to enhance characteristic coding productivity.
- Configuration involves selecting appropriate characteristics and setting thresholds.
- Only one Predictive Model can be active in production at a time.
- Model refresh is recommended twice a year to incorporate new data trends.

Do's and Don'ts

Do's

- Consult category experts to identify appropriate characteristics.
- Configure commonly used characteristics across categories.
- Include Product Group, Module, and Local Product Class in configuration.
- Use RR176 report to identify core characteristics.
- Update thresholds in real-time as needed.

Don'ts

- Do not configure numeric characteristics such as weight or volume.
- Do not include Euro characteristics as they are being unsubscribed.
- Do not delete or add new characteristics to an active model.
- Do not activate more than one model at a time.
- Do not configure characteristics coded with 'NOT DETERMINED'.

Summary

The Predictive Model in OGRDS is a powerful tool that enhances auto-cross coding and exception management through machine learning. Proper configuration and regular updates ensure optimal performance and accuracy. By following the outlined steps and best practices, countries can effectively implement and maintain the Predictive Model to support their data processing needs.

A reference to the original PowerPoint for visual context:

[OGRDS Configuration - Predictive Model.pptx](#)

Exception Workflow

Standard Operating Procedure

Exception Workflow – Configuration

Introduction

This document provides a comprehensive overview of the Exception Workflow as outlined in the OGRDS Configuration Module 3 presentation. It is intended for professionals involved in managing exception workflows within the OGRDS system. The content has been expanded from bullet points into coherent paragraphs, preserving the original structure and logical flow of the presentation. It includes an overview, key bullet points, do's and don'ts, and a summary to facilitate understanding and implementation.

Overview

The Exception Workflow module in OGRDS is designed to manage exceptions arising during the auto-coding and manual cross-coding processes. It enables countries to configure workflows and dispatch flags at the product group level, determine exception handling procedures, and apply prioritization logic. The module also includes tools for managing potentially reused barcodes and related items to enhance coding accuracy and efficiency.

Key Bullet Points

- Exception Workflow allows countries to manage exceptions effectively.
- Workflow and dispatch flags are configured at the product group level.
- Overrides can be applied for specific external code types or processing groups.
- Exceptions are categorized as IN or OUT market based on coding level.
- Prioritization tools help manage exception handling based on country-specific criteria.
- Potentially reused barcodes are identified and managed to prevent data inaccuracies.
- Related items functionality assists users in making informed cross-coding decisions.

Do's and Don'ts

Do's:

- Do configure workflow and dispatch flags appropriately for each product group.
- Do use overrides when specific behavior is required for external code types or processing groups.
- Do review and maintain priority factors regularly to ensure effective exception handling.
- Do utilize the related items grid to enhance cross-coding decisions.
- Do monitor potentially reused barcodes to maintain data integrity.

Don'ts:

- Don't apply dispatch settings to LAC/RVW code types as they are treated as complete.
- Don't ignore the need for prioritization in exception workflows.
- Don't use the item enhancement browser configuration as it is no longer active.
- Don't overlook the importance of accurate configuration in managing exceptions.

Summary

The Exception Workflow module in OGRDS provides a structured approach to managing exceptions through configurable workflows, dispatch flags, and prioritization tools. By adhering to best practices and utilizing available functionalities such as related items and potentially reused barcode management, countries can enhance the accuracy and efficiency of their coding processes. This document serves as a formal guide to understanding and implementing the Exception Workflow effectively.

A reference to the original PowerPoint for visual context:

[OGRDS Configuration 3 - Exception Workflow.pptx](#)

Standard Operating Procedure

Workflow Configuration

Introduction

This document provides a comprehensive overview of the Workflow Configuration module as presented in the PowerPoint file. It outlines the enhancements made to the OGRDS Workflow/Dispatch functionality, the rationale behind these changes, and the implications for users.

Overview

The Workflow Configuration module addresses the complexity and inconsistencies in the OGRDS Workflow/Dispatch functionality. It introduces simplified workflows such as 'SEND FOR ITEM CODING', 'COMPLETE', and 'DISPATCH DESTINATIONS' to streamline exception handling. The enhancements aim to improve user experience and ensure accurate dispatching of barcodes and exceptions.

Key Bullet Points

- Simplified Workflow/Dispatch functionality to reduce confusion and improve consistency.
- New workflows include SEND FOR ITEM CODING, COMPLETE, and DISPATCH DESTINATIONS.
- Dispatch destinations allow prioritization for Item Coding, Partial Items, Field, and Web.
- Validation toolbox and reports updated to reflect new workflows.

- Workflow overrides introduced for BCI countries to support retailer-specific configurations.
- New checkbox 'APPLY TO LAC' enables sending LACs to FIELD/DA selectively.
- Deprecated settings like USER SPECIFY and CHARACTERISE replaced with new workflows.
- Dispatch Grid Matrix enhanced to show destination options based on rules.
- Training sessions planned for SMEs to understand new workflow configurations.

Do's and Don'ts

Do's

- Use the appropriate workflow setting based on the exception type and destination.
- Enable 'APPLY TO LAC' only when LACs need to be sent to FIELD/DA.
- Apply workflow overrides for specific retailers or product groups as needed.
- Review dispatch grid settings before committing exceptions.
- Attend training sessions to understand the new workflow configurations.

Don'ts

- Do not use outdated workflow settings such as USER SPECIFY or CHARACTERISE.
- Avoid applying 'APPLY TO LAC' indiscriminately without proper justification.
- Do not ignore the dispatch grid matrix when committing exceptions.
- Avoid inconsistent workflow configurations across product groups or BCIs.
- Do not bypass the intake and approval process for workflow overrides.

Summary

The Workflow Configuration module introduces a streamlined approach to managing exceptions within OGRDS. By simplifying the Workflow/Dispatch functionality and providing clear guidelines for configuration, users can ensure accurate and efficient processing. The enhancements support better prioritization, improved reporting, and tailored workflows for specific countries and retailers.

A reference to the original PowerPoint for visual context:

[Workflow.pptx](#)