

# The FMB Algorithm

P. Baillehache

January 12, 2020

## **Abstract**

This paper introduces how to perform intersection detection of pair of static/dynamic cuboid/tetrahedron in 2D/3D by using the Fourier-Motzkin elimination method.

# Contents

|          |  |            |
|----------|--|------------|
| <b>1</b> | <b>The problem as a system of linear inequations</b>                               | <b>4</b>   |
| 1.1      | Notations and definitions . . . . .  | 4          |
| 1.2      | Static case . . . . .  | 4          |
| 1.3      | Dynamic case . . . . .   | 7          |
| <b>2</b> | <b>Resolution of the problem by Fourier-Motzkin method</b>                         | <b>11</b>  |
| 2.1      | The Fourier-Motzkin elimination method . . . . .                                   | 11         |
| 2.2      | Application of the Fourier-Motzkin method to the intersection<br>problem . . . . . | 13         |
| 2.3      | About the size of the system of linear inequations . . . . .                       | 13         |
| <b>3</b> | <b>Algorithms of the solution</b>  | <b>15</b>  |
| 3.1      | 2D static . . . . .  | 15         |
| 3.2      | 3D static . . . . .  | 21         |
| 3.3      | 2D dynamic . . . . .   | 28         |
| 3.4      | 3D dynamic . . . . .   | 35         |
| <b>4</b> | <b>Implementation of the algorithms in C</b>                                       | <b>43</b>  |
| 4.1      | Frames . . . . .   | 43         |
| 4.1.1    | Header . . . . .   | 43         |
| 4.1.2    | Body . . . . .   | 46         |
| 4.2      | FMB . . . . .  | 68         |
| 4.2.1    | 2D static . . . . .  | 68         |
| 4.2.2    | 3D static . . . . .  | 76         |
| 4.2.3    | 2D dynamic . . . . .   | 85         |
| 4.2.4    | 3D dynamic . . . . .   | 95         |
| <b>5</b> | <b>Minimal example of use</b>  | <b>106</b> |
| 5.1      | 2D static . . . . .  | 106        |
| 5.2      | 3D static . . . . .  | 108        |
| 5.3      | 2D dynamic . . . . .   | 109        |
| 5.4      | 3D dynamic . . . . .   | 110        |
| <b>6</b> | <b>Unit tests</b>  | <b>112</b> |
| 6.1      | Code . . . . .   | 112        |
| 6.1.1    | 2D static . . . . .  | 112        |
| 6.1.2    | 3D static . . . . .  | 124        |
| 6.1.3    | 2D dynamic . . . . .   | 132        |
| 6.1.4    | 3D dynamic . . . . .   | 137        |
| 6.2      | Results . . . . .  | 143        |

|           |                                  |            |
|-----------|----------------------------------|------------|
| 6.2.1     | 2D static . . . . .              | 143        |
| 6.2.2     | 3D static . . . . .              | 146        |
| 6.2.3     | 2D dynamic . . . . .             | 149        |
| 6.2.4     | 3D dynamic . . . . .             | 151        |
| <b>7</b>  | <b>Validation against SAT</b>    | <b>153</b> |
| 7.1       | Code . . . . .                   | 153        |
| 7.1.1     | 2D static . . . . .              | 153        |
| 7.1.2     | 3D static . . . . .              | 156        |
| 7.1.3     | 2D dynamic . . . . .             | 160        |
| 7.1.4     | 3D dynamic . . . . .             | 163        |
| 7.2       | Results . . . . .                | 167        |
| 7.2.1     | Failures . . . . .               | 167        |
| 7.2.2     | 2D static . . . . .              | 167        |
| 7.2.3     | 2D dynamic . . . . .             | 167        |
| 7.2.4     | 3D static . . . . .              | 168        |
| 7.2.5     | 3D dynamic . . . . .             | 168        |
| <b>8</b>  | <b>Qualification against SAT</b> | <b>168</b> |
| 8.1       | Code . . . . .                   | 168        |
| 8.1.1     | 2D static . . . . .              | 168        |
| 8.1.2     | 3D static . . . . .              | 179        |
| 8.1.3     | 2D dynamic . . . . .             | 190        |
| 8.1.4     | 3D dynamic . . . . .             | 200        |
| 8.2       | Results . . . . .                | 211        |
| 8.2.1     | 2D static . . . . .              | 211        |
| 8.2.2     | 3D static . . . . .              | 218        |
| 8.2.3     | 2D dynamic . . . . .             | 224        |
| 8.2.4     | 3D dynamic . . . . .             | 230        |
| <b>9</b>  | <b>Conclusion</b>                | <b>236</b> |
| <b>10</b> | <b>Annex</b>                     | <b>236</b> |
| 10.1      | Runtime environment . . . . .    | 236        |
| 10.2      | SAT implementation . . . . .     | 238        |
| 10.2.1    | Header . . . . .                 | 238        |
| 10.2.2    | Body . . . . .                   | 239        |
| 10.3      | Makefile . . . . .               | 259        |
| 10.3.1    | 2D static . . . . .              | 262        |
| 10.3.2    | 3D static . . . . .              | 262        |
| 10.3.3    | 2D dynamic . . . . .             | 263        |

|                             |     |
|-----------------------------|-----|
| 10.3.4 3D dynamic . . . . . | 264 |
| 10.3.5 Doc . . . . .        | 265 |

## Introduction

This paper introduces the FMB (Fourier-Motzkin-Baillehache) algorithm which can be used to perform intersection detection of moving and resting parallelepipeds and triangles in 2D, and cuboids and tetrahedrons in 3D.

The detection result is returned has a boolean (intersection / no intersection), and if there is intersection, a bounding box of the intersection.

The two first sections introduce how the problem can be expressed as a system of linear inequation, and its resolution using the Fourier-Motzkin method.

The algorithm of the solution and its implementation in the C programming language are detailed in the three following sections.

The last three sections introduce the validation and qualification in term of relative performance of the FMB algorithm against the SAT algorithm.

## 1 The problem as a system of linear inequations

### 1.1 Notations and definitions

- $[M]_{r,c}$  is the component at column  $c$  and row  $r$  of the matrix  $M$
- $[V]_r$  is the  $r$ -th component of the vector  $\vec{V}$
- the term "Frame" is used indifferently for parallelepiped, triangle, cuboid and tetrahedron.

### 1.2 Static case

The two Frames are represented as a vector origin and a number of component vectors equal to the dimension  $D$  of the space where live the Frames. Each vector is of dimension equal to  $D$ .

Let's call  $\mathbb{A}$  and  $\mathbb{B}$  the two Frames tested for intersection. If  $\mathbb{A}$  and  $\mathbb{B}$  are two cuboids:

$$\mathbb{A} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ \vec{O}_{\mathbb{A}} + C_{\mathbb{A}} \cdot \vec{X} \end{array} \right\} \quad (1)$$

$$\mathbb{B} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ \vec{O}_{\mathbb{B}} + C_{\mathbb{B}} \cdot \vec{X} \end{array} \right\} \quad (2)$$

where  $\vec{O}_{\mathbb{A}}$  is the origin of  $\mathbb{A}$  and  $C_{\mathbb{A}}$  is the matrix of the components of  $\mathbb{A}$  (one component per column). Idem for  $\vec{O}_{\mathbb{B}}$  and  $C_{\mathbb{B}}$ .

If  $\mathbb{A}$  and  $\mathbb{B}$  are two tetrahedrons:

$$\mathbb{A} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ \vec{O}_{\mathbb{A}} + C_{\mathbb{A}} \cdot \vec{X} \end{array} \right\} \quad (3)$$

$$\mathbb{B} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ \vec{O}_{\mathbb{B}} + C_{\mathbb{B}} \cdot \vec{X} \end{array} \right\} \quad (4)$$

I'll assume the Frames are well formed, i.e. their components matrix is invertible. It is then possible to express  $\mathbb{B}$  in  $\mathbb{A}$ 's coordinates system, noted as  $\mathbb{B}_{\mathbb{A}}$ . If  $\mathbb{B}$  is a cuboid:

$$\mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X}) \end{array} \right\} \quad (5)$$

If  $\mathbb{B}$  is a tetrahedron:

$$\mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X}) \end{array} \right\} \quad (6)$$

$\mathbb{A}$  in its own coordinates system becomes, for a cuboid:

$$\mathbb{A}_{\mathbb{A}} = \left\{ \vec{X} \in [0.0, 1.0]^D \right\} \quad (7)$$

and for a tetrahedron:

$$\mathbb{A}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \end{array} \right\} \quad (8)$$

The intersection of  $\mathbb{A}$  and  $\mathbb{B}$  in  $\mathbb{A}$ 's coordinates sytem,  $\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}}$ , can then be expressed as follow.

If  $\mathbb{A}$  and  $\mathbb{B}$  are two cuboids:

$$\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X}) \in [0.0, 1.0]^D \end{array} \right\} \quad (9)$$

If  $\mathbb{A}$  is a cuboid and  $\mathbb{B}$  is a tetrahedron:

$$\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X}) \in [0.0, 1.0]^D \end{array} \right\} \quad (10)$$

If  $\mathbb{A}$  is a tetrahedron and  $\mathbb{B}$  is a cuboid:

$$\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X}) \in [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} [C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X})]_i \leq 1.0 \end{array} \right\} \quad (11)$$

If  $\mathbb{A}$  and  $\mathbb{B}$  are two tetrahedrons:

$$\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X}) \in [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} [C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X})]_i \leq 1.0 \end{array} \right\} \quad (12)$$

These can in turn be expressed as systems of linear inequations as follow, given the two shortcuts  $\vec{O}_{\mathbb{B}_{\mathbb{A}}} = C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}})$  and  $C_{\mathbb{B}_{\mathbb{A}}} = C_{\mathbb{A}}^{-1} \cdot C_{\mathbb{B}}$ .

If  $\mathbb{A}$  and  $\mathbb{B}$  are two cuboids:

$$\left\{ \begin{array}{l} [X]_0 \leq 1.0 \\ \dots \\ [X]_{D-1} \leq 1.0 \\ -[X]_0 \leq 0.0 \\ \dots \\ -[X]_{D-1} \leq 0.0 \\ \sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{0,i} \cdot [X]_i \leq 1.0 - [O_{\mathbb{B}_{\mathbb{A}}}]_0 \\ \dots \\ \sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{D-1,i} \cdot [X]_i \leq 1.0 - [O_{\mathbb{B}_{\mathbb{A}}}]_{D-1} \\ -\sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{0,i} \cdot [X]_i \leq [O_{\mathbb{B}_{\mathbb{A}}}]_0 \\ \dots \\ -\sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{D-1,i} \cdot [X]_i \leq [O_{\mathbb{B}_{\mathbb{A}}}]_{D-1} \end{array} \right. \quad (13)$$

If  $\mathbb{A}$  is a cuboid and  $\mathbb{B}$  is a tetrahedron:

$$\left\{ \begin{array}{l} -[X]_0 \leq 0.0 \\ \dots \\ -[X]_{D-1} \leq 0.0 \\ \sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{0,i} \cdot [X]_i \leq 1.0 - [O_{\mathbb{B}_{\mathbb{A}}}]_0 \\ \dots \\ \sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{D-1,i} \cdot [X]_i \leq 1.0 - [O_{\mathbb{B}_{\mathbb{A}}}]_{D-1} \\ -\sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{0,i} \cdot [X]_i \leq [O_{\mathbb{B}_{\mathbb{A}}}]_0 \\ \dots \\ -\sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{D-1,i} \cdot [X]_i \leq [O_{\mathbb{B}_{\mathbb{A}}}]_{D-1} \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \end{array} \right. \quad (14)$$

If  $\mathbb{A}$  is a tetrahedron and  $\mathbb{B}$  is a cuboid:

$$\left\{ \begin{array}{l} [X]_0 \leq 1.0 \\ \dots \\ [X]_{D-1} \leq 1.0 \\ -[X]_0 \leq 0.0 \\ \dots \\ -[X]_{D-1} \leq 0.0 \\ -\sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{0,i} \cdot [X]_i \leq [O_{\mathbb{B}_{\mathbb{A}}}]_0 \\ \dots \\ -\sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{D-1,i} \cdot [X]_i \leq [O_{\mathbb{B}_{\mathbb{A}}}]_{D-1} \\ \sum_{j=0}^{D-1} \left( \left( \sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{j,i} \right) \cdot [X]_i \right) \leq 1.0 - \sum_{j=0}^{D-1} [O_{\mathbb{B}_{\mathbb{A}}}]_j \end{array} \right. \quad (15)$$

If  $\mathbb{A}$  and  $\mathbb{B}$  are two tetrahedrons:

$$\left\{ \begin{array}{l} -[X]_0 \leq 0.0 \\ \dots \\ -[X]_{D-1} \leq 0.0 \\ -\sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{0,i} \cdot [X]_i \leq [O_{\mathbb{B}_{\mathbb{A}}}]_0 \\ \dots \\ -\sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{D-1,i} \cdot [X]_i \leq [O_{\mathbb{B}_{\mathbb{A}}}]_{D-1} \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ \sum_{j=0}^{D-1} \left( \left( \sum_{i=0}^{D-1} [C_{\mathbb{B}_{\mathbb{A}}}]_{j,i} \right) \cdot [X]_i \right) \leq 1.0 - \sum_{j=0}^{D-1} [O_{\mathbb{B}_{\mathbb{A}}}]_j \end{array} \right. \quad (16)$$

### 1.3 Dynamic case

If the frames  $\mathbb{A}$  and  $\mathbb{B}$  are moving linearly along the vectors  $\vec{V}_{\mathbb{A}}$  and  $\vec{V}_{\mathbb{B}}$  respectively during the interval of time  $t \in [0.0, 1.0]$ , the above definition of

the problem is modified as follow.

If  $\mathbb{A}$  and  $\mathbb{B}$  are two cuboids:

$$\mathbb{A} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ \vec{O}_{\mathbb{A}} + C_{\mathbb{A}} \cdot \vec{X} + \vec{V}_{\mathbb{A}} \cdot t \end{array} \right\} \quad (17)$$

$$\mathbb{B} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ \vec{O}_{\mathbb{B}} + C_{\mathbb{B}} \cdot \vec{X} + \vec{V}_{\mathbb{B}} \cdot t \end{array} \right\} \quad (18)$$

where  $\vec{O}_{\mathbb{A}}$  is the origin of  $\mathbb{A}$  and  $C_{\mathbb{A}}$  is the matrix of the components of  $\mathbb{A}$  (one component per column). Idem for  $\vec{O}_{\mathbb{B}}$  and  $C_{\mathbb{B}}$ .

If  $\mathbb{A}$  and  $\mathbb{B}$  are two tetrahedrons:

$$\mathbb{A} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ \vec{O}_{\mathbb{A}} + C_{\mathbb{A}} \cdot \vec{X} + \vec{V}_{\mathbb{A}} \cdot t \end{array} \right\} \quad (19)$$

$$\mathbb{B} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ \vec{O}_{\mathbb{B}} + C_{\mathbb{B}} \cdot \vec{X} + \vec{V}_{\mathbb{B}} \cdot t \end{array} \right\} \quad (20)$$

If  $\mathbb{B}$  is a cuboid,  $\mathbb{B}_{\mathbb{A}}$  becomes:

$$\mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X} + (\vec{V}_{\mathbb{B}} - \vec{V}_{\mathbb{A}}) \cdot t) \end{array} \right\} \quad (21)$$

If  $\mathbb{B}$  is a tetrahedron,  $\mathbb{B}_{\mathbb{A}}$  becomes:

$$\mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ C_{\mathbb{A}}^{-1} \cdot (\vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X} + (\vec{V}_{\mathbb{B}} - \vec{V}_{\mathbb{A}}) \cdot t) \end{array} \right\} \quad (22)$$



$\mathbb{A}$  in its own coordinates system has the same definition as in the static case. For a cuboid:

$$\mathbb{A}_{\mathbb{A}} = \left\{ \vec{X} \in [0.0, 1.0]^D \right\} \quad (23)$$

and for a tetrahedron:

$$\mathbb{A}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \end{array} \right\} \quad (24)$$

The intersection of  $\mathbb{A}$  and  $\mathbb{B}$  in  $\mathbb{A}$ 's coordinates sytem,  $\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}}$ , can then be expressed as follow.

If  $\mathbb{A}$  and  $\mathbb{B}$  are two cuboids:

$$\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ C_{\mathbb{A}}^{-1} \cdot \left( \vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X} + (\vec{V}_{\mathbb{B}} - \vec{V}_{\mathbb{A}}) \cdot t \right) \cap [0.0, 1.0]^D \end{array} \right\} \quad (25)$$

If  $\mathbb{A}$  is a cuboid and  $\mathbb{B}$  is a tetrahedron:

$$\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ C_{\mathbb{A}}^{-1} \cdot \left( \vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X} + (\vec{V}_{\mathbb{B}} - \vec{V}_{\mathbb{A}}) \cdot t \right) \cap [0.0, 1.0]^D \end{array} \right\} \quad (26)$$

If  $\mathbb{A}$  is a tetrahedron and  $\mathbb{B}$  is a cuboid:

$$\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ C_{\mathbb{A}}^{-1} \cdot \left( \vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X} + (\vec{V}_{\mathbb{B}} - \vec{V}_{\mathbb{A}}) \cdot t \right) \cap [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} \left[ C_{\mathbb{A}}^{-1} \cdot \left( \vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X} + (\vec{V}_{\mathbb{B}} - \vec{V}_{\mathbb{A}}) \cdot t \right) \right]_i \leq 1.0 \end{array} \right\} \quad (27)$$

If  $\mathbb{A}$  and  $\mathbb{B}$  are two tetrahedrons:

$$\mathbb{A}_{\mathbb{A}} \cap \mathbb{B}_{\mathbb{A}} = \left\{ \begin{array}{l} \vec{X} \in [0.0, 1.0]^D \\ t \in [0.0, 1.0] \\ \sum_{i=0}^{D-1} [X]_i \leq 1.0 \\ C_{\mathbb{A}}^{-1} \cdot \left( \vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X} + (\vec{V}_{\mathbb{B}} - \vec{V}_{\mathbb{A}}) \cdot t \right) \cap [0.0, 1.0]^D \\ \sum_{i=0}^{D-1} \left[ C_{\mathbb{A}}^{-1} \cdot \left( \vec{O}_{\mathbb{B}} - \vec{O}_{\mathbb{A}} + C_{\mathbb{B}} \cdot \vec{X} + (\vec{V}_{\mathbb{B}} - \vec{V}_{\mathbb{A}}) \cdot t \right) \right]_i \leq 1.0 \end{array} \right\} \quad (28)$$

These lead to the following systems of linear inequations, given the three shortcuts  $\overrightarrow{O_{\mathbb{B}_A}} = C_{\mathbb{A}}^{-1} \cdot (\overrightarrow{O_{\mathbb{B}}} - \overrightarrow{O_{\mathbb{A}}})$ ,  $\overrightarrow{V_{\mathbb{B}_A}} = C_{\mathbb{A}}^{-1} \cdot (\overrightarrow{V_{\mathbb{B}}} - \overrightarrow{V_{\mathbb{A}}})$  and  $C_{\mathbb{B}_A} = C_{\mathbb{A}}^{-1} \cdot C_{\mathbb{B}}$ .

If  $\mathbb{A}$  and  $\mathbb{B}$  are two cuboids:

$$\left\{ \begin{array}{rcl} t & \leq & 1.0 \\ -t & \leq & 0.0 \\ [X]_0 & \leq & 1.0 \\ \dots & & \\ [X]_{D-1} & \leq & 1.0 \\ -[X]_0 & \leq & 0.0 \\ \dots & & \\ -[X]_{D-1} & \leq & 0.0 \\ [V_{\mathbb{B}_A}]_0 \cdot t + \sum_{i=0}^{D-1} [C_{\mathbb{B}_A}]_{0,i} [X]_i & \leq & 1.0 - [O_{\mathbb{B}_A}]_0 \\ \dots & & \\ [V_{\mathbb{B}_A}]_{D-1} \cdot t + \sum_{i=0}^{D-1} [C_{\mathbb{B}_A}]_{D-1,i} [X]_i & \leq & 1.0 - [O_{\mathbb{B}_A}]_{D-1} \\ -[V_{\mathbb{B}_A}]_0 \cdot t - \sum_{i=0}^{D-1} [C_{\mathbb{B}_A}]_{0,i} [X]_i & \leq & [O_{\mathbb{B}_A}]_0 \\ \dots & & \\ -[V_{\mathbb{B}_A}]_{D-1} \cdot t - \sum_{i=0}^{D-1} [C_{\mathbb{B}_A}]_{D-1,i} [X]_i & \leq & [O_{\mathbb{B}_A}]_{D-1} \end{array} \right. \quad (29)$$

If  $\mathbb{A}$  is a cuboid and  $\mathbb{B}$  is a tetrahedron:

$$\left\{ \begin{array}{rcl} t & \leq & 1.0 \\ -t & \leq & 0.0 \\ -[X]_0 & \leq & 0.0 \\ \dots & & \\ -[X]_{D-1} & \leq & 0.0 \\ [V_{\mathbb{B}_A}]_0 \cdot t + \sum_{i=0}^{D-1} [C_{\mathbb{B}_A}]_{0,i} [X]_i & \leq & 1.0 - [O_{\mathbb{B}_A}]_0 \\ \dots & & \\ [V_{\mathbb{B}_A}]_{D-1} \cdot t + \sum_{i=0}^{D-1} [C_{\mathbb{B}_A}]_{D-1,i} [X]_i & \leq & 1.0 - [O_{\mathbb{B}_A}]_{D-1} \\ -[V_{\mathbb{B}_A}]_0 \cdot t - \sum_{i=0}^{D-1} [C_{\mathbb{B}_A}]_{0,i} [X]_i & \leq & [O_{\mathbb{B}_A}]_0 \\ \dots & & \\ -[V_{\mathbb{B}_A}]_{D-1} \cdot t - \sum_{i=0}^{D-1} [C_{\mathbb{B}_A}]_{D-1,i} [X]_i & \leq & [O_{\mathbb{B}_A}]_{D-1} \\ \sum_{i=0}^{D-1} [X]_i & \leq & 1.0 \end{array} \right. \quad (30)$$

If  $\mathbb{A}$  is a tetrahedron and  $\mathbb{B}$  is a cuboid:

$$\left\{ \begin{array}{rcl} t & \leq & 1.0 \\ -t & \leq & 0.0 \\ [X]_0 & \leq & 1.0 \\ \dots & & \\ [X]_{D-1} & \leq & 1.0 \\ -[X]_0 & \leq & 0.0 \\ \dots & & \\ -[X]_{D-1} & \leq & 0.0 \\ -[V_{\mathbb{A}}]_0 \cdot t - \sum_{i=0}^{D-1} [C_{\mathbb{A}}]_{0,i} [X]_i & \leq & [O_{\mathbb{A}}]_0 \\ \dots & & \\ -[V_{\mathbb{A}}]_{D-1} \cdot t - \sum_{i=0}^{D-1} [C_{\mathbb{A}}]_{D-1,i} [X]_i & \leq & [O_{\mathbb{A}}]_{D-1} \\ \sum_{j=0}^{D-1} \left( [V_{\mathbb{A}}]_j \cdot t + \sum_{i=0}^{D-1} [C_{\mathbb{A}}]_{j,i} [X]_i \right) & \leq & 1.0 - \sum_{j=0}^{D-1} [O_{\mathbb{A}}]_j \end{array} \right. \quad (31)$$

If  $\mathbb{A}$  and  $\mathbb{B}$  are two tetrahedrons:

$$\left\{ \begin{array}{rcl} t & \leq & 1.0 \\ -t & \leq & 0.0 \\ -[X]_0 & \leq & 0.0 \\ \dots & & \\ -[X]_{D-1} & \leq & 0.0 \\ -[V_{\mathbb{A}}]_0 \cdot t - \sum_{i=0}^{D-1} [C_{\mathbb{A}}]_{0,i} [X]_i & \leq & [O_{\mathbb{A}}]_0 \\ \dots & & \\ -[V_{\mathbb{A}}]_{D-1} \cdot t - \sum_{i=0}^{D-1} [C_{\mathbb{A}}]_{D-1,i} [X]_i & \leq & [O_{\mathbb{A}}]_{D-1} \\ \sum_{i=0}^{D-1} [X]_i & \leq & 1.0 \\ \sum_{j=0}^{D-1} \left( [V_{\mathbb{A}}]_j \cdot t + \sum_{i=0}^{D-1} [C_{\mathbb{A}}]_{j,i} [X]_i \right) & \leq & 1.0 - \sum_{j=0}^{D-1} [O_{\mathbb{A}}]_j \end{array} \right. \quad (32)$$

## 2 Resolution of the problem by Fourier-Motzkin method

### 2.1 The Fourier-Motzkin elimination method

The Fourier-Motzkin elimination method has been introduced by J.J.-B. Fourier in 1827 [1], and described in the Ph.D. thesis of T.S. Motzkin in 1936 [2]. This is a generalization of the Gaussian elimination method to linear systems of inequalities. This method consists of eliminating one variable of the system and rewrite a new system accordingly. Then the elimination operation is repeated on another variable in the new system, and so on until we obtain a trivial system with only one variable. From there, a solution

for each variable can be obtained if it exists. The variable elimination is performed as follow.

Lets write the linear system  $\mathcal{I}$  of  $m$  inequalities and  $n$  variables as

$$\left\{ \begin{array}{cccc} a_{11}.x_1 & +a_{12}.x_2 & +\cdots & +a_{1n}.x_n & \leq b_1 \\ a_{21}.x_1 & +a_{22}.x_2 & +\cdots & +a_{2n}.x_n & \leq b_2 \\ & & \vdots & & \\ a_{m1}.x_1 & +a_{m2}.x_2 & +\cdots & +a_{mn}.x_n & \leq b_m \end{array} \right. \quad (33)$$

with

$$\begin{aligned} i &\in 1, 2, \dots, m \\ j &\in 1, 2, \dots, n \\ x_i &\in \mathbb{R} \\ a_{ij} &\in \mathbb{R} \\ b_j &\in \mathbb{R} \end{aligned} \quad (34)$$

To eliminate the first variable  $x_1$ , lets multiply each inequality by  $1.0/|a_{i1}|$  where  $a_{i1} \neq 0.0$ . The system becomes

$$\left\{ \begin{array}{ll} x_1 & +a'_{i2}.x_2 +\cdots +a'_{in}.x_n \leq b'_i \quad (i \in \mathcal{I}_+) \\ & a_{i2}.x_2 +\cdots +a_{in}.x_n \leq b_i \quad (i \in \mathcal{I}_0) \\ -x_1 & +a'_{i2}.x_2 +\cdots +a'_{in}.x_n \leq b'_i \quad (i \in \mathcal{I}_-) \end{array} \right. \quad (35)$$

where

$$\begin{aligned} \mathcal{I}_+ &= \{i : a_{i1} > 0.0\} \\ \mathcal{I}_0 &= \{i : a_{i1} = 0.0\} \\ \mathcal{I}_- &= \{i : a_{i1} < 0.0\} \\ a'_{ij} &= a_{ij}/|a_{i1}| \\ b'_i &= b_i/|a_{i1}| \end{aligned}$$

Then  $x_1, x_2, \dots, x_n \in \mathbb{R}^n$  is a solution of  $\mathcal{I}$  if and only if

$$\left\{ \begin{array}{ll} \sum_{j=2}^n ((a'_{kj} + a'_{lj}).x_j) \leq b'_k + b'_l & (k \in \mathcal{I}_+, l \in \mathcal{I}_-) \\ \sum_{j=2}^n (a_{ij}.x_j) \leq b_i & i \in \mathcal{I}_0 \end{array} \right. \quad (36)$$

and

$$\max_{l \in \mathcal{I}_-} \left( \sum_{j=2}^n (a'_{lj}.x_j) - b'_l \right) \leq x_1 \leq \min_{k \in \mathcal{I}_+} (b'_k - \sum_{j=2}^n (a'_{kj}.x_j)) \quad (37)$$

The same method is then applied on this new system to eliminate the second variable  $x_2$ , and so on until we reach the inequality

$$\max_{l \in \mathcal{I}_-'''} (-b_l''') \leq x_n \leq \min_{k \in \mathcal{I}_+'''} (b_k''') \quad (38)$$

If this inequality has no solution, then neither the system  $\mathcal{I}$ . If it has a solution, the minimum and maximum are the bounding values for the variable  $x_n$ . One can get a particular solution to the system  $\mathcal{I}$  by choosing a value for  $x_n$  between these bounding values, which allows to set a particular value for the variable  $x_{n-1}$ , and so on back up to  $x_1$ .

## 2.2 Application of the Fourier-Motzkin method to the intersection problem

The Fourier-Motzkin method can be directly applied to the inequality systems of the previous section, to obtain the bounding box of the intersection, if the system has a solution. If the system has no solution, the method will eventually reach an inconsistent inequality, meaning there is no intersection between the two Frames.

One coordinate  $\vec{S}$ , or  $(\vec{S}, t)$  in dynamic case, within the bounds obtained by the resolution of the system is expressed in the Frame  $\mathbb{B}$ 's coordinates system. One can get the equivalent coordinates  $\vec{S}'$ , or  $(\vec{S}', t)$ , in the real world's coordinates system as follow:

$$\vec{S}' = \vec{O}_{\mathbb{B}} + C_{\mathbb{B}} \cdot \vec{S} \quad (39)$$

$$(\vec{S}', t) = \left( \vec{O}_{\mathbb{B}} + C_{\mathbb{B}} \cdot \vec{S} + \vec{V}_{\mathbb{B}} \cdot t, t \right) \quad (40)$$

Only one inconsistent inequality is sufficient to prove the absence of solution, and then the non intersection of the Frames. Thus, one shall check the inconsistency of each inequality as soon as possible during the resolution of the system to optimize the speed of the algorithm.

A sufficient condition for one inequality  $\sum_i a_i X_i \leq Y$  to be inconsistent is, given that  $\forall i, X_i \in [0.0, 1.0]$ :

$$Y < \sum_{i \in I^-} a_i \quad (41)$$

where  $I^- = \{i, a_i < 0.0\}$ .

## 2.3 About the size of the system of linear inequations

During implementation in languages where the developer needs to manage memory itself the size of the systems (35) resulting from variable elimination

is necessary but cannot be forecasted. Instead, a maximum size can be calculated as follow.

Let's call  $n_-$ ,  $n_+$  and  $n_0$ , each in  $[0, \mathbb{N}]$ , the size of, respectively,  $\mathcal{I}_-$ ,  $\mathcal{I}_+$  and  $\mathcal{I}_0$ , and  $N$  the number of inequalities in the original system and  $N'$  the number inequalities in the resulting system. We have:

$$n_- + n_+ + n_0 = N \quad (42)$$

and

$$n_-.n_+ + n_0 = N' \quad (43)$$

Now let's define  $K = N - n_0$ , then we have:

$$n_- + n_+ = K \quad (44)$$

then,

$$n_-.n_+ = n_-.(K - n_-) \quad (45)$$

then,

$$n_-.n_+ = K.n_- - n_-^2 \quad (46)$$

The right part is a polynomial whose maximum is reached for  $n_- = K/2$ . Then,

$$n_-.n_+ \leq K^2/2 - K^2/4 \quad (47)$$

or,

$$n_-.n_+ \leq K^2/4 \quad (48)$$

and putting back the definition of  $K$

$$n_-.n_+ \leq (N - n_0)^2/4 \quad (49)$$

which is also

$$n_-.n_+ \leq N^2/4 \quad (50)$$

From (43) we get,

$$N' \leq N^2/4 + n_0 \quad (51)$$

and finally,

$$N' \leq N^2/4 + N \quad (52)$$

The maximum number of inequations in the initial system is defined for each case (2D/3D, static/dynamic) in the previous section. This leads to the following maximum number of inequations:

|                  | $N$ | $N'$ | $N''$ | $N'''$ |
|------------------|-----|------|-------|--------|
| <i>2Dstatic</i>  | 8   | 24   |       |        |
| <i>2Ddynamic</i> | 10  | 35   | 342   |        |
| <i>3Dstatic</i>  | 12  | 48   | 624   |        |
| <i>3Ddynamic</i> | 14  | 63   | 1056  | 279840 |

However, these theoretical values are much higher than the ones encountered in practice, and the maximum number of inequations encountered during validation were:

|                  | $N$ | $N'$ | $N''$ | $N'''$ |
|------------------|-----|------|-------|--------|
| <i>2Dstatic</i>  | 8   | 11   |       |        |
| <i>2Ddynamic</i> | 10  | 13   | 21    |        |
| <i>3Dstatic</i>  | 12  | 20   | 55    |        |
| <i>3Ddynamic</i> | 14  | 22   | 57    | 560    |

### 3 Algorithms of the solution

In this section I introduce the algorithms of the solution of the previous section for each case (static/dynamic and 2D/3D), and the algorithms to manipulate the structure used to represent the Frames.

Algorithms are given in pseudo code, and consequently without any optimization based on properties of one given language. One can refer to the C implementation in the following section for possible optimization in this language.

Algorithms are also given independantly from each other. Code common-alization may be possible if one plans to use several cases together, but this is dependant of the implementation and thus left to the developer responsibility.

#### 3.1 2D static

```

ENUM FrameType
    FrameCuboid,
    FrameTetrahedron
END ENUM

STRUCT AAB2D
    // x,y
    real min[2]

```

```

    real max[2]
END STRUCT

STRUCT Frame2D
    FrameType type
    real orig[2]
    // comp[iComp][iAxis]
    real comp[2][2]
    AABB2D bdgBox
    real invComp[2][2]
END STRUCT

FUNCTION powi(base, exp)
    res = 1
    FOR i=0 TO (exp - 1)
        res = res * base
    END FOR
    RETURN res
END FUNCTION

FUNCTION Frame2DPrint(that)
    IF that.type == FrameTetrahedron
        PRINT "T"
    ELSE IF that.type == FrameCuboid
        PRINT "C"
    END IF
    PRINT "o("
    FOR i = 0 TO 1
        PRINT that.orig[i]
        IF i < 1
            PRINT ","
        END IF
    END FOR
    comp = ["x","y"]
    FOR j = 0 TO 1
        PRINT ") ", comp[j], "("
        FOR i = 0 TO 1
            PRINT that.comp[j][i]
            IF i < 1
                PRINT ","
            END IF
        END FOR
    END FOR
    PRINT ")"
END FUNCTION

FUNCTION AABB2DPrint(that)
    PRINT "minXY("
    FOR i = 0 TO 1
        PRINT that.min[i]
        IF i < 1
            PRINT ","
        END IF
    END FOR
    PRINT ") -maxXY("
    FOR i = 0 TO 1
        PRINT that.max[i]
        IF i < 1
            PRINT ","
        END IF
    END FOR
    PRINT ")"

```



```

END FUNCTION

FUNCTION Frame2DExportBdgBox(that, bdgBox, bdgBoxProj)
  FOR i = 0 TO 1
    bdgBoxProj.max[i] = that.orig[i]
    FOR j = 0 TO 1
      bdgBoxProj.max[i] =
        bdgBoxProj.max[i] + that.comp[j][i] * bdgBox.min[j]
    END FOR
    bdgBoxProj.min[i] = bdgBoxProj.max[i]
  END FOR
  nbVertices = powi(2, 2)
  FOR iVertex = 1 TO (nbVertices - 1)
    FOR i = 0 TO 1
      IF BITWISEAND(iVertex, powi(2, i)) <> 0
        v[i] = bdgBox.max[i]
      ELSE
        v[i] = bdgBox.min[i]
      END IF
    END FOR
    FOR i = 0 TO 1
      w[i] = that.orig[i]
      FOR j = 0 TO 1
        w[i] = w[i] + that.comp[j][i] * v[j]
      END FOR
    END FOR
    FOR i = 0 TO 1
      IF bdgBoxProj.min[i] > w[i]
        bdgBoxProj.min[i] = w[i]
      END IF
      IF bdgBoxProj.max[i] < w[i]
        bdgBoxProj.max[i] = w[i]
      END IF
    END FOR
  END FOR
END FUNCTION

FUNCTION Frame2DImportFrame(P, Q, Qp)
  FOR i = 0 TO 1
    v[i] = Q.orig[i] - P.orig[i]
  END FOR
  FOR i = 0 TO 1
    Qp.orig[i] = 0.0
    FOR j = 0 TO 1
      Qp.orig[i] = Qp.orig[i] + P.invComp[j][i] * v[j]
      Qp.comp[j][i] = 0.0
      FOR k = 0 TO 1
        Qp.comp[j][i] = Qp.comp[j][i] + P.invComp[k][i] * Q.comp[j][k]
      END FOR
    END FOR
  END FOR
END FUNCTION

FUNCTION Frame2DUpdateInv(that)
  det = that.comp[0][0] * that.comp[1][1] -
    that.comp[1][0] * that.comp[0][1]
  that.invComp[0][0] = that.comp[1][1] / det
  that.invComp[0][1] = -that.comp[0][1] / det
  that.invComp[1][0] = -that.comp[1][0] / det
  that.invComp[1][1] = that.comp[0][0] / det
END FUNCTION

```

```

FUNCTION Frame2DCreateStatic(type, orig, comp)
    that.type = type
    FOR iAxis = 0 TO 1
        that.orig[iAxis] = orig[iAxis]
        FOR iComp = 0 TO 1
            that.comp[iComp][iAxis] = comp[iComp][iAxis]
        END FOR
    END FOR
    FOR iAxis = 0 TO 1
        min = orig[iAxis]
        max = orig[iAxis]
        FOR iComp = 0 TO 1
            IF that.type == FrameCuboid
                IF that.comp[iComp][iAxis] < 0.0
                    min = min + that.comp[iComp][iAxis]
                END IF
                IF that.comp[iComp][iAxis] > 0.0
                    max = max + that.comp[iComp][iAxis]
                END IF
            ELSE IF that.type == FrameTetrahedron
                IF that.comp[iComp][iAxis] < 0.0 AND
                    min > orig[iAxis] + that.comp[iComp][iAxis]
                    min = orig[iAxis] + that.comp[iComp][iAxis]
                END IF
                IF that.comp[iComp][iAxis] > 0.0 AND
                    max < orig[iAxis] + that.comp[iComp][iAxis]
                    max = orig[iAxis] + that.comp[iComp][iAxis]
                END IF
            END IF
        END FOR
        that.bdgBox.min[iAxis] = min
        that.bdgBox.max[iAxis] = max
    END FOR
    Frame2DUpdateInv(that)
    RETURN that
END FUNCTION

FUNCTION Sgn(v)
    IF 0.0 < v
        a = 1
    ELSE
        a = 0
    END IF
    IF v < 0.0
        b = 1
    ELSE
        b = 0
    END IF
    RETURN a - b
END FUNCTION

FUNCTION Neg(x)
    IF x < 0.0
        RETURN x
    ELSE
        RETURN 0.0
    END IF
END FUNCTION

FST_VAR = 0
SND_VAR = 1

```

```

FUNCTION ElimVar2D(iVar, M, Y, nbRows, nbCols, Mp, Yp, nbRemainRows)
    nbRemainRows = 0
    FOR iRow = 0 TO (nbRows - 2)
        FOR jRow = (iRow + 1) TO (nbRows - 1)
            IF sgn(M[iRow][iVar]) <> sgn(M[jRow][iVar]) AND
                M[iRow][iVar] <> 0.0 AND
                M[jRow][iVar] <> 0.0
                sumNegCoeff = 0.0
                jCol = 0
                FOR iCol = 0 TO (nbCols - 1)
                    IF iCol <> iVar
                        Mp[nbRemainRows][jCol] =
                            M[iRow][iCol] / fabs(M[iRow][iVar]) +
                            M[jRow][iCol] / fabs(M[jRow][iVar])
                        sumNegCoeff = sumNegCoeff + neg(Mp[nbRemainRows][jCol])
                        jCol = jCol + 1
                    END IF
                END FOR
                Yp[nbRemainRows] =
                    Y[iRow] / fabs(M[iRow][iVar]) +
                    Y[jRow] / fabs(M[jRow][iVar])
                IF Yp[nbRemainRows] < sumNegCoeff
                    RETURN TRUE
                END IF
                nbRemainRows = nbRemainRows + 1
            END IF
        END FOR
    END FOR
    FOR iRow = 0 TO (nbRows - 1)
        IF M[iRow][iVar] == 0.0
            jCol = 0
            FOR iCol = 0 TO (nbCols - 1)
                IF iCol <> iVar
                    Mp[nbRemainRows][jCol] = M[iRow][iCol]
                    jCol = jCol + 1
                END IF
            END FOR
            Yp[nbRemainRows] = Y[iRow]
            nbRemainRows = nbRemainRows + 1
        END IF
    END FOR
    RETURN FALSE
END FUNCTION

FUNCTION GetBound2D(iVar, M, Y, nbRows, bdgBox)
    bdgBox.min[iVar] = 0.0
    bdgBox.max[iVar] = 1.0
    FOR jRow = 0 TO (nbRows - 1)
        IF M[jRow][0] > 0.0
            y = Y[jRow] / M[jRow][0]
            IF bdgBox.max[iVar] > y
                bdgBox.max[iVar] = y
            END IF
        ELSE IF M[jRow][0] < 0.0
            y = Y[jRow] / M[jRow][0]
            IF bdgBox.min[iVar] < y
                bdgBox.min[iVar] = y
            END IF
        END IF
    END FOR
END FUNCTION

```

```

FUNCTION FMBTestIntersection2D(that, tho, bdgBox)
  Frame2DImportFrame(that, tho, thoProj)
  M[0][0] = -thoProj.comp[0][0]
  M[0][1] = -thoProj.comp[1][0]
  Y[0] = thoProj.orig[0]
  IF Y[0] < neg(M[0][0]) + neg(M[0][1])
    RETURN FALSE
  END IF
  M[1][0] = -thoProj.comp[0][1]
  M[1][1] = -thoProj.comp[1][1]
  Y[1] = thoProj.orig[1]
  IF Y[1] < neg(M[1][0]) + neg(M[1][1])
    RETURN FALSE
  END IF
  M[2][0] = -1.0
  M[2][1] = 0.0
  Y[2] = 0.0
  M[3][0] = 0.0
  M[3][1] = -1.0
  Y[3] = 0.0
  nbRows = 4
  IF that.type == FrameCuboid
    M[nbRows][0] = thoProj.comp[0][0]
    M[nbRows][1] = thoProj.comp[1][0]
    Y[nbRows] = 1.0 - thoProj.orig[0]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1])
      RETURN FALSE
    END IF
    nbRows = nbRows + 1
    M[nbRows][0] = thoProj.comp[0][1]
    M[nbRows][1] = thoProj.comp[1][1]
    Y[nbRows] = 1.0 - thoProj.orig[1]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1])
      RETURN FALSE
    END IF
    nbRows = nbRows + 1
  ELSE
    M[nbRows][0] = thoProj.comp[0][0] + thoProj.comp[0][1]
    M[nbRows][1] = thoProj.comp[1][0] + thoProj.comp[1][1]
    Y[nbRows] = 1.0 - thoProj.orig[0] - thoProj.orig[1]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1])
      RETURN FALSE
    END IF
    nbRows = nbRows + 1
  END IF
  IF tho.type == FrameCuboid
    M[nbRows][0] = 1.0
    M[nbRows][1] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
    M[nbRows][0] = 0.0
    M[nbRows][1] = 1.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
  ELSE
    M[nbRows][0] = 1.0
    M[nbRows][1] = 1.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
  END IF
  inconsistency = ElimVar2D(FST_VAR, M, Y, nbRows, 2, Mp, Yp, nbRowsP)
  IF inconsistency == TRUE

```

```

        RETURN FALSE
    END IF
    GetBound2D(SND_VAR, Mp, Yp, nbRowsP, bdgBoxLocal)
    IF bdgBoxLocal.min[SND_VAR] >= bdgBoxLocal.max[SND_VAR]
        RETURN FALSE
    END IF
    ElimVar2D(SND_VAR, M, Y, nbRows, 2, Mp, Yp, nbRowsP)
    GetBound2D(FST_VAR, Mp, Yp, nbRowsP, bdgBoxLocal)
    bdgBox = bdgBoxLocal
    RETURN TRUE
END FUNCTION

origP2D = [0.0, 0.0]
compP2D = [
    [1.0, 0.0],
    [0.0, 1.0]]
P2D = Frame2DCreateStatic(FrameCuboid, origP2D, compP2D)
origQ2D = [0.0, 0.0]
compQ2D = [
    [1.0, 0.0],
    [0.0, 1.0]]
Q2D = Frame2DCreateStatic(FrameCuboid, origQ2D, compQ2D)
isIntersecting2D = FMBTestIntersection2D(P2D, Q2D, bdgBox2DLocal)
IF isIntersecting2D == TRUE
    PRINT "Intersection detected."
    Frame2DExportBdgBox(Q2D, bdgBox2DLocal, bdgBox2D);
    AABB2DPrint(bdgBox2D)
ELSE
    PRINT "No intersection."
END IF

```

## 3.2 3D static

```

ENUM FrameType
    FrameCuboid,
    FrameTetrahedron
END ENUM

STRUCT AABB3D
    // x,y,z
    real min[3]
    real max[3]
END STRUCT

STRUCT Frame3D
    FrameType type
    real orig[3]
    // comp[iComp][iAxis]
    real comp[3][3]
    AABB3D bdgBox
    real invComp[3][3]
END STRUCT

FUNCTION powi(base, exp)
    res = 1
    FOR i=0 TO (exp - 1)
        res = res * base
    END FOR
    RETURN res
END FUNCTION

```

```

FUNCTION Frame3DPrint(that)
  IF that.type == FrameTetrahedron
    PRINT "T"
  ELSE IF that.type == FrameCuboid
    PRINT "C"
  END IF
  PRINT "o("
  FOR i = 0 TO 2
    PRINT that.orig[i]
    IF i < 2
      PRINT ", "
    END IF
  END FOR
  comp = ["x","y","z"]
  FOR j = 0 TO 2
    PRINT ") ", comp[j], "("
    FOR i = 0 TO 2
      PRINT that.comp[j][i]
      IF i < 2
        PRINT ", "
      END IF
    END FOR
  END FOR
  PRINT ")"
END FUNCTION

FUNCTION AAB3DPrint(that)
  PRINT "minXYZ("
  FOR i = 0 TO 2
    PRINT that.min[i]
    IF i < 2
      PRINT ", "
    END IF
  END FOR
  PRINT ") -maxXYZ("
  FOR i = 0 TO 2
    PRINT that.max[i]
    IF i < 2
      PRINT ", "
    END IF
  END FOR
  PRINT ")"
END FUNCTION

FUNCTION Frame3DExportBdgBox(that, bdgBox, bdgBoxProj)
  FOR i = 0 TO 2
    bdgBoxProj.max[i] = that.orig[i]
    FOR j = 0 TO 2
      bdgBoxProj.max[i] =
        bdgBoxProj.max[i] + that.comp[j][i] * bdgBox.min[j]
    END FOR
    bdgBoxProj.min[i] = bdgBoxProj.max[i]
  END FOR
  nbVertices = powi(2, 3)
  FOR iVertex = 1 TO (nbVertices - 1)
    FOR i = 0 TO 2
      IF BITWISEAND(iVertex, powi(2, i)) <> 0
        v[i] = bdgBox.max[i]
      ELSE
        v[i] = bdgBox.min[i]
      END IF
    END FOR
  END FOR

```

```

FOR i = 0 TO 2
  w[i] = that.orig[i]
  FOR j = 0 TO 2
    w[i] = w[i] + that.comp[j][i] * v[j]
  END FOR
END FOR
FOR i = 0 TO 2
  IF bdgBoxProj.min[i] > w[i]
    bdgBoxProj.min[i] = w[i]
  END IF
  IF bdgBoxProj.max[i] < w[i]
    bdgBoxProj.max[i] = w[i]
  END IF
END FOR
END FOR
END FUNCTION

FUNCTION Frame3DImportFrame(P, Q, Qp)
FOR i = 0 TO 2
  v[i] = Q.orig[i] - P.orig[i]
END FOR
FOR i = 0 TO 2
  Qp.orig[i] = 0.0
  FOR j = 0 TO 2
    Qp.orig[i] = Qp.orig[i] + P.invComp[j][i] * v[j]
    Qp.comp[j][i] = 0.0
    FOR k = 0 TO 2
      Qp.comp[j][i] = Qp.comp[j][i] + P.invComp[k][i] * Q.comp[j][k]
    END FOR
  END FOR
END FOR
END FOR
END FUNCTION

FUNCTION Frame3DUpdateInv(that)
det =
  that.comp[0][0] * (that.comp[1][1] * that.comp[2][2] -
  that.comp[1][2] * that.comp[2][1]) -
  that.comp[1][0] * (that.comp[0][1] * that.comp[2][2] -
  that.comp[0][2] * that.comp[2][1]) +
  that.comp[2][0] * (that.comp[0][1] * that.comp[1][2] -
  that.comp[0][2] * that.comp[1][1])
that.invComp[0][0] = (that.comp[1][1] * that.comp[2][2] -
  that.comp[2][1] * that.comp[1][2]) / det
that.invComp[0][1] = (that.comp[2][1] * that.comp[0][2] -
  that.comp[2][2] * that.comp[0][1]) / det
that.invComp[0][2] = (that.comp[0][1] * that.comp[1][2] -
  that.comp[0][2] * that.comp[1][1]) / det
that.invComp[1][0] = (that.comp[2][0] * that.comp[1][2] -
  that.comp[2][2] * that.comp[1][0]) / det
that.invComp[1][1] = (that.comp[0][0] * that.comp[2][2] -
  that.comp[2][0] * that.comp[0][2]) / det
that.invComp[1][2] = (that.comp[0][2] * that.comp[1][0] -
  that.comp[1][2] * that.comp[0][0]) / det
that.invComp[2][0] = (that.comp[1][0] * that.comp[2][1] -
  that.comp[2][0] * that.comp[1][1]) / det
that.invComp[2][1] = (that.comp[0][1] * that.comp[2][0] -
  that.comp[2][1] * that.comp[0][0]) / det
that.invComp[2][2] = (that.comp[0][0] * that.comp[1][1] -
  that.comp[1][0] * that.comp[0][1]) / det
END FUNCTION

FUNCTION Frame3DCreateStatic(type, orig, comp)

```

```

that.type = type
FOR iAxis = 0 TO 2
    that.orig[iAxis] = orig[iAxis]
    FOR iComp = 0 TO 2
        that.comp[iComp][iAxis] = comp[iComp][iAxis]
    END FOR
END FOR
FOR iAxis = 0 TO 2
    min = orig[iAxis]
    max = orig[iAxis]
    FOR iComp = 0 TO 2
        IF that.type == FrameCuboid
            IF that.comp[iComp][iAxis] < 0.0
                min = min + that.comp[iComp][iAxis]
            END IF
            IF that.comp[iComp][iAxis] > 0.0
                max = max + that.comp[iComp][iAxis]
            END IF
        ELSE IF that.type == FrameTetrahedron
            IF that.comp[iComp][iAxis] < 0.0 AND
                min > orig[iAxis] + that.comp[iComp][iAxis]
                min = orig[iAxis] + that.comp[iComp][iAxis]
            END IF
            IF that.comp[iComp][iAxis] > 0.0 AND
                max < orig[iAxis] + that.comp[iComp][iAxis]
                max = orig[iAxis] + that.comp[iComp][iAxis]
            END IF
        END IF
    END FOR
    that.bdgBox.min[iAxis] = min
    that.bdgBox.max[iAxis] = max
END FOR
Frame3DUpdateInv(that)
RETURN that
END FUNCTION

FUNCTION Sgn(v)
    IF 0.0 < v
        a = 1
    ELSE
        a = 0
    END IF
    IF v < 0.0
        b = 1
    ELSE
        b = 0
    END IF
    RETURN A - B
END FUNCTION

FUNCTION Neg(x)
    IF x < 0.0
        RETURN x
    ELSE
        RETURN 0.0
    END IF
END FUNCTION

FST_VAR = 0
SND_VAR = 1
THD_VAR = 2

```



```

FUNCTION ElimVar3D(iVar, M, Y, nbRows, nbCols, Mp, Yp, nbRemainRows)
  nbRemainRows = 0
  FOR iRow = 0 TO (nbRows - 2)
    FOR jRow = (iRow + 1) TO (nbRows - 1)
      IF sgn(M[iRow][iVar]) <> sgn(M[jRow][iVar]) AND
        M[iRow][iVar] <> 0.0 AND
        M[jRow][iVar] <> 0.0
        sumNegCoeff = 0.0
        jCol = 0
        FOR iCol = 0 TO (nbCols - 1)
          IF iCol <> iVar
            Mp[nbRemainRows][jCol] =
              M[iRow][iCol] / fabs(M[iRow][iVar]) +
              M[jRow][iCol] / fabs(M[jRow][iVar])
            sumNegCoeff = sumNegCoeff + neg(Mp[nbRemainRows][jCol])
            jCol = jCol + 1
          END IF
        END FOR
        Yp[nbRemainRows] =
          Y[iRow] / fabs(M[iRow][iVar]) +
          Y[jRow] / fabs(M[jRow][iVar])
        IF Yp[nbRemainRows] < sumNegCoeff
          RETURN TRUE
        END IF
        nbRemainRows = nbRemainRows + 1
      END IF
    END FOR
  END FOR
  FOR iRow = 0 TO (nbRows - 1)
    IF M[iRow][iVar] == 0.0
      jCol = 0
      FOR iCol = 0 TO (nbCols - 1)
        IF iCol <> iVar
          Mp[nbRemainRows][jCol] = M[iRow][iCol]
          jCol = jCol + 1
        END IF
      END FOR
      Yp[nbRemainRows] = Y[iRow]
      nbRemainRows = nbRemainRows + 1
    END IF
  END FOR
  RETURN FALSE
END FUNCTION

FUNCTION GetBound3D(iVar, M, Y, nbRows, bdgBox)
  bdgBox.min[iVar] = 0.0
  bdgBox.max[iVar] = 1.0
  FOR jRow = 0 TO (nbRows - 1)
    IF M[jRow][0] > 0.0
      y = Y[jRow] / M[jRow][0]
      IF bdgBox.max[iVar] > y
        bdgBox.max[iVar] = y
      END IF
    ELSE IF M[jRow][0] < 0.0
      y = Y[jRow] / M[jRow][0]
      IF bdgBox.min[iVar] < y
        bdgBox.min[iVar] = y
      END IF
    END IF
  END FOR
END FUNCTION

```

```

FUNCTION FMBTestIntersection3D(that, tho, bdgBox)
  Frame3DImportFrame(that, tho, thoProj)
  M[0][0] = -thoProj.comp[0][0]
  M[0][1] = -thoProj.comp[1][0]
  M[0][2] = -thoProj.comp[2][0]
  Y[0] = thoProj.orig[0]
  IF Y[0] < neg(M[0][0]) + neg(M[0][1]) + neg(M[0][2])
    RETURN FALSE
  END IF
  M[1][0] = -thoProj.comp[0][1]
  M[1][1] = -thoProj.comp[1][1]
  M[1][2] = -thoProj.comp[2][1]
  Y[1] = thoProj.orig[1]
  IF Y[1] < neg(M[1][0]) + neg(M[1][1]) + neg(M[1][2])
    RETURN FALSE
  END IF
  M[2][0] = -thoProj.comp[0][2]
  M[2][1] = -thoProj.comp[1][2]
  M[2][2] = -thoProj.comp[2][2]
  Y[2] = thoProj.orig[2]
  IF Y[2] < neg(M[2][0]) + neg(M[2][1]) + neg(M[2][2])
    RETURN FALSE
  END IF
  M[3][0] = -1.0
  M[3][1] = 0.0
  M[3][2] = 0.0
  Y[3] = 0.0
  M[4][0] = 0.0
  M[4][1] = -1.0
  M[4][2] = 0.0
  Y[4] = 0.0
  M[5][0] = 0.0
  M[5][1] = 0.0
  M[5][2] = -1.0
  Y[5] = 0.0
  nbRows = 6
  IF that.type == FrameCuboid
    M[nbRows][0] = thoProj.comp[0][0]
    M[nbRows][1] = thoProj.comp[1][0]
    M[nbRows][2] = thoProj.comp[2][0]
    Y[nbRows] = 1.0 - thoProj.orig[0]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
      neg(M[nbRows][2])
      RETURN FALSE
    END IF
    nbRows = nbRows + 1
    M[nbRows][0] = thoProj.comp[0][1]
    M[nbRows][1] = thoProj.comp[1][1]
    M[nbRows][2] = thoProj.comp[2][1]
    Y[nbRows] = 1.0 - thoProj.orig[1]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
      neg(M[nbRows][2])
      RETURN FALSE
    END IF
    nbRows = nbRows + 1
    M[nbRows][0] = thoProj.comp[0][2]
    M[nbRows][1] = thoProj.comp[1][2]
    M[nbRows][2] = thoProj.comp[2][2]
    Y[nbRows] = 1.0 - thoProj.orig[2]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
      neg(M[nbRows][2])
      RETURN FALSE
    END IF
  END IF

```

```

    END IF
    nbRows = nbRows + 1
ELSE
    M[nbRows][0] =
        thoProj.comp[0][0] + thoProj.comp[0][1] + thoProj.comp[0][2]
    M[nbRows][1] =
        thoProj.comp[1][0] + thoProj.comp[1][1] + thoProj.comp[1][2]
    M[nbRows][2] =
        thoProj.comp[2][0] + thoProj.comp[2][1] + thoProj.comp[2][2]
    Y[nbRows] =
        1.0 - thoProj.orig[0] - thoProj.orig[1] - thoProj.orig[2]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
        neg(M[nbRows][2])
        RETURN FALSE
    END IF
    nbRows = nbRows + 1
END
IF tho.type == FrameCuboid
    M[nbRows][0] = 1.0
    M[nbRows][1] = 0.0
    M[nbRows][2] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
    M[nbRows][0] = 0.0
    M[nbRows][1] = 1.0
    M[nbRows][2] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
    M[nbRows][0] = 0.0
    M[nbRows][1] = 0.0
    M[nbRows][2] = 1.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
ELSE
    M[nbRows][0] = 1.0
    M[nbRows][1] = 1.0
    M[nbRows][2] = 1.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
END IF
inconsistency =
    ElimVar3D(THD_VAR, M, Y, nbRows, 3, Mp, Yp, nbRowsP)
IF inconsistency == TRUE
    RETURN FALSE
END IF
inconsistency =
    ElimVar3D(FST_VAR, Mp, Yp, nbRowsP, 2, Mpp, Ypp, nbRowsPP)
IF inconsistency == TRUE
    RETURN FALSE
END IF
GetBound3D(THD_VAR, Mpp, Ypp, nbRowsPP, bdgBoxLocal)
IF bdgBoxLocal.min[THD_VAR] >= bdgBoxLocal.max[THD_VAR]
    RETURN FALSE
END IF
ElimVar3D(SND_VAR, Mp, Yp, nbRowsP, 2, Mpp, Ypp, nbRowsPP)
GetBound3D(SND_VAR, Mpp, Ypp, nbRowsPP, bdgBoxLocal)
ElimVar3D(THD_VAR, M, Y, nbRows, 3, Mp, Yp, nbRowsP)
ElimVar3D(SND_VAR, Mp, Yp, nbRowsP, 2, Mpp, Ypp, nbRowsPP)
GetBound3D(FST_VAR, Mpp, Ypp, nbRowsPP, bdgBoxLocal)
bdgBox = bdgBoxLocal
RETURN TRUE
END FUNCTION

```

```

origP3D = [0.0, 0.0, 0.0]
compP3D = [
    [1.0, 0.0, 0.0],
    [0.0, 1.0, 0.0],
    [0.0, 0.0, 1.0]]
P3D = Frame3DCreateStatic(FrameTetrahedron, origP3D, compP3D)
origQ3D = [0.0, 0.0, 0.0]
compQ3D = [
    [1.0, 0.0, 0.0],
    [0.0, 1.0, 0.0],
    [0.0, 0.0, 1.0]]
Q3D = Frame3DCreateStatic(FrameTetrahedron, origQ3D, compQ3D)
isIntersecting3D = FMBTestIntersection3D(P3D, Q3D, bdgBox3DLocal)
IF isIntersecting3D == TRUE
    PRINT "Intersection detected."
    Frame3DExportBdgBox(Q3D, bdgBox3DLocal, bdgBox3D)
    AABBB3DPrint(bdgBox3D)
ELSE
    PRINT "No intersection."
END IF

```

### 3.3 2D dynamic

```

ENUM FrameType
    FrameCuboid,
    FrameTetrahedron
END ENUM

STRUCT AABBB2DTime
    // x,y,t
    real min[3]
    real max[3]
END STRUCT

STRUCT Frame2DTime
    FrameType type
    real orig[2]
    // comp[iComp][iAxis]
    real comp[2][2]
    AABBB2DTime bdgBox
    real invComp[2][2]
    real speed[2]
END STRUCT

FUNCTION powi(base, exp)
    res = 1
    FOR i=0 TO (exp - 1)
        res = res * base
    END FOR
    RETURN res
END FUNCTION

FUNCTION Frame2DTimePrint(that)
    IF that.type == FrameTetrahedron
        PRINT "T"
    ELSE IF that.type == FrameCuboid
        PRINT "C"
    END IF
    PRINT "o("
    FOR i = 0 TO 1

```

```

        PRINT that.orig[i]
        IF i < 1
            PRINT ","
        END IF
    END FOR
    PRINT ") s("
    FOR i = 0 TO 1
        PRINT that.speed[i]
        IF i < 1
            PRINT ","
        END IF
    END FOR
    comp = ["x", "y"]
    FOR j = 0 TO 1
        PRINT ") ", comp[j], "("
        FOR i = 0 TO 1
            PRINT that.comp[j][i]
            IF i < 1
                PRINT ","
            END IF
        END FOR
    END FOR
    PRINT ")"
END FUNCTION

FUNCTION AAB2DTimePrint(that)
    PRINT "minXYT("
    FOR i = 0 TO 2
        PRINT that.min[i]
        IF i < 2
            PRINT ","
        END IF
    END FOR
    PRINT ") -maxXYT("
    FOR i = 0 TO 2
        PRINT that.max[i]
        IF i < 2
            PRINT ","
        END IF
    END FOR
    PRINT ")"
END FUNCTION

FUNCTION Frame2DTimeExportBdgBox(that, bdgBox, bdgBoxProj)
    bdgBoxProj.min[2] = bdgBox.min[2]
    bdgBoxProj.max[2] = bdgBox.max[2]
    FOR i = 0 TO 1
        bdgBoxProj.max[i] = that.orig[i] + that.speed[i] * bdgBox.min[2]
        FOR j = 0 TO 1
            bdgBoxProj.max[i] =
                bdgBoxProj.max[i] + that.comp[j][i] * bdgBox.min[j]
        END FOR
        bdgBoxProj.min[i] = bdgBoxProj.max[i]
    END FOR
    nbVertices = powi(2, 2)
    FOR iVertex = 1 TO (nbVertices - 1)
        FOR i = 0 TO 1
            IF BITWISEAND(iVertex, powi(2, i)) <> 0
                v[i] = bdgBox.max[i]
            ELSE
                v[i] = bdgBox.min[i]
            END IF
        END FOR
    END FOR

```

```

END FOR
FOR i = 0 TO 1
  w[i] = that.orig[i]
  FOR j = 0 TO 1
    w[i] = w[i] + that.comp[j][i] * v[j]
  END FOR
END FOR
FOR i = 0 TO 1
  IF bdgBoxProj.min[i] > w[i] + that.speed[i] * bdgBox.min[2]
    bdgBoxProj.min[i] = w[i] + that.speed[i] * bdgBox.min[2]
  END IF
  IF bdgBoxProj.min[i] > w[i] + that.speed[i] * bdgBox.max[2]
    bdgBoxProj.min[i] = w[i] + that.speed[i] * bdgBox.max[2]
  END IF
  IF bdgBoxProj.max[i] < w[i] + that.speed[i] * bdgBox.min[2]
    bdgBoxProj.max[i] = w[i] + that.speed[i] * bdgBox.min[2]
  END IF
  IF bdgBoxProj.max[i] < w[i] + that.speed[i] * bdgBox.max[2]
    bdgBoxProj.max[i] = w[i] + that.speed[i] * bdgBox.max[2]
  END IF
END FOR
END FOR
END FUNCTION

FUNCTION Frame2DTimeImportFrame(P, Q, Qp)
  FOR i = 0 TO 1
    v[i] = Q.orig[i] - P.orig[i]
    s[i] = Q.speed[i] - P.speed[i]
  END FOR
  FOR i = 0 TO 1
    Qp.orig[i] = 0.0
    Qp.speed[i] = 0.0
    FOR j = 0 TO 1
      Qp.orig[i] = Qp.orig[i] + P.invComp[j][i] * v[j]
      Qp.speed[i] = Qp.speed[i] + P.invComp[j][i] * s[j]
      Qp.comp[j][i] = 0.0
      FOR k = 0 TO 1
        Qp.comp[j][i] = Qp.comp[j][i] + P.invComp[k][i] * Q.comp[j][k]
      END FOR
    END FOR
  END FOR
END FUNCTION

FUNCTION Frame2DTimeUpdateInv(that)
  det = that.comp[0][0] * that.comp[1][1] -
    that.comp[1][0] * that.comp[0][1]
  that.invComp[0][0] = that.comp[1][1] / det
  that.invComp[0][1] = -that.comp[0][1] / det
  that.invComp[1][0] = -that.comp[1][0] / det
  that.invComp[1][1] = that.comp[0][0] / det
END FUNCTION

FUNCTION Frame2DTimeCreateStatic(type, orig, comp)
  that.type = type
  FOR iAxis = 0 TO 1
    that.orig[iAxis] = orig[iAxis]
    that.speed[iAxis] = speed[iAxis]
    FOR iComp = 0 TO 1
      that.comp[iComp][iAxis] = comp[iComp][iAxis]
    END FOR
  END FOR
  FOR iAxis = 0 TO 1

```

```

min = orig[iAxis]
max = orig[iAxis]
FOR iComp = 0 TO 1
  IF that.type == FrameCuboid
    IF that.comp[iComp][iAxis] < 0.0
      min = min + that.comp[iComp][iAxis]
    END IF
    IF that.comp[iComp][iAxis] > 0.0
      max = max + that.comp[iComp][iAxis]
    END IF
  ELSE IF that.type == FrameTetrahedron
    IF that.comp[iComp][iAxis] < 0.0 AND
      min > orig[iAxis] + that.comp[iComp][iAxis]
      min = orig[iAxis] + that.comp[iComp][iAxis]
    END IF
    IF that.comp[iComp][iAxis] > 0.0 AND
      max < orig[iAxis] + that.comp[iComp][iAxis]
      max = orig[iAxis] + that.comp[iComp][iAxis]
    END IF
  END IF
END FOR
IF that.speed[iAxis] < 0.0
  min = min + that.speed[iAxis]
END IF
IF that.speed[iAxis] > 0.0
  max = max + that.speed[iAxis]
END IF
that.bdgBox.min[iAxis] = min
that.bdgBox.max[iAxis] = max
END FOR
that.bdgBox.min[2] = 0.0
that.bdgBox.max[2] = 1.0
Frame2DTimeUpdateInv(that)
RETURN that
END FUNCTION

FUNCTION Sgn(v)
  IF 0.0 < v
    a = 1
  ELSE
    a = 0
  END IF
  IF v < 0.0
    b = 1
  ELSE
    b = 0
  END IF
  RETURN a - b
END FUNCTION

FUNCTION Neg(x)
  IF x < 0.0
    RETURN x
  ELSE
    RETURN 0.0
  END IF
END FUNCTION

FST_VAR = 0
SND_VAR = 1
THD_VAR = 2

```

```

FUNCTION ElimVar2DTime(iVar, M, Y, nbRows, nbCols, Mp, Yp, nbRemainRows)
    nbRemainRows = 0
    FOR iRow = 0 TO (nbRows - 2)
        FOR jRow = (iRow + 1) TO (nbRows - 1)
            IF sgn(M[iRow][iVar]) <> sgn(M[jRow][iVar]) AND
                M[iRow][iVar] <> 0.0 AND
                M[jRow][iVar] <> 0.0
                sumNegCoeff = 0.0
                jCol = 0
                FOR iCol = 0 TO (nbCols - 1)
                    IF iCol <> iVar
                        Mp[nbRemainRows][jCol] =
                            M[iRow][iCol] / fabs(M[iRow][iVar]) +
                            M[jRow][iCol] / fabs(M[jRow][iVar])
                        sumNegCoeff = sumNegCoeff + neg(Mp[nbRemainRows][jCol])
                        jCol = jCol + 1
                    END IF
                END FOR
                Yp[nbRemainRows] =
                    Y[iRow] / fabs(M[iRow][iVar]) +
                    Y[jRow] / fabs(M[jRow][iVar])
                IF Yp[nbRemainRows] < sumNegCoeff
                    RETURN TRUE
                END IF
                nbRemainRows = nbRemainRows + 1
            END IF
        END FOR
    END FOR
    FOR iRow = 0 TO (nbRows - 1)
        IF M[iRow][iVar] == 0.0
            jCol = 0
            FOR iCol = 0 TO (nbCols - 1)
                IF iCol <> iVar
                    Mp[nbRemainRows][jCol] = M[iRow][iCol]
                    jCol = jCol + 1
                END IF
            END FOR
            Yp[nbRemainRows] = Y[iRow]
            nbRemainRows = nbRemainRows + 1
        END IF
    END FOR
    RETURN FALSE
END FUNCTION

FUNCTION GetBound2DTime(iVar, M, Y, nbRows, bdgBox)
    bdgBox.min[iVar] = 0.0
    bdgBox.max[iVar] = 1.0
    FOR jRow = 0 TO (nbRows - 1)
        IF M[jRow][0] > 0.0
            y = Y[jRow] / M[jRow][0]
            IF bdgBox.max[iVar] > y
                bdgBox.max[iVar] = y
            END IF
        ELSE IF M[jRow][0] < 0.0
            y = Y[jRow] / M[jRow][0]
            IF bdgBox.min[iVar] < y
                bdgBox.min[iVar] = y
            END IF
        END IF
    END FOR
END FUNCTION

```



```

FUNCTION FMBTestIntersection2DTime(that, tho, bdgBox)
  Frame2DTimeImportFrame(that, tho, thoProj)
  M[0][0] = -thoProj.comp[0][0]
  M[0][1] = -thoProj.comp[1][0]
  M[0][2] = -thoProj.speed[0]
  Y[0] = thoProj.orig[0]
  IF (Y[0] < neg(M[0][0]) + neg(M[0][1]) + neg(M[0][2]))
    RETURN FALSE
  END IF
  M[1][0] = -thoProj.comp[0][1]
  M[1][1] = -thoProj.comp[1][1]
  M[1][2] = -thoProj.speed[1]
  Y[1] = thoProj.orig[1]
  IF (Y[1] < neg(M[1][0]) + neg(M[1][1]) + neg(M[1][2]))
    RETURN FALSE
  END IF
  M[2][0] = -1.0
  M[2][1] = 0.0
  M[2][2] = 0.0
  Y[2] = 0.0
  M[3][0] = 0.0
  M[3][1] = -1.0
  M[3][2] = 0.0
  Y[3] = 0.0
  M[4][0] = 0.0
  M[4][1] = 0.0
  M[4][2] = 1.0
  Y[4] = 1.0
  M[5][0] = 0.0
  M[5][1] = 0.0
  M[5][2] = -1.0
  Y[5] = 0.0
  nbRows = 6
  IF that.type == FrameCuboid
    M[nbRows][0] = thoProj.comp[0][0]
    M[nbRows][1] = thoProj.comp[1][0]
    M[nbRows][2] = thoProj.speed[0]
    Y[nbRows] = 1.0 - thoProj.orig[0]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
      neg(M[nbRows][2])
      RETURN FALSE
    END IF
    nbRows = nbRows + 1
    M[nbRows][0] = thoProj.comp[0][1]
    M[nbRows][1] = thoProj.comp[1][1]
    M[nbRows][2] = thoProj.speed[1]
    Y[nbRows] = 1.0 - thoProj.orig[1]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
      neg(M[nbRows][2])
      RETURN FALSE
    END IF
    nbRows = nbRows + 1
  ELSE
    M[nbRows][0] = thoProj.comp[0][0] + thoProj.comp[0][1]
    M[nbRows][1] = thoProj.comp[1][0] + thoProj.comp[1][1]
    M[nbRows][2] = thoProj.speed[0] + thoProj.speed[1]
    Y[nbRows] = 1.0 - thoProj.orig[0] - thoProj.orig[1]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
      neg(M[nbRows][2])
      RETURN FALSE
    END IF
    nbRows = nbRows + 1
  
```

```

END
IF tho.type == FrameCuboid
    M[nbRows][0] = 1.0
    M[nbRows][1] = 0.0
    M[nbRows][2] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
    M[nbRows][0] = 0.0
    M[nbRows][1] = 1.0
    M[nbRows][2] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
ELSE
    M[nbRows][0] = 1.0
    M[nbRows][1] = 1.0
    M[nbRows][2] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
END IF
inconsistency =
    ElimVar2DTime(FST_VAR, M, Y, nbRows, 3, Mp, Yp, nbRowsP)
IF inconsistency == TRUE
    RETURN FALSE
END IF
inconsistency =
    ElimVar2DTime(FST_VAR, Mp, Yp, nbRowsP, 2, Mpp, Ypp, nbRowsPP)
IF inconsistency == TRUE
    RETURN FALSE
END IF
GetBound2DTime(THD_VAR, Mpp, Ypp, nbRowsPP, bdgBoxLocal)
IF bdgBoxLocal.min[THD_VAR] >= bdgBoxLocal.max[THD_VAR]
    RETURN FALSE
END IF
ElimVar2DTime(SND_VAR, Mp, Yp, nbRowsP, 2, Mpp, Ypp, nbRowsPP)
GetBound2DTime(SND_VAR, Mpp, Ypp, nbRowsPP, bdgBoxLocal)
ElimVar2DTime(THD_VAR, M, Y, nbRows, 3, Mp, Yp, nbRowsP)
ElimVar2DTime(SND_VAR, Mp, Yp, nbRowsP, 2, Mpp, Ypp, nbRowsPP)
GetBound2DTime(FST_VAR, Mpp, Ypp, nbRowsPP, bdgBoxLocal)
bdgBox = bdgBoxLocal
RETURN TRUE
END FUNCTION

origP2DTime = [0.0, 0.0]
speedP2DTime = [0.0, 0.0]
compP2DTime = [
    [1.0, 0.0],
    [0.0, 1.0]]
P2DTime =
    Frame2DTimeCreateStatic(
        FrameCuboid, origP2DTime, speedP2DTime, compP2DTime)
origQ2DTime = [0.0, 0.0]
speedQ2DTime = [0.0, 0.0]
compQ2DTime = [
    [1.0, 0.0],
    [0.0, 1.0]]
Q2DTime =
    Frame2DTimeCreateStatic(
        FrameCuboid, origQ2DTime, speedQ2DTime, compQ2DTime)
isIntersecting2DTime =
    FMBTestIntersection2DTime(P2DTime, Q2DTime, bdgBox2DTimeLocal)
IF isIntersecting2DTime == TRUE
    PRINT "Intersection detected."

```

```

    Frame2DTimeExportBdgBox(Q2DTime, bdgBox2DTimeLocal, bdgBox2DTime)
    AABB2DTimePrint(bdgBox2DTime)
ELSE
    PRINT "No intersection."
END IF

```

### 3.4 3D dynamic

```

ENUM FrameType
    FrameCuboid,
    FrameTetrahedron
END ENUM

STRUCT AABB3DTime
    // x,y,z,t
    real min[4]
    real max[4]
END STRUCT

STRUCT Frame3DTime
    FrameType type
    real orig[3]
    // comp[iComp][iAxis]
    real comp[3][3]
    AABB3DTime bdgBox
    real invComp[3][3]
    real speed[3]
END STRUCT

FUNCTION powi(base, exp)
    res = 1
    FOR i=0 TO (exp - 1)
        res = res * base
    END FOR
    RETURN res
END FUNCTION

FUNCTION Frame3DTimePrint(that)
    IF that.type == FrameTetrahedron
        PRINT "T"
    ELSE IF that.type == FrameCuboid
        PRINT "C"
    END IF
    PRINT "o("
    FOR i = 0 TO 2
        PRINT that.orig[i]
        IF i < 2
            PRINT ", "
        END IF
    END FOR
    PRINT " s("
    FOR i = 0 TO 2
        PRINT that.speed[i]
        IF i < 2
            PRINT ", "
        END IF
    END FOR
    comp = ["x", "y", "z"]
    FOR j = 0 TO 2
        PRINT " ", comp[j], "("
        FOR i = 0 TO 2

```

```

        PRINT that.comp[j][i]
        IF i < 2
            PRINT ","
        END IF
    END FOR
END FOR
PRINT ")"
END FUNCTION

FUNCTION AAB3DTimePrint(that)
    PRINT "minXYZT("
    FOR i = 0 TO 3
        PRINT that.min[i]
        IF i < 3
            PRINT ","
        END IF
    END FOR
    PRINT ")-maxXYZT("
    FOR i = 0 TO 3
        PRINT that.max[i]
        IF i < 3
            PRINT ","
        END IF
    END FOR
    PRINT ")"
END FUNCTION

FUNCTION Frame3DTimeExportBdgBox(that, bdgBox, bdgBoxProj)
    bdgBoxProj.min[3] = bdgBox.min[3]
    bdgBoxProj.max[3] = bdgBox.max[3]
    FOR i = 0 TO 2
        bdgBoxProj.max[i] = that.orig[i] + that.speed[i] * bdgBox.min[3]
        FOR j = 0 TO 2
            bdgBoxProj.max[i] =
                bdgBoxProj.max[i] + that.comp[j][i] * bdgBox.min[j]
        END FOR
        bdgBoxProj.min[i] = bdgBoxProj.max[i]
    END FOR
    nbVertices = powi(2, 3)
    FOR iVertex = 1 TO (nbVertices - 1)
        FOR i = 0 TO 2
            IF BITWISEAND(iVertex, powi(2, i)) <> 0
                v[i] = bdgBox.max[i]
            ELSE
                v[i] = bdgBox.min[i]
            END IF
        END FOR
        FOR i = 0 TO 2
            w[i] = that.orig[i]
            FOR j = 0 TO 2
                w[i] = w[i] + that.comp[j][i] * v[j]
            END FOR
        END FOR
        FOR i = 0 TO 2
            IF bdgBoxProj.min[i] > w[i] + that.speed[i] * bdgBox.min[3]
                bdgBoxProj.min[i] = w[i] + that.speed[i] * bdgBox.min[3]
            END IF
            IF bdgBoxProj.min[i] > w[i] + that.speed[i] * bdgBox.max[3]
                bdgBoxProj.min[i] = w[i] + that.speed[i] * bdgBox.max[3]
            END IF
            IF bdgBoxProj.max[i] < w[i] + that.speed[i] * bdgBox.min[3]
                bdgBoxProj.max[i] = w[i] + that.speed[i] * bdgBox.min[3]
            END IF
        END FOR
    END FOR
END FUNCTION

```

```

        END IF
        IF bdgBoxProj.max[i] < w[i] + that.speed[i] * bdgBox.max[3]
            bdgBoxProj.max[i] = w[i] + that.speed[i] * bdgBox.max[3]
        END IF
    END FOR
END FOR
END FUNCTION

FUNCTION Frame3DTimeImportFrame(P, Q, Qp)
    FOR i = 0 TO 2
        v[i] = Q.orig[i] - P.orig[i]
        s[i] = Q.speed[i] - P.speed[i]
    END FOR
    FOR i = 0 TO 2
        Qp.orig[i] = 0.0
        Qp.speed[i] = 0.0
        FOR j = 0 TO 2
            Qp.orig[i] = Qp.orig[i] + P.invComp[j][i] * v[j]
            Qp.speed[i] = Qp.speed[i] + P.invComp[j][i] * s[j]
            Qp.comp[j][i] = 0.0
            FOR k = 0 TO 2
                Qp.comp[j][i] = Qp.comp[j][i] + P.invComp[k][i] * Q.comp[j][k]
            END FOR
        END FOR
    END FOR
END FUNCTION

FUNCTION Frame3DTimeUpdateInv(that)
    det =
        that.comp[0][0] *
        (that.comp[1][1] * that.comp[2][2] - that.comp[1][2] * that.comp[2][1])
        -
        that.comp[1][0] *
        (that.comp[0][1] * that.comp[2][2] - that.comp[0][2] * that.comp[2][1])
        +
        that.comp[2][0] *
        (that.comp[0][1] * that.comp[1][2] - that.comp[0][2] * that.comp[1][1])
    that.invComp[0][0] = (that.comp[1][1] * that.comp[2][2] -
        that.comp[2][1] * that.comp[1][2]) / det
    that.invComp[0][1] = (that.comp[2][1] * that.comp[0][2] -
        that.comp[2][2] * that.comp[0][1]) / det
    that.invComp[0][2] = (that.comp[0][1] * that.comp[1][2] -
        that.comp[0][2] * that.comp[1][1]) / det
    that.invComp[1][0] = (that.comp[2][0] * that.comp[1][2] -
        that.comp[2][2] * that.comp[1][0]) / det
    that.invComp[1][1] = (that.comp[0][0] * that.comp[2][2] -
        that.comp[2][0] * that.comp[0][2]) / det
    that.invComp[1][2] = (that.comp[0][2] * that.comp[1][0] -
        that.comp[1][2] * that.comp[0][0]) / det
    that.invComp[2][0] = (that.comp[1][0] * that.comp[2][1] -
        that.comp[2][0] * that.comp[1][1]) / det
    that.invComp[2][1] = (that.comp[0][1] * that.comp[2][0] -
        that.comp[2][1] * that.comp[0][0]) / det
    that.invComp[2][2] = (that.comp[0][0] * that.comp[1][1] -
        that.comp[1][0] * that.comp[0][1]) / det
END FUNCTION

FUNCTION Frame3DTimeCreateStatic(type, orig, comp)
    that.type = type
    FOR iAxis = 0 TO 2
        that.orig[iAxis] = orig[iAxis]
        that.speed[iAxis] = speed[iAxis]
    END FOR
END FUNCTION

```

```

    FOR iComp = 0 TO 2
        that.comp[iComp][iAxis] = comp[iComp][iAxis]
    END FOR
END FOR
FOR iAxis = 0 TO 2
    min = orig[iAxis]
    max = orig[iAxis]
    FOR iComp = 0 TO 2
        IF that.type == FrameCuboid
            IF that.comp[iComp][iAxis] < 0.0
                min = min + that.comp[iComp][iAxis]
            END IF
            IF that.comp[iComp][iAxis] > 0.0
                max = max + that.comp[iComp][iAxis]
            END IF
        ELSE IF that.type == FrameTetrahedron
            IF that.comp[iComp][iAxis] < 0.0 AND
                min > orig[iAxis] + that.comp[iComp][iAxis]
                min = orig[iAxis] + that.comp[iComp][iAxis]
            END IF
            IF that.comp[iComp][iAxis] > 0.0 AND
                max < orig[iAxis] + that.comp[iComp][iAxis]
                max = orig[iAxis] + that.comp[iComp][iAxis]
            END IF
        END IF
    END FOR
    IF that.speed[iAxis] < 0.0
        min = min + that.speed[iAxis]
    END IF
    IF that.speed[iAxis] > 0.0
        max = max + that.speed[iAxis]
    END IF
    that.bdgBox.min[iAxis] = min
    that.bdgBox.max[iAxis] = max
END FOR
that.bdgBox.min[3] = 0.0
that.bdgBox.max[3] = 1.0
Frame3DTimeUpdateInv(that)
RETURN that
END FUNCTION

FUNCTION Sgn(v)
    IF 0.0 < v
        a = 1
    ELSE
        a = 0
    END IF
    IF v < 0.0
        b = 1
    ELSE
        b = 0
    END IF
    RETURN a - b
END FUNCTION

FUNCTION Neg(x)
    IF x < 0.0
        RETURN x
    ELSE
        RETURN 0.0
    END IF
END FUNCTION

```

```

FST_VAR = 0
SND_VAR = 1
THD_VAR = 2
FOR_VAR = 3

FUNCTION ElimVar3DTime(iVar, M, Y, nbRows, nbCols, Mp, Yp, nbRemainRows)
    nbRemainRows = 0
    FOR iRow = 0 TO (nbRows - 2)
        FOR jRow = (iRow + 1) TO (nbRows - 1)
            IF Sgn(M[iRow][iVar]) <> Sgn(M[jRow][iVar]) AND
                M[iRow][iVar] <> 0.0 AND
                M[jRow][iVar] <> 0.0
                sumNegCoeff = 0.0
                jCol = 0
                FOR iCol = 0 TO (nbCols - 1)
                    IF iCol <> iVar
                        Mp[nbRemainRows][jCol] =
                            M[iRow][iCol] / fabs(M[iRow][iVar]) +
                            M[jRow][iCol] / fabs(M[jRow][iVar])
                        sumNegCoeff = sumNegCoeff + neg(Mp[nbRemainRows][jCol])
                        jCol = jCol + 1
                    END IF
                END FOR
                Yp[nbRemainRows] =
                    Y[iRow] / fabs(M[iRow][iVar]) +
                    Y[jRow] / fabs(M[jRow][iVar])
                IF Yp[nbRemainRows] < sumNegCoeff
                    RETURN TRUE
                END IF
                nbRemainRows = nbRemainRows + 1
            END IF
        END FOR
    END FOR
    FOR iRow = 0 TO (nbRows - 1)
        IF M[iRow][iVar] == 0.0
            jCol = 0
            FOR iCol = 0 TO (nbCols - 1)
                IF iCol <> iVar
                    Mp[nbRemainRows][jCol] = M[iRow][iCol]
                    jCol = jCol + 1
                END IF
            END FOR
            Yp[nbRemainRows] = Y[iRow]
            nbRemainRows = nbRemainRows + 1
        END IF
    END FOR
    RETURN FALSE
END FUNCTION

FUNCTION GetBound3DTime(iVar, M, Y, nbRows, bdgBox)
    bdgBox.min[iVar] = 0.0
    bdgBox.max[iVar] = 1.0
    FOR jRow = 0 TO (nbRows - 1)
        IF M[jRow][0] > 0.0
            y = Y[jRow] / M[jRow][0]
            IF bdgBox.max[iVar] > y
                bdgBox.max[iVar] = y
            END IF
        ELSE IF M[jRow][0] < 0.0
            y = Y[jRow] / M[jRow][0]
            IF bdgBox.min[iVar] < y

```

```

        bdgBox.min[iVar] = y
    END IF
END IF
END FOR
END FUNCTION

FUNCTION FMBTestIntersection3DTime(that, tho, bdgBox)
    Frame3DTimeImportFrame(that, tho, thoProj)
    M[0][0] = -thoProj.comp[0][0]
    M[0][1] = -thoProj.comp[1][0]
    M[0][2] = -thoProj.comp[2][0]
    M[0][3] = -thoProj.speed[0]
    Y[0] = thoProj.orig[0]
    IF Y[0] < neg(M[0][0]) + neg(M[0][1]) + neg(M[0][2]) + neg(M[0][3])
        RETURN FALSE
    END IF
    M[1][0] = -thoProj.comp[0][1]
    M[1][1] = -thoProj.comp[1][1]
    M[1][2] = -thoProj.comp[2][1]
    M[1][3] = -thoProj.speed[1]
    Y[1] = thoProj.orig[1]
    IF Y[1] < neg(M[1][0]) + neg(M[1][1]) + neg(M[1][2]) + neg(M[1][3])
        RETURN FALSE
    END IF
    M[2][0] = -thoProj.comp[0][2]
    M[2][1] = -thoProj.comp[1][2]
    M[2][2] = -thoProj.comp[2][2]
    M[2][3] = -thoProj.speed[2]
    Y[2] = thoProj.orig[2]
    IF Y[2] < neg(M[2][0]) + neg(M[2][1]) + neg(M[2][2]) + neg(M[2][3])
        RETURN FALSE
    END IF
    nbRows = 3
    IF that.type == FrameCuboid
        M[nbRows][0] = thoProj.comp[0][0]
        M[nbRows][1] = thoProj.comp[1][0]
        M[nbRows][2] = thoProj.comp[2][0]
        M[nbRows][3] = thoProj.speed[0]
        Y[nbRows] = 1.0 - thoProj.orig[0]
        IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
            neg(M[nbRows][2]) + neg(M[nbRows][3])
            RETURN FALSE
        END IF
        nbRows = nbRows + 1
        M[nbRows][0] = thoProj.comp[0][1]
        M[nbRows][1] = thoProj.comp[1][1]
        M[nbRows][2] = thoProj.comp[2][1]
        M[nbRows][3] = thoProj.speed[1]
        Y[nbRows] = 1.0 - thoProj.orig[1]
        IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
            neg(M[nbRows][2]) + neg(M[nbRows][3])
            RETURN FALSE
        END IF
        nbRows = nbRows + 1
        M[nbRows][0] = thoProj.comp[0][2]
        M[nbRows][1] = thoProj.comp[1][2]
        M[nbRows][2] = thoProj.comp[2][2]
        M[nbRows][3] = thoProj.speed[2]
        Y[nbRows] = 1.0 - thoProj.orig[2]
        IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
            neg(M[nbRows][2]) + neg(M[nbRows][3])
            RETURN FALSE
        END IF
    END IF

```



```

    END IF
    nbRows = nbRows + 1
ELSE
    M[nbRows][0] =
        thoProj.comp[0][0] + thoProj.comp[0][1] + thoProj.comp[0][2]
    M[nbRows][1] =
        thoProj.comp[1][0] + thoProj.comp[1][1] + thoProj.comp[1][2]
    M[nbRows][2] =
        thoProj.comp[2][0] + thoProj.comp[2][1] + thoProj.comp[2][2]
    M[nbRows][3] = thoProj.speed[0] + thoProj.speed[1] + thoProj.speed[2]
    Y[nbRows] = 1.0 - thoProj.orig[0] - thoProj.orig[1] - thoProj.orig[2]
    IF Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
        neg(M[nbRows][2]) + neg(M[nbRows][3])
        RETURN FALSE
    END IF
    nbRows = nbRows + 1
END IF
IF tho.type == FrameCuboid
    M[nbRows][0] = 1.0
    M[nbRows][1] = 0.0
    M[nbRows][2] = 0.0
    M[nbRows][3] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
    M[nbRows][0] = 0.0
    M[nbRows][1] = 1.0
    M[nbRows][2] = 0.0
    M[nbRows][3] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
    M[nbRows][0] = 0.0
    M[nbRows][1] = 0.0
    M[nbRows][2] = 1.0
    M[nbRows][3] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
ELSE
    M[nbRows][0] = 1.0
    M[nbRows][1] = 1.0
    M[nbRows][2] = 1.0
    M[nbRows][3] = 0.0
    Y[nbRows] = 1.0
    nbRows = nbRows + 1
END IF
M[nbRows][0] = -1.0
M[nbRows][1] = 0.0
M[nbRows][2] = 0.0
M[nbRows][3] = 0.0
Y[nbRows] = 0.0
nbRows = nbRows + 1
M[nbRows][0] = 0.0
M[nbRows][1] = -1.0
M[nbRows][2] = 0.0
M[nbRows][3] = 0.0
Y[nbRows] = 0.0
nbRows = nbRows + 1
M[nbRows][0] = 0.0
M[nbRows][1] = 0.0
M[nbRows][2] = -1.0
M[nbRows][3] = 0.0
Y[nbRows] = 0.0
nbRows = nbRows + 1

```

```

M[nbRows][0] = 0.0
M[nbRows][1] = 0.0
M[nbRows][2] = 0.0
M[nbRows][3] = 1.0
Y[nbRows] = 1.0
nbRows = nbRows + 1
M[nbRows][0] = 0.0
M[nbRows][1] = 0.0
M[nbRows][2] = 0.0
M[nbRows][3] = -1.0
Y[nbRows] = 0.0
nbRows = nbRows + 1
inconsistency =
    ElimVar3DTime(FST_VAR, M, Y, nbRows, 4, Mp, Yp, nbRowsP)
IF inconsistency == TRUE
    RETURN FALSE
END IF
inconsistency =
    ElimVar3DTime(FST_VAR, Mp, Yp, nbRowsP, 3, Mpp, Ypp, nbRowsPP)
IF inconsistency == TRUE
    RETURN FALSE
END IF
inconsistency =
    ElimVar3DTime(FST_VAR, Mpp, Ypp, nbRowsPP, 2, Mppp, Yppp, nbRowsPPP)
IF inconsistency == TRUE
    RETURN FALSE
END IF
GetBound3DTime(FOR_VAR, Mppp, Yppp, nbRowsPPP, bdgBoxLocal)
IF bdgBoxLocal.min[FOR_VAR] >= bdgBoxLocal.max[FOR_VAR]
    RETURN FALSE
END IF
ElimVar3DTime(SND_VAR, Mpp, Ypp, nbRowsPP, 2, Mppp, Yppp, nbRowsPPP)
GetBound3DTime(THD_VAR, Mppp, Yppp, nbRowsPPP, bdgBoxLocal)
ElimVar3DTime(FOR_VAR, M, Y, nbRows, 4, Mp, Yp, nbRowsP)
ElimVar3DTime(THD_VAR, Mp, Yp, nbRowsP, 3, Mpp, Ypp, nbRowsPP)
ElimVar3DTime(SND_VAR, Mpp, Ypp, nbRowsPP, 2, Mppp, Yppp, nbRowsPPP)
GetBound3DTime(FST_VAR, Mppp, Yppp, nbRowsPPP, bdgBoxLocal)
ElimVar3DTime(FST_VAR, Mpp, Ypp, nbRowsPP, 2, Mppp, Yppp, nbRowsPPP)
GetBound3DTime(SND_VAR, Mppp, Yppp, nbRowsPPP, bdgBoxLocal)
bdgBox = bdgBoxLocal
RETURN TRUE
END FUNCTION

origP3DTime = [0.0, 0.0, 0.0]
speedP3DTime = [0.0, 0.0, 0.0]
compP3DTime = [
    [1.0, 0.0, 0.0],
    [0.0, 1.0, 0.0],
    [0.0, 0.0, 1.0]]
P3DTime =
    Frame3DTimeCreateStatic(
        FrameCuboid, origP3DTime, speedP3DTime, compP3DTime)
origQ3DTime = [0.0, 0.0, 0.0]
speedQ3DTime = [0.0, 0.0, 0.0]
compQ3DTime = [
    [1.0, 0.0, 0.0],
    [0.0, 1.0, 0.0],
    [0.0, 0.0, 1.0]]
Q3DTime =
    Frame3DTimeCreateStatic(
        FrameCuboid, origQ3DTime, speedQ3DTime, compQ3DTime)
isIntersecting3DTime =

```

```

    FMBTestIntersection3DTime(P3DTime, Q3DTime, bdgBox3DTimeLocal)
IF isIntersecting3DTime == TRUE
    PRINT "Intersection detected."
    Frame3DTimeExportBdgBox(Q3DTime, bdgBox3DTimeLocal, bdgBox3DTime)
    AABB3DTimePrint(bdgBox3DTime)
ELSE
    PRINT "No intersection."
END IF

```

## 4 Implementation of the algorithms in C

In this section I introduce an implementation of the algorithms of the previous section in the C language.

### 4.1 Frames

#### 4.1.1 Header

```

#ifndef __FRAME_H_
#define __FRAME_H_

// ----- Includes -----

#include <math.h>
#include <stdio.h>
#include <stdlib.h>

// ----- Macros -----

// ----- Enumerations -----

typedef enum {
    FrameCuboid,
    FrameTetrahedron
} FrameType;

// ----- Data structures -----

// Axis aligned bounding box structure
typedef struct {
    // x,y
    double min[2];
    double max[2];
} AABB2D;

typedef struct {
    // x,y,z
    double min[3];
    double max[3];
} AABB3D;

typedef struct {
    // x,y,t
    double min[3];
    double max[3];
} AABB2DTime;

```

```

typedef struct {
    // x,y,z,t
    double min[4];
    double max[4];
} AABBB3DTime;

// Axis unaligned cuboid and tetrahedron structure
typedef struct {
    FrameType type;
    double orig[2];
    double comp[2][2];
    // AABBB of the frame
    AABBB2D bdgBox;
    // Inverted components used during computation
    double invComp[2][2];
} Frame2D;

typedef struct {
    FrameType type;
    double orig[3];
    double comp[3][3];
    // AABBB of the frame
    AABBB3D bdgBox;
    // Inverted components used during computation
    double invComp[3][3];
} Frame3D;

typedef struct {
    FrameType type;
    double orig[2];
    double comp[2][2];
    // AABBB of the frame
    AABBB2DTime bdgBox;
    // Inverted components used during computation
    double invComp[2][2];
    double speed[2];
} Frame2DTime;

typedef struct {
    FrameType type;
    double orig[3];
    double comp[3][3];
    // AABBB of the frame
    AABBB3DTime bdgBox;
    // Inverted components used during computation
    double invComp[3][3];
    double speed[3];
} Frame3DTime;

// ----- Functions declaration -----

// Print the AABBB 'that' on stdout
// Output format is
// (min[0], min[1], min[2], min[3])-(max[0], max[1], max[2], max[3])
void AABBB2DPrint(const AABBB2D* const that);
void AABBB3DPrint(const AABBB3D* const that);
void AABBB2DTimePrint(const AABBB2DTime* const that);
void AABBB3DTimePrint(const AABBB3DTime* const that);

// Print the Frame 'that' on stdout
// Output format is

```

```

// T/C <- type of Frame
// o(orig[0], orig[1], orig[2])
// s(speed[0], speed[1], speed[2])
// x(comp[0][0], comp[0][1], comp[0][2])
// y(comp[1][0], comp[1][1], comp[1][2])
// z(comp[2][0], comp[2][1], comp[2][2])
void Frame2DPrint(const Frame2D* const that);
void Frame3DPrint(const Frame3D* const that);
void Frame2DTimePrint(const Frame2DTime* const that);
void Frame3DTimePrint(const Frame3DTime* const that);

// Create a static Frame structure of FrameType 'type',
// at position 'orig' with components 'comp' ([iComp][iAxis])
// and 'speed'
Frame2D Frame2DCreateStatic(
    const FrameType type,
    const double orig[2],
    const double comp[2][2]);
Frame3D Frame3DCreateStatic(
    const FrameType type,
    const double orig[3],
    const double comp[3][3]);
Frame2DTime Frame2DTimeCreateStatic(
    const FrameType type,
    const double orig[2],
    const double speed[2],
    const double comp[2][2]);
Frame3DTime Frame3DTimeCreateStatic(
    const FrameType type,
    const double orig[3],
    const double speed[3],
    const double comp[3][3]);

// Project the Frame 'Q' in the Frame 'P' 's coordinates system and
// memorize the result in the Frame 'Qp'
void Frame2DImportFrame(
    const Frame2D* const P,
    const Frame2D* const Q,
    Frame2D* const Qp);
void Frame3DImportFrame(
    const Frame3D* const P,
    const Frame3D* const Q,
    Frame3D* const Qp);
void Frame2DTimeImportFrame(
    const Frame2DTime* const P,
    const Frame2DTime* const Q,
    Frame2DTime* const Qp);
void Frame3DTimeImportFrame(
    const Frame3DTime* const P,
    const Frame3DTime* const Q,
    Frame3DTime* const Qp);

// Export the ABB 'bdgBox' from 'that' 's coordinates system to
// the real coordinates system and update 'bdgBoxProj' with the resulting
// ABB
void Frame2DExportBdgBox(
    const Frame2D* const that,
    const ABB2D* const bdgBox,
    ABB2D* const bdgBoxProj);
void Frame3DExportBdgBox(
    const Frame3D* const that,
    const ABB3D* const bdgBox,

```

```

        AABB3D* const bdgBoxProj);
void Frame2DTimeExportBdgBox(
    const Frame2DTime* const that,
    const AABB2DTime* const bdgBox,
    AABB2DTime* const bdgBoxProj);
void Frame3DTimeExportBdgBox(
    const Frame3DTime* const that,
    const AABB3DTime* const bdgBox,
    AABB3DTime* const bdgBoxProj);

// Power function for integer base and exponent
// Return 'base' ^ 'exp'
int powi(
    int base,
    unsigned int exp);

#endif

```

## 4.1.2 Body

```

#include "frame.h"

// ----- Macros -----

#define EPSILON 0.0000001

// ----- Functions declaration -----

// Update the inverse components of the Frame 'that'
void Frame2DUpdateInv(Frame2D* const that);
void Frame3DUpdateInv(Frame3D* const that);
void Frame2DTimeUpdateInv(Frame2DTime* const that);
void Frame3DTimeUpdateInv(Frame3DTime* const that);

// ----- Functions implementation -----

// Create a static Frame structure of FrameType 'type',
// at position 'orig' with components 'comp' and 'speed'
// arrangement is comp[iComp][iAxis]
Frame2D Frame2DCreateStatic(
    const FrameType type,
    const double orig[2],
    const double comp[2][2]) {

    // Create the new Frame
    Frame2D that;
    that.type = type;
    for (int iAxis = 2;
        iAxis--;) {

        that.orig[iAxis] = orig[iAxis];

        for (int iComp = 2;
            iComp--;) {

            that.comp[iComp][iAxis] = comp[iComp][iAxis];

        }
    }
}

```

```

// Create the bounding box
for (int iAxis = 2;
    iAxis--;) {

    double min = orig[iAxis];
    double max = orig[iAxis];

    for (int iComp = 2;
        iComp--;) {

        if (that.type == FrameCuboid) {

            if (that.comp[iComp][iAxis] < 0.0) {

                min += that.comp[iComp][iAxis];

            }

            if (that.comp[iComp][iAxis] > 0.0) {

                max += that.comp[iComp][iAxis];

            }

        } else if (that.type == FrameTetrahedron) {

            if (that.comp[iComp][iAxis] < 0.0 &&
                min > orig[iAxis] + that.comp[iComp][iAxis]) {

                min = orig[iAxis] + that.comp[iComp][iAxis];

            }

            if (that.comp[iComp][iAxis] > 0.0 &&
                max < orig[iAxis] + that.comp[iComp][iAxis]) {

                max = orig[iAxis] + that.comp[iComp][iAxis];

            }

        }

    }

    that.bdgBox.min[iAxis] = min;
    that.bdgBox.max[iAxis] = max;

}

// Calculate the inverse matrix
Frame2DUpdateInv(&that);

// Return the new Frame
return that;

}

Frame3D Frame3DCreateStatic(
    const FrameType type,
    const double orig[3],
    const double comp[3][3]) {

```

```

// Create the new Frame
Frame3D that;
that.type = type;
for (int iAxis = 3;
    iAxis--;) {

    that.orig[iAxis] = orig[iAxis];

    for (int iComp = 3;
        iComp--;) {

        that.comp[iComp][iAxis] = comp[iComp][iAxis];

    }
}

// Create the bounding box
for (int iAxis = 3;
    iAxis--;) {

    double min = orig[iAxis];
    double max = orig[iAxis];

    for (int iComp = 3;
        iComp--;) {

        if (that.type == FrameCuboid) {

            if (that.comp[iComp][iAxis] < 0.0) {

                min += that.comp[iComp][iAxis];

            }

            if (that.comp[iComp][iAxis] > 0.0) {

                max += that.comp[iComp][iAxis];

            }

        } else if (that.type == FrameTetrahedron) {

            if (that.comp[iComp][iAxis] < 0.0 &&
                min > orig[iAxis] + that.comp[iComp][iAxis]) {

                min = orig[iAxis] + that.comp[iComp][iAxis];

            }

            if (that.comp[iComp][iAxis] > 0.0 &&
                max < orig[iAxis] + that.comp[iComp][iAxis]) {

                max = orig[iAxis] + that.comp[iComp][iAxis];

            }

        }

    }

}

```



```

        that.bdgBox.min[iAxis] = min;
        that.bdgBox.max[iAxis] = max;
    }

    // Calculate the inverse matrix
    Frame3DUpdateInv(&that);

    // Return the new Frame
    return that;
}

Frame2DTime Frame2DTimeCreateStatic(
    const FrameType type,
    const double orig[2],
    const double speed[2],
    const double comp[2][2]) {

    // Create the new Frame
    Frame2DTime that;
    that.type = type;
    for (int iAxis = 2;
        iAxis--;) {

        that.orig[iAxis] = orig[iAxis];
        that.speed[iAxis] = speed[iAxis];

        for (int iComp = 2;
            iComp--;) {

            that.comp[iComp][iAxis] = comp[iComp][iAxis];

        }
    }

    // Create the bounding box
    for (int iAxis = 2;
        iAxis--;) {

        double min = orig[iAxis];
        double max = orig[iAxis];

        for (int iComp = 2;
            iComp--;) {

            if (that.type == FrameCuboid) {

                if (that.comp[iComp][iAxis] < 0.0) {

                    min += that.comp[iComp][iAxis];

                }

                if (that.comp[iComp][iAxis] > 0.0) {

                    max += that.comp[iComp][iAxis];

                }
            }
        }
    }
}

```

```

    } else if (that.type == FrameTetrahedron) {

        if (that.comp[iComp][iAxis] < 0.0 &&
            min > orig[iAxis] + that.comp[iComp][iAxis]) {

            min = orig[iAxis] + that.comp[iComp][iAxis];

        }

        if (that.comp[iComp][iAxis] > 0.0 &&
            max < orig[iAxis] + that.comp[iComp][iAxis]) {

            max = orig[iAxis] + that.comp[iComp][iAxis];

        }

    }

}

if (that.speed[iAxis] < 0.0) {

    min += that.speed[iAxis];

}

if (that.speed[iAxis] > 0.0) {

    max += that.speed[iAxis];

}

that.bdgBox.min[iAxis] = min;
that.bdgBox.max[iAxis] = max;

}

that.bdgBox.min[2] = 0.0;
that.bdgBox.max[2] = 1.0;

// Calculate the inverse matrix
Frame2DTimeUpdateInv(&that);

// Return the new Frame
return that;

}

Frame3DTime Frame3DTimeCreateStatic(
    const FrameType type,
    const double orig[3],
    const double speed[3],
    const double comp[3][3]) {

    // Create the new Frame
    Frame3DTime that;
    that.type = type;
    for (int iAxis = 3;
        iAxis--;) {

        that.orig[iAxis] = orig[iAxis];

    }

}

```

```

        that.speed[iAxis] = speed[iAxis];

        for (int iComp = 3;
              iComp--;) {

            that.comp[iComp][iAxis] = comp[iComp][iAxis];

        }
    }

    // Create the bounding box
    for (int iAxis = 3;
          iAxis--;) {

        double min = orig[iAxis];
        double max = orig[iAxis];

        for (int iComp = 3;
              iComp--;) {

            if (that.type == FrameCuboid) {

                if (that.comp[iComp][iAxis] < 0.0) {

                    min += that.comp[iComp][iAxis];

                }

                if (that.comp[iComp][iAxis] > 0.0) {

                    max += that.comp[iComp][iAxis];

                }

            } else if (that.type == FrameTetrahedron) {

                if (that.comp[iComp][iAxis] < 0.0 &&
                    min > orig[iAxis] + that.comp[iComp][iAxis]) {

                    min = orig[iAxis] + that.comp[iComp][iAxis];

                }

                if (that.comp[iComp][iAxis] > 0.0 &&
                    max < orig[iAxis] + that.comp[iComp][iAxis]) {

                    max = orig[iAxis] + that.comp[iComp][iAxis];

                }

            }

        }

    }

    if (that.speed[iAxis] < 0.0) {

        min += that.speed[iAxis];

    }

    if (that.speed[iAxis] > 0.0) {

```

```

        max += that.speed[iAxis];

    }

    that.bdgBox.min[iAxis] = min;
    that.bdgBox.max[iAxis] = max;

}

that.bdgBox.min[3] = 0.0;
that.bdgBox.max[3] = 1.0;

// Calculate the inverse matrix
Frame3DTimeUpdateInv(&that);

// Return the new Frame
return that;

}

// Update the inverse components of the Frame 'that'
void Frame2DUpdateInv(Frame2D* const that) {

    // Shortcuts
    double (*tc)[2] = that->comp;
    double (*tic)[2] = that->invComp;

    double det = tc[0][0] * tc[1][1] - tc[1][0] * tc[0][1];
    if (fabs(det) < EPSILON) {
        fprintf(stderr,
            "FrameUpdateInv: det == 0.0\n");
        exit(1);
    }

    tic[0][0] = tc[1][1] / det;
    tic[0][1] = -tc[0][1] / det;
    tic[1][0] = -tc[1][0] / det;
    tic[1][1] = tc[0][0] / det;

}

void Frame3DUpdateInv(Frame3D* const that) {

    // Shortcuts
    double (*tc)[3] = that->comp;
    double (*tic)[3] = that->invComp;

    // Update the inverse components
    double det =
        tc[0][0] * (tc[1][1] * tc[2][2] - tc[1][2] * tc[2][1]) -
        tc[1][0] * (tc[0][1] * tc[2][2] - tc[0][2] * tc[2][1]) +
        tc[2][0] * (tc[0][1] * tc[1][2] - tc[0][2] * tc[1][1]);
    if (fabs(det) < EPSILON) {
        fprintf(stderr,
            "FrameUpdateInv: det == 0.0\n");
        exit(1);
    }

    tic[0][0] = (tc[1][1] * tc[2][2] - tc[2][1] * tc[1][2]) / det;
    tic[0][1] = (tc[2][1] * tc[0][2] - tc[2][2] * tc[0][1]) / det;
    tic[0][2] = (tc[0][1] * tc[1][2] - tc[0][2] * tc[1][1]) / det;

```

```

tic[1][0] = (tc[2][0] * tc[1][2] - tc[2][2] * tc[1][0]) / det;
tic[1][1] = (tc[0][0] * tc[2][2] - tc[2][0] * tc[0][2]) / det;
tic[1][2] = (tc[0][2] * tc[1][0] - tc[1][2] * tc[0][0]) / det;
tic[2][0] = (tc[1][0] * tc[2][1] - tc[2][0] * tc[1][1]) / det;
tic[2][1] = (tc[0][1] * tc[2][0] - tc[2][1] * tc[0][0]) / det;
tic[2][2] = (tc[0][0] * tc[1][1] - tc[1][0] * tc[0][1]) / det;
}

// Update the inverse components of the Frame 'that'
void Frame2DTimeUpdateInv(Frame2DTime* const that) {

    // Shortcuts
    double (*tc)[2] = that->comp;
    double (*tic)[2] = that->invComp;

    double det = tc[0][0] * tc[1][1] - tc[1][0] * tc[0][1];
    if (fabs(det) < EPSILON) {
        fprintf(stderr,
            "FrameUpdateInv: det == 0.0\n");
        exit(1);
    }

    tic[0][0] = tc[1][1] / det;
    tic[0][1] = -tc[0][1] / det;
    tic[1][0] = -tc[1][0] / det;
    tic[1][1] = tc[0][0] / det;
}

void Frame3DTimeUpdateInv(Frame3DTime* const that) {

    // Shortcuts
    double (*tc)[3] = that->comp;
    double (*tic)[3] = that->invComp;

    // Update the inverse components
    double det =
        tc[0][0] * (tc[1][1] * tc[2][2] - tc[1][2] * tc[2][1]) -
        tc[1][0] * (tc[0][1] * tc[2][2] - tc[0][2] * tc[2][1]) +
        tc[2][0] * (tc[0][1] * tc[1][2] - tc[0][2] * tc[1][1]);
    if (fabs(det) < EPSILON) {
        fprintf(stderr,
            "FrameUpdateInv: det == 0.0\n");
        exit(1);
    }

    tic[0][0] = (tc[1][1] * tc[2][2] - tc[2][1] * tc[1][2]) / det;
    tic[0][1] = (tc[2][1] * tc[0][2] - tc[2][2] * tc[0][1]) / det;
    tic[0][2] = (tc[0][1] * tc[1][2] - tc[0][2] * tc[1][1]) / det;
    tic[1][0] = (tc[2][0] * tc[1][2] - tc[2][2] * tc[1][0]) / det;
    tic[1][1] = (tc[0][0] * tc[2][2] - tc[2][0] * tc[0][2]) / det;
    tic[1][2] = (tc[0][2] * tc[1][0] - tc[1][2] * tc[0][0]) / det;
    tic[2][0] = (tc[1][0] * tc[2][1] - tc[2][0] * tc[1][1]) / det;
    tic[2][1] = (tc[0][1] * tc[2][0] - tc[2][1] * tc[0][0]) / det;
    tic[2][2] = (tc[0][0] * tc[1][1] - tc[1][0] * tc[0][1]) / det;
}

// Project the Frame 'Q' in the Frame 'P' 's coordinates system and
// memorize the result in the Frame 'Qp'
void Frame2DImportFrame(

```

```

const Frame2D* const P,
const Frame2D* const Q,
    Frame2D* const Qp) {

// Shortcuts
const double* qo = Q->orig;
    double* qpo = Qp->orig;
const double* po = P->orig;

const double (*pi)[2] = P->invComp;
    double (*qpc)[2] = Qp->comp;
const double (*qc)[2] = Q->comp;

// Calculate the projection
double v[2];
for (int i = 2;
    i--;) {

    v[i] = qo[i] - po[i];
}

for (int i = 2;
    i--;) {

    qpo[i] = 0.0;

    for (int j = 2;
        j--;) {

        qpo[i] += pi[j][i] * v[j];
        qpc[j][i] = 0.0;

        for (int k = 2;
            k--;) {

            qpc[j][i] += pi[k][i] * qc[j][k];
        }
    }
}
}

void Frame3DImportFrame(
    const Frame3D* const P,
    const Frame3D* const Q,
    Frame3D* const Qp) {

// Shortcuts
const double* qo = Q->orig;
    double* qpo = Qp->orig;
const double* po = P->orig;

const double (*pi)[3] = P->invComp;
    double (*qpc)[3] = Qp->comp;
const double (*qc)[3] = Q->comp;

// Calculate the projection
double v[3];
for (int i = 3;
    i--;) {

```

```

        v[i] = qo[i] - po[i];
    }

    for (int i = 3;
        i--;) {

        qpo[i] = 0.0;

        for (int j = 3;
            j--;) {

            qpo[i] += pi[j][i] * v[j];
            qpc[j][i] = 0.0;

            for (int k = 3;
                k--;) {

                qpc[j][i] += pi[k][i] * qc[j][k];
            }
        }
    }
}

void Frame2DTimeImportFrame(
    const Frame2DTime* const P,
    const Frame2DTime* const Q,
    Frame2DTime* const Qp) {

    // Shortcuts
    const double* qo = Q->orig;
    double* qpo = Qp->orig;
    const double* po = P->orig;

    const double* qs = Q->speed;
    double* qps = Qp->speed;
    const double* ps = P->speed;

    const double (*pi)[2] = P->invComp;
    double (*qpc)[2] = Qp->comp;
    const double (*qc)[2] = Q->comp;

    // Calculate the projection
    double v[2];
    double s[2];
    for (int i = 2;
        i--;) {

        v[i] = qo[i] - po[i];
        s[i] = qs[i] - ps[i];
    }

    for (int i = 2;
        i--;) {

        qpo[i] = 0.0;
        qps[i] = 0.0;

        for (int j = 2;
            j--;) {

```

```

        qpo[i] += pi[j][i] * v[j];
        qps[i] += pi[j][i] * s[j];
        qpc[j][i] = 0.0;

        for (int k = 2;
             k--;) {

            qpc[j][i] += pi[k][i] * qc[j][k];

        }
    }
}

void Frame3DTimeImportFrame(
    const Frame3DTime* const P,
    const Frame3DTime* const Q,
    Frame3DTime* const Qp) {

    // Shortcuts
    const double* qo = Q->orig;
    double* qpo = Qp->orig;
    const double* po = P->orig;

    const double* qs = Q->speed;
    double* qps = Qp->speed;
    const double* ps = P->speed;

    const double (*pi)[3] = P->invComp;
    double (*qpc)[3] = Qp->comp;
    const double (*qc)[3] = Q->comp;

    // Calculate the projection
    double v[3];
    double s[3];
    for (int i = 3;
        i--;) {

        v[i] = qo[i] - po[i];
        s[i] = qs[i] - ps[i];

    }

    for (int i = 3;
        i--;) {

        qpo[i] = 0.0;
        qps[i] = 0.0;

        for (int j = 3;
            j--;) {

            qpo[i] += pi[j][i] * v[j];
            qps[i] += pi[j][i] * s[j];
            qpc[j][i] = 0.0;

            for (int k = 3;
                k--;) {

                qpc[j][i] += pi[k][i] * qc[j][k];

            }

        }

    }

}

```



```

    }
  }
}

// Export the AABB 'bdgBox' from 'that' 's coordinates system to
// the real coordinates system and update 'bdgBoxProj' with the resulting
// AABB
void Frame2DExportBdgBox(
    const Frame2D* const that,
    const AABB2D* const bdgBox,
    AABB2D* const bdgBoxProj) {

    // Shortcuts
    const double* to      = that->orig;
    const double* bbmi    = bdgBox->min;
    const double* bbma    = bdgBox->max;
    double* bbpmi = bdgBoxProj->min;
    double* bbpma = bdgBoxProj->max;

    const double (*tc)[2] = that->comp;

    // Initialise the coordinates of the result AABB with the projection
    // of the first corner of the AABB in argument
    for (int i = 2;
        i--;) {

        bbpma[i] = to[i];

        for (int j = 2;
            j--;) {

            bbpma[i] += tc[j][i] * bbmi[j];

        }

        bbpmi[i] = bbpma[i];
    }

    // Loop on vertices of the AABB
    // skip the first vertex which is the origin already computed above
    int nbVertices = powi(2, 2);
    for (int iVertex = nbVertices;
        iVertex-- && iVertex;) {

        // Declare a variable to memorize the coordinates of the vertex in
        // 'that' 's coordinates system
        double v[2];

        // Calculate the coordinates of the vertex in
        // 'that' 's coordinates system
        for (int i = 2;
            i--;) {

            v[i] = ((iVertex & (1 << i)) ? bbma[i] : bbmi[i]);

        }

        // Declare a variable to memorize the projected coordinates
        // in real coordinates system
        double w[2];

```

```

// Project the vertex to real coordinates system
for (int i = 2;
    i--;) {

    w[i] = to[i];

    for (int j = 2;
        j--;) {

        w[i] += tc[j][i] * v[j];

    }
}

// Update the coordinates of the result AABB
for (int i = 2;
    i--;) {

    if (bbpma[i] > w[i]) {

        bbpma[i] = w[i];

    }
    if (bbpma[i] < w[i]) {

        bbpma[i] = w[i];

    }
}
}

}

void Frame3DExportBdgBox(
    const Frame3D* const that,
    const AABB3D* const bdgBox,
    AABB3D* const bdgBoxProj) {

    // Shortcuts
    const double* to      = that->orig;
    const double* bbmi     = bdgBox->min;
    const double* bbma     = bdgBox->max;
    double* bbpma         = bdgBoxProj->min;
    double* bbpma         = bdgBoxProj->max;

    const double (*tc)[3] = that->comp;

    // Initialise the coordinates of the result AABB with the projection
    // of the first corner of the AABB in argument
    for (int i = 3;
        i--;) {

        bbpma[i] = to[i];

        for (int j = 3;
            j--;) {

            bbpma[i] += tc[j][i] * bbmi[j];

        }
    }
}

```

```

        bbpmi[i] = bbpma[i];
    }

    // Loop on vertices of the AABB
    // skip the first vertex which is the origin already computed above
    int nbVertices = powi(2, 3);
    for (int iVertex = nbVertices;
        iVertex-- && iVertex;) {

        // Declare a variable to memorize the coordinates of the vertex in
        // 'that' 's coordinates system
        double v[3];

        // Calculate the coordinates of the vertex in
        // 'that' 's coordinates system
        for (int i = 3;
            i--;) {

            v[i] = ((iVertex & (1 << i)) ? bbma[i] : bbmi[i]);

        }

        // Declare a variable to memorize the projected coordinates
        // in real coordinates system
        double w[3];

        // Project the vertex to real coordinates system
        for (int i = 3;
            i--;) {

            w[i] = to[i];

            for (int j = 3;
                j--;) {

                w[i] += tc[j][i] * v[j];

            }

        }

        // Update the coordinates of the result AABB
        for (int i = 3;
            i--;) {

            if (bbpmi[i] > w[i]) {

                bbpmi[i] = w[i];

            }

            if (bbpma[i] < w[i]) {

                bbpma[i] = w[i];

            }

        }

    }

}

void Frame2DTimeExportBdgBox(
    const Frame2DTime* const that,

```

```

const AABB2DTime* const bdgBox,
      AABB2DTime* const bdgBoxProj) {

// Shortcuts
const double* to      = that->orig;
const double* ts      = that->speed;
const double* bbmi    = bdgBox->min;
const double* bbma    = bdgBox->max;
      double* bbpmi   = bdgBoxProj->min;
      double* bbpma   = bdgBoxProj->max;
const double (*tc)[2] = that->comp;

// The time component is not affected
bbpmi[2] = bbmi[2];
bbpma[2] = bbma[2];

// Initialise the coordinates of the result AABB with the projection
// of the first corner of the AABB in argument
for (int i = 2;
     i--;) {

    bbpma[i] = to[i] + ts[i] * bbmi[2];

    for (int j = 2;
         j--;) {

        bbpma[i] += tc[j][i] * bbmi[j];

    }

    bbpmi[i] = bbpma[i];

}

// Loop on vertices of the AABB
// skip the first vertex which is the origin already computed above
int nbVertices = powi(2, 2);
for (int iVertex = nbVertices;
     iVertex-- && iVertex;) {

    // Declare a variable to memorize the coordinates of the vertex in
    // 'that' 's coordinates system
    double v[2];

    // Calculate the coordinates of the vertex in
    // 'that' 's coordinates system
    for (int i = 2;
         i--;) {

        v[i] = ((iVertex & (1 << i)) ? bbma[i] : bbmi[i]);

    }

    // Declare a variable to memorize the projected coordinates
    // in real coordinates system
    double w[2];

    // Project the vertex to real coordinates system
    for (int i = 2;
         i--;) {

        w[i] = to[i];

```

```

        for (int j = 2;
            j--;) {

            w[i] += tc[j][i] * v[j];

        }
    }

    // Update the coordinates of the result AABB
    for (int i = 2;
        i--;) {

        if (bbpmi[i] > w[i] + ts[i] * bbmi[2]) {

            bbpmi[i] = w[i] + ts[i] * bbmi[2];

        }
        if (bbpmi[i] > w[i] + ts[i] * bbma[2]) {

            bbpmi[i] = w[i] + ts[i] * bbma[2];

        }
        if (bbpma[i] < w[i] + ts[i] * bbmi[2]) {

            bbpma[i] = w[i] + ts[i] * bbmi[2];

        }
        if (bbpma[i] < w[i] + ts[i] * bbma[2]) {

            bbpma[i] = w[i] + ts[i] * bbma[2];

        }
    }
}

}

void Frame3DTimeExportBdgBox(
    const Frame3DTime* const that,
    const AABB3DTime* const bdgBox,
    AABB3DTime* const bdgBoxProj) {

    // Shortcuts
    const double* to    = that->orig;
    const double* ts    = that->speed;
    const double* bbmi  = bdgBox->min;
    const double* bbma  = bdgBox->max;
    double* bbpmi = bdgBoxProj->min;
    double* bbpma = bdgBoxProj->max;
    const double (*tc)[3] = that->comp;

    // The time component is not affected
    bbpmi[3] = bbmi[3];
    bbpma[3] = bbma[3];

    // Initialise the coordinates of the result AABB with the projection
    // of the first corner of the AABB in argument
    for (int i = 3;
        i--;) {

        bbpma[i] = to[i] + ts[i] * bbmi[3];
    }
}

```

```

    for (int j = 3;
        j--;) {

        bbpma[i] += tc[j][i] * bbmi[j];

    }

    bbpmi[i] = bbpma[i];
}

// Loop on vertices of the AABB
// skip the first vertex which is the origin already computed above
int nbVertices = powi(2, 3);
for (int iVertex = nbVertices;
    iVertex-- && iVertex;) {

    // Declare a variable to memorize the coordinates of the vertex in
    // 'that' 's coordinates system
    double v[3];

    // Calculate the coordinates of the vertex in
    // 'that' 's coordinates system
    for (int i = 3;
        i--;) {

        v[i] = ((iVertex & (1 << i)) ? bbma[i] : bbmi[i]);

    }

    // Declare a variable to memorize the projected coordinates
    // in real coordinates system
    double w[3];

    // Project the vertex to real coordinates system
    for (int i = 3;
        i--;) {

        w[i] = to[i];

        for (int j = 3;
            j--;) {

            w[i] += tc[j][i] * v[j];

        }

    }

    // Update the coordinates of the result AABB
    for (int i = 3;
        i--;) {

        if (bbpmi[i] > w[i] + ts[i] * bbmi[3]) {

            bbpmi[i] = w[i] + ts[i] * bbmi[3];

        }

        if (bbpmi[i] > w[i] + ts[i] * bbma[3]) {

            bbpmi[i] = w[i] + ts[i] * bbma[3];

        }

    }

}

```

```

    }
    if (bbpma[i] < w[i] + ts[i] * bbmi[3]) {
        bbpma[i] = w[i] + ts[i] * bbmi[3];
    }
    if (bbpma[i] < w[i] + ts[i] * bbma[3]) {
        bbpma[i] = w[i] + ts[i] * bbma[3];
    }
}
}
}

// Print the AABBB 'that' on stdout
// Output format is (min[0], min[1], ...)-(max[0], max[1], ...)
void AABBB2DPrint(const AABBB2D* const that) {

    printf("minXY(");
    for (int i = 0;
         i < 2;
         ++i) {

        printf("%f", that->min[i]);
        if (i < 1)
            printf(",");
    }
    printf(")-maxXY(");
    for (int i = 0;
         i < 2;
         ++i) {

        printf("%f", that->max[i]);
        if (i < 1)
            printf(",");
    }
    printf(")");
}

void AABBB3DPrint(const AABBB3D* const that) {

    printf("minXYZ(");
    for (int i = 0;
         i < 3;
         ++i) {

        printf("%f", that->min[i]);
        if (i < 2)
            printf(",");
    }
    printf(")-maxXYZ(");
    for (int i = 0;
         i < 3;
         ++i) {

        printf("%f", that->max[i]);

```

```

        if (i < 2)
            printf(",");

    }
    printf(")");
}

void AABBB2DTimePrint(const AABBB2DTime* const that) {

    printf("minXYT(");
    for (int i = 0;
         i < 3;
         ++i) {

        printf("%f", that->min[i]);
        if (i < 2)
            printf(",");

    }
    printf(")-maxXYT(");
    for (int i = 0;
         i < 3;
         ++i) {

        printf("%f", that->max[i]);
        if (i < 2)
            printf(",");

    }
    printf(")");
}

void AABBB3DTimePrint(const AABBB3DTime* const that) {

    printf("minXYZT(");
    for (int i = 0;
         i < 4;
         ++i) {

        printf("%f", that->min[i]);
        if (i < 3)
            printf(",");

    }
    printf(")-maxXYZT(");
    for (int i = 0;
         i < 4;
         ++i) {

        printf("%f", that->max[i]);
        if (i < 3)
            printf(",");

    }
    printf(")");
}

// Print the Frame 'that' on stdout
// Output format is

```



```

// T/C <- type of Frame
// o(orig[0], orig[1], orig[2])
// s(speed[0], speed[1], speed[2])
// x(comp[0][0], comp[0][1], comp[0][2])
// y(comp[1][0], comp[1][1], comp[1][2])
// z(comp[2][0], comp[2][1], comp[2][2])
void Frame2DPrint(const Frame2D* const that) {
    if (that->type == FrameTetrahedron) {
        printf("T");
    } else if (that->type == FrameCuboid) {
        printf("C");
    }
    printf("o(");
    for (int i = 0;
         i < 2;
         ++i) {

        printf("%f", that->orig[i]);
        if (i < 1)
            printf(",");

    }
    char comp[2] = {'x', 'y'};
    for (int j = 0;
         j < 2;
         ++j) {
        printf(") %c(", comp[j]);
        for (int i = 0;
             i < 2;
             ++i) {

            printf("%f", that->comp[j][i]);
            if (i < 1)
                printf(",");

        }
    }
    printf(")");
}

void Frame3DPrint(const Frame3D* const that) {
    if (that->type == FrameTetrahedron) {
        printf("T");
    } else if (that->type == FrameCuboid) {
        printf("C");
    }
    printf("o(");
    for (int i = 0;
         i < 3;
         ++i) {

        printf("%f", that->orig[i]);
        if (i < 2)
            printf(",");

    }
    char comp[3] = {'x', 'y', 'z'};
    for (int j = 0;
         j < 3;
         ++j) {
        printf(") %c(", comp[j]);

```

```

        for (int i = 0;
            i < 3;
            ++i) {

            printf("%f", that->comp[j][i]);
            if (i < 2)
                printf(",");

        }
    }
    printf(")");
}

void Frame2DTimePrint(const Frame2DTime* const that) {
    if (that->type == FrameTetrahedron) {
        printf("T");
    } else if (that->type == FrameCuboid) {
        printf("C");
    }
    printf("o(");
    for (int i = 0;
        i < 2;
        ++i) {

        printf("%f", that->orig[i]);
        if (i < 1)
            printf(",");

    }
    printf(") s(");
    for (int i = 0;
        i < 2;
        ++i) {

        printf("%f", that->speed[i]);
        if (i < 1)
            printf(",");

    }
    char comp[2] = {'x', 'y'};
    for (int j = 0;
        j < 2;
        ++j) {
        printf(") %c(", comp[j]);
        for (int i = 0;
            i < 2;
            ++i) {

            printf("%f", that->comp[j][i]);
            if (i < 1)
                printf(",");

        }
    }
    printf(")");
}

void Frame3DTimePrint(const Frame3DTime* const that) {
    if (that->type == FrameTetrahedron) {
        printf("T");
    }
}

```

```

    } else if (that->type == FrameCuboid) {
        printf("C");
    }
    printf("o(");
    for (int i = 0;
        i < 3;
        ++i) {

        printf("%f", that->orig[i]);
        if (i < 2)
            printf(",");

    }
    printf(") s(");
    for (int i = 0;
        i < 3;
        ++i) {

        printf("%f", that->speed[i]);
        if (i < 2)
            printf(",");

    }
    char comp[3] = {'x', 'y', 'z'};
    for (int j = 0;
        j < 3;
        ++j) {
        printf(") %c(", comp[j]);
        for (int i = 0;
            i < 3;
            ++i) {

            printf("%f", that->comp[j][i]);
            if (i < 2)
                printf(",");

        }
    }
    printf(")");
}

// Power function for integer base and exponent
// Return 'base' ^ 'exp'
int powi(
    int base,
    unsigned int exp) {

    int res = 1;
    for (;
        exp;
        --exp) {

        res *= base;

    }
    return res;
}

```

## 4.2 FMB

### 4.2.1 2D static

Header

```
#ifndef __FMB2D_H_
#define __FMB2D_H_

#include <stdbool.h>
#include "frame.h"

// ----- Functions declaration -----

// Test for intersection between Frame 'that' and Frame 'tho'
// Return true if the two Frames are intersecting, else false
// If the Frame are intersecting the AABB of the intersection
// is stored into 'bdgBox', else 'bdgBox' is not modified
// If 'bdgBox' is null, the result AABB is not memorized (to use if
// unnecessary and want to speed up the algorithm)
// The resulting AABB may be larger than the smallest possible AABB
// The resulting AABB of FMBTestIntersection(A,B) may be different
// of the resulting AABB of FMBTestIntersection(B,A)
// The resulting AABB is given in 'tho' 's local coordinates system
bool FMBTestIntersection2D(
    const Frame2D* const that,
    const Frame2D* const tho,
    AABB2D* const bdgBox);

#endif
```

Body

```
#include "fmb2d.h"

// ----- Macros -----

// Return 1.0 if v is positive, -1.0 if v is negative, 0.0 else
#define sgn(v) (((0.0 < (v)) ? 1 : 0) - (((v) < 0.0) ? 1 : 0))

// Return x if x is negative, 0.0 else
#define neg(x) (x < 0.0 ? x : 0.0)

#define FST_VAR 0
#define SND_VAR 1

#define EPSILON 0.0000001

// ----- Functions declaration -----

// Eliminate the 'iVar'-th variable in the system 'M'.X<='Y'
// using the Fourier-Motzkin method and return
// the resulting system in 'Mp' and 'Yp', and the number of rows of
// the resulting system in 'nbRemainRows'
// Return false if the system becomes inconsistent during elimination,
// else return true
bool ElimVar2D(
    const int iVar,
    const double (*M)[2],
    const double* Y,
    const int nbRows,
    const int nbCols,
```

```

        double (*Mp)[2],
        double* Yp,
        int* const nbRemainRows);

// Get the bounds of the 'iVar'-th variable in the 'nbRows' rows
// system 'M'.X<='Y' and store them in the 'iVar'-th axis of the
// AABBB 'bdgBox'
// ('M' arrangement is [iRow][iCol])
// The system is supposed to have been reduced to only one variable
// per row, the one in argument, which can be located in a different
// column than 'iVar'
// May return inconsistent values (max < min), which would
// mean the system has no solution
void GetBound2D(
    const int iVar,
    const double (*M)[2],
    const double* Y,
    const int nbRows,
    AABBB2D* const bdgBox);

// ----- Functions implementation -----

// Eliminate the 'iVar'-th variable in the system 'M'.X<='Y'
// using the Fourier-Motzkin method and return
// the resulting system in 'Mp' and 'Yp', and the number of rows of
// the resulting system in 'nbRemainRows'
// ('M' arrangement is [iRow][iCol])
// Return true if the system becomes inconsistent during elimination,
// else return false
bool ElimVar2D(
    const int iVar,
    const double (*M)[2],
    const double* Y,
    const int nbRows,
    const int nbCols,
    double (*Mp)[2],
    double* Yp,
    int* const nbRemainRows) {

    // Initialize the number of rows in the result system
    *nbRemainRows = 0;

    // First we process the rows where the eliminated variable is not null

    // For each row except the last one
    for (int iRow = 0;
        iRow < nbRows - 1;
        ++iRow) {

        // Shortcuts
        int sgnMIRowIVar = sgn(M[iRow][iVar]);
        double fabsMIRowIVar = fabs(M[iRow][iVar]);
        double YIRowDivideByFabsMIRowIVar = Y[iRow] / fabsMIRowIVar;

        // For each following rows
        for (int jRow = iRow + 1;
            jRow < nbRows;
            ++jRow) {

            // If coefficients of the eliminated variable in the two rows have
            // different signs and are not null
            if (sgnMIRowIVar != sgn(M[jRow][iVar]) &&

```

```

        fabsMIRowIVar > EPSILON &&
        fabs(M[jRow][iVar]) > EPSILON) {

    // Declare a variable to memorize the sum of the negative
    // coefficients in the row
    double sumNegCoeff = 0.0;

    // Add the sum of the two normed (relative to the eliminated
    // variable) rows into the result system. This actually
    // eliminate the variable while keeping the constraints on
    // others variables
    for (int iCol = 0, jCol = 0;
        iCol < nbCols;
        ++iCol ) {

        if (iCol != iVar) {

            Mp[*nbRemainRows][jCol] =
                M[iRow][iCol] / fabsMIRowIVar +
                M[jRow][iCol] / fabs(M[jRow][iVar]);

            // Update the sum of the negative coefficient
            sumNegCoeff += neg(Mp[*nbRemainRows][jCol]);

            // Increment the number of columns in the new inequality
            ++jCol;

        }

    }

    // Update the right side of the inequality
    Yp[*nbRemainRows] =
        YIRowDivideByFabsMIRowIVar +
        Y[jRow] / fabs(M[jRow][iVar]);

    // If the right side of the inequality is lower than the sum of
    // negative coefficients in the row
    // (Add epsilon for numerical imprecision)
    if (Yp[*nbRemainRows] < sumNegCoeff - EPSILON) {

        // Given that X is in [0,1], the system is inconsistent
        return true;

    }

    // Increment the nb of rows into the result system
    ++(*nbRemainRows);

}

}

// Then we copy and compress the rows where the eliminated
// variable is null

// Loop on rows of the input system
for (int iRow = 0;
    iRow < nbRows;
    ++iRow) {

```

```

// Shortcut
const double* MiRow = M[iRow];

// If the coefficient of the eliminated variable is null on
// this row
if (fabs(MiRow[iVar]) < EPSILON) {

    // Shortcut
    double* MpnbRemainRows = Mp[*nbRemainRows];

    // Copy this row into the result system excluding the eliminated
    // variable
    for (int iCol = 0, jCol = 0;
        iCol < nbCols;
        ++iCol) {

        if (iCol != iVar) {

            MpnbRemainRows[jCol] = MiRow[iCol];

            ++jCol;

        }

    }

    Yp[*nbRemainRows] = Y[iRow];

    // Increment the nb of rows into the result system
    ++(*nbRemainRows);

}

}

// If we reach here the system is not inconsistent
return false;

}

// Get the bounds of the 'iVar'-th variable in the 'nbRows' rows
// system 'M'.X<='Y' and store them in the 'iVar'-th axis of the
// AABB 'bdgBox'
// ('M' arrangement is [iRow][iCol])
// The system is supposed to have been reduced to only one variable
// per row, the one in argument
// May return inconsistent values (max < min), which would
// mean the system has no solution
void GetBound2D(
    const int iVar,
    const double (*M)[2],
    const double* Y,
    const int nbRows,
    AABB2D* const bdgBox) {

    // Shortcuts
    double* min = bdgBox->min + iVar;
    double* max = bdgBox->max + iVar;

    // Initialize the bounds to their maximum maximum and minimum minimum
    *min = 0.0;

```

```

*max = 1.0;

// Loop on rows
for (int jRow = 0;
    jRow < nbRows;
    ++jRow) {

    // Shortcut
    double MjRowiVar = M[jRow][0];

    // If this row has been reduced to the variable in argument
    // and it has a strictly positive coefficient
    if (MjRowiVar > EPSILON) {

        // Get the scaled value of Y for this row
        double y = Y[jRow] / MjRowiVar;

        // If the value is lower than the current maximum bound
        if (*max > y) {

            // Update the maximum bound
            *max = y;

        }

        // Else, if this row has been reduced to the variable in argument
        // and it has a strictly negative coefficient
    } else if (MjRowiVar < -EPSILON) {

        // Get the scaled value of Y for this row
        double y = Y[jRow] / MjRowiVar;

        // If the value is greater than the current minimum bound
        if (*min < y) {

            // Update the minimum bound
            *min = y;

        }

    }

}

}

// Test for intersection between Frame 'that' and Frame 'tho'
// Return true if the two Frames are intersecting, else false
// If the Frame are intersecting the AABB of the intersection
// is stored into 'bdgBox', else 'bdgBox' is not modified
// If 'bdgBox' is null, the result AABB is not memorized (to use if
// unnecessary and want to speed up the algorithm)
// The resulting AABB may be larger than the smallest possible AABB
// The resulting AABB of FMBTestIntersection(A,B) may be different
// of the resulting AABB of FMBTestIntersection(B,A)
// The resulting AABB is given in 'tho' 's local coordinates system
bool FMBTestIntersection2D(
    const Frame2D* const that,
    const Frame2D* const tho,
    AABB2D* const bdgBox) {

    // Get the projection of the Frame 'tho' in Frame 'that' coordinates

```



```

// system
Frame2D thoProj;
Frame2DImportFrame(that, tho, &thoProj);

// Declare two variables to memorize the system to be solved M.X <= Y
// (M arrangement is [iRow][iCol])
double M[8][2];
double Y[8];

// Create the inequality system

// -sum_iC_j, iX_i <= 0_j
M[0][0] = -thoProj.comp[0][0];
M[0][1] = -thoProj.comp[1][0];
Y[0] = thoProj.orig[0];
if (Y[0] < neg(M[0][0]) + neg(M[0][1]))
    return false;

M[1][0] = -thoProj.comp[0][1];
M[1][1] = -thoProj.comp[1][1];
Y[1] = thoProj.orig[1];
if (Y[1] < neg(M[1][0]) + neg(M[1][1]))
    return false;

// -X_i <= 0.0
M[2][0] = -1.0;
M[2][1] = 0.0;
Y[2] = 0.0;

M[3][0] = 0.0;
M[3][1] = -1.0;
Y[3] = 0.0;

// Variable to memorize the nb of rows in the system
int nbRows = 4;

if (that->type == FrameCuboid) {

    // sum_iC_j, iX_i <= 1.0 - 0_j
    M[nbRows][0] = thoProj.comp[0][0];
    M[nbRows][1] = thoProj.comp[1][0];
    Y[nbRows] = 1.0 - thoProj.orig[0];
    if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]))
        return false;
    ++nbRows;

    M[nbRows][0] = thoProj.comp[0][1];
    M[nbRows][1] = thoProj.comp[1][1];
    Y[nbRows] = 1.0 - thoProj.orig[1];
    if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]))
        return false;
    ++nbRows;

} else {

    // sum_j(sum_iC_j, iX_i) <= 1.0 - sum_i0_i
    M[nbRows][0] = thoProj.comp[0][0] + thoProj.comp[0][1];
    M[nbRows][1] = thoProj.comp[1][0] + thoProj.comp[1][1];
    Y[nbRows] = 1.0 - thoProj.orig[0] - thoProj.orig[1];
    if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]))
        return false;
    ++nbRows;
}

```

```

}

if (tho->type == FrameCuboid) {

    // X_i <= 1.0
    M[nbRows][0] = 1.0;
    M[nbRows][1] = 0.0;
    Y[nbRows] = 1.0;
    ++nbRows;

    M[nbRows][0] = 0.0;
    M[nbRows][1] = 1.0;
    Y[nbRows] = 1.0;
    ++nbRows;

} else {

    // sum_i X_i <= 1.0
    M[nbRows][0] = 1.0;
    M[nbRows][1] = 1.0;
    Y[nbRows] = 1.0;
    ++nbRows;

}

// Solve the system

// Declare a AABB to memorize the bounding box of the intersection
// in the coordinates system of tho
AABB2D bdgBoxLocal;

// Declare variables to eliminate the first variable
// The size of the array given in the doc is a majoring value.
// Instead I use a smaller value which has proven to be sufficient
// during tests, validation and qualification, to avoid running
// into the heap limit and to optimize slightly the performance
//double Mp[24][2];
//double Yp[24];
double Mp[11][2];
double Yp[11];
int nbRowsP;

// Eliminate the first variable
bool inconsistency =
    ElimVar2D(
        FST_VAR,
        M,
        Y,
        nbRows,
        2,
        Mp,
        Yp,
        &nbRowsP);

// If the system is inconsistent
if (inconsistency == true) {

    // The two Frames are not in intersection
    return false;

}

```

```

// Get the bounds for the remaining second variable
GetBound2D(
    SND_VAR,
    Mp,
    Yp,
    nbRowsP,
    &bdgBoxLocal);

// If the bounds are inconsistent
if (bdgBoxLocal.min[SND_VAR] >= bdgBoxLocal.max[SND_VAR]) {

    // The two Frames are not in intersection
    return false;

// Else, if the bounds are consistent here it means
// the two Frames are in intersection.
// If the user hasn't requested for the resulting bounding box
} else if (bdgBox == NULL) {

    // Immediately return true
    return true;

}

// Now starts again from the initial systems and eliminate the
// second variable to get the bounds of the first variable
// No need to check for consistency because we already know here
// that the Frames are intersecting and the system is consistent
inconsistency =
    ElimVar2D(
        SND_VAR,
        M,
        Y,
        nbRows,
        2,
        Mp,
        Yp,
        &nbRowsP);

// Get the bounds for the remaining first variable
GetBound2D(
    FST_VAR,
    Mp,
    Yp,
    nbRowsP,
    &bdgBoxLocal);

// If the user requested the resulting bounding box
if (bdgBox != NULL) {

    // Memorize the result
    *bdgBox = bdgBoxLocal;

}

// If we've reached here the two Frames are intersecting
return true;

}

```

## 4.2.2 3D static

### Header

```
#ifndef __FMB3D_H_
#define __FMB3D_H_

#include <stdbool.h>
#include "frame.h"

// ----- Functions declaration -----

// Test for intersection between Frame 'that' and Frame 'tho'
// Return true if the two Frames are intersecting, else false
// If the Frame are intersecting the AABB of the intersection
// is stored into 'bdgBox', else 'bdgBox' is not modified
// If 'bdgBox' is null, the result AABB is not memorized (to use if
// unnecessary and want to speed up the algorithm)
// The resulting AABB may be larger than the smallest possible AABB
// The resulting AABB of FMBTestIntersection(A,B) may be different
// of the resulting AABB of FMBTestIntersection(B,A)
// The resulting AABB is given in 'tho' 's local coordinates system
bool FMBTestIntersection3D(
    const Frame3D* const that,
    const Frame3D* const tho,
    AABB3D* const bdgBox);

#endif
```

### Body

```
#include "fmb3d.h"

// ----- Macros -----

// Return 1.0 if v is positive, -1.0 if v is negative, 0.0 else
#define sgn(v) (((0.0 < (v)) ? 1 : 0) - (((v) < 0.0) ? 1 : 0))

// Return x if x is negative, 0.0 else
#define neg(x) (x < 0.0 ? x : 0.0)

#define FST_VAR 0
#define SND_VAR 1
#define THD_VAR 2

#define EPSILON 0.0000001

// ----- Functions declaration -----

// Eliminate the 'iVar'-th variable in the system 'M'.X<='Y'
// using the Fourier-Motzkin method and return
// the resulting system in 'Mp' and 'Yp', and the number of rows of
// the resulting system in 'nbRemainRows'
// Return false if the system becomes inconsistent during elimination,
// else return true
bool ElimVar3D(
    const int iVar,
    const double (*M)[3],
    const double* Y,
    const int nbRows,
    const int nbCols,
    double (*Mp)[3],
```

```

        double* Yp,
        int* const nbRemainRows);

// Get the bounds of the 'iVar'-th variable in the 'nbRows' rows
// system 'M'.X<='Y' and store them in the 'iVar'-th axis of the
// AABB 'bdgBox'
// ('M' arrangement is [iRow][iCol])
// The system is supposed to have been reduced to only one variable
// per row, the one in argument, which can be located in a different
// column than 'iVar'
// May return inconsistent values (max < min), which would
// mean the system has no solution
void GetBound3D(
    const int iVar,
    const double (*M)[3],
    const double* Y,
    const int nbRows,
    AABB3D* const bdgBox);

// ----- Functions implementation -----

// Eliminate the 'iVar'-th variable in the system 'M'.X<='Y'
// using the Fourier-Motzkin method and return
// the resulting system in 'Mp' and 'Yp', and the number of rows of
// the resulting system in 'nbRemainRows'
// ('M' arrangement is [iRow][iCol])
// Return true if the system becomes inconsistent during elimination,
// else return false
bool ElimVar3D(
    const int iVar,
    const double (*M)[3],
    const double* Y,
    const int nbRows,
    const int nbCols,
    double (*Mp)[3],
    double* Yp,
    int* const nbRemainRows) {

    // Initialize the number of rows in the result system
    *nbRemainRows = 0;

    // First we process the rows where the eliminated variable is not null

    // For each row except the last one
    for (int iRow = 0;
        iRow < nbRows - 1;
        ++iRow) {

        // Shortcuts
        int sgnMIRowIVar = sgn(M[iRow][iVar]);
        double fabsMIRowIVar = fabs(M[iRow][iVar]);
        double YIRowDivideByFabsMIRowIVar = Y[iRow] / fabsMIRowIVar;

        // For each following rows
        for (int jRow = iRow + 1;
            jRow < nbRows;
            ++jRow) {

            // If coefficients of the eliminated variable in the two rows have
            // different signs and are not null
            if (sgnMIRowIVar != sgn(M[jRow][iVar]) &&
                fabsMIRowIVar > EPSILON &&

```

```

        fabs(M[jRow][iVar]) > EPSILON) {

// Declare a variable to memorize the sum of the negative
// coefficients in the row
double sumNegCoeff = 0.0;

// Add the sum of the two normed (relative to the eliminated
// variable) rows into the result system. This actually
// eliminate the variable while keeping the constraints on
// others variables
for (int iCol = 0, jCol = 0;
     iCol < nbCols;
     ++iCol ) {

    if (iCol != iVar) {

        Mp[*nbRemainRows][jCol] =
            M[iRow][iCol] / fabsMIRowIVar +
            M[jRow][iCol] / fabs(M[jRow][iVar]);

        // Update the sum of the negative coefficient
        sumNegCoeff += neg(Mp[*nbRemainRows][jCol]);

        // Increment the number of columns in the new inequality
        ++jCol;

    }

}

// Update the right side of the inequality
Yp[*nbRemainRows] =
    YIRowDivideByFabsMIRowIVar +
    Y[jRow] / fabs(M[jRow][iVar]);

// If the right side of the inequality is lower than the sum of
// negative coefficients in the row
// (Add epsilon for numerical imprecision)
if (Yp[*nbRemainRows] < sumNegCoeff - EPSILON) {

    // Given that X is in [0,1], the system is inconsistent
    return true;

}

// Increment the nb of rows into the result system
++(*nbRemainRows);

}

}

// Then we copy and compress the rows where the eliminated
// variable is null

// Loop on rows of the input system
for (int iRow = 0;
     iRow < nbRows;
     ++iRow) {

```

```

// Shortcut
const double* MiRow = M[iRow];

// If the coefficient of the eliminated variable is null on
// this row
if (fabs(MiRow[iVar]) < EPSILON) {

    // Shortcut
    double* MpnbRemainRows = Mp[*nbRemainRows];

    // Copy this row into the result system excluding the eliminated
    // variable
    for (int iCol = 0, jCol = 0;
        iCol < nbCols;
        ++iCol) {

        if (iCol != iVar) {

            MpnbRemainRows[jCol] = MiRow[iCol];

            ++jCol;

        }

    }

    Yp[*nbRemainRows] = Y[iRow];

    // Increment the nb of rows into the result system
    ++(*nbRemainRows);

}

}

// If we reach here the system is not inconsistent
return false;

}

// Get the bounds of the 'iVar'-th variable in the 'nbRows' rows
// system 'M'.X<='Y' and store them in the 'iVar'-th axis of the
// AABB 'bdgBox'
// ('M' arrangement is [iRow][iCol])
// The system is supposed to have been reduced to only one variable
// per row, the one in argument
// May return inconsistent values (max < min), which would
// mean the system has no solution
void GetBound3D(
    const int iVar,
    const double (*M)[3],
    const double* Y,
    const int nbRows,
    AABB3D* const bdgBox) {

    // Shortcuts
    double* min = bdgBox->min + iVar;
    double* max = bdgBox->max + iVar;

    // Initialize the bounds to their maximum maximum and minimum minimum
    *min = 0.0;
    *max = 1.0;

```

```

// Loop on rows
for (int jRow = 0;
    jRow < nbRows;
    ++jRow) {

    // Shortcut
    double MjRowiVar = M[jRow][0];

    // If this row has been reduced to the variable in argument
    // and it has a strictly positive coefficient
    if (MjRowiVar > EPSILON) {

        // Get the scaled value of Y for this row
        double y = Y[jRow] / MjRowiVar;

        // If the value is lower than the current maximum bound
        if (*max > y) {

            // Update the maximum bound
            *max = y;

        }

        // Else, if this row has been reduced to the variable in argument
        // and it has a strictly negative coefficient
    } else if (MjRowiVar < -EPSILON) {

        // Get the scaled value of Y for this row
        double y = Y[jRow] / MjRowiVar;

        // If the value is greater than the current minimum bound
        if (*min < y) {

            // Update the minimum bound
            *min = y;

        }

    }

}

}

// Test for intersection between Frame 'that' and Frame 'tho'
// Return true if the two Frames are intersecting, else false
// If the Frame are intersecting the AABB of the intersection
// is stored into 'bdgBox', else 'bdgBox' is not modified
// If 'bdgBox' is null, the result AABB is not memorized (to use if
// unnecessary and want to speed up the algorithm)
// The resulting AABB may be larger than the smallest possible AABB
// The resulting AABB of FMBTestIntersection(A,B) may be different
// of the resulting AABB of FMBTestIntersection(B,A)
// The resulting AABB is given in 'tho' 's local coordinates system
bool FMBTestIntersection3D(
    const Frame3D* const that,
    const Frame3D* const tho,
    AABB3D* const bdgBox) {

    // Get the projection of the Frame 'tho' in Frame 'that' coordinates
    // system

```



```

Frame3D thoProj;
Frame3DImportFrame(that, tho, &thoProj);

// Declare two variables to memorize the system to be solved  $M.X \leq Y$ 
// (M arrangement is [iRow][iCol])
double M[12][3];
double Y[12];

// Create the inequality system

// -sum_iC_j, iX_i <= 0_j
M[0][0] = -thoProj.comp[0][0];
M[0][1] = -thoProj.comp[1][0];
M[0][2] = -thoProj.comp[2][0];
Y[0] = thoProj.orig[0];
if (Y[0] < neg(M[0][0]) + neg(M[0][1]) + neg(M[0][2]))
    return false;

M[1][0] = -thoProj.comp[0][1];
M[1][1] = -thoProj.comp[1][1];
M[1][2] = -thoProj.comp[2][1];
Y[1] = thoProj.orig[1];
if (Y[1] < neg(M[1][0]) + neg(M[1][1]) + neg(M[1][2]))
    return false;

M[2][0] = -thoProj.comp[0][2];
M[2][1] = -thoProj.comp[1][2];
M[2][2] = -thoProj.comp[2][2];
Y[2] = thoProj.orig[2];
if (Y[2] < neg(M[2][0]) + neg(M[2][1]) + neg(M[2][2]))
    return false;

// -X_i <= 0.0
M[3][0] = -1.0;
M[3][1] = 0.0;
M[3][2] = 0.0;
Y[3] = 0.0;

M[4][0] = 0.0;
M[4][1] = -1.0;
M[4][2] = 0.0;
Y[4] = 0.0;

M[5][0] = 0.0;
M[5][1] = 0.0;
M[5][2] = -1.0;
Y[5] = 0.0;

// Variable to memorize the nb of rows in the system
int nbRows = 6;

if (that->type == FrameCuboid) {

    // sum_iC_j, iX_i <= 1.0 - 0_j
    M[nbRows][0] = thoProj.comp[0][0];
    M[nbRows][1] = thoProj.comp[1][0];
    M[nbRows][2] = thoProj.comp[2][0];
    Y[nbRows] = 1.0 - thoProj.orig[0];
    if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
        neg(M[nbRows][2]))
        return false;
    ++nbRows;
}

```

```

M[nbRows][0] = thoProj.comp[0][1];
M[nbRows][1] = thoProj.comp[1][1];
M[nbRows][2] = thoProj.comp[2][1];
Y[nbRows] = 1.0 - thoProj.orig[1];
if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
    neg(M[nbRows][2]))
    return false;
++nbRows;

M[nbRows][0] = thoProj.comp[0][2];
M[nbRows][1] = thoProj.comp[1][2];
M[nbRows][2] = thoProj.comp[2][2];
Y[nbRows] = 1.0 - thoProj.orig[2];
if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
    neg(M[nbRows][2]))
    return false;
++nbRows;

} else {

// sum_j(sum_iC_j, iX_i) <= 1.0 - sum_iO_i
M[nbRows][0] =
    thoProj.comp[0][0] + thoProj.comp[0][1] + thoProj.comp[0][2];
M[nbRows][1] =
    thoProj.comp[1][0] + thoProj.comp[1][1] + thoProj.comp[1][2];
M[nbRows][2] =
    thoProj.comp[2][0] + thoProj.comp[2][1] + thoProj.comp[2][2];
Y[nbRows] =
    1.0 - thoProj.orig[0] - thoProj.orig[1] - thoProj.orig[2];
if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
    neg(M[nbRows][2]))
    return false;
++nbRows;

}

if (tho->type == FrameCuboid) {

// X_i <= 1.0
M[nbRows][0] = 1.0;
M[nbRows][1] = 0.0;
M[nbRows][2] = 0.0;
Y[nbRows] = 1.0;
++nbRows;

M[nbRows][0] = 0.0;
M[nbRows][1] = 1.0;
M[nbRows][2] = 0.0;
Y[nbRows] = 1.0;
++nbRows;

M[nbRows][0] = 0.0;
M[nbRows][1] = 0.0;
M[nbRows][2] = 1.0;
Y[nbRows] = 1.0;
++nbRows;

} else {

// sum_iX_i <= 1.0
M[nbRows][0] = 1.0;

```

```

    M[nbRows][1] = 1.0;
    M[nbRows][2] = 1.0;
    Y[nbRows] = 1.0;
    ++nbRows;
}

// Solve the system

// Declare a AABB to memorize the bounding box of the intersection
// in the coordinates system of the
AABB3D bdgBoxLocal;

// Declare variables to eliminate the first variable
// The size of the array given in the doc is a majoring value.
// Instead I use a smaller value which has proven to be sufficient
// during tests, validation and qualification, to avoid running
// into the heap limit and to optimize slightly the performance
//double Mp[48][3];
//double Yp[48];
double Mp[20][3];
double Yp[20];
int nbRowsP;

// Eliminate the first variable in the original system
bool inconsistency =
    ElimVar3D(
        FST_VAR,
        M,
        Y,
        nbRows,
        3,
        Mp,
        Yp,
        &nbRowsP);

// If the system is inconsistent
if (inconsistency == true) {

    // The two Frames are not in intersection
    return false;
}

// Declare variables to eliminate the second variable
// The size of the array given in the doc is a majoring value.
// Instead I use a smaller value which has proven to be sufficient
// during tests, validation and qualification, to avoid running
// into the heap limit and to optimize slightly the performance
//double Mpp[624][3];
//double Ypp[624];
double Mpp[55][3];
double Ypp[55];
int nbRowsPP;

// Eliminate the second variable (which is the first in the new system)
inconsistency =
    ElimVar3D(
        FST_VAR,
        Mp,
        Yp,
        nbRowsP,

```

```

        2,
        Mpp,
        Ypp,
        &nbRowsPP);

// If the system is inconsistent
if (inconsistency == true) {

    // The two Frames are not in intersection
    return false;

}

// Get the bounds for the remaining third variable
GetBound3D(
    THD_VAR,
    Mpp,
    Ypp,
    nbRowsPP,
    &bdgBoxLocal);

// If the bounds are inconsistent
if (bdgBoxLocal.min[THD_VAR] >= bdgBoxLocal.max[THD_VAR]) {

    // The two Frames are not in intersection
    return false;

// Else, if the bounds are consistent here it means
// the two Frames are in intersection.
// If the user hasn't requested for the resulting bounding box
} else if (bdgBox == NULL) {

    // Immediately return true
    return true;

}

// Eliminate the third variable (which is the first in the new
// system)
inconsistency =
    ElimVar3D(
        SND_VAR,
        Mp,
        Yp,
        nbRowsP,
        2,
        Mpp,
        Ypp,
        &nbRowsPP);

// Get the bounds for the remaining second variable
GetBound3D(
    SND_VAR,
    Mpp,
    Ypp,
    nbRowsPP,
    &bdgBoxLocal);

// Now starts again from the initial systems and eliminate the
// second and third variables to get the bounds of the first variable
// No need to check for consistency because we already know here
// that the Frames are intersecting and the system is consistent

```

```

inconsistency =
    ElimVar3D(
        THD_VAR,
        M,
        Y,
        nbRows,
        3,
        Mp,
        Yp,
        &nbRowsP);

inconsistency =
    ElimVar3D(
        SND_VAR,
        Mp,
        Yp,
        nbRowsP,
        2,
        Mpp,
        Ypp,
        &nbRowsPP);

GetBound3D(
    FST_VAR,
    Mpp,
    Ypp,
    nbRowsPP,
    &bdgBoxLocal);

// If the user requested the resulting bounding box
if (bdgBox != NULL) {

    // Memorize the result
    *bdgBox = bdgBoxLocal;

}

// If we've reached here the two Frames are intersecting
return true;

}

```

### 4.2.3 2D dynamic

#### Header

```

#ifndef __FMB2DT_H_
#define __FMB2DT_H_

#include <stdbool.h>
#include "frame.h"

// ----- Functions declaration -----

// Test for intersection between Frame 'that' and Frame 'tho'
// Return true if the two Frames are intersecting, else false
// If the Frame are intersecting the AABB of the intersection
// is stored into 'bdgBox', else 'bdgBox' is not modified
// If 'bdgBox' is null, the result AABB is not memorized (to use if
// unnecessary and want to speed up the algorithm)

```

```

// The resulting AABB may be larger than the smallest possible AABB
// The resulting AABB of FMBTestIntersection(A,B) may be different
// of the resulting AABB of FMBTestIntersection(B,A)
// The resulting AABB is given in 'tho' 's local coordinates system
bool FMBTestIntersection2DTime(
    const Frame2DTime* const that,
    const Frame2DTime* const tho,
    AABB2DTime* const bdgBox);

#endif

Body

#include "fmb2dt.h"

// ----- Macros -----

// Return 1.0 if v is positive, -1.0 if v is negative, 0.0 else
#define sgn(v) (((0.0 < (v)) ? 1 : 0) - (((v) < 0.0) ? 1 : 0))

// Return x if x is negative, 0.0 else
#define neg(x) (x < 0.0 ? x : 0.0)

#define FST_VAR 0
#define SND_VAR 1
#define THD_VAR 2

#define EPSILON 0.0000001

// ----- Functions declaration -----

// Eliminate the 'iVar'-th variable in the system 'M'.X<='Y'
// using the Fourier-Motzkin method and return
// the resulting system in 'Mp' and 'Yp', and the number of rows of
// the resulting system in 'nbRemainRows'
// Return false if the system becomes inconsistent during elimination,
// else return true
bool ElimVar2DTime(
    const int iVar,
    const double (*M)[3],
    const double* Y,
    const int nbRows,
    const int nbCols,
    double (*Mp)[3],
    double* Yp,
    int* const nbRemainRows);

// Get the bounds of the 'iVar'-th variable in the 'nbRows' rows
// system 'M'.X<='Y' and store them in the 'iVar'-th axis of the
// AABB 'bdgBox'
// ('M' arrangement is [iRow][iCol])
// The system is supposed to have been reduced to only one variable
// per row, the one in argument, which can be located in a different
// column than 'iVar'
// May return inconsistent values (max < min), which would
// mean the system has no solution
void GetBound2DTime(
    const int iVar,
    const double (*M)[3],
    const double* Y,
    const int nbRows,
    AABB2DTime* const bdgBox);

```

```

// ----- Functions implementation -----

// Eliminate the 'iVar'-th variable in the system 'M'.X<='Y'
// using the Fourier-Motzkin method and return
// the resulting system in 'Mp' and 'Yp', and the number of rows of
// the resulting system in 'nbRemainRows'
// ('M' arrangement is [iRow][iCol])
// Return true if the system becomes inconsistent during elimination,
// else return false
bool ElimVar2DTime(
    const int iVar,
    const double (*M)[3],
    const double* Y,
    const int nbRows,
    const int nbCols,
    double (*Mp)[3],
    double* Yp,
    int* const nbRemainRows) {

    // Initialize the number of rows in the result system
    *nbRemainRows = 0;

    // First we process the rows where the eliminated variable is not null

    // For each row except the last one
    for (int iRow = 0;
        iRow < nbRows - 1;
        ++iRow) {

        // Shortcuts
        int sgnMIRowIVar = sgn(M[iRow][iVar]);
        double fabsMIRowIVar = fabs(M[iRow][iVar]);
        double YIRowDivideByFabsMIRowIVar = Y[iRow] / fabsMIRowIVar;

        // For each following rows
        for (int jRow = iRow + 1;
            jRow < nbRows;
            ++jRow) {

            // If coefficients of the eliminated variable in the two rows have
            // different signs and are not null
            if (sgnMIRowIVar != sgn(M[jRow][iVar]) &&
                fabsMIRowIVar > EPSILON &&
                fabs(M[jRow][iVar]) > EPSILON) {

                // Declare a variable to memorize the sum of the negative
                // coefficients in the row
                double sumNegCoeff = 0.0;

                // Add the sum of the two normed (relative to the eliminated
                // variable) rows into the result system. This actually
                // eliminate the variable while keeping the constraints on
                // others variables
                for (int iCol = 0, jCol = 0;
                    iCol < nbCols;
                    ++iCol) {

                    if (iCol != iVar) {

                        Mp[*nbRemainRows][jCol] =
                            M[iRow][iCol] / fabsMIRowIVar +

```

```

        M[jRow][iCol] / fabs(M[jRow][iVar]);

        // Update the sum of the negative coefficient
        sumNegCoeff += neg(Mp[*nbRemainRows][jCol]);

        // Increment the number of columns in the new inequality
        ++jCol;
    }

}

// Update the right side of the inequality
Yp[*nbRemainRows] =
    YIRowDivideByFabsMIRowIVar +
    Y[jRow] / fabs(M[jRow][iVar]);

// If the right side of the inequality is lower than the sum of
// negative coefficients in the row
// (Add epsilon for numerical imprecision)
if (Yp[*nbRemainRows] < sumNegCoeff - EPSILON) {

    // Given that X is in [0,1], the system is inconsistent
    return true;

}

// Increment the nb of rows into the result system
++(*nbRemainRows);

}

}

// Then we copy and compress the rows where the eliminated
// variable is null

// Loop on rows of the input system
for (int iRow = 0;
     iRow < nbRows;
     ++iRow) {

    // Shortcut
    const double* MiRow = M[iRow];

    // If the coefficient of the eliminated variable is null on
    // this row
    if (fabs(MiRow[iVar]) < EPSILON) {

        // Shortcut
        double* MpnbRemainRows = Mp[*nbRemainRows];

        // Copy this row into the result system excluding the eliminated
        // variable
        for (int iCol = 0, jCol = 0;
             iCol < nbCols;
             ++iCol) {

            if (iCol != iVar) {

```



```

        MpnbRemainRows[jCol] = MiRow[iCol];

        ++jCol;

    }

}

Yp[*nbRemainRows] = Y[iRow];

// Increment the nb of rows into the result system
++(*nbRemainRows);

}

}

// If we reach here the system is not inconsistent
return false;

}

// Get the bounds of the 'iVar'-th variable in the 'nbRows' rows
// system 'M'.X<='Y' and store them in the 'iVar'-th axis of the
// AABB 'bdgBox'
// ('M' arrangement is [iRow][iCol])
// The system is supposed to have been reduced to only one variable
// per row, the one in argument
// May return inconsistent values (max < min), which would
// mean the system has no solution
void GetBound2DTime(
    const int iVar,
    const double (*M)[3],
    const double* Y,
    const int nbRows,
    AABB2DTime* const bdgBox) {

    // Shortcuts
    double* min = bdgBox->min + iVar;
    double* max = bdgBox->max + iVar;

    // Initialize the bounds to there maximum maximum and minimum minimum
    *min = 0.0;
    *max = 1.0;

    // Loop on rows
    for (int jRow = 0;
        jRow < nbRows;
        ++jRow) {

        // Shortcut
        double MjRowiVar = M[jRow][0];

        // If this row has been reduced to the variable in argument
        // and it has a strictly positive coefficient
        if (MjRowiVar > EPSILON) {

            // Get the scaled value of Y for this row
            double y = Y[jRow] / MjRowiVar;

            // If the value is lower than the current maximum bound
            if (*max > y) {

```

```

        // Update the maximum bound
        *max = y;

    }

    // Else, if this row has been reduced to the variable in argument
    // and it has a strictly negative coefficient
    } else if (MjRowiVar < -EPSILON) {

        // Get the scaled value of Y for this row
        double y = Y[jRow] / MjRowiVar;

        // If the value is greater than the current minimum bound
        if (*min < y) {

            // Update the minimum bound
            *min = y;

        }

    }

}

}

}

// Test for intersection between Frame 'that' and Frame 'tho'
// Return true if the two Frames are intersecting, else false
// If the Frame are intersecting the AABB of the intersection
// is stored into 'bdgBox', else 'bdgBox' is not modified
// If 'bdgBox' is null, the result AABB is not memorized (to use if
// unnecessary and want to speed up the algorithm)
// The resulting AABB may be larger than the smallest possible AABB
// The resulting AABB of FMBTestIntersection(A,B) may be different
// of the resulting AABB of FMBTestIntersection(B,A)
// The resulting AABB is given in 'tho' 's local coordinates system
bool FMBTestIntersection2DTime(
    const Frame2DTime* const that,
    const Frame2DTime* const tho,
    AABB2DTime* const bdgBox) {

    // Get the projection of the Frame 'tho' in Frame 'that' coordinates
    // system
    Frame2DTime thoProj;
    Frame2DTimeImportFrame(that, tho, &thoProj);

    // Declare two variables to memorize the system to be solved M.X <= Y
    // (M arrangement is [iRow][iCol])
    double M[10][3];
    double Y[10];

    // Create the inequality system

    // -V_jT-sum_iC_j,iX_i<=0_j
    M[0][0] = -thoProj.comp[0][0];
    M[0][1] = -thoProj.comp[1][0];
    M[0][2] = -thoProj.speed[0];
    Y[0] = thoProj.orig[0];
    if (Y[0] < neg(M[0][0]) + neg(M[0][1]) + neg(M[0][2]))
        return false;

```

```

M[1][0] = -thoProj.comp[0][1];
M[1][1] = -thoProj.comp[1][1];
M[1][2] = -thoProj.speed[1];
Y[1] = thoProj.orig[1];
if (Y[1] < neg(M[1][0]) + neg(M[1][1]) + neg(M[1][2]))
    return false;

// -X_i <= 0.0
M[2][0] = -1.0;
M[2][1] = 0.0;
M[2][2] = 0.0;
Y[2] = 0.0;

M[3][0] = 0.0;
M[3][1] = -1.0;
M[3][2] = 0.0;
Y[3] = 0.0;

// 0.0 <= t <= 1.0
M[4][0] = 0.0;
M[4][1] = 0.0;
M[4][2] = 1.0;
Y[4] = 1.0;

M[5][0] = 0.0;
M[5][1] = 0.0;
M[5][2] = -1.0;
Y[5] = 0.0;

// Variable to memorize the nb of rows in the system
int nbRows = 6;

if (that->type == FrameCuboid) {

    // V_jT+sum_iC_j,iX_i<=1.0-0_j
    M[nbRows][0] = thoProj.comp[0][0];
    M[nbRows][1] = thoProj.comp[1][0];
    M[nbRows][2] = thoProj.speed[0];
    Y[nbRows] = 1.0 - thoProj.orig[0];
    if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
        neg(M[nbRows][2]))
        return false;
    ++nbRows;

    M[nbRows][0] = thoProj.comp[0][1];
    M[nbRows][1] = thoProj.comp[1][1];
    M[nbRows][2] = thoProj.speed[1];
    Y[nbRows] = 1.0 - thoProj.orig[1];
    if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
        neg(M[nbRows][2]))
        return false;
    ++nbRows;

} else {

    // sum_j(V_jT+sum_iC_j,iX_i)<=1.0-sum_i0_i
    M[nbRows][0] = thoProj.comp[0][0] + thoProj.comp[0][1];
    M[nbRows][1] = thoProj.comp[1][0] + thoProj.comp[1][1];
    M[nbRows][2] = thoProj.speed[0] + thoProj.speed[1];
    Y[nbRows] = 1.0 - thoProj.orig[0] - thoProj.orig[1];
    if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
        neg(M[nbRows][2]))

```

```

        return false;
        ++nbRows;
    }

    if (tho->type == FrameCuboid) {

        // X_i <= 1.0
        M[nbRows][0] = 1.0;
        M[nbRows][1] = 0.0;
        M[nbRows][2] = 0.0;
        Y[nbRows] = 1.0;
        ++nbRows;

        M[nbRows][0] = 0.0;
        M[nbRows][1] = 1.0;
        M[nbRows][2] = 0.0;
        Y[nbRows] = 1.0;
        ++nbRows;

    } else {

        // sum_iX_i<=1.0
        M[nbRows][0] = 1.0;
        M[nbRows][1] = 1.0;
        M[nbRows][2] = 0.0;
        Y[nbRows] = 1.0;
        ++nbRows;

    }

    // Solve the system

    // Declare a AABB to memorize the bounding box of the intersection
    // in the coordinates system of tho
    AABB2DTime bdgBoxLocal;

    // Declare variables to eliminate the first variable
    // The size of the array given in the doc is a majoring value.
    // Instead I use a smaller value which has proven to be sufficient
    // during tests, validation and qualification, to avoid running
    // into the heap limit and to optimize slightly the performance
    //double Mp[35][3];
    //double Yp[35];
    double Mp[13][3];
    double Yp[13];
    int nbRowsP;

    // Eliminate the first variable in the original system
    bool inconsistency =
        ElimVar2DTime(
            FST_VAR,
            M,
            Y,
            nbRows,
            3,
            Mp,
            Yp,
            &nbRowsP);

    // If the system is inconsistent
    if (inconsistency == true) {

```

```

    // The two Frames are not in intersection
    return false;

}

// Declare variables to eliminate the second variable
// The size of the array given in the doc is a majoring value.
// Instead I use a smaller value which has proven to be sufficient
// during tests, validation and qualification, to avoid running
// into the heap limit and to optimize slightly the performance
//double Mpp[342][3];
//double Ypp[342];
double Mpp[21][3];
double Ypp[21];
int nbRowsPP;

// Eliminate the second variable (which is the first in the new system)
inconsistency =
    ElimVar2DTime(
        FST_VAR,
        Mp,
        Yp,
        nbRowsP,
        2,
        Mpp,
        Ypp,
        &nbRowsPP);

// If the system is inconsistent
if (inconsistency == true) {

    // The two Frames are not in intersection
    return false;

}

// Get the bounds for the remaining third variable
GetBound2DTime(
    THD_VAR,
    Mpp,
    Ypp,
    nbRowsPP,
    &bdgBoxLocal);

// If the bounds are inconsistent
if (bdgBoxLocal.min[THD_VAR] >= bdgBoxLocal.max[THD_VAR]) {

    // The two Frames are not in intersection
    return false;

// Else, if the bounds are consistent here it means
// the two Frames are in intersection.
// If the user hasn't requested for the resulting bounding box
} else if (bdgBox == NULL) {

    // Immediately return true
    return true;

}

// Eliminate the third variable (which is the second in the new

```

```

// system)
inconsistency =
    ElimVar2DTime(
        SND_VAR,
        Mp,
        Yp,
        nbRowsP,
        2,
        Mpp,
        Ypp,
        &nbRowsPP);

// Get the bounds for the remaining second variable
GetBound2DTime(
    SND_VAR,
    Mpp,
    Ypp,
    nbRowsPP,
    &bdgBoxLocal);

// Now starts again from the initial systems and eliminate the
// second and third variables to get the bounds of the first variable
// No need to check for consistency because we already know here
// that the Frames are intersecting and the system is consistent
inconsistency =
    ElimVar2DTime(
        THD_VAR,
        M,
        Y,
        nbRows,
        3,
        Mp,
        Yp,
        &nbRowsP);

inconsistency =
    ElimVar2DTime(
        SND_VAR,
        Mp,
        Yp,
        nbRowsP,
        2,
        Mpp,
        Ypp,
        &nbRowsPP);

GetBound2DTime(
    FST_VAR,
    Mpp,
    Ypp,
    nbRowsPP,
    &bdgBoxLocal);

// If the user requested the resulting bounding box
if (bdgBox != NULL) {

    // Memorize the result
    *bdgBox = bdgBoxLocal;
}

// If we've reached here the two Frames are intersecting

```

```

    return true;
}

```

#### 4.2.4 3D dynamic

##### Header

```

#ifndef __FMB3DT_H_
#define __FMB3DT_H_

#include <stdbool.h>
#include "frame.h"

// ----- Functions declaration -----

// Test for intersection between Frame 'that' and Frame 'tho'
// Return true if the two Frames are intersecting, else false
// If the Frame are intersecting the AABB of the intersection
// is stored into 'bdgBox', else 'bdgBox' is not modified
// If 'bdgBox' is null, the result AABB is not memorized (to use if
// unnecessary and want to speed up the algorithm)
// The resulting AABB may be larger than the smallest possible AABB
// The resulting AABB of FMBTestIntersection(A,B) may be different
// of the resulting AABB of FMBTestIntersection(B,A)
// The resulting AABB is given in 'tho' 's local coordinates system
bool FMBTestIntersection3DTime(
    const Frame3DTime* const that,
    const Frame3DTime* const tho,
    AABB3DTime* const bdgBox);

#endif

```

##### Body

```

#include "fmb3dt.h"

// ----- Macros -----

// Return 1.0 if v is positive, -1.0 if v is negative, 0.0 else
#define sgn(v) (((0.0 < (v)) ? 1 : 0) - (((v) < 0.0) ? 1 : 0))

// Return x if x is negative, 0.0 else
#define neg(x) (x < 0.0 ? x : 0.0)

#define FST_VAR 0
#define SND_VAR 1
#define THD_VAR 2
#define FOR_VAR 3

#define EPSILON 0.0000001

// ----- Functions declaration -----

// Eliminate the 'iVar'-th variable in the system 'M'.X<='Y'
// using the Fourier-Motzkin method and return
// the resulting system in 'Mp' and 'Yp', and the number of rows of
// the resulting system in 'nbRemainRows'
// Return false if the system becomes inconsistent during elimination,
// else return true

```

```

bool ElimVar3DTime(
    const int iVar,
    const double (*M)[4],
    const double* Y,
    const int nbRows,
    const int nbCols,
    double (*Mp)[4],
    double* Yp,
    int* const nbRemainRows);

// Get the bounds of the 'iVar'-th variable in the 'nbRows' rows
// system 'M'.X<='Y' and store them in the 'iVar'-th axis of the
// AABB 'bdgBox'
// ('M' arrangement is [iRow][iCol])
// The system is supposed to have been reduced to only one variable
// per row, the one in argument, which can be located in a different
// column than 'iVar'
// May return inconsistent values (max < min), which would
// mean the system has no solution
void GetBound3DTime(
    const int iVar,
    const double (*M)[4],
    const double* Y,
    const int nbRows,
    AABB3DTime* const bdgBox);

// ----- Functions implementation -----

// Eliminate the 'iVar'-th variable in the system 'M'.X<='Y'
// using the Fourier-Motzkin method and return
// the resulting system in 'Mp' and 'Yp', and the number of rows of
// the resulting system in 'nbRemainRows'
// ('M' arrangement is [iRow][iCol])
// Return true if the system becomes inconsistent during elimination,
// else return false
bool ElimVar3DTime(
    const int iVar,
    const double (*M)[4],
    const double* Y,
    const int nbRows,
    const int nbCols,
    double (*Mp)[4],
    double* Yp,
    int* const nbRemainRows) {

    // Initialize the number of rows in the result system
    *nbRemainRows = 0;

    // First we process the rows where the eliminated variable is not null

    // For each row except the last one
    for (int iRow = 0;
        iRow < nbRows - 1;
        ++iRow) {

        // Shortcuts
        int sgnMIRowIVar = sgn(M[iRow][iVar]);
        double fabsMIRowIVar = fabs(M[iRow][iVar]);
        double YIRowDivideByFabsMIRowIVar = Y[iRow] / fabsMIRowIVar;

        // For each following rows
        for (int jRow = iRow + 1;

```



```

        jRow < nbRows;
        ++jRow) {

// If coefficients of the eliminated variable in the two rows have
// different signs and are not null
if (sgnMIRowIVar != sgn(M[jRow][iVar]) &&
    fabsMIRowIVar > EPSILON &&
    fabs(M[jRow][iVar]) > EPSILON) {

// Declare a variable to memorize the sum of the negative
// coefficients in the row
double sumNegCoeff = 0.0;

// Add the sum of the two normed (relative to the eliminated
// variable) rows into the result system. This actually
// eliminate the variable while keeping the constraints on
// others variables
for (int iCol = 0, jCol = 0;
     iCol < nbCols;
     ++iCol ) {

    if (iCol != iVar) {

        Mp[*nbRemainRows][jCol] =
            M[iRow][iCol] / fabsMIRowIVar +
            M[jRow][iCol] / fabs(M[jRow][iVar]);

        // Update the sum of the negative coefficient
        sumNegCoeff += neg(Mp[*nbRemainRows][jCol]);

        // Increment the number of columns in the new inequality
        ++jCol;

    }

}

// Update the right side of the inequality
Yp[*nbRemainRows] =
    YIRowDivideByFabsMIRowIVar +
    Y[jRow] / fabs(M[jRow][iVar]);

// If the right side of the inequality is lower than the sum of
// negative coefficients in the row
// (Add epsilon for numerical imprecision)
if (Yp[*nbRemainRows] < sumNegCoeff - EPSILON) {

    // Given that X is in [0,1], the system is inconsistent
    return true;

}

// Increment the nb of rows into the result system
++(*nbRemainRows);

}

}

// Then we copy and compress the rows where the eliminated

```

```

// variable is null

// Loop on rows of the input system
for (int iRow = 0;
    iRow < nbRows;
    ++iRow) {

    // Shortcut
    const double* MiRow = M[iRow];

    // If the coefficient of the eliminated variable is null on
    // this row
    if (fabs(MiRow[iVar]) < EPSILON) {

        // Shortcut
        double* MpnbRemainRows = Mp[*nbRemainRows];

        // Copy this row into the result system excluding the eliminated
        // variable
        for (int iCol = 0, jCol = 0;
            iCol < nbCols;
            ++iCol) {

            if (iCol != iVar) {

                MpnbRemainRows[jCol] = MiRow[iCol];

                ++jCol;

            }

        }

        Yp[*nbRemainRows] = Y[iRow];

        // Increment the nb of rows into the result system
        ++(*nbRemainRows);

    }

}

// If we reach here the system is not inconsistent
return false;

}

// Get the bounds of the 'iVar'-th variable in the 'nbRows' rows
// system 'M'.X<='Y' and store them in the 'iVar'-th axis of the
// AABB 'bdgBox'
// ('M' arrangement is [iRow][iCol])
// The system is supposed to have been reduced to only one variable
// per row, the one in argument
// May return inconsistent values (max < min), which would
// mean the system has no solution
void GetBound3DTime(
    const int iVar,
    const double (*M)[4],
    const double* Y,
    const int nbRows,
    AABB3DTime* const bdgBox) {

```

```

// Shortcuts
double* min = bdgBox->min + iVar;
double* max = bdgBox->max + iVar;

// Initialize the bounds to there maximum maximum and minimum minimum
*min = 0.0;
*max = 1.0;

// Loop on rows
for (int jRow = 0;
    jRow < nbRows;
    ++jRow) {

    // Shortcut
    double MjRowiVar = M[jRow][0];

    // If this row has been reduced to the variable in argument
    // and it has a strictly positive coefficient
    if (MjRowiVar > EPSILON) {

        // Get the scaled value of Y for this row
        double y = Y[jRow] / MjRowiVar;

        // If the value is lower than the current maximum bound
        if (*max > y) {

            // Update the maximum bound
            *max = y;

        }

        // Else, if this row has been reduced to the variable in argument
        // and it has a strictly negative coefficient
        } else if (MjRowiVar < -EPSILON) {

            // Get the scaled value of Y for this row
            double y = Y[jRow] / MjRowiVar;

            // If the value is greater than the current minimum bound
            if (*min < y) {

                // Update the minimum bound
                *min = y;

            }

        }

    }

}

// Test for intersection between Frame 'that' and Frame 'tho'
// Return true if the two Frames are intersecting, else false
// If the Frame are intersecting the AABB of the intersection
// is stored into 'bdgBox', else 'bdgBox' is not modified
// If 'bdgBox' is null, the result AABB is not memorized (to use if
// unnecessary and want to speed up the algorithm)
// The resulting AABB may be larger than the smallest possible AABB
// The resulting AABB of FMBTestIntersection(A,B) may be different
// of the resulting AABB of FMBTestIntersection(B,A)
// The resulting AABB is given in 'tho' 's local coordinates system

```

```

bool FMBTestIntersection3DTime(
    const Frame3DTime* const that,
    const Frame3DTime* const tho,
    AABB3DTime* const bdgBox) {

    // Get the projection of the Frame 'tho' in Frame 'that' coordinates
    // system
    Frame3DTime thoProj;
    Frame3DTimeImportFrame(that, tho, &thoProj);

    // Declare two variables to memorize the system to be solved M.X <= Y
    // (M arrangement is [iRow][iCol])
    double M[14][4];
    double Y[14];

    // Create the inequality system

    // -V_jT+sum_iC_j, iX_i<=0_j
    M[0][0] = -thoProj.comp[0][0];
    M[0][1] = -thoProj.comp[1][0];
    M[0][2] = -thoProj.comp[2][0];
    M[0][3] = -thoProj.speed[0];
    Y[0] = thoProj.orig[0];
    if (Y[0] < neg(M[0][0]) + neg(M[0][1]) + neg(M[0][2]) + neg(M[0][3]))
        return false;

    M[1][0] = -thoProj.comp[0][1];
    M[1][1] = -thoProj.comp[1][1];
    M[1][2] = -thoProj.comp[2][1];
    M[1][3] = -thoProj.speed[1];
    Y[1] = thoProj.orig[1];
    if (Y[1] < neg(M[1][0]) + neg(M[1][1]) + neg(M[1][2]) + neg(M[1][3]))
        return false;

    M[2][0] = -thoProj.comp[0][2];
    M[2][1] = -thoProj.comp[1][2];
    M[2][2] = -thoProj.comp[2][2];
    M[2][3] = -thoProj.speed[2];
    Y[2] = thoProj.orig[2];
    if (Y[2] < neg(M[2][0]) + neg(M[2][1]) + neg(M[2][2]) + neg(M[2][3]))
        return false;

    // Variable to memorize the nb of rows in the system
    int nbRows = 3;

    if (that->type == FrameCuboid) {

        // V_jT+sum_iC_j, iX_i<=1.0-0_j
        M[nbRows][0] = thoProj.comp[0][0];
        M[nbRows][1] = thoProj.comp[1][0];
        M[nbRows][2] = thoProj.comp[2][0];
        M[nbRows][3] = thoProj.speed[0];
        Y[nbRows] = 1.0 - thoProj.orig[0];
        if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
            neg(M[nbRows][2]) + neg(M[nbRows][3]))
            return false;
        ++nbRows;

        M[nbRows][0] = thoProj.comp[0][1];
        M[nbRows][1] = thoProj.comp[1][1];
        M[nbRows][2] = thoProj.comp[2][1];
        M[nbRows][3] = thoProj.speed[1];
    }
}

```

```

Y[nbRows] = 1.0 - thoProj.orig[1];
if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
    neg(M[nbRows][2]) + neg(M[nbRows][3]))
    return false;
++nbRows;

M[nbRows][0] = thoProj.comp[0][2];
M[nbRows][1] = thoProj.comp[1][2];
M[nbRows][2] = thoProj.comp[2][2];
M[nbRows][3] = thoProj.speed[2];
Y[nbRows] = 1.0 - thoProj.orig[2];
if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
    neg(M[nbRows][2]) + neg(M[nbRows][3]))
    return false;
++nbRows;

} else {

    // sum_j(V_jT+sum_iC_j,iX_i)<=1.0-sum_iO_i
    M[nbRows][0] =
        thoProj.comp[0][0] + thoProj.comp[0][1] + thoProj.comp[0][2];
    M[nbRows][1] =
        thoProj.comp[1][0] + thoProj.comp[1][1] + thoProj.comp[1][2];
    M[nbRows][2] =
        thoProj.comp[2][0] + thoProj.comp[2][1] + thoProj.comp[2][2];
    M[nbRows][3] = thoProj.speed[0] + thoProj.speed[1] + thoProj.speed[2];
    Y[nbRows] = 1.0 - thoProj.orig[0] - thoProj.orig[1] - thoProj.orig[2];
    if (Y[nbRows] < neg(M[nbRows][0]) + neg(M[nbRows][1]) +
        neg(M[nbRows][2]) + neg(M[nbRows][3]))
        return false;
    ++nbRows;

}

if (tho->type == FrameCuboid) {

    // X_i <= 1.0
    M[nbRows][0] = 1.0;
    M[nbRows][1] = 0.0;
    M[nbRows][2] = 0.0;
    M[nbRows][3] = 0.0;
    Y[nbRows] = 1.0;
    ++nbRows;

    M[nbRows][0] = 0.0;
    M[nbRows][1] = 1.0;
    M[nbRows][2] = 0.0;
    M[nbRows][3] = 0.0;
    Y[nbRows] = 1.0;
    ++nbRows;

    M[nbRows][0] = 0.0;
    M[nbRows][1] = 0.0;
    M[nbRows][2] = 1.0;
    M[nbRows][3] = 0.0;
    Y[nbRows] = 1.0;
    ++nbRows;

} else {

    // sum_iX_i<=1.0
    M[nbRows][0] = 1.0;

```

```

        M[nbRows][1] = 1.0;
        M[nbRows][2] = 1.0;
        M[nbRows][3] = 0.0;
        Y[nbRows] = 1.0;
        ++nbRows;
    }

    // -X_i <= 0.0
    M[nbRows][0] = -1.0;
    M[nbRows][1] = 0.0;
    M[nbRows][2] = 0.0;
    M[nbRows][3] = 0.0;
    Y[nbRows] = 0.0;
    ++nbRows;

    M[nbRows][0] = 0.0;
    M[nbRows][1] = -1.0;
    M[nbRows][2] = 0.0;
    M[nbRows][3] = 0.0;
    Y[nbRows] = 0.0;
    ++nbRows;

    M[nbRows][0] = 0.0;
    M[nbRows][1] = 0.0;
    M[nbRows][2] = -1.0;
    M[nbRows][3] = 0.0;
    Y[nbRows] = 0.0;
    ++nbRows;

    // 0.0 <= t <= 1.0
    M[nbRows][0] = 0.0;
    M[nbRows][1] = 0.0;
    M[nbRows][2] = 0.0;
    M[nbRows][3] = 1.0;
    Y[nbRows] = 1.0;
    ++nbRows;

    M[nbRows][0] = 0.0;
    M[nbRows][1] = 0.0;
    M[nbRows][2] = 0.0;
    M[nbRows][3] = -1.0;
    Y[nbRows] = 0.0;
    ++nbRows;

    // Solve the system

    // Declare a AABB to memorize the bounding box of the intersection
    // in the coordinates system of that
    AABB3DTime bdgBoxLocal;

    // Declare variables to eliminate the first variable
    // The size of the array given in the doc is a majoring value.
    // Instead I use a smaller value which has proven to be sufficient
    // during tests, validation and qualification, to avoid running
    // into the heap limit and to optimize slightly the performance
    //double Mp[63][4];
    //double Yp[63];
    double Mp[22][4];
    double Yp[22];
    int nbRowsP;

```

```

// Eliminate the first variable in the original system
bool inconsistency =
    ElimVar3DTime(
        FST_VAR,
        M,
        Y,
        nbRows,
        4,
        Mp,
        Yp,
        &nbRowsP);

// If the system is inconsistent
if (inconsistency == true) {

    // The two Frames are not in intersection
    return false;

}

// Declare variables to eliminate the second variable
// The size of the array given in the doc is a majoring value.
// Instead I use a smaller value which has proven to be sufficient
// during tests, validation and qualification, to avoid running
// into the heap limit and to optimize slightly the performance
//double Mpp[1056][4];
//double Ypp[1056];
double Mpp[57][4];
double Ypp[57];
int nbRowsPP;

// Eliminate the second variable (which is the first in the new system)
inconsistency =
    ElimVar3DTime(
        FST_VAR,
        Mp,
        Yp,
        nbRowsP,
        3,
        Mpp,
        Ypp,
        &nbRowsPP);

// If the system is inconsistent
if (inconsistency == true) {

    // The two Frames are not in intersection
    return false;

}

// Declare variables to eliminate the third variable
// The size of the array given in the doc is a majoring value.
// Instead I use a smaller value which has proven to be sufficient
// during tests, validation and qualification, to avoid running
// into the heap limit and to optimize slightly the performance
//double Mppp[279840][4];
//double Yppp[279840];
double Mppp[560][4];
double Yppp[560];
int nbRowsPPP;

```

```

// Eliminate the third variable (which is the first in the new system)
inconsistency =
    ElimVar3DTime(
        FST_VAR,
        Mpp,
        Ypp,
        nbRowsPP,
        2,
        Mppp,
        Yppp,
        &nbRowsPPP);

// If the system is inconsistent
if (inconsistency == true) {

    // The two Frames are not in intersection
    return false;

}

// Get the bounds for the remaining fourth variable
GetBound3DTime(
    FOR_VAR,
    Mppp,
    Yppp,
    nbRowsPPP,
    &bdgBoxLocal);

// If the bounds are inconsistent
if (bdgBoxLocal.min[FOR_VAR] >= bdgBoxLocal.max[FOR_VAR]) {

    // The two Frames are not in intersection
    return false;

// Else, if the bounds are consistent here it means
// the two Frames are in intersection.
// If the user hasn't requested for the resulting bounding box
} else if (bdgBox == NULL) {

    // Immediately return true
    return true;

}

// Eliminate the fourth variable (which is the second in the new
// system)
inconsistency =
    ElimVar3DTime(
        SND_VAR,
        Mpp,
        Ypp,
        nbRowsPP,
        2,
        Mppp,
        Yppp,
        &nbRowsPPP);

// Get the bounds for the remaining third variable
GetBound3DTime(
    THD_VAR,
    Mppp,
    Yppp,

```



```

    nbRowsPPP,
    &bdgBoxLocal);

// Now starts again from the initial systems and eliminate the
// third and fourth variables to get the bounds of the first and
// second variables.
// No need to check for consistency because we already know here
// that the Frames are intersecting and the system is consistent
inconsistency =
    ElimVar3DTime(
        FOR_VAR,
        M,
        Y,
        nbRows,
        4,
        Mp,
        Yp,
        &nbRowsP);

inconsistency =
    ElimVar3DTime(
        THD_VAR,
        Mp,
        Yp,
        nbRowsP,
        3,
        Mpp,
        Ypp,
        &nbRowsPP);

inconsistency =
    ElimVar3DTime(
        SND_VAR,
        Mpp,
        Ypp,
        nbRowsPP,
        2,
        Mppp,
        Yppp,
        &nbRowsPPP);

GetBound3DTime(
    FST_VAR,
    Mppp,
    Yppp,
    nbRowsPPP,
    &bdgBoxLocal);

inconsistency =
    ElimVar3DTime(
        FST_VAR,
        Mpp,
        Ypp,
        nbRowsPP,
        2,
        Mppp,
        Yppp,
        &nbRowsPPP);

GetBound3DTime(
    SND_VAR,
    Mppp,

```

```

    Yppp,
    nbRowsPPP,
    &bdgBoxLocal);

// If the user requested the resulting bounding box
if (bdgBox != NULL) {

    // Memorize the result
    *bdgBox = bdgBoxLocal;

}

// If we've reached here the two Frames are intersecting
return true;

}

```

## 5 Minimal example of use

In this section I give a minimal example for each case of how to use the code given in the previous section.

### 5.1 2D static

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>

// Include the FMB algorithm library
#include "fmb2d.h"

// Main function
int main(int argc, char** argv) {

    // Create the two objects to be tested for intersection
    double origP2D[2] = {0.0, 0.0};
    double compP2D[2][2] = {
        {1.0, 0.0}, // First component
        {0.0, 1.0}}; // Second component
    Frame2D P2D =
        Frame2DCreateStatic(
            FrameCuboid,
            origP2D,
            compP2D);

    double origQ2D[2] = {0.0, 0.0};
    double compQ2D[2][2] = {
        {1.0, 0.0},
        {0.0, 1.0}};
    Frame2D Q2D =
        Frame2DCreateStatic(
            FrameCuboid,
            origQ2D,
            compQ2D);
}

```

```

// Declare a variable to memorize the result of the intersection
// detection
AABB2D bdgBox2DLocal;

// Test for intersection between P and Q
bool isIntersecting2D =
    FMBTestIntersection2D(
        &P2D,
        &Q2D,
        &bdgBox2DLocal);

// If the two objects are intersecting
if (isIntersecting2D) {

    printf("Intersection detected in AABB ");

    // Export the local bounding box toward the real coordinates
    // system
    AABB2D bdgBox2D;
    Frame2DExportBdgBox(
        &Q2D,
        &bdgBox2DLocal,
        &bdgBox2D);

    // Clip with the AABB of 'Q2D' and 'P2D' to improve results
    for (int iAxis = 2;
        iAxis--;) {

        if (bdgBox2D.min[iAxis] < P2D.bdgBox.min[iAxis]) {

            bdgBox2D.min[iAxis] = P2D.bdgBox.min[iAxis];

        }
        if (bdgBox2D.max[iAxis] > P2D.bdgBox.max[iAxis]) {

            bdgBox2D.max[iAxis] = P2D.bdgBox.max[iAxis];

        }

        if (bdgBox2D.min[iAxis] < Q2D.bdgBox.min[iAxis]) {

            bdgBox2D.min[iAxis] = Q2D.bdgBox.min[iAxis];

        }
        if (bdgBox2D.max[iAxis] > Q2D.bdgBox.max[iAxis]) {

            bdgBox2D.max[iAxis] = Q2D.bdgBox.max[iAxis];

        }

    }

    AABB2DPrint(&bdgBox2D);
    printf("\n");

// Else, the two objects are not intersecting
} else {

    printf("No intersection.\n");

}

```

```

    return 0;
}

```

## 5.2 3D static

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>

// Include the FMB algorithm library
#include "fmb3d.h"

// Main function
int main(int argc, char** argv) {

    // Create the two objects to be tested for intersection
    double origP3D[3] = {0.0, 0.0, 0.0};
    double compP3D[3][3] = {
        {1.0, 0.0, 0.0}, // First component
        {0.0, 1.0, 0.0}, // Second component
        {0.0, 0.0, 1.0}}; // Third component
    Frame3D P3D =
        Frame3DCreateStatic(
            FrameTetrahedron,
            origP3D,
            compP3D);

    double origQ3D[3] = {0.0, 0.0, 0.0};
    double compQ3D[3][3] = {
        {1.0, 0.0, 0.0},
        {0.0, 1.0, 0.0},
        {0.0, 0.0, 1.0}};
    Frame3D Q3D =
        Frame3DCreateStatic(
            FrameTetrahedron,
            origQ3D,
            compQ3D);

    // Declare a variable to memorize the result of the intersection
    // detection
    AABB3D bdgBox3DLocal;

    // Test for intersection between P and Q
    bool isIntersecting3D =
        FMBTestIntersection3D(
            &P3D,
            &Q3D,
            &bdgBox3DLocal);

    // If the two objects are intersecting
    if (isIntersecting3D) {

        printf("Intersection detected in AABB ");

        // Export the local bounding box toward the real coordinates
        // system
        AABB3D bdgBox3D;
        Frame3DExportBdgBox(
            &Q3D,

```

```

        &bdgBox3DLocal,
        &bdgBox3D);

// Clip with the AABB of 'Q3D' and 'P3D' to improve results
for (int iAxis = 2;
     iAxis--;) {

    if (bdgBox3D.min[iAxis] < P3D.bdgBox.min[iAxis]) {

        bdgBox3D.min[iAxis] = P3D.bdgBox.min[iAxis];

    }
    if (bdgBox3D.max[iAxis] > P3D.bdgBox.max[iAxis]) {

        bdgBox3D.max[iAxis] = P3D.bdgBox.max[iAxis];

    }

    if (bdgBox3D.min[iAxis] < Q3D.bdgBox.min[iAxis]) {

        bdgBox3D.min[iAxis] = Q3D.bdgBox.min[iAxis];

    }
    if (bdgBox3D.max[iAxis] > Q3D.bdgBox.max[iAxis]) {

        bdgBox3D.max[iAxis] = Q3D.bdgBox.max[iAxis];

    }

}

AABB3DPrint(&bdgBox3D);
printf("\n");

// Else, the two objects are not intersecting
} else {

    printf("No intersection.\n");

}

return 0;
}

```

## 5.3 2D dynamic

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>

// Include the FMB algorithm library
#include "fmb2dt.h"

// Main function
int main(int argc, char** argv) {

    // Create the two objects to be tested for intersection
    double origP2DTime[2] = {0.0, 0.0};
    double speedP2DTime[2] = {0.0, 0.0};
    double compP2DTime[2][2] = {

```

```

        {1.0, 0.0}, // First component
        {0.0, 1.0}}; // Second component
Frame2DTime P2DTime =
    Frame2DTimeCreateStatic(
        FrameCuboid,
        origP2DTime,
        speedP2DTime,
        compP2DTime);

double origQ2DTime[2] = {0.0,0.0};
double speedQ2DTime[2] = {0.0,0.0};
double compQ2DTime[2][2] = {
    {1.0, 0.0},
    {0.0, 1.0}};
Frame2DTime Q2DTime =
    Frame2DTimeCreateStatic(
        FrameCuboid,
        origQ2DTime,
        speedQ2DTime,
        compQ2DTime);

// Declare a variable to memorize the result of the intersection
// detection
AABB2DTime bdgBox2DTimeLocal;

// Test for intersection between P and Q
bool isIntersecting2DTime =
    FMBTestIntersection2DTime(
        &P2DTime,
        &Q2DTime,
        &bdgBox2DTimeLocal);

// If the two objects are intersecting
if (isIntersecting2DTime) {

    printf("Intersection detected in AABB ");

    // Export the local bounding box toward the real coordinates
    // system
    AABB2DTime bdgBox2DTime;
    Frame2DTimeExportBdgBox(
        &Q2DTime,
        &bdgBox2DTimeLocal,
        &bdgBox2DTime);

    AABB2DTimePrint(&bdgBox2DTime);
    printf("\n");

// Else, the two objects are not intersecting
} else {

    printf("No intersection.\n");

}

return 0;
}

```

## 5.4 3D dynamic

```

// Include standard libraries

```

```

#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>

// Include the FMB algorithm library
#include "fmb3dt.h"

// Main function
int main(int argc, char** argv) {

    // Create the two objects to be tested for intersection
    double origP3DTime[3] = {0.0, 0.0, 0.0};
    double speedP3DTime[3] = {0.0, 0.0, 0.0};
    double compP3DTime[3][3] = {
        {1.0, 0.0, 0.0}, // First component
        {0.0, 1.0, 0.0}, // Second component
        {0.0, 0.0, 1.0}}; // Third component
    Frame3DTime P3DTime =
        Frame3DTimeCreateStatic(
            FrameCuboid,
            origP3DTime,
            speedP3DTime,
            compP3DTime);

    double origQ3DTime[3] = {0.0, 0.0, 0.0};
    double speedQ3DTime[3] = {0.0, 0.0, 0.0};
    double compQ3DTime[3][3] = {
        {1.0, 0.0, 0.0},
        {0.0, 1.0, 0.0},
        {0.0, 0.0, 1.0}};
    Frame3DTime Q3DTime =
        Frame3DTimeCreateStatic(
            FrameCuboid,
            origQ3DTime,
            speedQ3DTime,
            compQ3DTime);

    // Declare a variable to memorize the result of the intersection
    // detection
    AABBB3DTime bdgBox3DTimeLocal;

    // Test for intersection between P and Q
    bool isIntersecting3DTime =
        FMBTestIntersection3DTime(
            &P3DTime,
            &Q3DTime,
            &bdgBox3DTimeLocal);

    // If the two objects are intersecting
    if (isIntersecting3DTime) {

        printf("Intersection detected in AABBB ");

        // Export the local bounding box toward the real coordinates
        // system
        AABBB3DTime bdgBox3DTime;
        Frame3DTimeExportBdgBox(
            &Q3DTime,
            &bdgBox3DTimeLocal,
            &bdgBox3DTime);

        AABBB3DTimePrint(&bdgBox3DTime);
    }
}

```

```

        printf("\n");

// Else, the two objects are not intersecting
} else {

    printf("No intersection.\n");

}

return 0;
}

```

## 6 Unit tests

In this section I introduce the code I've used to test the algorithm and its implementation. The test consists of running the algorithm on a set of cases for which the solution has been computed by hand. The code of the implementation of the SAT algorithm is given in annex (p.238)

### 6.1 Code

#### 6.1.1 2D static

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>

// Include the FMB algorithm library
#include "fmb2d.h"

// Epsilon for numerical precision
#define EPSILON 0.0001

// Helper structure to pass arguments to the UnitTest function
typedef struct {
    FrameType type;
    double orig[2];
    double comp[2][2];
} Param2D;

// Unit test function
// Takes two Frame definitions, the correct answer in term of
// intersection/no intersection and the correct bounding box
// Run the FMB intersection detection algorithm on the Frames
// and check against the correct results
void UnitTest2D(
    const Param2D paramP,
    const Param2D paramQ,
    const bool correctAnswer,
    const AABB2D* const correctBdgBox) {

    // Create the two Frames
    Frame2D P =
        Frame2DCreateStatic(

```



```

        paramP.type,
        paramP.orig,
        paramP.comp);

Frame2D Q =
    Frame2DCreateStatic(
        paramQ.type,
        paramQ.orig,
        paramQ.comp);

// Declare a variable to memorize the resulting bounding box
AABB2D bdgBoxLocal;

// Helper variables to loop on the pair (that, tho) and (tho, that)
Frame2D* that = &P;
Frame2D* tho = &Q;

// Loop on pairs of Frames
for (int iPair = 2;
     iPair--;) {

    // Display the tested frames
    Frame2DPrint(that);
    printf("\nagainst\n");
    Frame2DPrint(tho);
    printf("\n");

    // Run the FMB intersection test
    bool isIntersecting =
        FMBTestIntersection2D(
            that,
            tho,
            &bdgBoxLocal);

    // If the test hasn't given the expected answer about intersection
    if (isIntersecting != correctAnswer) {

        // Display information about the failure
        printf(" Failed\n");
        printf("Expected : ");
        if (correctAnswer == false)
            printf("no ");
        printf("intersection\n");
        printf("Got : ");
        if (isIntersecting == false)
            printf("no ");
        printf("intersection\n");
        exit(0);

    // Else, the test has given the expected answer about intersection
    } else {

        // If the Frames were intersecting
        if (isIntersecting == true) {

            AABB2D bdgBox;
            Frame2DExportBdgBox(
                tho,
                &bdgBoxLocal,
                &bdgBox);

            for (int iAxis = 2;

```

```

        iAxis--;) {

    if (bdgBox.min[iAxis] < that->bdgBox.min[iAxis]) {
        bdgBox.min[iAxis] = that->bdgBox.min[iAxis];
    }
    if (bdgBox.max[iAxis] > that->bdgBox.max[iAxis]) {
        bdgBox.max[iAxis] = that->bdgBox.max[iAxis];
    }
    if (bdgBox.min[iAxis] < tho->bdgBox.min[iAxis]) {
        bdgBox.min[iAxis] = tho->bdgBox.min[iAxis];
    }
    if (bdgBox.max[iAxis] > tho->bdgBox.max[iAxis]) {
        bdgBox.max[iAxis] = tho->bdgBox.max[iAxis];
    }
}

// Check the bounding box
bool flag = true;
for (int i = 2;
     i--;) {

    if (bdgBox.min[i] > correctBdgBox->min[i] + EPSILON ||
        bdgBox.max[i] < correctBdgBox->max[i] - EPSILON) {

        flag = false;
    }

}

// If the bounding box is the expected one
if (flag == true) {

    // Display information
    printf("Succeed\n");

// Else, the bounding box wasn't the expected one
} else {

    // Display information
    printf("Failed\n");
    printf("Expected : ");
    AABB2DPrint(correctBdgBox);
    printf("\n");
    printf("        Got : ");
    AABB2DPrint(&bdgBox);
    printf("\n");

    // Terminate the unit tests
    exit(0);

}

// Else the Frames were not intersected,
// no need to check the bounding box
} else {

    // Display information
    printf(" Succeed\n");

}

```

```

    }
    printf("\n");

    // Flip the pair of Frames
    that = &Q;
    tho = &P;

}

}

void Test2D(void) {

    // Declare two variables to memoize the arguments to the
    // Validation function
    Param2D paramP;
    Param2D paramQ;

    // Declare a variable to memorize the correct bounding box
    AABB2D correctBdgBox;

    // Execute the unit test on various cases

    // -----
    paramP = (Param2D)
        {.type = FrameCuboid,
         .orig = {0.0, 0.0},
         .comp =
             {{1.0, 0.0},
              {0.0, 1.0}}
        };
    paramQ = (Param2D)
        {.type = FrameCuboid,
         .orig = {0.0, 0.0},
         .comp =
             {{1.0, 0.0},
              {0.0, 1.0}}
        };
    correctBdgBox = (AABB2D)
        {.min = {0.0, 0.0},
         .max = {1.0, 1.0}
        };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

    // -----
    paramP = (Param2D)
        {.type = FrameCuboid,
         .orig = {0.0, 0.0},
         .comp =
             {{1.0, 0.0},
              {0.0, 1.0}}
        };
    paramQ = (Param2D)
        {.type = FrameCuboid,
         .orig = {0.5, 0.5},
         .comp =
             {{1.0, 0.0},
              {0.0, 1.0}}
        };

```

```

    };
    correctBdgBox = (AABB2D)
        {.min = {0.5, 0.5},
         .max = {1.0, 1.0}
        };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

    // -----
    paramP = (Param2D)
        {.type = FrameCuboid,
         .orig = {-0.5, -0.5},
         .comp =
             {{1.0, 0.0},
              {0.0, 1.0}}
        };
    paramQ = (Param2D)
        {.type = FrameCuboid,
         .orig = {0.5, 0.5},
         .comp =
             {{1.0, 0.0},
              {0.0, 1.0}}
        };
    UnitTest2D(
        paramP,
        paramQ,
        false,
        NULL);

    // -----
    paramP = (Param2D)
        {.type = FrameCuboid,
         .orig = {0.0, 0.0},
         .comp =
             {{1.0, 0.0},
              {0.0, 1.0}}
        };
    paramQ = (Param2D)
        {.type = FrameCuboid,
         .orig = {0.25, -0.25},
         .comp =
             {{0.5, 0.0},
              {0.0, 2.0}}
        };
    correctBdgBox = (AABB2D)
        {.min = {0.25, 0.0},
         .max = {0.75, 1.0}
        };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

    // -----
    paramP = (Param2D)
        {.type = FrameCuboid,
         .orig = {0.0, 0.0},
         .comp =

```

```

        {{1.0, 0.0},
         {0.0, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {-0.25, 0.25},
        .comp =
            {{2.0, 0.0},
             {0.0, 0.5}}
    };
    correctBdgBox = (AABB2D)
    {
        .min = {0.0, 0.25},
        .max = {1.0, 0.75}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
    paramP = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 0.0},
        .comp =
            {{1.0, 1.0},
             {-1.0, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 0.0},
        .comp =
            {{1.0, 0.0},
             {0.0, 1.0}}
    };
    correctBdgBox = (AABB2D)
    {
        .min = {0.0, 0.0},
        .max = {1.0, 1.0}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
    paramP = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {-0.5, -0.5},
        .comp =
            {{1.0, 1.0},
             {-1.0, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 0.0},
        .comp =
            {{1.0, 0.0},
             {0.0, 1.0}}
    };
    correctBdgBox = (AABB2D)
    {
        .min = {0.0, 0.0},

```

```

        .max = {0.5, 1.0}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

    // -----
    paramP = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {1.5, 1.5},
        .comp =
        {
            {1.0, -1.0},
            {-1.0, -1.0}
        }
    };
    paramQ = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {1.0, 0.0},
        .comp =
        {
            {-1.0, 0.0},
            {0.0, 1.0}
        }
    };
    correctBdgBox = (AABB2D)
    {
        .min = {0.5, 0.0},
        .max = {1.0, 1.0}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

    // -----
    paramP = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {1.0, 0.5},
        .comp =
        {
            {-0.5, 0.5},
            {-0.5, -0.5}
        }
    };
    paramQ = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 1.0},
        .comp =
        {
            {1.0, 0.0},
            {0.0, -1.0}
        }
    };
    correctBdgBox = (AABB2D)
    {
        .min = {0.0, 0.0},
        .max = {1.0, 1.0}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

    // -----
    paramP = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 0.0},

```

```

        .comp =
            {{1.0, 0.0},
             {1.0, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {2.0, -1.0},
        .comp =
            {{0.0, 1.0},
             {-0.5, 1.0}}
    };
    correctBdgBox = (AABB2D)
    {
        .min = {1.5, 0.5},
        .max = {1.5 + 0.5 / 3.0, 1.0}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
    paramP = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 0.0},
        .comp =
            {{1.0, 0.5},
             {0.5, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {1.0, 1.0},
        .comp =
            {{-0.5, -0.5},
             {0.0, -1.0}}
    };
    correctBdgBox = (AABB2D)
    {
        .min = {0.5, 0.25},
        .max = {1.0, 1.0}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
    paramP = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 0.0},
        .comp =
            {{1.0, 0.5},
             {0.5, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {1.0, 2.0},
        .comp =
            {{-0.5, -0.5},
             {0.0, -1.0}}
    };
    correctBdgBox = (AABB2D)

```

```

        {.min = {0.5, 0.75},
         .max = {1.0, 1.25}
        };
UnitTest2D(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param2D)
    {.type = FrameTetrahedron,
     .orig = {0.0, 0.0},
     .comp =
         {{1.0, 0.5},
          {0.5, 1.0}}
    };
paramQ = (Param2D)
    {.type = FrameCuboid,
     .orig = {1.0, 2.0},
     .comp =
         {{-0.5, -0.5},
          {0.0, -1.0}}
    };
correctBdgBox = (AABB2D)
    {.min = {0.5, 0.5},
     .max = {0.75, 1.0}
    };
UnitTest2D(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param2D)
    {.type = FrameCuboid,
     .orig = {0.0, 0.0},
     .comp =
         {{1.0, 0.5},
          {0.5, 1.0}}
    };
paramQ = (Param2D)
    {.type = FrameTetrahedron,
     .orig = {1.0, 2.0},
     .comp =
         {{-0.5, -0.5},
          {0.0, -1.0}}
    };
correctBdgBox = (AABB2D)
    {.min = {0.5 + 1.0 / 3.0, 1.0},
     .max = {1.0, 1.0 + 1.0 / 3.0}
    };
UnitTest2D(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param2D)
    {.type = FrameCuboid,

```



```

        .orig = {0.0, 0.0},
        .comp =
            {{1.0, 0.0},
             {0.0, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameTetrahedron,
        .orig = {0.0, 0.0},
        .comp =
            {{1.0, 0.0},
             {0.0, 1.0}}
    };
    correctBdgBox = (AABB2D)
    {
        .min = {0.0, 0.0},
        .max = {1.0, 1.0}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
    paramP = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 0.0},
        .comp =
            {{1.0, 0.0},
             {0.0, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameTetrahedron,
        .orig = {0.0, -0.5},
        .comp =
            {{1.0, 0.0},
             {0.0, 1.0}}
    };
    correctBdgBox = (AABB2D)
    {
        .min = {0.0, 0.0},
        .max = {0.5, 0.5}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
    paramP = (Param2D)
    {
        .type = FrameCuboid,
        .orig = {0.5, 0.5},
        .comp =
            {{-0.5, 0.0},
             {0.0, -0.5}}
    };
    paramQ = (Param2D)
    {
        .type = FrameTetrahedron,
        .orig = {0.0, -0.5},
        .comp =
            {{1.0, 0.0},
             {0.0, 1.0}}
    };

```

```

correctBdgBox = (AABB2D)
    {.min = {0.0, 0.0},
     .max = {0.5, 0.5}
    };
UnitTest2D(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param2D)
    {.type = FrameCuboid,
     .orig = {0.5, 0.5},
     .comp =
         {{1.0, 0.0},
          {0.0, 1.0}}
    };
paramQ = (Param2D)
    {.type = FrameTetrahedron,
     .orig = {0.0, 0.0},
     .comp =
         {{1.0, 0.0},
          {0.0, 1.0}}
    };
UnitTest2D(
    paramP,
    paramQ,
    false,
    NULL);

// -----
paramP = (Param2D)
    {.type = FrameCuboid,
     .orig = {0.0, 0.0},
     .comp =
         {{1.0, 0.0},
          {0.0, 1.0}}
    };
paramQ = (Param2D)
    {.type = FrameTetrahedron,
     .orig = {1.5, 1.5},
     .comp =
         {{-1.5, 0.0},
          {0.0, -1.5}}
    };
correctBdgBox = (AABB2D)
    {.min = {0.5, 0.5},
     .max = {1.0, 1.0}
    };
UnitTest2D(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param2D)
    {.type = FrameTetrahedron,
     .orig = {0.0, 0.0},
     .comp =
         {{1.0, 0.0},

```

```

        {0.0, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameTetrahedron,
        .orig = {1.01, 1.01},
        .comp =
            {
                {-1.0, 0.0},
                {0.0, -1.0}}
    };
    UnitTest2D(
        paramP,
        paramQ,
        false,
        NULL);

// -----
    paramP = (Param2D)
    {
        .type = FrameTetrahedron,
        .orig = {0.0, 0.0},
        .comp =
            {
                {1.0, 0.5},
                {0.5, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameTetrahedron,
        .orig = {1.0, 1.0},
        .comp =
            {
                {-0.5, -0.5},
                {0.0, -1.0}}
    };
    correctBdgBox = (AABB2D)
    {
        .min = {0.5, 0.5 - 1.0 / 6.0},
        .max = {1.0, 0.75}
    };
    UnitTest2D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
    paramP = (Param2D)
    {
        .type = FrameTetrahedron,
        .orig = {0.0, 0.0},
        .comp =
            {
                {1.0, 0.5},
                {0.5, 1.0}}
    };
    paramQ = (Param2D)
    {
        .type = FrameTetrahedron,
        .orig = {1.01, 1.5},
        .comp =
            {
                {-0.5, -0.5},
                {0.0, -1.0}}
    };
    UnitTest2D(
        paramP,
        paramQ,
        false,
        NULL);

// If we reached here, it means all the unit tests succeed

```

```

    printf("All unit tests 2D have succeed.\n");
}

// Main function
int main(int argc, char** argv) {

    Test2D();

    return 0;
}

```

### 6.1.2 3D static

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>

// Include the FMB algorithm library
#include "fmb3d.h"

// Epsilon for numerical precision
#define EPSILON 0.0001

// Helper structure to pass arguments to the UnitTest function
typedef struct {
    FrameType type;
    double orig[3];
    double comp[3][3];
} Param3D;

// Unit test function
// Takes two Frame definitions, the correct answer in term of
// intersection/no intersection and the correct bounding box
// Run the FMB intersection detection algorithm on the Frames
// and check against the correct results
void UnitTest3D(
    const Param3D paramP,
    const Param3D paramQ,
    const bool correctAnswer,
    const AABB3D* const correctBdgBox) {

    // Create the two Frames
    Frame3D P =
        Frame3DCreateStatic(
            paramP.type,
            paramP.orig,
            paramP.comp);

    Frame3D Q =
        Frame3DCreateStatic(
            paramQ.type,
            paramQ.orig,
            paramQ.comp);

    // Declare a variable to memorize the resulting bounding box
    AABB3D bdgBoxLocal;

    // Helper variables to loop on the pair (that, tho) and (tho, that)
    Frame3D* that = &P;

```

```

Frame3D* tho = &Q;

// Loop on pairs of Frames
for (int iPair = 2;
     iPair--;) {

    // Display the tested frames
    Frame3DPrint(that);
    printf("\nagainst\n");
    Frame3DPrint(tho);
    printf("\n");

    // Run the FMB intersection test
    bool isIntersecting =
        FMBTestIntersection3D(
            that,
            tho,
            &bdgBoxLocal);

    // If the test hasn't given the expected answer about intersection
    if (isIntersecting != correctAnswer) {

        // Display information about the failure
        printf(" Failed\n");
        printf("Expected : ");
        if (correctAnswer == false)
            printf("no ");
        printf("intersection\n");
        printf("Got : ");
        if (isIntersecting == false)
            printf("no ");
        printf("intersection\n");
        exit(0);

    // Else, the test has given the expected answer about intersection
    } else {

        // If the Frames were intersecting
        if (isIntersecting == true) {

            AABB3D bdgBox;
            Frame3DExportBdgBox(
                tho,
                &bdgBoxLocal,
                &bdgBox);

            for (int iAxis = 2;
                 iAxis--;) {

                if (bdgBox.min[iAxis] < that->bdgBox.min[iAxis]) {
                    bdgBox.min[iAxis] = that->bdgBox.min[iAxis];
                }
                if (bdgBox.max[iAxis] > that->bdgBox.max[iAxis]) {
                    bdgBox.max[iAxis] = that->bdgBox.max[iAxis];
                }
                if (bdgBox.min[iAxis] < tho->bdgBox.min[iAxis]) {
                    bdgBox.min[iAxis] = tho->bdgBox.min[iAxis];
                }
                if (bdgBox.max[iAxis] > tho->bdgBox.max[iAxis]) {
                    bdgBox.max[iAxis] = tho->bdgBox.max[iAxis];
                }
            }
        }
    }
}

```

```

        // Check the bounding box
        bool flag = true;
        for (int i = 3;
            i--;) {

            if (bdgBox.min[i] > correctBdgBox->min[i] + EPSILON ||
                bdgBox.max[i] < correctBdgBox->max[i] - EPSILON) {

                flag = false;

            }

        }

        // If the bounding box is the expected one
        if (flag == true) {

            // Display information
            printf("Succeed\n");

        } else {

            // Display information
            printf("Failed\n");
            printf("Expected : ");
            AABB3DPrint(correctBdgBox);
            printf("\n");
            printf("      Got : ");
            AABB3DPrint(&bdgBox);
            printf("\n");

            // Terminate the unit tests
            exit(0);

        }

        // Else the Frames were not intersected,
        // no need to check the bounding box
        } else {

            // Display information
            printf(" Succeed\n");

        }

    }

    printf("\n");

    // Flip the pair of Frames
    that = &Q;
    tho = &P;

}

}

void Test3D(void) {

    // Declare two variables to memoize the arguments to the
    // Validation function

```

```

Param3D paramP;
Param3D paramQ;

// Declare a variable to memorize the correct bounding box
AABB3D correctBdgBox;

// Execute the unit test on various cases

// -----
paramP = (Param3D)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
   {{1.0, 0.0, 0.0},
    {0.0, 1.0, 0.0},
    {0.0, 0.0, 1.0}}
};
paramQ = (Param3D)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
   {{1.0, 0.0, 0.0},
    {0.0, 1.0, 0.0},
    {0.0, 0.0, 1.0}}
};
correctBdgBox = (AABB3D)
{.min = {0.0, 0.0, 0.0},
 .max = {1.0, 1.0, 1.0}
};
UnitTest3D(
  paramP,
  paramQ,
  true,
  &correctBdgBox);

// -----
paramP = (Param3D)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
   {{1.0, 0.0, 0.0},
    {0.0, 1.0, 0.0},
    {0.0, 0.0, 1.0}}
};
paramQ = (Param3D)
{.type = FrameCuboid,
 .orig = {0.5, 0.5, 0.5},
 .comp =
   {{1.0, 0.0, 0.0},
    {0.0, 1.0, 0.0},
    {0.0, 0.0, 1.0}}
};
correctBdgBox = (AABB3D)
{.min = {0.5, 0.5, 0.5},
 .max = {1.0, 1.0, 1.0}
};
UnitTest3D(
  paramP,
  paramQ,
  true,
  &correctBdgBox);

```

```

// -----
paramP = (Param3D)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
   {{1.0, 0.0, 0.0},
    {0.0, 1.0, 0.0},
    {0.0, 0.0, 1.0}}
};
paramQ = (Param3D)
{.type = FrameCuboid,
 .orig = {-0.5, -0.5, -0.5},
 .comp =
   {{1.0, 0.0, 0.0},
    {0.0, 1.0, 0.0},
    {0.0, 0.0, 1.0}}
};
correctBdgBox = (AABB3D)
{.min = {0.0, 0.0, 0.0},
 .max = {0.5, 0.5, 0.5}
};
UnitTest3D(
  paramP,
  paramQ,
  true,
  &correctBdgBox);

// -----
paramP = (Param3D)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
   {{1.0, 0.0, 0.0},
    {0.0, 1.0, 0.0},
    {0.0, 0.0, 1.0}}
};
paramQ = (Param3D)
{.type = FrameCuboid,
 .orig = {1.5, 1.5, 1.5},
 .comp =
   {{-1.0, 0.0, 0.0},
    {0.0, -1.0, 0.0},
    {0.0, 0.0, -1.0}}
};
correctBdgBox = (AABB3D)
{.min = {0.5, 0.5, 0.5},
 .max = {1.0, 1.0, 1.0}
};
UnitTest3D(
  paramP,
  paramQ,
  true,
  &correctBdgBox);

// -----
paramP = (Param3D)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
   {{1.0, 0.0, 0.0},
    {0.0, 1.0, 0.0},
    {0.0, 0.0, 1.0}}
};

```



```

    };
    paramQ = (Param3D)
    {
        .type = FrameCuboid,
        .orig = {0.5, 1.5, -1.5},
        .comp =
        {
            {1.0, 0.0, 0.0},
            {0.0, -1.0, 0.0},
            {0.0, 0.0, 1.0}
        }
    };
    UnitTest3D(
        paramP,
        paramQ,
        false,
        NULL);

// -----
    paramP = (Param3D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 0.0, 0.0},
        .comp =
        {
            {1.0, 0.0, 0.0},
            {0.0, 1.0, 0.0},
            {0.0, 0.0, -1.0}
        }
    };
    paramQ = (Param3D)
    {
        .type = FrameCuboid,
        .orig = {0.5, 1.5, -1.5},
        .comp =
        {
            {1.0, 0.0, 0.0},
            {0.0, -1.0, 0.0},
            {0.0, 0.0, 1.0}
        }
    };
    correctBdgBox = (AABB3D)
    {
        .min = {0.5, 0.5, -1.0},
        .max = {1.0, 1.0, -0.5}
    };
    UnitTest3D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
    paramP = (Param3D)
    {
        .type = FrameCuboid,
        .orig = {-1.01, -1.01, -1.01},
        .comp =
        {
            {1.0, 0.0, 0.0},
            {1.0, 1.0, 1.0},
            {0.0, 0.0, 1.0}
        }
    };
    paramQ = (Param3D)
    {
        .type = FrameCuboid,
        .orig = {0.0, 0.0, 0.0},
        .comp =
        {
            {1.0, 0.0, 0.0},
            {0.0, 1.0, 0.0},
            {0.0, 0.0, 1.0}
        }
    };
    UnitTest3D(
        paramP,
        paramQ,

```

```

        false,
        NULL);

// -----
paramP = (Param3D)
{.type = FrameCuboid,
 .orig = {-1.0, -1.0, -1.0},
 .comp =
     {{1.0, 0.0, 0.0},
      {1.0, 1.0, 1.0},
      {0.0, 0.0, 1.0}}
};
paramQ = (Param3D)
{.type = FrameCuboid,
 .orig = {0.0, -0.5, 0.0},
 .comp =
     {{1.0, 0.0, 0.0},
      {0.0, 1.0, 0.0},
      {0.0, 0.0, 1.0}}
};
correctBdgBox = (AABB3D)
{.min = {0.0, -0.5, 0.0},
 .max = {1.0, 0.0, 1.0}
};
UnitTest3D(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param3D)
{.type = FrameTetrahedron,
 .orig = {-1.0, -1.0, -1.0},
 .comp =
     {{1.0, 0.0, 0.0},
      {1.0, 1.0, 1.0},
      {0.0, 0.0, 1.0}}
};
paramQ = (Param3D)
{.type = FrameCuboid,
 .orig = {0.0, -0.5, 0.0},
 .comp =
     {{1.0, 0.0, 0.0},
      {0.0, 1.0, 0.0},
      {0.0, 0.0, 1.0}}
};
UnitTest3D(
    paramP,
    paramQ,
    false,
    NULL);

// -----
paramP = (Param3D)
{.type = FrameCuboid,
 .orig = {-1.0, -1.0, -1.0},
 .comp =
     {{1.0, 0.0, 0.0},
      {1.0, 1.0, 1.0},
      {0.0, 0.0, 1.0}}
};

```

```

paramQ = (Param3D)
    {.type = FrameTetrahedron,
     .orig = {0.0, -0.5, 0.0},
     .comp =
         {{1.0, 0.0, 0.0},
          {0.0, 1.0, 0.0},
          {0.0, 0.0, 1.0}}
    };
correctBdgBox = (AABB3D)
    {.min = {0.0, -0.5, 0.0},
     .max = {0.75, 0.0, 0.75}
    };
UnitTest3D(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param3D)
    {.type = FrameTetrahedron,
     .orig = {-1.0, -1.0, -1.0},
     .comp =
         {{1.0, 0.0, 0.0},
          {1.0, 1.0, 1.0},
          {0.0, 0.0, 1.0}}
    };
paramQ = (Param3D)
    {.type = FrameTetrahedron,
     .orig = {0.0, -0.5, 0.0},
     .comp =
         {{1.0, 0.0, 0.0},
          {0.0, 1.0, 0.0},
          {0.0, 0.0, 1.0}}
    };
UnitTest3D(
    paramP,
    paramQ,
    false,
    NULL);

// -----
paramP = (Param3D)
    {.type = FrameTetrahedron,
     .orig = {-0.5, -1.0, -0.5},
     .comp =
         {{1.0, 0.0, 0.0},
          {1.0, 1.0, 1.0},
          {0.0, 0.0, 1.0}}
    };
paramQ = (Param3D)
    {.type = FrameTetrahedron,
     .orig = {0.0, -0.5, 0.0},
     .comp =
         {{1.0, 0.0, 0.0},
          {0.0, 1.0, 0.0},
          {0.0, 0.0, 1.0}}
    };
correctBdgBox = (AABB3D)
    {.min = {0.0, -0.5, 0.0},
     .max = {0.5, -0.5 + 1.0 / 3.0, 0.5}
    };

```

```

    UnitTest3D(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

    // If we reached here, it means all the unit tests succeed
    printf("All unit tests 3D have succeed.\n");
}

// Main function
int main(int argc, char** argv) {

    Test3D();

    return 0;
}

```

### 6.1.3 2D dynamic

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>

// Include the FMB algorithm library
#include "fmb2dt.h"

// Epsilon for numerical precision
#define EPSILON 0.0001

// Helper structure to pass arguments to the UnitTest function
typedef struct {
    FrameType type;
    double orig[2];
    double comp[2][2];
    double speed[2];
} Param2DTime;

// Unit test function
// Takes two Frame definitions, the correct answer in term of
// intersection/no intersection and the correct bounding box
// Run the FMB intersection detection algorithm on the Frames
// and check against the correct results
void UnitTest2DTime(
    const Param2DTime paramP,
    const Param2DTime paramQ,
    const bool correctAnswer,
    const AABB2DTime* const correctBdgBox) {

    // Create the two Frames
    Frame2DTime P =
        Frame2DTimeCreateStatic(
            paramP.type,
            paramP.orig,
            paramP.speed,
            paramP.comp);

    Frame2DTime Q =

```

```

    Frame2DTimeCreateStatic(
        paramQ.type,
        paramQ.orig,
        paramQ.speed,
        paramQ.comp);

// Declare a variable to memorize the resulting bounding box
AABB2DTime bdgBoxLocal;

// Helper variables to loop on the pair (that, tho) and (tho, that)
Frame2DTime* that = &P;
Frame2DTime* tho = &Q;

// Loop on pairs of Frames
for (int iPair = 2;
    iPair--;) {

    // Display the tested frames
    Frame2DTimePrint(that);
    printf("\nagainst\n");
    Frame2DTimePrint(tho);
    printf("\n");

    // Run the FMB intersection test
    bool isIntersecting =
        FMBTestIntersection2DTime(
            that,
            tho,
            &bdgBoxLocal);

    // If the test hasn't given the expected answer about intersection
    if (isIntersecting != correctAnswer) {

        // Display information about the failure
        printf(" Failed\n");
        printf("Expected : ");
        if (correctAnswer == false)
            printf("no ");
        printf("intersection\n");
        printf("Got : ");
        if (isIntersecting == false)
            printf("no ");
        printf("intersection\n");
        exit(0);

    // Else, the test has given the expected answer about intersection
    } else {

        // If the Frames were intersecting
        if (isIntersecting == true) {

            AABB2DTime bdgBox;
            Frame2DTimeExportBdgBox(
                tho,
                &bdgBoxLocal,
                &bdgBox);
            // Check the bounding box
            bool flag = true;
            for (int i = 3;
                i--;) {

                if (bdgBox.min[i] > correctBdgBox->min[i] + EPSILON ||

```

```

        bdgBox.max[i] < correctBdgBox->max[i] - EPSILON) {

        flag = false;

    }

}

// If the bounding box is the expected one
if (flag == true) {

    // Display information
    printf("Succeed\n");

    // Else, the bounding box wasn't the expected one
} else {

    // Display information
    printf("Failed\n");
    printf("Expected : ");
    AABB2DTimePrint(correctBdgBox);
    printf("\n");
    printf("      Got : ");
    AABB2DTimePrint(&bdgBox);
    printf("\n");

    // Terminate the unit tests
    exit(0);

}

// Else the Frames were not intersected,
// no need to check the bounding box
} else {

    // Display information
    printf(" Succeed\n");

}

}
printf("\n");

// Flip the pair of Frames
that = &Q;
tho = &P;

}

}

void Test2DTime(void) {

    // Declare two variables to memoize the arguments to the
    // Validation function
    Param2DTime paramP;
    Param2DTime paramQ;

    // Declare a variable to memorize the correct bounding box
    AABB2DTime correctBdgBox;

    // Execute the unit test on various cases

```

```

// -----
paramP = (Param2DTime)
{.type = FrameCuboid,
 .orig = {0.0, 0.0},
 .comp =
  {{1.0, 0.0},
   {0.0, 1.0}},
 .speed = {0.0, 0.0}
};
paramQ = (Param2DTime)
{.type = FrameCuboid,
 .orig = {-1.0, 0.0},
 .comp =
  {{1.0, 0.0},
   {0.0, 1.0}},
 .speed = {-1.0, 0.0}
};
UnitTest2DTime(
  paramP,
  paramQ,
  false,
  NULL);

// -----
paramP = (Param2DTime)
{.type = FrameCuboid,
 .orig = {0.0, 0.0},
 .comp =
  {{1.0, 0.0},
   {0.0, 1.0}},
 .speed = {0.0, 0.0}
};
paramQ = (Param2DTime)
{.type = FrameCuboid,
 .orig = {-1.01, -1.01},
 .comp =
  {{1.0, 0.0},
   {0.0, 1.0}},
 .speed = {1.0, 0.0}
};
UnitTest2DTime(
  paramP,
  paramQ,
  false,
  NULL);

// -----
paramP = (Param2DTime)
{.type = FrameCuboid,
 .orig = {0.0, 0.0},
 .comp =
  {{1.0, 0.0},
   {0.0, 1.0}},
 .speed = {0.0, 0.0}
};
paramQ = (Param2DTime)
{.type = FrameCuboid,
 .orig = {-1.0, 0.0},
 .comp =
  {{1.0, 0.0},
   {0.0, 1.0}},

```

```

        .speed = {1.0, 0.0}
    };
    correctBdgBox = (AABB2DTime)
    {
        .min = {0.0, 0.0, 0.0},
        .max = {1.0, 1.0, 1.0}
    };
    UnitTest2DTime(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
paramP = (Param2DTime)
{
    .type = FrameCuboid,
    .orig = {0.0, 0.0},
    .comp =
    {
        {{1.0, 0.0},
        {0.0, 1.0}},
    },
    .speed = {0.0, 0.0}
};
paramQ = (Param2DTime)
{
    .type = FrameCuboid,
    .orig = {-1.0, 0.25},
    .comp =
    {
        {{0.5, 0.0},
        {0.0, 0.5}},
    },
    .speed = {4.0, 0.0}
};
correctBdgBox = (AABB2DTime)
{
    .min = {0.0, 0.25, 0.125},
    .max = {1.0, 0.75, 0.5}
};
    UnitTest2DTime(
        paramP,
        paramQ,
        true,
        &correctBdgBox);

// -----
paramP = (Param2DTime)
{
    .type = FrameCuboid,
    .orig = {0.0, 0.0},
    .comp =
    {
        {{1.0, 0.0},
        {0.0, 1.0}},
    },
    .speed = {0.0, 0.0}
};
paramQ = (Param2DTime)
{
    .type = FrameCuboid,
    .orig = {0.25, -1.0},
    .comp =
    {
        {{0.5, 0.0},
        {0.0, 0.5}},
    },
    .speed = {0.0, 4.0}
};
correctBdgBox = (AABB2DTime)
{
    .min = {0.25, 0.0, 0.125},
    .max = {0.75, 1.0, 0.5}
};
    UnitTest2DTime(
        paramP,

```



```

    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param2DTime)
{.type = FrameCuboid,
 .orig = {0.0, 0.0},
 .comp =
    {{1.0, 0.0},
     {0.0, 1.0}},
 .speed = {0.0, 0.0}
};
paramQ = (Param2DTime)
{.type = FrameCuboid,
 .orig = {0.9, -1.0},
 .comp =
    {{0.5, 0.0},
     {0.0, 0.5}},
 .speed = {0.0, 4.0}
};
correctBdgBox = (AABB2DTime)
{.min = {0.9, 0.0, 0.125},
 .max = {1.0, 1.0, 0.5}
};
UnitTest2DTime(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// If we reached here, it means all the unit tests succeed
printf("All unit tests 2DTime have succeed.\n");

}

// Main function
int main(int argc, char** argv) {

    Test2DTime();

    return 0;
}

```

### 6.1.4 3D dynamic

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>

// Include the FMB algorithm library
#include "fmb3dt.h"

// Epsilon for numerical precision
#define EPSILON 0.0001

// Helper structure to pass arguments to the UnitTest function
typedef struct {
    FrameType type;
    double orig[3];
}

```

```

    double comp[3][3];
    double speed[3];
} Param3DTime;

// Unit test function
// Takes two Frame definitions, the correct answer in term of
// intersection/no intersection and the correct bounding box
// Run the FMB intersection detection algorithm on the Frames
// and check against the correct results
void UnitTest3DTime(
    const Param3DTime paramP,
    const Param3DTime paramQ,
    const bool correctAnswer,
    const AABB3DTime* const correctBdgBox) {

    // Create the two Frames
    Frame3DTime P =
        Frame3DTimeCreateStatic(
            paramP.type,
            paramP.orig,
            paramP.speed,
            paramP.comp);

    Frame3DTime Q =
        Frame3DTimeCreateStatic(
            paramQ.type,
            paramQ.orig,
            paramQ.speed,
            paramQ.comp);

    // Declare a variable to memorize the resulting bounding box
    AABB3DTime bdgBoxLocal;

    // Helper variables to loop on the pair (that, tho) and (tho, that)
    Frame3DTime* that = &P;
    Frame3DTime* tho = &Q;

    // Loop on pairs of Frames
    for (int iPair = 2;
        iPair--;) {

        // Display the tested frames
        Frame3DTimePrint(that);
        printf("\nagainst\n");
        Frame3DTimePrint(tho);
        printf("\n");

        // Run the FMB intersection test
        bool isIntersecting =
            FMBTestIntersection3DTime(
                that,
                tho,
                &bdgBoxLocal);

        // If the test hasn't given the expected answer about intersection
        if (isIntersecting != correctAnswer) {

            // Display information about the failure
            printf(" Failed\n");
            printf("Expected : ");
            if (correctAnswer == false)
                printf("no ");
        }
    }
}

```

```

printf("intersection\n");
printf("Got : ");
if (isIntersecting == false)
    printf("no ");
printf("intersection\n");
exit(0);

// Else, the test has given the expected answer about intersection
} else {

    // If the Frames were intersecting
    if (isIntersecting == true) {

        AABB3DTime bdgBox;
        Frame3DTimeExportBdgBox(
            tho,
            &bdgBoxLocal,
            &bdgBox);
        // Check the bounding box
        bool flag = true;
        for (int i = 4;
            i--;) {

            if (bdgBox.min[i] > correctBdgBox->min[i] + EPSILON ||
                bdgBox.max[i] < correctBdgBox->max[i] - EPSILON) {

                flag = false;
            }
        }

        // If the bounding box is the expected one
        if (flag == true) {

            // Display information
            printf("Succeed\n");

            // Else, the bounding box wasn't the expected one
        } else {

            // Display information
            printf("Failed\n");
            printf("Expected : ");
            AABB3DTimePrint(correctBdgBox);
            printf("\n");
            printf("      Got : ");
            AABB3DTimePrint(&bdgBox);
            printf("\n");

            // Terminate the unit tests
            exit(0);
        }

        // Else the Frames were not intersected,
        // no need to check the bounding box
    } else {

        // Display information
        printf(" Succeed\n");
    }
}

```

```

    }

    }
    printf("\n");

    // Flip the pair of Frames
    that = &Q;
    tho = &P;

}

}

void Test3DTime(void) {

    // Declare two variables to memoize the arguments to the
    // Validation function
    Param3DTime paramP;
    Param3DTime paramQ;

    // Declare a variable to memorize the correct bounding box
    AABB3DTime correctBdgBox;

    // Execute the unit test on various cases

    // -----
    paramP = (Param3DTime)
        {.type = FrameCuboid,
         .orig = {0.0, 0.0, 0.0},
         .comp =
             {{1.0, 0.0, 0.0},
              {0.0, 1.0, 0.0},
              {0.0, 0.0, 1.0}},
         .speed = {0.0, 0.0, 0.0}
        };
    paramQ = (Param3DTime)
        {.type = FrameCuboid,
         .orig = {-1.0, 0.0, 0.0},
         .comp =
             {{1.0, 0.0, 0.0},
              {0.0, 1.0, 0.0},
              {0.0, 0.0, 1.0}},
         .speed = {-1.0, 0.0, 0.0}
        };
    UnitTest3DTime(
        paramP,
        paramQ,
        false,
        NULL);

    // -----
    paramP = (Param3DTime)
        {.type = FrameCuboid,
         .orig = {0.0, 0.0, 0.0},
         .comp =
             {{1.0, 0.0, 0.0},
              {0.0, 1.0, 0.0},
              {0.0, 0.0, 1.0}},
         .speed = {0.0, 0.0, 0.0}
        };
    paramQ = (Param3DTime)
        {.type = FrameCuboid,

```

```

        .orig = {-1.01, -1.01, 0.0},
        .comp =
            {{1.0, 0.0, 0.0},
             {0.0, 1.0, 0.0},
             {0.0, 0.0, 1.0}},
        .speed = {1.0, 0.0, 0.0}
    };
    UnitTest3DTime(
        paramP,
        paramQ,
        false,
        NULL);

// -----
paramP = (Param3DTime)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
     {{1.0, 0.0, 0.0},
      {0.0, 1.0, 0.0},
      {0.0, 0.0, 1.0}},
 .speed = {0.0, 0.0, 0.0}
};
paramQ = (Param3DTime)
{.type = FrameCuboid,
 .orig = {-1.0, 0.0, 0.0},
 .comp =
     {{1.0, 0.0, 0.0},
      {0.0, 1.0, 0.0},
      {0.0, 0.0, 1.0}},
 .speed = {1.0, 0.0, 0.0}
};
correctBdgBox = (AABB3DTime)
{.min = {0.0, 0.0, 0.0, 0.0},
 .max = {1.0, 1.0, 1.0, 1.0}
};
UnitTest3DTime(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param3DTime)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
     {{1.0, 0.0, 0.0},
      {0.0, 1.0, 0.0},
      {0.0, 0.0, 1.0}},
 .speed = {0.0, 0.0, 0.0}
};
paramQ = (Param3DTime)
{.type = FrameCuboid,
 .orig = {-1.0, 0.25, 0.0},
 .comp =
     {{0.5, 0.0, 0.0},
      {0.0, 0.5, 0.0},
      {0.0, 0.0, 1.0}},
 .speed = {4.0, 0.0, 0.0}
};
correctBdgBox = (AABB3DTime)

```

```

        {.min = {0.0, 0.25, 0.0, 0.125},
         .max = {1.0, 0.75, 1.0, 0.5}
        };
UnitTest3DTime(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param3DTime)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
    {{1.0, 0.0, 0.0},
     {0.0, 1.0, 0.0},
     {0.0, 0.0, 1.0}},
 .speed = {0.0, 0.0, 0.0}
};
paramQ = (Param3DTime)
{.type = FrameCuboid,
 .orig = {0.25, -1.0, 0.0},
 .comp =
    {{0.5, 0.0, 0.0},
     {0.0, 0.5, 0.0},
     {0.0, 0.0, 1.0}},
 .speed = {0.0, 4.0, 0.0}
};
correctBdgBox = (AABB3DTime)
{.min = {0.25, 0.0, 0.0, 0.125},
 .max = {0.75, 1.0, 1.0, 0.5}
};
UnitTest3DTime(
    paramP,
    paramQ,
    true,
    &correctBdgBox);

// -----
paramP = (Param3DTime)
{.type = FrameCuboid,
 .orig = {0.0, 0.0, 0.0},
 .comp =
    {{1.0, 0.0, 0.0},
     {0.0, 1.0, 0.0},
     {0.0, 0.0, 1.0}},
 .speed = {0.0, 0.0, 0.0}
};
paramQ = (Param3DTime)
{.type = FrameCuboid,
 .orig = {0.9, -1.0, 0.0},
 .comp =
    {{0.5, 0.0, 0.0},
     {0.0, 0.5, 0.0},
     {0.0, 0.0, 1.0}},
 .speed = {0.0, 4.0, 0.0}
};
correctBdgBox = (AABB3DTime)
{.min = {0.9, 0.0, 0.0, 0.125},
 .max = {1.0, 1.0, 1.0, 0.5}
};
UnitTest3DTime(

```

```

    paramP,
    paramQ,
    true,
    &correctBdgBox);

    // If we reached here, it means all the unit tests succeed
    printf("All unit tests 3DTime have succeed.\n");

}

// Main function
int main(int argc, char** argv) {

    Test3DTime();

    return 0;
}

```

## 6.2 Results

### 6.2.1 2D static

```

Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.500000,0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.500000,0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(-0.500000,-0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.500000,0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.500000,0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(-0.500000,-0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.250000,-0.250000) x(0.500000,0.000000) y(0.000000,2.000000)
Succeed

Co(0.250000,-0.250000) x(0.500000,0.000000) y(0.000000,2.000000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

```

```

Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(-0.250000,0.250000) x(2.000000,0.000000) y(0.000000,0.500000)
Succeed

Co(-0.250000,0.250000) x(2.000000,0.000000) y(0.000000,0.500000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,1.000000) y(-1.000000,1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.000000,0.000000) x(1.000000,1.000000) y(-1.000000,1.000000)
Succeed

Co(-0.500000,-0.500000) x(1.000000,1.000000) y(-1.000000,1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(-0.500000,-0.500000) x(1.000000,1.000000) y(-1.000000,1.000000)
Succeed

Co(1.500000,1.500000) x(1.000000,-1.000000) y(-1.000000,-1.000000)
against
Co(1.000000,0.000000) x(-1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(1.000000,0.000000) x(-1.000000,0.000000) y(0.000000,1.000000)
against
Co(1.500000,1.500000) x(1.000000,-1.000000) y(-1.000000,-1.000000)
Succeed

Co(1.000000,0.500000) x(-0.500000,0.500000) y(-0.500000,-0.500000)
against
Co(0.000000,1.000000) x(1.000000,0.000000) y(0.000000,-1.000000)
Succeed

Co(0.000000,1.000000) x(1.000000,0.000000) y(0.000000,-1.000000)
against
Co(1.000000,0.500000) x(-0.500000,0.500000) y(-0.500000,-0.500000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.000000) y(1.000000,1.000000)
against
Co(2.000000,-1.000000) x(0.000000,1.000000) y(-0.500000,1.000000)
Succeed

Co(2.000000,-1.000000) x(0.000000,1.000000) y(-0.500000,1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(1.000000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)

```



```

against
Co(1.000000,1.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
Succeed

Co(1.000000,1.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
against
Co(1.000000,2.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
Succeed

Co(1.000000,2.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
Succeed

To(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
against
Co(1.000000,2.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
Succeed

Co(1.000000,2.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
against
To(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
against
To(1.000000,2.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
Succeed

To(1.000000,2.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
To(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

To(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
To(0.000000,-0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

To(0.000000,-0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed

Co(0.500000,0.500000) x(-0.500000,0.000000) y(0.000000,-0.500000)
against
To(0.000000,-0.500000) x(1.000000,0.000000) y(0.000000,1.000000)

```

Succeed

```
To(0.000000,-0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.500000,0.500000) x(-0.500000,0.000000) y(0.000000,-0.500000)
Succeed
```

```
Co(0.500000,0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
against
To(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed
```

```
To(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
Co(0.500000,0.500000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed
```

```
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
To(1.500000,1.500000) x(-1.500000,0.000000) y(0.000000,-1.500000)
Succeed
```

```
To(1.500000,1.500000) x(-1.500000,0.000000) y(0.000000,-1.500000)
against
Co(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed
```

```
To(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
against
To(1.010000,1.010000) x(-1.000000,0.000000) y(0.000000,-1.000000)
Succeed
```

```
To(1.010000,1.010000) x(-1.000000,0.000000) y(0.000000,-1.000000)
against
To(0.000000,0.000000) x(1.000000,0.000000) y(0.000000,1.000000)
Succeed
```

```
To(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
against
To(1.000000,1.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
Succeed
```

```
To(1.000000,1.000000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
against
To(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
Succeed
```

```
To(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
against
To(1.010000,1.500000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
Succeed
```

```
To(1.010000,1.500000) x(-0.500000,-0.500000) y(0.000000,-1.000000)
against
To(0.000000,0.000000) x(1.000000,0.500000) y(0.500000,1.000000)
Succeed
```

All unit tests 2D have succeed.

## 6.2.2 3D static





```

Succeed

Co(-1.000000,-1.000000,-1.000000) x(1.000000,0.000000,0.000000) y
  (1.000000,1.000000,1.000000) z(0.000000,0.000000,1.000000)
against
To(0.000000,-0.500000,0.000000) x(1.000000,0.000000,0.000000) y
  (0.000000,1.000000,0.000000) z(0.000000,0.000000,1.000000)
Succeed

To(0.000000,-0.500000,0.000000) x(1.000000,0.000000,0.000000) y
  (0.000000,1.000000,0.000000) z(0.000000,0.000000,1.000000)
against
Co(-1.000000,-1.000000,-1.000000) x(1.000000,0.000000,0.000000) y
  (1.000000,1.000000,1.000000) z(0.000000,0.000000,1.000000)
Succeed

To(-1.000000,-1.000000,-1.000000) x(1.000000,0.000000,0.000000) y
  (1.000000,1.000000,1.000000) z(0.000000,0.000000,1.000000)
against
To(0.000000,-0.500000,0.000000) x(1.000000,0.000000,0.000000) y
  (0.000000,1.000000,0.000000) z(0.000000,0.000000,1.000000)
Succeed

To(0.000000,-0.500000,0.000000) x(1.000000,0.000000,0.000000) y
  (0.000000,1.000000,0.000000) z(0.000000,0.000000,1.000000)
against
To(-1.000000,-1.000000,-1.000000) x(1.000000,0.000000,0.000000) y
  (1.000000,1.000000,1.000000) z(0.000000,0.000000,1.000000)
Succeed

To(-0.500000,-1.000000,-0.500000) x(1.000000,0.000000,0.000000) y
  (1.000000,1.000000,1.000000) z(0.000000,0.000000,1.000000)
against
To(0.000000,-0.500000,0.000000) x(1.000000,0.000000,0.000000) y
  (0.000000,1.000000,0.000000) z(0.000000,0.000000,1.000000)
Succeed

To(0.000000,-0.500000,0.000000) x(1.000000,0.000000,0.000000) y
  (0.000000,1.000000,0.000000) z(0.000000,0.000000,1.000000)
against
To(-0.500000,-1.000000,-0.500000) x(1.000000,0.000000,0.000000) y
  (1.000000,1.000000,1.000000) z(0.000000,0.000000,1.000000)
Succeed

All unit tests 3D have succeed.

```

### 6.2.3 2D dynamic

```

Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
  (0.000000,1.000000)
against
Co(-1.000000,0.000000) s(-1.000000,0.000000) x(1.000000,0.000000) y
  (0.000000,1.000000)
Succeed

Co(-1.000000,0.000000) s(-1.000000,0.000000) x(1.000000,0.000000) y
  (0.000000,1.000000)
against
Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
  (0.000000,1.000000)
Succeed

```

```

Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
against
Co(-1.010000,-1.010000) s(1.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
Succeed

Co(-1.010000,-1.010000) s(1.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
against
Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
against
Co(-1.000000,0.000000) s(1.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
Succeed

Co(-1.000000,0.000000) s(1.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
against
Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
against
Co(-1.000000,0.250000) s(4.000000,0.000000) x(0.500000,0.000000) y
(0.000000,0.500000)
Succeed

Co(-1.000000,0.250000) s(4.000000,0.000000) x(0.500000,0.000000) y
(0.000000,0.500000)
against
Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
against
Co(0.250000,-1.000000) s(0.000000,4.000000) x(0.500000,0.000000) y
(0.000000,0.500000)
Succeed

Co(0.250000,-1.000000) s(0.000000,4.000000) x(0.500000,0.000000) y
(0.000000,0.500000)
against
Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
Succeed

Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
against
Co(0.900000,-1.000000) s(0.000000,4.000000) x(0.500000,0.000000) y
(0.000000,0.500000)

```

Succeed

```
Co(0.900000,-1.000000) s(0.000000,4.000000) x(0.500000,0.000000) y
(0.000000,0.500000)
```

against

```
Co(0.000000,0.000000) s(0.000000,0.000000) x(1.000000,0.000000) y
(0.000000,1.000000)
```

Succeed

All unit tests 2DTime have succeed.

## 6.2.4 3D dynamic

```
Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

against

```
Co(-1.000000,0.000000,0.000000) s(-1.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

Succeed

```
Co(-1.000000,0.000000,0.000000) s(-1.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

against

```
Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

Succeed

```
Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

against

```
Co(-1.010000,-1.010000,0.000000) s(1.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

Succeed

```
Co(-1.010000,-1.010000,0.000000) s(1.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

against

```
Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

Succeed

```
Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

against

```
Co(-1.000000,0.000000,0.000000) s(1.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

Succeed

```
Co(-1.000000,0.000000,0.000000) s(1.000000,0.000000,0.000000) x
(1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
(0.000000,0.000000,1.000000)
```

```

against
Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
  (1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
  (0.000000,0.000000,1.000000)
Succeed

Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
  (1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
  (0.000000,0.000000,1.000000)
against
Co(-1.000000,0.250000,0.000000) s(4.000000,0.000000,0.000000) x
  (0.500000,0.000000,0.000000) y(0.000000,0.500000,0.000000) z
  (0.000000,0.000000,1.000000)
Succeed

Co(-1.000000,0.250000,0.000000) s(4.000000,0.000000,0.000000) x
  (0.500000,0.000000,0.000000) y(0.000000,0.500000,0.000000) z
  (0.000000,0.000000,1.000000)
against
Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
  (1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
  (0.000000,0.000000,1.000000)
Succeed

Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
  (1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
  (0.000000,0.000000,1.000000)
against
Co(0.250000,-1.000000,0.000000) s(0.000000,4.000000,0.000000) x
  (0.500000,0.000000,0.000000) y(0.000000,0.500000,0.000000) z
  (0.000000,0.000000,1.000000)
Succeed

Co(0.250000,-1.000000,0.000000) s(0.000000,4.000000,0.000000) x
  (0.500000,0.000000,0.000000) y(0.000000,0.500000,0.000000) z
  (0.000000,0.000000,1.000000)
against
Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
  (1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
  (0.000000,0.000000,1.000000)
Succeed

Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
  (1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
  (0.000000,0.000000,1.000000)
against
Co(0.900000,-1.000000,0.000000) s(0.000000,4.000000,0.000000) x
  (0.500000,0.000000,0.000000) y(0.000000,0.500000,0.000000) z
  (0.000000,0.000000,1.000000)
against
Co(0.000000,0.000000,0.000000) s(0.000000,0.000000,0.000000) x
  (1.000000,0.000000,0.000000) y(0.000000,1.000000,0.000000) z
  (0.000000,0.000000,1.000000)
Succeed

All unit tests 3DTime have succeed.

```



## 7 Validation against SAT

In this section I introduce the code I've used to validate the algorithm and its implementation. The validation consists of running the FMB algorithm on randomly generated pairs of Frame and check that its result is equal to the one of running the SAT algorithm on the same pair of Frames. The code of the implementation of the SAT algorithm is given in annex (p.238)

### 7.1 Code

#### 7.1.1 2D static

```
// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>
#include <time.h>

// Include FMB and SAT algorithm library
#include "fmb2d.h"
#include "sat.h"

// Epsilon to detect degenerated triangles
#define EPSILON 0.1
// Range of values for the random generation of Frames
#define RANGE_AXIS 100.0
// Nb of tests of the validation
#define NB_TESTS 1000000

// Helper macro to generate random number in [0.0, 1.0]
#define rnd() (double)(rand())/(double)(RAND_MAX)

// Global variables to count nb of tests resulting in intersection
// and no intersection
unsigned long int nbInter;
unsigned long int nbNoInter;

// Helper structure to pass arguments to the Validation function
typedef struct {
    FrameType type;
    double orig[2];
    double comp[2][2];
} Param2D;

// Validation function
// Takes two Frame definition as input, run the intersection test on
// them with FMB and SAT, and check the results are identical
void ValidationOnePair2D(
    const Param2D paramP,
    const Param2D paramQ) {

    // Create the two Frames
    Frame2D P =
        Frame2DCreateStatic(
            paramP.type,
```

```

        paramP.orig,
        paramP.comp);

Frame2D Q =
    Frame2DCreateStatic(
        paramQ.type,
        paramQ.orig,
        paramQ.comp);

// Helper variables to loop on the pair (that, tho) and (tho, that)
Frame2D* that = &P;
Frame2D* tho = &Q;

// Loop on pairs of Frames
for (int iPair = 2;
     iPair--;) {

    // Test intersection with FMB
    bool isIntersectingFMB =
        FMBTestIntersection2D(
            that,
            tho,
            NULL);

    // Test intersection with SAT
    bool isIntersectingSAT =
        SATTestIntersection2D(
            that,
            tho);

    // If the results are different
    if (isIntersectingFMB != isIntersectingSAT) {

        // Print the disagreement
        printf("Validation2D has failed\n");
        Frame2DPrint(that);
        printf(" against ");
        Frame2DPrint(tho);
        printf("\n");
        printf("FMB : ");
        if (isIntersectingFMB == false)
            printf("no ");
        printf("intersection\n");
        printf("SAT : ");
        if (isIntersectingSAT == false)
            printf("no ");
        printf("intersection\n");

        // Stop the validation
        exit(0);

    }

    // If the Frames are in intersection
    if (isIntersectingFMB == true) {

        // Update the number of intersection
        nbInter++;

    }

    // If the Frames are not in intersection
} else {

```

```

        // Update the number of no intersection
        nbNoInter++;

    }

    // Flip the pair of Frames
    that = &Q;
    tho = &P;

}

}

void Validate2D(void) {

    // Initialise the random generator
    srand(time(NULL));

    // Declare two variables to memorize the arguments to the
    // Validation function
    Param2D paramP;
    Param2D paramQ;

    // Initialize the number of intersection and no intersection
    nbInter = 0;
    nbNoInter = 0;

    // Loop on the tests
    for (unsigned long iTest = NB_TESTS;
        iTest--;) {

        // Create two random Frame definitions
        Param2D* param = &paramP;
        for (int iParam = 2;
            iParam--;) {

            // 50% chance of being a Cuboid or a Tetrahedron
            if (rnd() < 0.5)
                param->type = FrameCuboid;
            else
                param->type = FrameTetrahedron;

            for (int iAxis = 2;
                iAxis--;) {

                param->orig[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

                for (int iComp = 2;
                    iComp--;) {

                    param->comp[iComp][iAxis] =
                        -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

                }

            }

            param = &paramQ;

        }

        // Calculate the determinant of the Frames' components matrix

```

```

double detP =
    paramP.comp[0][0] * paramP.comp[1][1] -
    paramP.comp[1][0] * paramP.comp[0][1];

double detQ =
    paramQ.comp[0][0] * paramQ.comp[1][1] -
    paramQ.comp[1][0] * paramQ.comp[0][1];

// If the determinants are not null, ie the Frame are not degenerate
if (fabs(detP) > EPSILON && fabs(detQ) > EPSILON) {

    // Run the validation on the two Frames
    ValidationOnePair2D(
        paramP,
        paramQ);

}

}

// If we reached it means the validation was successfull
// Print results
printf("Validation2D has succeed.\n");
printf("Tested %lu intersections ", nbInter);
printf("and %lu no intersections\n", nbNoInter);

}

int main(int argc, char** argv) {

    printf("==== 2D static =====\n");
    Validate2D();

    return 0;
}

```

### 7.1.2 3D static

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>
#include <time.h>

// Include FMB and SAT algorithm library
#include "fmb3d.h"
#include "sat.h"

// Epsilon to detect degenerated triangles
#define EPSILON 0.1
// Range of values for the random generation of Frames
#define RANGE_AXIS 100.0
// Nb of tests of the validation
#define NB_TESTS 1000000

// Helper macro to generate random number in [0.0, 1.0]
#define rnd() (double)(rand())/(double)(RAND_MAX)

// Global variables to count nb of tests resulting in intersection
// and no intersection
unsigned long int nbInter;

```

```

unsigned long int nbNoInter;

// Helper structure to pass arguments to the Validation function
typedef struct {
    FrameType type;
    double orig[3];
    double comp[3][3];
} Param3D;

// Validation function
// Takes two Frame definition as input, run the intersection test on
// them with FMB and SAT, and check the results are identical
void ValidationOnePair3D(
    const Param3D paramP,
    const Param3D paramQ) {

    // Create the two Frames
    Frame3D P =
        Frame3DCreateStatic(
            paramP.type,
            paramP.orig,
            paramP.comp);

    Frame3D Q =
        Frame3DCreateStatic(
            paramQ.type,
            paramQ.orig,
            paramQ.comp);

    // Helper variables to loop on the pair (that, tho) and (tho, that)
    Frame3D* that = &P;
    Frame3D* tho = &Q;

    // Loop on pairs of Frames
    for (int iPair = 2;
        iPair--;) {

        // Test intersection with FMB
        bool isIntersectingFMB =
            FMBTestIntersection3D(
                that,
                tho,
                NULL);

        // Test intersection with SAT
        bool isIntersectingSAT =
            SATTestIntersection3D(
                that,
                tho);

        // If the results are different
        if (isIntersectingFMB != isIntersectingSAT) {

            // Print the disagreement
            printf("Validation3D has failed\n");
            Frame3DPrint(that);
            printf(" against ");
            Frame3DPrint(tho);
            printf("\n");
            printf("FMB : ");
            if (isIntersectingFMB == false)
                printf("no ");
        }
    }
}

```

```

        printf("intersection\n");
        printf("SAT : ");
        if (isIntersectingSAT == false)
            printf("no ");
        printf("intersection\n");

        // Stop the validation
        exit(0);
    }

    // If the Frames are in intersection
    if (isIntersectingFMB == true) {

        // Update the number of intersection
        nbInter++;

    // If the Frames are not in intersection
    } else {

        // Update the number of no intersection
        nbNoInter++;

    }

    // Flip the pair of Frames
    that = &Q;
    tho = &P;
}

}

void Validate3D(void) {

    // Initialise the random generator
    srand(time(NULL));

    // Declare two variables to memorize the arguments to the
    // Validation function
    Param3D paramP;
    Param3D paramQ;

    // Initialize the number of intersection and no intersection
    nbInter = 0;
    nbNoInter = 0;

    // Loop on the tests
    for (unsigned long iTest = NB_TESTS;
        iTest--;) {

        // Create two random Frame definitions
        Param3D* param = &paramP;
        for (int iParam = 2;
            iParam--;) {

            // 50% chance of being a Cuboid or a Tetrahedron
            if (rnd() < 0.5)
                param->type = FrameCuboid;
            else
                param->type = FrameTetrahedron;
        }
    }
}

```

```

    for (int iAxis = 3;
        iAxis--;) {

        param->orig[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

        for (int iComp = 3;
            iComp--;) {

            param->comp[iComp][iAxis] =
                -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

        }

    }

    param = &paramQ;
}

// Calculate the determinant of the Frames' components matrix
double detP =
    paramP.comp[0][0] * (paramP.comp[1][1] * paramP.comp[2][2] -
        paramP.comp[1][2] * paramP.comp[2][1]) -
    paramP.comp[1][0] * (paramP.comp[0][1] * paramP.comp[2][2] -
        paramP.comp[0][2] * paramP.comp[2][1]) +
    paramP.comp[2][0] * (paramP.comp[0][1] * paramP.comp[1][2] -
        paramP.comp[0][2] * paramP.comp[1][1]);

double detQ =
    paramQ.comp[0][0] * (paramQ.comp[1][1] * paramQ.comp[2][2] -
        paramQ.comp[1][2] * paramQ.comp[2][1]) -
    paramQ.comp[1][0] * (paramQ.comp[0][1] * paramQ.comp[2][2] -
        paramQ.comp[0][2] * paramQ.comp[2][1]) +
    paramQ.comp[2][0] * (paramQ.comp[0][1] * paramQ.comp[1][2] -
        paramQ.comp[0][2] * paramQ.comp[1][1]);

// If the determinants are not null, ie the Frame are not degenerate
if (fabs(detP) > EPSILON && fabs(detQ) > EPSILON) {

    // Run the validation on the two Frames
    ValidationOnePair3D(
        paramP,
        paramQ);

}

}

// If we reached it means the validation was successfull
// Print results
printf("Validation3D has succeed.\n");
printf("Tested %lu intersections ", nbInter);
printf("and %lu no intersections\n", nbNoInter);

}

int main(int argc, char** argv) {

    printf("==== 3D static =====\n");
    Validate3D();

    return 0;
}

```

```
}

```

### 7.1.3 2D dynamic

```
// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>
#include <time.h>

// Include the FMB and SAT algorithm library
#include "fmb2dt.h"
#include "sat.h"

// Epsilon to detect degenerated triangles
#define EPSILON 0.1
// Range of values for the random generation of Frames
#define RANGE_AXIS 100.0
// Nb of tests of the validation
#define NB_TESTS 1000000

// Helper macro to generate random number in [0.0, 1.0]
#define rnd() (double)(rand())/(double)(RAND_MAX)

// Global variables to count nb of tests resulting in intersection
// and no intersection
unsigned long int nbInter;
unsigned long int nbNoInter;

// Helper structure to pass arguments to the Validation function
typedef struct {
    FrameType type;
    double orig[2];
    double comp[2][2];
    double speed[2];
} Param2DTime;

// Validation function
// Takes two Frame definition as input, run the intersection test on
// them with FMB and SAT, and check the results are identical
void ValidationOnePair2DTime(
    const Param2DTime paramP,
    const Param2DTime paramQ) {

    // Create the two Frames
    Frame2DTime P =
        Frame2DTimeCreateStatic(
            paramP.type,
            paramP.orig,
            paramP.speed,
            paramP.comp);

    Frame2DTime Q =
        Frame2DTimeCreateStatic(
            paramQ.type,
            paramQ.orig,
            paramQ.speed,
            paramQ.comp);

    // Helper variables to loop on the pair (that, tho) and (tho, that)
    Frame2DTime* that = &P;

```



```

Frame2DTime* tho = &Q;

// Loop on pairs of Frames
for (int iPair = 2;
     iPair--;) {

    // Test intersection with FMB
    bool isIntersectingFMB =
        FMBTestIntersection2DTime(
            that,
            tho,
            NULL);

    // Test intersection with SAT
    bool isIntersectingSAT =
        SATTestIntersection2DTime(
            that,
            tho);

    // If the results are different
    if (isIntersectingFMB != isIntersectingSAT) {

        // Print the disagreement
        printf("Validation2D has failed\n");
        Frame2DTimePrint(that);
        printf(" against ");
        Frame2DTimePrint(tho);
        printf("\n");
        printf("FMB : ");
        if (isIntersectingFMB == false)
            printf("no ");
        printf("intersection\n");
        printf("SAT : ");
        if (isIntersectingSAT == false)
            printf("no ");
        printf("intersection\n");

        // Stop the validation
        exit(0);

    }

    // If the Frames are in intersection
    if (isIntersectingFMB == true) {

        // Update the number of intersection
        nbInter++;

    }

    // If the Frames are not in intersection
    } else {

        // Update the number of no intersection
        nbNoInter++;

    }

    // Flip the pair of Frames
    that = &Q;
    tho = &P;

}

```

```

}

void Validate2DTime(void) {

    // Initialise the random generator
    srand(time(NULL));

    // Declare two variables to memorize the arguments to the
    // Validation function
    Param2DTime paramP;
    Param2DTime paramQ;

    // Initialize the number of intersection and no intersection
    nbInter = 0;
    nbNoInter = 0;

    // Loop on the tests
    for (unsigned long iTest = NB_TESTS;
        iTest--;) {

        // Create two random Frame definitions
        Param2DTime* param = &paramP;
        for (int iParam = 2;
            iParam--;) {

            // 50% chance of being a Cuboid or a Tetrahedron
            if (rnd() < 0.5)
                param->type = FrameCuboid;
            else
                param->type = FrameTetrahedron;

            for (int iAxis = 2;
                iAxis--;) {

                param->orig[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;
                param->speed[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

                for (int iComp = 2;
                    iComp--;) {

                    param->comp[iComp][iAxis] =
                        -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

                }

            }

            param = &paramQ;

        }

        // Calculate the determinant of the Frames' components matrix
        double detP =
            paramP.comp[0][0] * paramP.comp[1][1] -
            paramP.comp[1][0] * paramP.comp[0][1];

        double detQ =
            paramQ.comp[0][0] * paramQ.comp[1][1] -
            paramQ.comp[1][0] * paramQ.comp[0][1];

        // If the determinants are not null, ie the Frame are not degenerate
        if (fabs(detP) > EPSILON && fabs(detQ) > EPSILON) {

```

```

        // Run the validation on the two Frames
        ValidationOnePair2DTime(
            paramP,
            paramQ);

    }

}

// If we reached it means the validation was successfull
// Print results
printf("Validation2DTime has succeed.\n");
printf("Tested %lu intersections ", nbInter);
printf("and %lu no intersections\n", nbNoInter);

}

int main(int argc, char** argv) {

    printf("==== 2D dynamic =====\n");
    Validate2DTime();

    return 0;
}

```

#### 7.1.4 3D dynamic

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>
#include <time.h>

// Include the FMB and SAT algorithm library
#include "fmb3dt.h"
#include "sat.h"

// Epsilon to detect degenerated triangles
#define EPSILON 0.1
// Range of values for the random generation of Frames
#define RANGE_AXIS 100.0
// Nb of tests of the validation
#define NB_TESTS 1000000

// Helper macro to generate random number in [0.0, 1.0]
#define rnd() (double)(rand())/(double)(RAND_MAX)

// Global variables to count nb of tests resulting in intersection
// and no intersection
unsigned long int nbInter;
unsigned long int nbNoInter;

// Helper structure to pass arguments to the Validation function
typedef struct {
    FrameType type;
    double orig[3];
    double comp[3][3];
    double speed[3];
} Param3DTime;

```

```

// Validation function
// Takes two Frame definition as input, run the intersection test on
// them with FMB and SAT, and check the results are identical
void ValidationOnePair3DTime(
    const Param3DTime paramP,
    const Param3DTime paramQ) {

    // Create the two Frames
    Frame3DTime P =
        Frame3DTimeCreateStatic(
            paramP.type,
            paramP.orig,
            paramP.speed,
            paramP.comp);

    Frame3DTime Q =
        Frame3DTimeCreateStatic(
            paramQ.type,
            paramQ.orig,
            paramQ.speed,
            paramQ.comp);

    // Helper variables to loop on the pair (that, tho) and (tho, that)
    Frame3DTime* that = &P;
    Frame3DTime* tho = &Q;

    // Loop on pairs of Frames
    for (int iPair = 2;
        iPair--;) {

        // Test intersection with FMB
        bool isIntersectingFMB =
            FMBTestIntersection3DTime(
                that,
                tho,
                NULL);

        // Test intersection with SAT
        bool isIntersectingSAT =
            SATTestIntersection3DTime(
                that,
                tho);

        // If the results are different
        if (isIntersectingFMB != isIntersectingSAT) {

            // Print the disagreement
            printf("Validation3D has failed\n");
            Frame3DTimePrint(that);
            printf(" against ");
            Frame3DTimePrint(tho);
            printf("\n");
            printf("FMB : ");
            if (isIntersectingFMB == false)
                printf("no ");
            printf("intersection\n");
            printf("SAT : ");
            if (isIntersectingSAT == false)
                printf("no ");
            printf("intersection\n");

            // Stop the validation

```

```

        exit(0);
    }

    // If the Frames are in intersection
    if (isIntersectingFMB == true) {

        // Update the number of intersection
        nbInter++;

    // If the Frames are not in intersection
    } else {

        // Update the number of no intersection
        nbNoInter++;

    }

    // Flip the pair of Frames
    that = &Q;
    tho = &P;

}

}

void Validate3DTime(void) {

    // Initialise the random generator
    srand(time(NULL));

    // Declare two variables to memorize the arguments to the
    // Validation function
    Param3DTime paramP;
    Param3DTime paramQ;

    // Initialize the number of intersection and no intersection
    nbInter = 0;
    nbNoInter = 0;

    // Loop on the tests
    for (unsigned long iTest = NB_TESTS;
        iTest--;) {

        // Create two random Frame definitions
        Param3DTime* param = &paramP;
        for (int iParam = 2;
            iParam--;) {

            // 50% chance of being a Cuboid or a Tetrahedron
            if (rnd() < 0.5)
                param->type = FrameCuboid;
            else
                param->type = FrameTetrahedron;

            for (int iAxis = 3;
                iAxis--;) {

                param->orig[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;
                param->speed[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

                for (int iComp = 3;

```

```

        iComp--;) {

            param->comp[iComp][iAxis] =
                -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

        }

    }

    param = &paramQ;

}

// Calculate the determinant of the Frames' components matrix
double detP =
    paramP.comp[0][0] * (paramP.comp[1][1] * paramP.comp[2][2] -
        paramP.comp[1][2] * paramP.comp[2][1]) -
    paramP.comp[1][0] * (paramP.comp[0][1] * paramP.comp[2][2] -
        paramP.comp[0][2] * paramP.comp[2][1]) +
    paramP.comp[2][0] * (paramP.comp[0][1] * paramP.comp[1][2] -
        paramP.comp[0][2] * paramP.comp[1][1]);

double detQ =
    paramQ.comp[0][0] * (paramQ.comp[1][1] * paramQ.comp[2][2] -
        paramQ.comp[1][2] * paramQ.comp[2][1]) -
    paramQ.comp[1][0] * (paramQ.comp[0][1] * paramQ.comp[2][2] -
        paramQ.comp[0][2] * paramQ.comp[2][1]) +
    paramQ.comp[2][0] * (paramQ.comp[0][1] * paramQ.comp[1][2] -
        paramQ.comp[0][2] * paramQ.comp[1][1]);

// If the determinants are not null, ie the Frame are not degenerate
if (fabs(detP) > EPSILON && fabs(detQ) > EPSILON) {

    // Run the validation on the two Frames
    ValidationOnePair3DTime(
        paramP,
        paramQ);

}

}

// If we reached it means the validation was successfull
// Print results
printf("Validation3DTime has succeed.\n");
printf("Tested %lu intersections ", nbInter);
printf("and %lu no intersections\n", nbNoInter);

}

int main(int argc, char** argv) {

    printf("==== 3D dynamic =====\n");
    Validate3DTime();

    return 0;
}


```

## 7.2 Results

### 7.2.1 Failures

Validation has failed in one case: when one or both of the frame are degenerated (at least two of there components are colinear). An example is given below for reference:

```
===== 2D static =====  
Validation2D has failed  
Co(-63.571705,-22.581119) x(55.239119,38.152177) y(-62.031537,-42.843548) against To(3.474294,22.751011)  
x(-49.195251,84.166201) y(41.179031,-95.350316)  
FMB : intersection  
SAT : no intersection
```

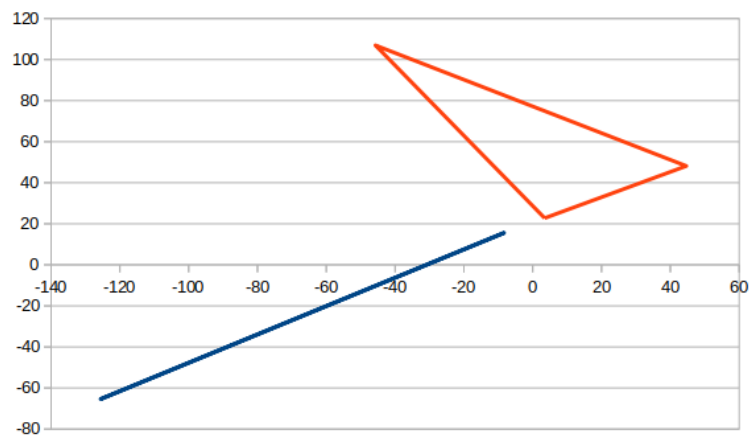

This case can be detected and avoided prior to the intersection test by checking the determinant of the frame: degenerated frames have a null determinant. In the example above the determinant of the first frame is equal to -0.001667.

### 7.2.2 2D static

```
===== 2D static =====  
Validation2D has succeed.  
Tested 466398 intersections and 1533536 no intersections
```

### 7.2.3 2D dynamic

```

===== 2D dynamic =====
Validation2DTime has succeed.
Tested 745264 intersections and 1254682 no intersections

```

#### 7.2.4 3D static

```

===== 3D static =====
Validation3D has succeed.
Tested 314452 intersections and 1685546 no intersections

```

#### 7.2.5 3D dynamic

```

===== 3D dynamic =====
Validation3DTime has succeed.
Tested 523938 intersections and 1476062 no intersections

```

## 8 Qualification against SAT

In this section I introduce the code I've used to qualify the algorithm and its implementation. The qualification consists of running the FMB algorithm on randomly generated pairs of Frame, and check its execution time against the one of running the SAT algorithm on the same pair of Frames.

### 8.1 Code

#### 8.1.1 2D static

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>
#include <time.h>
#include <sys/time.h>

// Include FMB and SAT algorithm library
#include "fmb2d.h"
#include "sat.h"

// Epsilon to detect degenerated triangles
#define EPSILON 0.1
// Range of values for the random generation of Frames
#define RANGE_AXIS 100.0
// Nb of run
#define NB_RUNS 9
// Nb of tests per run
#define NB_TESTS 100000
// Nb of times the test is run on one pair of frame, used to
// slow down the process and be able to measure time
#define NB_REPEAT_2D 1500

// Helper macro to generate random number in [0.0, 1.0]
#define rnd() (double)(rand())/(double)(RAND_MAX)

```



```

// Helper structure to pass arguments to the Qualification function
typedef struct {
    FrameType type;
    double orig[2];
    double comp[2][2];
} Param2D;

// Global variables to count nb of tests resulting in intersection
// and no intersection, and min/max/total time of execution for each
double minInter;
double maxInter;
double sumInter;
unsigned long countInter;
double minNoInter;
double maxNoInter;
double sumNoInter;
unsigned long countNoInter;

double minInterCC;
double maxInterCC;
double sumInterCC;
unsigned long countInterCC;
double minNoInterCC;
double maxNoInterCC;
double sumNoInterCC;
unsigned long countNoInterCC;

double minInterCT;
double maxInterCT;
double sumInterCT;
unsigned long countInterCT;
double minNoInterCT;
double maxNoInterCT;
double sumNoInterCT;
unsigned long countNoInterCT;

double minInterTC;
double maxInterTC;
double sumInterTC;
unsigned long countInterTC;
double minNoInterTC;
double maxNoInterTC;
double sumNoInterTC;
unsigned long countNoInterTC;

double minInterTT;
double maxInterTT;
double sumInterTT;
unsigned long countInterTT;
double minNoInterTT;
double maxNoInterTT;
double sumNoInterTT;
unsigned long countNoInterTT;

// Qualification function
// Takes two Frame definition as input, run the intersection test on
// them with FMB and SAT, and measure the time of execution of each
void Qualification2DStatic(
    const Param2D paramP,
    const Param2D paramQ) {

    // Create the two Frames

```

```

Frame2D P =
    Frame2DCreateStatic(
        paramP.type,
        paramP.orig,
        paramP.comp);

Frame2D Q =
    Frame2DCreateStatic(
        paramQ.type,
        paramQ.orig,
        paramQ.comp);

// Helper variables to loop on the pair (that, tho) and (tho, that)
Frame2D* that = &P;
Frame2D* tho = &Q;

// Loop on pairs of Frames
for (int iPair = 2;
     iPair--;) {

    // Declare an array to memorize the results of the repeated
    // test on the same pair,
    // to prevent optimization from the compiler to remove the for loop
    bool isIntersectingFMB[NB_REPEAT_2D] = {false};

    // Start measuring time
    struct timeval start;
    gettimeofday(&start, NULL);

    // Run the FMB intersection test
    for (int i = NB_REPEAT_2D;
         i--;) {

        isIntersectingFMB[i] =
            FMBTestIntersection2D(
                that,
                tho,
                NULL);
    }

    // Stop measuring time
    struct timeval stop;
    gettimeofday(&stop, NULL);

    // Calculate the delay of execution
    unsigned long deltausFMB = 0;
    if (stop.tv_sec < start.tv_sec) {
        printf("time warps, try again\n");
        exit(0);
    }
    if (stop.tv_sec > start.tv_sec + 1) {
        printf("deltausFMB >> 1s, decrease NB_REPEAT\n");
        exit(0);
    }
    if (stop.tv_usec < start.tv_usec) {
        deltausFMB = stop.tv_sec - start.tv_sec;
        deltausFMB += stop.tv_usec + 1000000 - start.tv_usec;
    } else {
        deltausFMB = stop.tv_usec - start.tv_usec;
    }

    // Declare an array to memorize the results of the repeated

```

```

// test on the same pair,
// to prevent optimization from the compiler to remove the for loop
bool isIntersectingSAT[NB_REPEAT_2D] = {false};

// Start measuring time
gettimeofday(&start, NULL);

// Run the FMB intersection test
for (int i = NB_REPEAT_2D;
     i--;) {

    isIntersectingSAT[i] =
        SATTestIntersection2D(
            that,
            tho);

}

// Stop measuring time
gettimeofday(&stop, NULL);

// Calculate the delay of execution
unsigned long deltausSAT = 0;
if (stop.tv_sec < start.tv_sec) {
    printf("time warps, try again\n");
    exit(0);
}
if (stop.tv_sec > start.tv_sec + 1) {
    printf("deltausSAT >> 1s, decrease NB_REPEAT\n");
    exit(0);
}
if (stop.tv_usec < start.tv_usec) {
    deltausSAT = stop.tv_sec - start.tv_sec;
    deltausSAT += stop.tv_usec + 1000000 - start.tv_usec;
} else {
    deltausSAT = stop.tv_usec - start.tv_usec;
}

// If the delays are greater than 10ms
if (deltausFMB >= 10 && deltausSAT >= 10) {

    // If FMB and SAT disagrees
    if (isIntersectingFMB[0] != isIntersectingSAT[0]) {

        printf("Qualification has failed\n");
        Frame2DPrint(that);
        printf(" against ");
        Frame2DPrint(tho);
        printf("\n");
        printf("FMB : ");
        if (isIntersectingFMB[0] == false)
            printf("no ");
        printf("intersection\n");
        printf("SAT : ");
        if (isIntersectingSAT[0] == false)
            printf("no ");
        printf("intersection\n");

        // Stop the qualification test
        exit(0);
    }
}

```

```

// Get the ratio of execution time
double ratio = ((double)deltausFMB) / ((double)deltausSAT);

// If the Frames intersect
if (isIntersectingSAT[0] == true) {

    // Update the counters
    if (countInter == 0) {

        minInter = ratio;
        maxInter = ratio;

    } else {

        if (minInter > ratio)
            minInter = ratio;
        if (maxInter < ratio)
            maxInter = ratio;

    }

    sumInter += ratio;
    ++countInter;

    if (paramP.type == FrameCuboid &&
        paramQ.type == FrameCuboid) {

        if (countInterCC == 0) {

            minInterCC = ratio;
            maxInterCC = ratio;

        } else {

            if (minInterCC > ratio)
                minInterCC = ratio;
            if (maxInterCC < ratio)
                maxInterCC = ratio;

        }

        sumInterCC += ratio;
        ++countInterCC;

    } else if (paramP.type == FrameCuboid &&
                paramQ.type == FrameTetrahedron) {

        if (countInterCT == 0) {

            minInterCT = ratio;
            maxInterCT = ratio;

        } else {

            if (minInterCT > ratio)
                minInterCT = ratio;
            if (maxInterCT < ratio)
                maxInterCT = ratio;

        }

        sumInterCT += ratio;
        ++countInterCT;

    }

}

```

```

} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameCuboid) {

    if (countInterTC == 0) {

        minInterTC = ratio;
        maxInterTC = ratio;

    } else {

        if (minInterTC > ratio)
            minInterTC = ratio;
        if (maxInterTC < ratio)
            maxInterTC = ratio;

    }

    sumInterTC += ratio;
    ++countInterTC;

} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameTetrahedron) {

    if (countInterTT == 0) {

        minInterTT = ratio;
        maxInterTT = ratio;

    } else {

        if (minInterTT > ratio)
            minInterTT = ratio;
        if (maxInterTT < ratio)
            maxInterTT = ratio;

    }

    sumInterTT += ratio;
    ++countInterTT;

}

// Else, the Frames do not intersect
} else {

    // Update the counters
    if (countNoInter == 0) {

        minNoInter = ratio;
        maxNoInter = ratio;

    } else {

        if (minNoInter > ratio)
            minNoInter = ratio;
        if (maxNoInter < ratio)
            maxNoInter = ratio;

    }

    sumNoInter += ratio;
    ++countNoInter;

    if (paramP.type == FrameCuboid &&
        paramQ.type == FrameCuboid) {

```

```

    if (countNoInterCC == 0) {

        minNoInterCC = ratio;
        maxNoInterCC = ratio;

    } else {

        if (minNoInterCC > ratio)
            minNoInterCC = ratio;
        if (maxNoInterCC < ratio)
            maxNoInterCC = ratio;

    }
    sumNoInterCC += ratio;
    ++countNoInterCC;

} else if (paramP.type == FrameCuboid &&
           paramQ.type == FrameTetrahedron) {

    if (countNoInterCT == 0) {

        minNoInterCT = ratio;
        maxNoInterCT = ratio;

    } else {

        if (minNoInterCT > ratio)
            minNoInterCT = ratio;
        if (maxNoInterCT < ratio)
            maxNoInterCT = ratio;

    }
    sumNoInterCT += ratio;
    ++countNoInterCT;

} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameCuboid) {

    if (countNoInterTC == 0) {

        minNoInterTC = ratio;
        maxNoInterTC = ratio;

    } else {

        if (minNoInterTC > ratio)
            minNoInterTC = ratio;
        if (maxNoInterTC < ratio)
            maxNoInterTC = ratio;

    }
    sumNoInterTC += ratio;
    ++countNoInterTC;

} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameTetrahedron) {

    if (countNoInterTT == 0) {

        minNoInterTT = ratio;
        maxNoInterTT = ratio;

```

```

        } else {

            if (minNoInterTT > ratio)
                minNoInterTT = ratio;
            if (maxNoInterTT < ratio)
                maxNoInterTT = ratio;

        }
        sumNoInterTT += ratio;
        ++countNoInterTT;

    }
}

// Else, if time of execution for FMB was less than a 10ms
} else if (deltausFMB < 10) {

    printf("deltausFMB < 10ms, increase NB_REPEAT\n");
    exit(0);

// Else, if time of execution for SAT was less than a 10ms
} else if (deltausSAT < 10) {

    printf("deltausSAT < 10ms, increase NB_REPEAT\n");
    exit(0);

}

// Flip the pair of Frames
that = &Q;
tho = &P;

}

}

void Qualify2DStatic(void) {

    // Initialise the random generator
    srand(time(NULL));

    // Loop on runs
    for (int iRun = 0;
        iRun < NB_RUNS;
        ++iRun) {

        // Ratio intersection/no intersection for the displayed results
        double ratioInter = 0.1 + 0.8 * (double)iRun / (double)(NB_RUNS - 1);

        // Initialize counters
        minInter = 0.0;
        maxInter = 0.0;
        sumInter = 0.0;
        countInter = 0;
        minNoInter = 0.0;
        maxNoInter = 0.0;
        sumNoInter = 0.0;
        countNoInter = 0;

        minInterCC = 0.0;
        maxInterCC = 0.0;

```

```

sumInterCC = 0.0;
countInterCC = 0;
minNoInterCC = 0.0;
maxNoInterCC = 0.0;
sumNoInterCC = 0.0;
countNoInterCC = 0;

minInterCT = 0.0;
maxInterCT = 0.0;
sumInterCT = 0.0;
countInterCT = 0;
minNoInterCT = 0.0;
maxNoInterCT = 0.0;
sumNoInterCT = 0.0;
countNoInterCT = 0;

minInterTC = 0.0;
maxInterTC = 0.0;
sumInterTC = 0.0;
countInterTC = 0;
minNoInterTC = 0.0;
maxNoInterTC = 0.0;
sumNoInterTC = 0.0;
countNoInterTC = 0;

minInterTT = 0.0;
maxInterTT = 0.0;
sumInterTT = 0.0;
countInterTT = 0;
minNoInterTT = 0.0;
maxNoInterTT = 0.0;
sumNoInterTT = 0.0;
countNoInterTT = 0;

// Declare two variables to memorize the arguments to the
// Qualification function
Param2D paramP;
Param2D paramQ;

// Loop on the number of tests
for (unsigned long iTest = NB_TESTS;
     iTest--;) {

    // Create two random Frame definitions
    Param2D* param = &paramP;
    for (int iParam = 2;
         iParam--;) {

        // 50% chance of being a Cuboid or a Tetrahedron
        if (rnd() < 0.5)
            param->type = FrameCuboid;
        else
            param->type = FrameTetrahedron;

        for (int iAxis = 2;
             iAxis--;) {

            param->orig[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

            for (int iComp = 2;
                 iComp--;) {

```



```

        param->comp[iComp][iAxis] =
            -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

    }

}

param = &paramQ;

}

// Calculate the determinant of the Frames' components matrix

double detP =
    paramP.comp[0][0] * paramP.comp[1][1] -
    paramP.comp[1][0] * paramP.comp[0][1];

double detQ =
    paramQ.comp[0][0] * paramQ.comp[1][1] -
    paramQ.comp[1][0] * paramQ.comp[0][1];

// If the determinants are not null, ie the Frame are not degenerate
if (fabs(detP) > EPSILON && fabs(detQ) > EPSILON) {

    // Run the validation on the two Frames
    Qualification2DStatic(
        paramP,
        paramQ);

}

}

// Display the results
if (iRun == 0) {

    printf("percPairInter\t");
    printf("countInter\tcountNoInter\t");
    printf("minInter\tavgInter\tmaxInter\t");
    printf("minNoInter\tavgNoInter\tmaxNoInter\t");
    printf("minTotal\tavgTotal\tmaxTotal\t");

    printf("countInterCC\tcountNoInterCC\t");
    printf("minInterCC\tavgInterCC\tmaxInterCC\t");
    printf("minNoInterCC\tavgNoInterCC\tmaxNoInterCC\t");
    printf("minTotalCC\tavgTotalCC\tmaxTotalCC\t");

    printf("countInterCT\tcountNoInterCT\t");
    printf("minInterCT\tavgInterCT\tmaxInterCT\t");
    printf("minNoInterCT\tavgNoInterCT\tmaxNoInterCT\t");
    printf("minTotalCT\tavgTotalCT\tmaxTotalCT\t");

    printf("countInterTC\tcountNoInterTC\t");
    printf("minInterTC\tavgInterTC\tmaxInterTC\t");
    printf("minNoInterTC\tavgNoInterTC\tmaxNoInterTC\t");
    printf("minTotalTC\tavgTotalTC\tmaxTotalTC\t");

    printf("countInterTT\tcountNoInterTT\t");
    printf("minInterTT\tavgInterTT\tmaxInterTT\t");
    printf("minNoInterTT\tavgNoInterTT\tmaxNoInterTT\t");
    printf("minTotalTT\tavgTotalTT\tmaxTotalTT\n");
}

```

```

}

printf("%.1f\t", ratioInter);

printf("%lu\t%lu\t", countInter, countNoInter);
double avgInter = sumInter / (double)countInter;
printf("%f\t%f\t%f\t", minInter, avgInter, maxInter);
double avgNoInter = sumNoInter / (double)countNoInter;
printf("%f\t%f\t%f\t", minNoInter, avgNoInter, maxNoInter);
double avg =
    ratioInter * avgInter + (1.0 - ratioInter) * avgNoInter;
printf("%f\t%f\t%f\t",
    (minNoInter < minInter ? minNoInter : minInter),
    avg,
    (maxNoInter > maxInter ? maxNoInter : maxInter));

printf("%lu\t%lu\t", countInterCC, countNoInterCC);
double avgInterCC = sumInterCC / (double)countInterCC;
printf("%f\t%f\t%f\t", minInterCC, avgInterCC, maxInterCC);
double avgNoInterCC = sumNoInterCC / (double)countNoInterCC;
printf("%f\t%f\t%f\t", minNoInterCC, avgNoInterCC, maxNoInterCC);
double avgCC =
    ratioInter * avgInterCC + (1.0 - ratioInter) * avgNoInterCC;
printf("%f\t%f\t%f\t",
    (minNoInterCC < minInterCC ? minNoInterCC : minInterCC),
    avgCC,
    (maxNoInterCC > maxInterCC ? maxNoInterCC : maxInterCC));

printf("%lu\t%lu\t", countInterCT, countNoInterCT);
double avgInterCT = sumInterCT / (double)countInterCT;
printf("%f\t%f\t%f\t", minInterCT, avgInterCT, maxInterCT);
double avgNoInterCT = sumNoInterCT / (double)countNoInterCT;
printf("%f\t%f\t%f\t", minNoInterCT, avgNoInterCT, maxNoInterCT);
double avgCT =
    ratioInter * avgInterCT + (1.0 - ratioInter) * avgNoInterCT;
printf("%f\t%f\t%f\t",
    (minNoInterCT < minInterCT ? minNoInterCT : minInterCT),
    avgCT,
    (maxNoInterCT > maxInterCT ? maxNoInterCT : maxInterCT));

printf("%lu\t%lu\t", countInterTC, countNoInterTC);
double avgInterTC = sumInterTC / (double)countInterTC;
printf("%f\t%f\t%f\t", minInterTC, avgInterTC, maxInterTC);
double avgNoInterTC = sumNoInterTC / (double)countNoInterTC;
printf("%f\t%f\t%f\t", minNoInterTC, avgNoInterTC, maxNoInterTC);
double avgTC =
    ratioInter * avgInterTC + (1.0 - ratioInter) * avgNoInterTC;
printf("%f\t%f\t%f\t",
    (minNoInterTC < minInterTC ? minNoInterTC : minInterTC),
    avgTC,
    (maxNoInterTC > maxInterTC ? maxNoInterTC : maxInterTC));

printf("%lu\t%lu\t", countInterTT, countNoInterTT);
double avgInterTT = sumInterTT / (double)countInterTT;
printf("%f\t%f\t%f\t", minInterTT, avgInterTT, maxInterTT);
double avgNoInterTT = sumNoInterTT / (double)countNoInterTT;
printf("%f\t%f\t%f\t", minNoInterTT, avgNoInterTT, maxNoInterTT);
double avgTT =
    ratioInter * avgInterTT + (1.0 - ratioInter) * avgNoInterTT;
printf("%f\t%f\t%f\t\n",
    (minNoInterTT < minInterTT ? minNoInterTT : minInterTT),
    avgTT,

```

```

        (maxNoInterTT > maxInterTT ? maxNoInterTT : maxInterTT));

    }

}

int main(int argc, char** argv) {

    Qualify2DStatic();

    return 0;
}

```

### 8.1.2 3D static

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>
#include <time.h>
#include <sys/time.h>

// Include FMB and SAT algorithm library
#include "fmb3d.h"
#include "sat.h"

// Epsilon to detect degenerated triangles
#define EPSILON 0.1
// Range of values for the random generation of Frames
#define RANGE_AXIS 100.0
// Nb of run
#define NB_RUNS 9
// Nb of tests per run
#define NB_TESTS 100000
// Nb of times the test is run on one pair of frame, used to
// slow down the processus and be able to measure time
#define NB_REPEAT_3D 800

// Helper macro to generate random number in [0.0, 1.0]
#define rnd() (double)(rand())/(double)(RAND_MAX)

// Helper structure to pass arguments to the Qualification function
typedef struct {
    FrameType type;
    double orig[3];
    double comp[3][3];
} Param3D;

// Global variables to count nb of tests resulting in intersection
// and no intersection, and min/max/total time of execution for each
double minInter;
double maxInter;
double sumInter;
unsigned long countInter;
double minNoInter;
double maxNoInter;
double sumNoInter;
unsigned long countNoInter;

double minInterCC;
double maxInterCC;

```

```

double sumInterCC;
unsigned long countInterCC;
double minNoInterCC;
double maxNoInterCC;
double sumNoInterCC;
unsigned long countNoInterCC;

double minInterCT;
double maxInterCT;
double sumInterCT;
unsigned long countInterCT;
double minNoInterCT;
double maxNoInterCT;
double sumNoInterCT;
unsigned long countNoInterCT;

double minInterTC;
double maxInterTC;
double sumInterTC;
unsigned long countInterTC;
double minNoInterTC;
double maxNoInterTC;
double sumNoInterTC;
unsigned long countNoInterTC;

double minInterTT;
double maxInterTT;
double sumInterTT;
unsigned long countInterTT;
double minNoInterTT;
double maxNoInterTT;
double sumNoInterTT;
unsigned long countNoInterTT;

// Qualification function
// Takes two Frame definition as input, run the intersection test on
// them with FMB and SAT, and measure the time of execution of each
void Qualification3DStatic(
    const Param3D paramP,
    const Param3D paramQ) {

    // Create the two Frames
    Frame3D P =
        Frame3DCreateStatic(
            paramP.type,
            paramP.orig,
            paramP.comp);

    Frame3D Q =
        Frame3DCreateStatic(
            paramQ.type,
            paramQ.orig,
            paramQ.comp);

    // Helper variables to loop on the pair (that, tho) and (tho, that)
    Frame3D* that = &P;
    Frame3D* tho = &Q;

    // Loop on pairs of Frames
    for (int iPair = 2;
        iPair--;) {

```

```

// Declare an array to memorize the results of the repeated
// test on the same pair,
// to prevent optimization from the compiler to remove the for loop
bool isIntersectingFMB[NB_REPEAT_3D] = {false};

// Start measuring time
struct timeval start;
gettimeofday(&start, NULL);

// Run the FMB intersection test
for (int i = NB_REPEAT_3D;
     i--;) {

    isIntersectingFMB[i] =
        FMBTestIntersection3D(
            that,
            tho,
            NULL);
}

// Stop measuring time
struct timeval stop;
gettimeofday(&stop, NULL);

// Calculate the delay of execution
unsigned long deltausFMB = 0;
if (stop.tv_sec < start.tv_sec) {
    printf("time warps, try again\n");
    exit(0);
}
if (stop.tv_sec > start.tv_sec + 1) {
    printf("deltausFMB >> 1s, decrease NB_REPEAT\n");
    exit(0);
}
if (stop.tv_usec < start.tv_usec) {
    deltausFMB = stop.tv_sec - start.tv_sec;
    deltausFMB += stop.tv_usec + 1000000 - start.tv_usec;
} else {
    deltausFMB = stop.tv_usec - start.tv_usec;
}

// Declare an array to memorize the results of the repeated
// test on the same pair,
// to prevent optimization from the compiler to remove the for loop
bool isIntersectingSAT[NB_REPEAT_3D] = {false};

// Start measuring time
gettimeofday(&start, NULL);

// Run the FMB intersection test
for (int i = NB_REPEAT_3D;
     i--;) {

    isIntersectingSAT[i] =
        SATTestIntersection3D(
            that,
            tho);
}

// Stop measuring time
gettimeofday(&stop, NULL);

```

```

// Calculate the delay of execution
unsigned long deltausSAT = 0;
if (stop.tv_sec < start.tv_sec) {
    printf("time warps, try again\n");
    exit(0);
}
if (stop.tv_sec > start.tv_sec + 1) {
    printf("deltausSAT >> 1s, decrease NB_REPEAT\n");
    exit(0);
}
if (stop.tv_usec < start.tv_usec) {
    deltausSAT = stop.tv_sec - start.tv_sec;
    deltausSAT += stop.tv_usec + 1000000 - start.tv_usec;
} else {
    deltausSAT = stop.tv_usec - start.tv_usec;
}

// If the delays are greater than 10ms
if (deltausFMB >= 10 && deltausSAT >= 10) {

    // If FMB and SAT disagrees
    if (isIntersectingFMB[0] != isIntersectingSAT[0]) {

        printf("Qualification has failed\n");
        Frame3DPrint(that);
        printf(" against ");
        Frame3DPrint(tho);
        printf("\n");
        printf("FMB : ");
        if (isIntersectingFMB[0] == false)
            printf("no ");
        printf("intersection\n");
        printf("SAT : ");
        if (isIntersectingSAT[0] == false)
            printf("no ");
        printf("intersection\n");

        // Stop the qualification test
        exit(0);
    }

    // Get the ratio of execution time
    double ratio = ((double)deltausFMB) / ((double)deltausSAT);

    // If the Frames intersect
    if (isIntersectingSAT[0] == true) {

        // Update the counters
        if (countInter == 0) {

            minInter = ratio;
            maxInter = ratio;

        } else {

            if (minInter > ratio)
                minInter = ratio;
            if (maxInter < ratio)
                maxInter = ratio;
        }
    }
}

```

```

}
sumInter += ratio;
++countInter;

if (paramP.type == FrameCuboid &&
    paramQ.type == FrameCuboid) {

    if (countInterCC == 0) {

        minInterCC = ratio;
        maxInterCC = ratio;

    } else {

        if (minInterCC > ratio)
            minInterCC = ratio;
        if (maxInterCC < ratio)
            maxInterCC = ratio;

    }

    sumInterCC += ratio;
    ++countInterCC;

} else if (paramP.type == FrameCuboid &&
    paramQ.type == FrameTetrahedron) {

    if (countInterCT == 0) {

        minInterCT = ratio;
        maxInterCT = ratio;

    } else {

        if (minInterCT > ratio)
            minInterCT = ratio;
        if (maxInterCT < ratio)
            maxInterCT = ratio;

    }

    sumInterCT += ratio;
    ++countInterCT;

} else if (paramP.type == FrameTetrahedron &&
    paramQ.type == FrameCuboid) {

    if (countInterTC == 0) {

        minInterTC = ratio;
        maxInterTC = ratio;

    } else {

        if (minInterTC > ratio)
            minInterTC = ratio;
        if (maxInterTC < ratio)
            maxInterTC = ratio;

    }

    sumInterTC += ratio;
    ++countInterTC;

} else if (paramP.type == FrameTetrahedron &&

```

```

        paramQ.type == FrameTetrahedron) {

    if (countInterTT == 0) {

        minInterTT = ratio;
        maxInterTT = ratio;

    } else {

        if (minInterTT > ratio)
            minInterTT = ratio;
        if (maxInterTT < ratio)
            maxInterTT = ratio;

    }

    sumInterTT += ratio;
    ++countInterTT;

}

// Else, the Frames do not intersect
} else {

    // Update the counters
    if (countNoInter == 0) {

        minNoInter = ratio;
        maxNoInter = ratio;

    } else {

        if (minNoInter > ratio)
            minNoInter = ratio;
        if (maxNoInter < ratio)
            maxNoInter = ratio;

    }

    sumNoInter += ratio;
    ++countNoInter;

    if (paramP.type == FrameCuboid &&
        paramQ.type == FrameCuboid) {

        if (countNoInterCC == 0) {

            minNoInterCC = ratio;
            maxNoInterCC = ratio;

        } else {

            if (minNoInterCC > ratio)
                minNoInterCC = ratio;
            if (maxNoInterCC < ratio)
                maxNoInterCC = ratio;

        }

        sumNoInterCC += ratio;
        ++countNoInterCC;

    } else if (paramP.type == FrameCuboid &&
                paramQ.type == FrameTetrahedron) {

```



```

        if (countNoInterCT == 0) {

            minNoInterCT = ratio;
            maxNoInterCT = ratio;

        } else {

            if (minNoInterCT > ratio)
                minNoInterCT = ratio;
            if (maxNoInterCT < ratio)
                maxNoInterCT = ratio;

        }
        sumNoInterCT += ratio;
        ++countNoInterCT;

    } else if (paramP.type == FrameTetrahedron &&
               paramQ.type == FrameCuboid) {

        if (countNoInterTC == 0) {

            minNoInterTC = ratio;
            maxNoInterTC = ratio;

        } else {

            if (minNoInterTC > ratio)
                minNoInterTC = ratio;
            if (maxNoInterTC < ratio)
                maxNoInterTC = ratio;

        }
        sumNoInterTC += ratio;
        ++countNoInterTC;

    } else if (paramP.type == FrameTetrahedron &&
               paramQ.type == FrameTetrahedron) {

        if (countNoInterTT == 0) {

            minNoInterTT = ratio;
            maxNoInterTT = ratio;

        } else {

            if (minNoInterTT > ratio)
                minNoInterTT = ratio;
            if (maxNoInterTT < ratio)
                maxNoInterTT = ratio;

        }
        sumNoInterTT += ratio;
        ++countNoInterTT;

    }
}

// Else, if time of execution for FMB was less than a 10ms
} else if (deltausFMB < 10) {

    printf("deltausFMB < 10ms, increase NB_REPEAT\n");
    exit(0);
}

```

```

// Else, if time of execution for SAT was less than a 10ms
} else if (deltausSAT < 10) {

    printf("deltausSAT < 10ms, increase NB_REPEAT\n");
    exit(0);

}

// Flip the pair of Frames
that = &Q;
tho = &P;

}

}

void Qualify3DStatic(void) {

    // Initialise the random generator
    srand(time(NULL));

    // Loop on runs
    for (int iRun = 0;
        iRun < NB_RUNS;
        ++iRun) {

        // Ratio intersection/no intersection for the displayed results
        double ratioInter = 0.1 + 0.8 * (double)iRun / (double)(NB_RUNS - 1);

        // Initialize counters
        minInter = 0.0;
        maxInter = 0.0;
        sumInter = 0.0;
        countInter = 0;
        minNoInter = 0.0;
        maxNoInter = 0.0;
        sumNoInter = 0.0;
        countNoInter = 0;

        minInterCC = 0.0;
        maxInterCC = 0.0;
        sumInterCC = 0.0;
        countInterCC = 0;
        minNoInterCC = 0.0;
        maxNoInterCC = 0.0;
        sumNoInterCC = 0.0;
        countNoInterCC = 0;

        minInterCT = 0.0;
        maxInterCT = 0.0;
        sumInterCT = 0.0;
        countInterCT = 0;
        minNoInterCT = 0.0;
        maxNoInterCT = 0.0;
        sumNoInterCT = 0.0;
        countNoInterCT = 0;

        minInterTC = 0.0;
        maxInterTC = 0.0;
        sumInterTC = 0.0;
        countInterTC = 0;

```

```

minNoInterTC = 0.0;
maxNoInterTC = 0.0;
sumNoInterTC = 0.0;
countNoInterTC = 0;

minInterTT = 0.0;
maxInterTT = 0.0;
sumInterTT = 0.0;
countInterTT = 0;
minNoInterTT = 0.0;
maxNoInterTT = 0.0;
sumNoInterTT = 0.0;
countNoInterTT = 0;

// Declare two variables to memorize the arguments to the
// Qualification function
Param3D paramP;
Param3D paramQ;

// Loop on the number of tests
for (unsigned long iTest = NB_TESTS;
     iTest--;) {

    // Create two random Frame definitions
    Param3D* param = &paramP;
    for (int iParam = 2;
         iParam--;) {

        // 50% chance of being a Cuboid or a Tetrahedron
        if (rnd() < 0.5)
            param->type = FrameCuboid;
        else
            param->type = FrameTetrahedron;

        for (int iAxis = 3;
             iAxis--;) {

            param->orig[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

            for (int iComp = 3;
                 iComp--;) {

                param->comp[iComp][iAxis] =
                    -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

            }

        }

        param = &paramQ;

    }

    // Calculate the determinant of the Frames' components matrix
    double detP =
        paramP.comp[0][0] * (paramP.comp[1][1] * paramP.comp[2][2] -
        paramP.comp[1][2] * paramP.comp[2][1]) -
        paramP.comp[1][0] * (paramP.comp[0][1] * paramP.comp[2][2] -
        paramP.comp[0][2] * paramP.comp[2][1]) +
        paramP.comp[2][0] * (paramP.comp[0][1] * paramP.comp[1][2] -
        paramP.comp[0][2] * paramP.comp[1][1]);

```

```

double detQ =
    paramQ.comp[0][0] * (paramQ.comp[1][1] * paramQ.comp[2][2] -
    paramQ.comp[1][2] * paramQ.comp[2][1]) -
    paramQ.comp[1][0] * (paramQ.comp[0][1] * paramQ.comp[2][2] -
    paramQ.comp[0][2] * paramQ.comp[2][1]) +
    paramQ.comp[2][0] * (paramQ.comp[0][1] * paramQ.comp[1][2] -
    paramQ.comp[0][2] * paramQ.comp[1][1]);

// If the determinants are not null, ie the Frame are not degenerate
if (fabs(detP) > EPSILON && fabs(detQ) > EPSILON) {

    // Run the validation on the two Frames
    Qualification3DStatic(
        paramP,
        paramQ);

}

}

// Display the results
if (iRun == 0) {

    printf("percPairInter\t");
    printf("countInter\tcountNoInter\t");
    printf("minInter\tavgInter\tmaxInter\t");
    printf("minNoInter\tavgNoInter\tmaxNoInter\t");
    printf("minTotal\tavgTotal\tmaxTotal\t");

    printf("countInterCC\tcountNoInterCC\t");
    printf("minInterCC\tavgInterCC\tmaxInterCC\t");
    printf("minNoInterCC\tavgNoInterCC\tmaxNoInterCC\t");
    printf("minTotalCC\tavgTotalCC\tmaxTotalCC\t");

    printf("countInterCT\tcountNoInterCT\t");
    printf("minInterCT\tavgInterCT\tmaxInterCT\t");
    printf("minNoInterCT\tavgNoInterCT\tmaxNoInterCT\t");
    printf("minTotalCT\tavgTotalCT\tmaxTotalCT\t");

    printf("countInterTC\tcountNoInterTC\t");
    printf("minInterTC\tavgInterTC\tmaxInterTC\t");
    printf("minNoInterTC\tavgNoInterTC\tmaxNoInterTC\t");
    printf("minTotalTC\tavgTotalTC\tmaxTotalTC\t");

    printf("countInterTT\tcountNoInterTT\t");
    printf("minInterTT\tavgInterTT\tmaxInterTT\t");
    printf("minNoInterTT\tavgNoInterTT\tmaxNoInterTT\t");
    printf("minTotalTT\tavgTotalTT\tmaxTotalTT\n");

}

printf("%.1f\t", ratioInter);

printf("%lu\t%lu\t", countInter, countNoInter);
double avgInter = sumInter / (double)countInter;
printf("%f\t%f\t%f\t", minInter, avgInter, maxInter);
double avgNoInter = sumNoInter / (double)countNoInter;
printf("%f\t%f\t%f\t", minNoInter, avgNoInter, maxNoInter);
double avg =
    ratioInter * avgInter + (1.0 - ratioInter) * avgNoInter;
printf("%f\t%f\t%f\t",
    (minNoInter < minInter ? minNoInter : minInter),

```

```

        avg,
        (maxNoInter > maxInter ? maxNoInter : maxInter));

printf("%lu\t%lu\t", countInterCC, countNoInterCC);
double avgInterCC = sumInterCC / (double)countInterCC;
printf("%f\t%f\t%f\t", minInterCC, avgInterCC, maxInterCC);
double avgNoInterCC = sumNoInterCC / (double)countNoInterCC;
printf("%f\t%f\t%f\t", minNoInterCC, avgNoInterCC, maxNoInterCC);
double avgCC =
    ratioInter * avgInterCC + (1.0 - ratioInter) * avgNoInterCC;
printf("%f\t%f\t%f\t",
    (minNoInterCC < minInterCC ? minNoInterCC : minInterCC),
    avgCC,
    (maxNoInterCC > maxInterCC ? maxNoInterCC : maxInterCC));

printf("%lu\t%lu\t", countInterCT, countNoInterCT);
double avgInterCT = sumInterCT / (double)countInterCT;
printf("%f\t%f\t%f\t", minInterCT, avgInterCT, maxInterCT);
double avgNoInterCT = sumNoInterCT / (double)countNoInterCT;
printf("%f\t%f\t%f\t", minNoInterCT, avgNoInterCT, maxNoInterCT);
double avgCT =
    ratioInter * avgInterCT + (1.0 - ratioInter) * avgNoInterCT;
printf("%f\t%f\t%f\t",
    (minNoInterCT < minInterCT ? minNoInterCT : minInterCT),
    avgCT,
    (maxNoInterCT > maxInterCT ? maxNoInterCT : maxInterCT));

printf("%lu\t%lu\t", countInterTC, countNoInterTC);
double avgInterTC = sumInterTC / (double)countInterTC;
printf("%f\t%f\t%f\t", minInterTC, avgInterTC, maxInterTC);
double avgNoInterTC = sumNoInterTC / (double)countNoInterTC;
printf("%f\t%f\t%f\t", minNoInterTC, avgNoInterTC, maxNoInterTC);
double avgTC =
    ratioInter * avgInterTC + (1.0 - ratioInter) * avgNoInterTC;
printf("%f\t%f\t%f\t",
    (minNoInterTC < minInterTC ? minNoInterTC : minInterTC),
    avgTC,
    (maxNoInterTC > maxInterTC ? maxNoInterTC : maxInterTC));

printf("%lu\t%lu\t", countInterTT, countNoInterTT);
double avgInterTT = sumInterTT / (double)countInterTT;
printf("%f\t%f\t%f\t", minInterTT, avgInterTT, maxInterTT);
double avgNoInterTT = sumNoInterTT / (double)countNoInterTT;
printf("%f\t%f\t%f\t", minNoInterTT, avgNoInterTT, maxNoInterTT);
double avgTT =
    ratioInter * avgInterTT + (1.0 - ratioInter) * avgNoInterTT;
printf("%f\t%f\t%f\t",
    (minNoInterTT < minInterTT ? minNoInterTT : minInterTT),
    avgTT,
    (maxNoInterTT > maxInterTT ? maxNoInterTT : maxInterTT));

}

}

int main(int argc, char** argv) {

    Qualify3DStatic();

    return 0;
}

```

### 8.1.3 2D dynamic

```
// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>
#include <time.h>
#include <sys/time.h>

// Include FMB and SAT algorithm library
#include "fmb2dt.h"
#include "sat.h"

// Epsilon to detect degenerated triangles
#define EPSILON 0.1
// Range of values for the random generation of Frames
#define RANGE_AXIS 100.0
// Nb of run
#define NB_RUNS 9
// Nb of tests per run
#define NB_TESTS 100000
// Nb of times the test is run on one pair of frame, used to
// slow down the processus and be able to measure time
#define NB_REPEAT_2D 1500

// Helper macro to generate random number in [0.0, 1.0]
#define rnd() (double)(rand())/(double)(RAND_MAX)

// Helper structure to pass arguments to the Qualification function
typedef struct {
    FrameType type;
    double orig[2];
    double comp[2][2];
    double speed[2];
} Param2DTime;

// Global variables to count nb of tests resulting in intersection
// and no intersection, and min/max/total time of execution for each
double minInter;
double maxInter;
double sumInter;
unsigned long countInter;
double minNoInter;
double maxNoInter;
double sumNoInter;
unsigned long countNoInter;

double minInterCC;
double maxInterCC;
double sumInterCC;
unsigned long countInterCC;
double minNoInterCC;
double maxNoInterCC;
double sumNoInterCC;
unsigned long countNoInterCC;

double minInterCT;
double maxInterCT;
double sumInterCT;
unsigned long countInterCT;
double minNoInterCT;
```

```

double maxNoInterCT;
double sumNoInterCT;
unsigned long countNoInterCT;

double minInterTC;
double maxInterTC;
double sumInterTC;
unsigned long countInterTC;
double minNoInterTC;
double maxNoInterTC;
double sumNoInterTC;
unsigned long countNoInterTC;

double minInterTT;
double maxInterTT;
double sumInterTT;
unsigned long countInterTT;
double minNoInterTT;
double maxNoInterTT;
double sumNoInterTT;
unsigned long countNoInterTT;

// Qualification function
// Takes two Frame definition as input, run the intersection test on
// them with FMB and SAT, and measure the time of execution of each
void Qualification2DDynamic(
    const Param2DTime paramP,
    const Param2DTime paramQ) {

    // Create the two Frames
    Frame2DTime P =
        Frame2DTimeCreateStatic(
            paramP.type,
            paramP.orig,
            paramP.speed,
            paramP.comp);

    Frame2DTime Q =
        Frame2DTimeCreateStatic(
            paramQ.type,
            paramQ.orig,
            paramQ.speed,
            paramQ.comp);

    // Helper variables to loop on the pair (that, tho) and (tho, that)
    Frame2DTime* that = &P;
    Frame2DTime* tho = &Q;

    // Loop on pairs of Frames
    for (int iPair = 2;
        iPair--;) {

        // Declare an array to memorize the results of the repeated
        // test on the same pair,
        // to prevent optimization from the compiler to remove the for loop
        bool isIntersectingFMB[NB_REPEAT_2D] = {false};

        // Start measuring time
        struct timeval start;
        gettimeofday(&start, NULL);

        // Run the FMB intersection test

```

```

for (int i = NB_REPEAT_2D;
    i--;) {

    isIntersectingFMB[i] =
        FMBTestIntersection2DTime(
            that,
            tho,
            NULL);
}

// Stop measuring time
struct timeval stop;
gettimeofday(&stop, NULL);

// Calculate the delay of execution
unsigned long deltausFMB = 0;
if (stop.tv_sec < start.tv_sec) {
    printf("time warps, try again\n");
    exit(0);
}
if (stop.tv_sec > start.tv_sec + 1) {
    printf("deltausFMB >> 1s, decrease NB_REPEAT\n");
    exit(0);
}
if (stop.tv_usec < start.tv_usec) {
    deltausFMB = stop.tv_sec - start.tv_sec;
    deltausFMB += stop.tv_usec + 1000000 - start.tv_usec;
} else {
    deltausFMB = stop.tv_usec - start.tv_usec;
}

// Declare an array to memorize the results of the repeated
// test on the same pair,
// to prevent optimization from the compiler to remove the for loop
bool isIntersectingSAT[NB_REPEAT_2D] = {false};

// Start measuring time
gettimeofday(&start, NULL);

// Run the FMB intersection test
for (int i = NB_REPEAT_2D;
    i--;) {

    isIntersectingSAT[i] =
        SATTestIntersection2DTime(
            that,
            tho);
}

// Stop measuring time
gettimeofday(&stop, NULL);

// Calculate the delay of execution
unsigned long deltausSAT = 0;
if (stop.tv_sec < start.tv_sec) {
    printf("time warps, try again\n");
    exit(0);
}
if (stop.tv_sec > start.tv_sec + 1) {
    printf("deltausSAT >> 1s, decrease NB_REPEAT\n");
    exit(0);
}

```



```

}
if (stop.tv_usec < start.tv_usec) {
    deltausSAT = stop.tv_sec - start.tv_sec;
    deltausSAT += stop.tv_usec + 1000000 - start.tv_usec;
} else {
    deltausSAT = stop.tv_usec - start.tv_usec;
}

// If the delays are greater than 10ms
if (deltausFMB >= 10 && deltausSAT >= 10) {

    // If FMB and SAT disagrees
    if (isIntersectingFMB[0] != isIntersectingSAT[0]) {

        printf("Qualification has failed\n");
        Frame2DTimePrint(that);
        printf(" against ");
        Frame2DTimePrint(tho);
        printf("\n");
        printf("FMB : ");
        if (isIntersectingFMB[0] == false)
            printf("no ");
        printf("intersection\n");
        printf("SAT : ");
        if (isIntersectingSAT[0] == false)
            printf("no ");
        printf("intersection\n");

        // Stop the qualification test
        exit(0);
    }

    // Get the ratio of execution time
    double ratio = ((double)deltausFMB) / ((double)deltausSAT);

    // If the Frames intersect
    if (isIntersectingSAT[0] == true) {

        // Update the counters
        if (countInter == 0) {

            minInter = ratio;
            maxInter = ratio;

        } else {

            if (minInter > ratio)
                minInter = ratio;
            if (maxInter < ratio)
                maxInter = ratio;

        }

        sumInter += ratio;
        ++countInter;

        if (paramP.type == FrameCuboid &&
            paramQ.type == FrameCuboid) {

            if (countInterCC == 0) {

                minInterCC = ratio;

```

```

        maxInterCC = ratio;
    } else {

        if (minInterCC > ratio)
            minInterCC = ratio;
        if (maxInterCC < ratio)
            maxInterCC = ratio;
    }
    sumInterCC += ratio;
    ++countInterCC;
} else if (paramP.type == FrameCuboid &&
           paramQ.type == FrameTetrahedron) {

    if (countInterCT == 0) {

        minInterCT = ratio;
        maxInterCT = ratio;
    } else {

        if (minInterCT > ratio)
            minInterCT = ratio;
        if (maxInterCT < ratio)
            maxInterCT = ratio;
    }

    sumInterCT += ratio;
    ++countInterCT;
} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameCuboid) {

    if (countInterTC == 0) {

        minInterTC = ratio;
        maxInterTC = ratio;
    } else {

        if (minInterTC > ratio)
            minInterTC = ratio;
        if (maxInterTC < ratio)
            maxInterTC = ratio;
    }

    sumInterTC += ratio;
    ++countInterTC;
} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameTetrahedron) {

    if (countInterTT == 0) {

        minInterTT = ratio;
        maxInterTT = ratio;
    } else {

        if (minInterTT > ratio)

```

```

        minInterTT = ratio;
        if (maxInterTT < ratio)
            maxInterTT = ratio;
    }
    sumInterTT += ratio;
    ++countInterTT;
}

// Else, the Frames do not intersect
} else {

    // Update the counters
    if (countNoInter == 0) {

        minNoInter = ratio;
        maxNoInter = ratio;

    } else {

        if (minNoInter > ratio)
            minNoInter = ratio;
        if (maxNoInter < ratio)
            maxNoInter = ratio;

    }
    sumNoInter += ratio;
    ++countNoInter;

    if (paramP.type == FrameCuboid &&
        paramQ.type == FrameCuboid) {

        if (countNoInterCC == 0) {

            minNoInterCC = ratio;
            maxNoInterCC = ratio;

        } else {

            if (minNoInterCC > ratio)
                minNoInterCC = ratio;
            if (maxNoInterCC < ratio)
                maxNoInterCC = ratio;

        }
        sumNoInterCC += ratio;
        ++countNoInterCC;

    } else if (paramP.type == FrameCuboid &&
                paramQ.type == FrameTetrahedron) {

        if (countNoInterCT == 0) {

            minNoInterCT = ratio;
            maxNoInterCT = ratio;

        } else {

            if (minNoInterCT > ratio)
                minNoInterCT = ratio;
            if (maxNoInterCT < ratio)

```

```

        maxNoInterCT = ratio;

    }
    sumNoInterCT += ratio;
    ++countNoInterCT;

} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameCuboid) {

    if (countNoInterTC == 0) {

        minNoInterTC = ratio;
        maxNoInterTC = ratio;

    } else {

        if (minNoInterTC > ratio)
            minNoInterTC = ratio;
        if (maxNoInterTC < ratio)
            maxNoInterTC = ratio;

    }
    sumNoInterTC += ratio;
    ++countNoInterTC;

} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameTetrahedron) {

    if (countNoInterTT == 0) {

        minNoInterTT = ratio;
        maxNoInterTT = ratio;

    } else {

        if (minNoInterTT > ratio)
            minNoInterTT = ratio;
        if (maxNoInterTT < ratio)
            maxNoInterTT = ratio;

    }
    sumNoInterTT += ratio;
    ++countNoInterTT;

}
}

// Else, if time of execution for FMB was less than a 10ms
} else if (deltausFMB < 10) {

    printf("deltausFMB < 10ms, increase NB_REPEAT\n");
    exit(0);

// Else, if time of execution for SAT was less than a 10ms
} else if (deltausSAT < 10) {

    printf("deltausSAT < 10ms, increase NB_REPEAT\n");
    exit(0);

}

// Flip the pair of Frames

```

```

        that = &Q;
        tho = &P;

    }

}

void Qualify2DDynamic(void) {

    // Initialise the random generator
    srand(time(NULL));

    // Loop on runs
    for (int iRun = 0;
        iRun < NB_RUNS;
        ++iRun) {

        // Ratio intersection/no intersection for the displayed results
        double ratioInter = 0.1 + 0.8 * (double)iRun / (double)(NB_RUNS - 1);

        // Initialize counters
        minInter = 0.0;
        maxInter = 0.0;
        sumInter = 0.0;
        countInter = 0;
        minNoInter = 0.0;
        maxNoInter = 0.0;
        sumNoInter = 0.0;
        countNoInter = 0;

        minInterCC = 0.0;
        maxInterCC = 0.0;
        sumInterCC = 0.0;
        countInterCC = 0;
        minNoInterCC = 0.0;
        maxNoInterCC = 0.0;
        sumNoInterCC = 0.0;
        countNoInterCC = 0;

        minInterCT = 0.0;
        maxInterCT = 0.0;
        sumInterCT = 0.0;
        countInterCT = 0;
        minNoInterCT = 0.0;
        maxNoInterCT = 0.0;
        sumNoInterCT = 0.0;
        countNoInterCT = 0;

        minInterTC = 0.0;
        maxInterTC = 0.0;
        sumInterTC = 0.0;
        countInterTC = 0;
        minNoInterTC = 0.0;
        maxNoInterTC = 0.0;
        sumNoInterTC = 0.0;
        countNoInterTC = 0;

        minInterTT = 0.0;
        maxInterTT = 0.0;
        sumInterTT = 0.0;
        countInterTT = 0;
        minNoInterTT = 0.0;

```

```

maxNoInterTT = 0.0;
sumNoInterTT = 0.0;
countNoInterTT = 0;

// Declare two variables to memorize the arguments to the
// Qualification function
Param2DTime paramP;
Param2DTime paramQ;

// Loop on the number of tests
for (unsigned long iTest = NB_TESTS;
     iTest--;) {

    // Create two random Frame definitions
    Param2DTime* param = &paramP;
    for (int iParam = 2;
         iParam--;) {

        // 50% chance of being a Cuboid or a Tetrahedron
        if (rnd() < 0.5)
            param->type = FrameCuboid;
        else
            param->type = FrameTetrahedron;

        for (int iAxis = 2;
             iAxis--;) {

            param->orig[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;
            param->speed[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

            for (int iComp = 2;
                 iComp--;) {

                param->comp[iComp][iAxis] =
                    -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

            }

        }

        param = &paramQ;
    }

    // Calculate the determinant of the Frames' components matrix

    double detP =
        paramP.comp[0][0] * paramP.comp[1][1] -
        paramP.comp[1][0] * paramP.comp[0][1];

    double detQ =
        paramQ.comp[0][0] * paramQ.comp[1][1] -
        paramQ.comp[1][0] * paramQ.comp[0][1];

    // If the determinants are not null, ie the Frame are not degenerate
    if (fabs(detP) > EPSILON && fabs(detQ) > EPSILON) {

        // Run the validation on the two Frames
        Qualification2DDynamic(
            paramP,
            paramQ);
    }
}

```

```

    }

}

// Display the results
if (iRun == 0) {

    printf("percPairInter\t");
    printf("countInter\tcountNoInter\t");
    printf("minInter\tavgInter\tmaxInter\t");
    printf("minNoInter\tavgNoInter\tmaxNoInter\t");
    printf("minTotal\tavgTotal\tmaxTotal\t");

    printf("countInterCC\tcountNoInterCC\t");
    printf("minInterCC\tavgInterCC\tmaxInterCC\t");
    printf("minNoInterCC\tavgNoInterCC\tmaxNoInterCC\t");
    printf("minTotalCC\tavgTotalCC\tmaxTotalCC\t");

    printf("countInterCT\tcountNoInterCT\t");
    printf("minInterCT\tavgInterCT\tmaxInterCT\t");
    printf("minNoInterCT\tavgNoInterCT\tmaxNoInterCT\t");
    printf("minTotalCT\tavgTotalCT\tmaxTotalCT\t");

    printf("countInterTC\tcountNoInterTC\t");
    printf("minInterTC\tavgInterTC\tmaxInterTC\t");
    printf("minNoInterTC\tavgNoInterTC\tmaxNoInterTC\t");
    printf("minTotalTC\tavgTotalTC\tmaxTotalTC\t");

    printf("countInterTT\tcountNoInterTT\t");
    printf("minInterTT\tavgInterTT\tmaxInterTT\t");
    printf("minNoInterTT\tavgNoInterTT\tmaxNoInterTT\t");
    printf("minTotalTT\tavgTotalTT\tmaxTotalTT\n");

}

printf("%.1f\t", ratioInter);

printf("%lu\t%lu\t", countInter, countNoInter);
double avgInter = sumInter / (double)countInter;
printf("%f\t%f\t%f\t", minInter, avgInter, maxInter);
double avgNoInter = sumNoInter / (double)countNoInter;
printf("%f\t%f\t%f\t", minNoInter, avgNoInter, maxNoInter);
double avg =
    ratioInter * avgInter + (1.0 - ratioInter) * avgNoInter;
printf("%f\t%f\t%f\t",
    (minNoInter < minInter ? minNoInter : minInter),
    avg,
    (maxNoInter > maxInter ? maxNoInter : maxInter));

printf("%lu\t%lu\t", countInterCC, countNoInterCC);
double avgInterCC = sumInterCC / (double)countInterCC;
printf("%f\t%f\t%f\t", minInterCC, avgInterCC, maxInterCC);
double avgNoInterCC = sumNoInterCC / (double)countNoInterCC;
printf("%f\t%f\t%f\t", minNoInterCC, avgNoInterCC, maxNoInterCC);
double avgCC =
    ratioInter * avgInterCC + (1.0 - ratioInter) * avgNoInterCC;
printf("%f\t%f\t%f\t",
    (minNoInterCC < minInterCC ? minNoInterCC : minInterCC),
    avgCC,
    (maxNoInterCC > maxInterCC ? maxNoInterCC : maxInterCC));

printf("%lu\t%lu\t", countInterCT, countNoInterCT);

```

```

double avgInterCT = sumInterCT / (double)countInterCT;
printf("%f\t%f\t%f\t", minInterCT, avgInterCT, maxInterCT);
double avgNoInterCT = sumNoInterCT / (double)countNoInterCT;
printf("%f\t%f\t%f\t", minNoInterCT, avgNoInterCT, maxNoInterCT);
double avgCT =
    ratioInter * avgInterCT + (1.0 - ratioInter) * avgNoInterCT;
printf("%f\t%f\t%f\t",
    (minNoInterCT < minInterCT ? minNoInterCT : minInterCT),
    avgCT,
    (maxNoInterCT > maxInterCT ? maxNoInterCT : maxInterCT));

printf("%lu\t%lu\t", countInterTC, countNoInterTC);
double avgInterTC = sumInterTC / (double)countInterTC;
printf("%f\t%f\t%f\t", minInterTC, avgInterTC, maxInterTC);
double avgNoInterTC = sumNoInterTC / (double)countNoInterTC;
printf("%f\t%f\t%f\t", minNoInterTC, avgNoInterTC, maxNoInterTC);
double avgTC =
    ratioInter * avgInterTC + (1.0 - ratioInter) * avgNoInterTC;
printf("%f\t%f\t%f\t",
    (minNoInterTC < minInterTC ? minNoInterTC : minInterTC),
    avgTC,
    (maxNoInterTC > maxInterTC ? maxNoInterTC : maxInterTC));

printf("%lu\t%lu\t", countInterTT, countNoInterTT);
double avgInterTT = sumInterTT / (double)countInterTT;
printf("%f\t%f\t%f\t", minInterTT, avgInterTT, maxInterTT);
double avgNoInterTT = sumNoInterTT / (double)countNoInterTT;
printf("%f\t%f\t%f\t", minNoInterTT, avgNoInterTT, maxNoInterTT);
double avgTT =
    ratioInter * avgInterTT + (1.0 - ratioInter) * avgNoInterTT;
printf("%f\t%f\t%f\t",
    (minNoInterTT < minInterTT ? minNoInterTT : minInterTT),
    avgTT,
    (maxNoInterTT > maxInterTT ? maxNoInterTT : maxInterTT));

}

}

int main(int argc, char** argv) {

    Qualify2DDynamic();

    return 0;
}

```

### 8.1.4 3D dynamic

```

// Include standard libraries
#include <stdlib.h>
#include <stdio.h>
#include <stdbool.h>
#include <time.h>
#include <sys/time.h>

// Include FMB and SAT algorithm library
#include "fmb3dt.h"
#include "sat.h"

// Epsilon to detect degenerated triangles
#define EPSILON 0.1

```



```

// Range of values for the random generation of Frames
#define RANGE_AXIS 100.0
// Nb of run
#define NB_RUNS 9
// Nb of tests per run
#define NB_TESTS 100000
// Nb of times the test is run on one pair of frame, used to
// slow down the processus and be able to measure time
#define NB_REPEAT_3D 800

// Helper macro to generate random number in [0.0, 1.0]
#define rnd() (double)(rand())/(double)(RAND_MAX)

// Helper structure to pass arguments to the Qualification function
typedef struct {
    FrameType type;
    double orig[3];
    double comp[3][3];
    double speed[3];
} Param3DTime;

// Global variables to count nb of tests resulting in intersection
// and no intersection, and min/max/total time of execution for each
double minInter;
double maxInter;
double sumInter;
unsigned long countInter;
double minNoInter;
double maxNoInter;
double sumNoInter;
unsigned long countNoInter;

double minInterCC;
double maxInterCC;
double sumInterCC;
unsigned long countInterCC;
double minNoInterCC;
double maxNoInterCC;
double sumNoInterCC;
unsigned long countNoInterCC;

double minInterCT;
double maxInterCT;
double sumInterCT;
unsigned long countInterCT;
double minNoInterCT;
double maxNoInterCT;
double sumNoInterCT;
unsigned long countNoInterCT;

double minInterTC;
double maxInterTC;
double sumInterTC;
unsigned long countInterTC;
double minNoInterTC;
double maxNoInterTC;
double sumNoInterTC;
unsigned long countNoInterTC;

double minInterTT;
double maxInterTT;
double sumInterTT;

```

```

unsigned long countInterTT;
double minNoInterTT;
double maxNoInterTT;
double sumNoInterTT;
unsigned long countNoInterTT;

// Qualification function
// Takes two Frame definition as input, run the intersection test on
// them with FMB and SAT, and measure the time of execution of each
void Qualification3DDynamic(
    const Param3DTime paramP,
    const Param3DTime paramQ) {

    // Create the two Frames
    Frame3DTime P =
        Frame3DTimeCreateStatic(
            paramP.type,
            paramP.orig,
            paramP.speed,
            paramP.comp);

    Frame3DTime Q =
        Frame3DTimeCreateStatic(
            paramQ.type,
            paramQ.orig,
            paramQ.speed,
            paramQ.comp);

    // Helper variables to loop on the pair (that, tho) and (tho, that)
    Frame3DTime* that = &P;
    Frame3DTime* tho = &Q;

    // Loop on pairs of Frames
    for (int iPair = 2;
        iPair--;) {

        // Declare an array to memorize the results of the repeated
        // test on the same pair,
        // to prevent optimization from the compiler to remove the for loop
        bool isIntersectingFMB[NB_REPEAT_3D] = {false};

        // Start measuring time
        struct timeval start;
        gettimeofday(&start, NULL);

        // Run the FMB intersection test
        for (int i = NB_REPEAT_3D;
            i--;) {

            isIntersectingFMB[i] =
                FMBTestIntersection3DTime(
                    that,
                    tho,
                    NULL);
        }

        // Stop measuring time
        struct timeval stop;
        gettimeofday(&stop, NULL);

        // Calculate the delay of execution
        unsigned long deltausFMB = 0;

```

```

if (stop.tv_sec < start.tv_sec) {
    printf("time warps, try again\n");
    exit(0);
}
if (stop.tv_sec > start.tv_sec + 1) {
    printf("deltausFMB >> 1s, decrease NB_REPEAT\n");
    exit(0);
}
if (stop.tv_usec < start.tv_usec) {
    deltausFMB = stop.tv_sec - start.tv_sec;
    deltausFMB += stop.tv_usec + 1000000 - start.tv_usec;
} else {
    deltausFMB = stop.tv_usec - start.tv_usec;
}

// Declare an array to memorize the results of the repeated
// test on the same pair,
// to prevent optimization from the compiler to remove the for loop
bool intersectingSAT[NB_REPEAT_3D] = {false};

// Start measuring time
gettimeofday(&start, NULL);

// Run the FMB intersection test
for (int i = NB_REPEAT_3D;
     i--;) {

    intersectingSAT[i] =
        SATTestIntersection3DTime(
            that,
            tho);
}

// Stop measuring time
gettimeofday(&stop, NULL);

// Calculate the delay of execution
unsigned long deltausSAT = 0;
if (stop.tv_sec < start.tv_sec) {
    printf("time warps, try again\n");
    exit(0);
}
if (stop.tv_sec > start.tv_sec + 1) {
    printf("deltausSAT >> 1s, decrease NB_REPEAT\n");
    exit(0);
}
if (stop.tv_usec < start.tv_usec) {
    deltausSAT = stop.tv_sec - start.tv_sec;
    deltausSAT += stop.tv_usec + 1000000 - start.tv_usec;
} else {
    deltausSAT = stop.tv_usec - start.tv_usec;
}

// If the delays are greater than 10ms
if (deltausFMB >= 10 && deltausSAT >= 10) {

    // If FMB and SAT disagrees
    if (intersectingFMB[0] != intersectingSAT[0]) {

        printf("Qualification has failed\n");
        Frame3DTimePrint(that);
    }
}

```

```

printf(" against ");
Frame3DTimePrint(tho);
printf("\n");
printf("FMB : ");
if (isIntersectingFMB[0] == false)
    printf("no ");
printf("intersection\n");
printf("SAT : ");
if (isIntersectingSAT[0] == false)
    printf("no ");
printf("intersection\n");

// Stop the qualification test
exit(0);
}

// Get the ratio of execution time
double ratio = ((double)deltausFMB) / ((double)deltausSAT);

// If the Frames intersect
if (isIntersectingSAT[0] == true) {

    // Update the counters
    if (countInter == 0) {

        minInter = ratio;
        maxInter = ratio;

    } else {

        if (minInter > ratio)
            minInter = ratio;
        if (maxInter < ratio)
            maxInter = ratio;

    }

    sumInter += ratio;
    ++countInter;

    if (paramP.type == FrameCuboid &&
        paramQ.type == FrameCuboid) {

        if (countInterCC == 0) {

            minInterCC = ratio;
            maxInterCC = ratio;

        } else {

            if (minInterCC > ratio)
                minInterCC = ratio;
            if (maxInterCC < ratio)
                maxInterCC = ratio;

        }

        sumInterCC += ratio;
        ++countInterCC;

    } else if (paramP.type == FrameCuboid &&
        paramQ.type == FrameTetrahedron) {

```

```

    if (countInterCT == 0) {

        minInterCT = ratio;
        maxInterCT = ratio;

    } else {

        if (minInterCT > ratio)
            minInterCT = ratio;
        if (maxInterCT < ratio)
            maxInterCT = ratio;

    }
    sumInterCT += ratio;
    ++countInterCT;

} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameCuboid) {

    if (countInterTC == 0) {

        minInterTC = ratio;
        maxInterTC = ratio;

    } else {

        if (minInterTC > ratio)
            minInterTC = ratio;
        if (maxInterTC < ratio)
            maxInterTC = ratio;

    }
    sumInterTC += ratio;
    ++countInterTC;

} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameTetrahedron) {

    if (countInterTT == 0) {

        minInterTT = ratio;
        maxInterTT = ratio;

    } else {

        if (minInterTT > ratio)
            minInterTT = ratio;
        if (maxInterTT < ratio)
            maxInterTT = ratio;

    }
    sumInterTT += ratio;
    ++countInterTT;

}

// Else, the Frames do not intersect
} else {

    // Update the counters
    if (countNoInter == 0) {

```

```

        minNoInter = ratio;
        maxNoInter = ratio;

    } else {

        if (minNoInter > ratio)
            minNoInter = ratio;
        if (maxNoInter < ratio)
            maxNoInter = ratio;

    }
    sumNoInter += ratio;
    ++countNoInter;

    if (paramP.type == FrameCuboid &&
        paramQ.type == FrameCuboid) {

        if (countNoInterCC == 0) {

            minNoInterCC = ratio;
            maxNoInterCC = ratio;

        } else {

            if (minNoInterCC > ratio)
                minNoInterCC = ratio;
            if (maxNoInterCC < ratio)
                maxNoInterCC = ratio;

        }

        sumNoInterCC += ratio;
        ++countNoInterCC;

    } else if (paramP.type == FrameCuboid &&
                paramQ.type == FrameTetrahedron) {

        if (countNoInterCT == 0) {

            minNoInterCT = ratio;
            maxNoInterCT = ratio;

        } else {

            if (minNoInterCT > ratio)
                minNoInterCT = ratio;
            if (maxNoInterCT < ratio)
                maxNoInterCT = ratio;

        }

        sumNoInterCT += ratio;
        ++countNoInterCT;

    } else if (paramP.type == FrameTetrahedron &&
                paramQ.type == FrameCuboid) {

        if (countNoInterTC == 0) {

            minNoInterTC = ratio;
            maxNoInterTC = ratio;

        } else {

```

```

        if (minNoInterTC > ratio)
            minNoInterTC = ratio;
        if (maxNoInterTC < ratio)
            maxNoInterTC = ratio;

    }
    sumNoInterTC += ratio;
    ++countNoInterTC;

} else if (paramP.type == FrameTetrahedron &&
           paramQ.type == FrameTetrahedron) {

    if (countNoInterTT == 0) {

        minNoInterTT = ratio;
        maxNoInterTT = ratio;

    } else {

        if (minNoInterTT > ratio)
            minNoInterTT = ratio;
        if (maxNoInterTT < ratio)
            maxNoInterTT = ratio;

    }
    sumNoInterTT += ratio;
    ++countNoInterTT;

}

}

// Else, if time of execution for FMB was less than a 10ms
} else if (deltausFMB < 10) {

    printf("deltausFMB < 10ms, increase NB_REPEAT\n");
    exit(0);

// Else, if time of execution for SAT was less than a 10ms
} else if (deltausSAT < 10) {

    printf("deltausSAT < 10ms, increase NB_REPEAT\n");
    exit(0);

}

// Flip the pair of Frames
that = &Q;
tho = &P;

}

}

void Qualify3DDynamic(void) {

    // Initialise the random generator
    srand(time(NULL));

    // Loop on runs
    for (int iRun = 0;
         iRun < NB_RUNS;
         ++iRun) {

```

```

// Ratio intersection/no intersection for the displayed results
double ratioInter = 0.1 + 0.8 * (double)iRun / (double)(NB_RUNS - 1);

// Initialize counters
minInter = 0.0;
maxInter = 0.0;
sumInter = 0.0;
countInter = 0;
minNoInter = 0.0;
maxNoInter = 0.0;
sumNoInter = 0.0;
countNoInter = 0;

minInterCC = 0.0;
maxInterCC = 0.0;
sumInterCC = 0.0;
countInterCC = 0;
minNoInterCC = 0.0;
maxNoInterCC = 0.0;
sumNoInterCC = 0.0;
countNoInterCC = 0;

minInterCT = 0.0;
maxInterCT = 0.0;
sumInterCT = 0.0;
countInterCT = 0;
minNoInterCT = 0.0;
maxNoInterCT = 0.0;
sumNoInterCT = 0.0;
countNoInterCT = 0;

minInterTC = 0.0;
maxInterTC = 0.0;
sumInterTC = 0.0;
countInterTC = 0;
minNoInterTC = 0.0;
maxNoInterTC = 0.0;
sumNoInterTC = 0.0;
countNoInterTC = 0;

minInterTT = 0.0;
maxInterTT = 0.0;
sumInterTT = 0.0;
countInterTT = 0;
minNoInterTT = 0.0;
maxNoInterTT = 0.0;
sumNoInterTT = 0.0;
countNoInterTT = 0;

// Declare two variables to memorize the arguments to the
// Qualification function
Param3DTime paramP;
Param3DTime paramQ;

// Loop on the number of tests
for (unsigned long iTest = NB_TESTS;
     iTest--;) {

    // Create two random Frame definitions
    Param3DTime* param = &paramP;
    for (int iParam = 2;

```



```

        iParam--;) {

// 50% chance of being a Cuboid or a Tetrahedron
if (rnd() < 0.5)
    param->type = FrameCuboid;
else
    param->type = FrameTetrahedron;

for (int iAxis = 3;
    iAxis--;) {

    param->orig[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;
    param->speed[iAxis] = -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

    for (int iComp = 3;
        iComp--;) {

        param->comp[iComp][iAxis] =
            -RANGE_AXIS + 2.0 * rnd() * RANGE_AXIS;

    }

}

param = &paramQ;

}

// Calculate the determinant of the Frames' components matrix

double detP =
    paramP.comp[0][0] * (paramP.comp[1][1] * paramP.comp[2][2] -
    paramP.comp[1][2] * paramP.comp[2][1]) -
    paramP.comp[1][0] * (paramP.comp[0][1] * paramP.comp[2][2] -
    paramP.comp[0][2] * paramP.comp[2][1]) +
    paramP.comp[2][0] * (paramP.comp[0][1] * paramP.comp[1][2] -
    paramP.comp[0][2] * paramP.comp[1][1]);

double detQ =
    paramQ.comp[0][0] * (paramQ.comp[1][1] * paramQ.comp[2][2] -
    paramQ.comp[1][2] * paramQ.comp[2][1]) -
    paramQ.comp[1][0] * (paramQ.comp[0][1] * paramQ.comp[2][2] -
    paramQ.comp[0][2] * paramQ.comp[2][1]) +
    paramQ.comp[2][0] * (paramQ.comp[0][1] * paramQ.comp[1][2] -
    paramQ.comp[0][2] * paramQ.comp[1][1]);

// If the determinants are not null, ie the Frame are not degenerate
if (fabs(detP) > EPSILON && fabs(detQ) > EPSILON) {

    // Run the validation on the two Frames
    Qualification3DDynamic(
        paramP,
        paramQ);

}

}

// Display the results
if (iRun == 0) {

    printf("percPairInter\t");

```

```

printf("countInter\tcountNoInter\t");
printf("minInter\tavgInter\tmaxInter\t");
printf("minNoInter\tavgNoInter\tmaxNoInter\t");
printf("minTotal\tavgTotal\tmaxTotal\t");

printf("countInterCC\tcountNoInterCC\t");
printf("minInterCC\tavgInterCC\tmaxInterCC\t");
printf("minNoInterCC\tavgNoInterCC\tmaxNoInterCC\t");
printf("minTotalCC\tavgTotalCC\tmaxTotalCC\t");

printf("countInterCT\tcountNoInterCT\t");
printf("minInterCT\tavgInterCT\tmaxInterCT\t");
printf("minNoInterCT\tavgNoInterCT\tmaxNoInterCT\t");
printf("minTotalCT\tavgTotalCT\tmaxTotalCT\t");

printf("countInterTC\tcountNoInterTC\t");
printf("minInterTC\tavgInterTC\tmaxInterTC\t");
printf("minNoInterTC\tavgNoInterTC\tmaxNoInterTC\t");
printf("minTotalTC\tavgTotalTC\tmaxTotalTC\t");

printf("countInterTT\tcountNoInterTT\t");
printf("minInterTT\tavgInterTT\tmaxInterTT\t");
printf("minNoInterTT\tavgNoInterTT\tmaxNoInterTT\t");
printf("minTotalTT\tavgTotalTT\tmaxTotalTT\n");
}

printf("%.1f\t", ratioInter);

printf("%lu\t%lu\t", countInter, countNoInter);
double avgInter = sumInter / (double)countInter;
printf("%f\t%f\t%f\t", minInter, avgInter, maxInter);
double avgNoInter = sumNoInter / (double)countNoInter;
printf("%f\t%f\t%f\t", minNoInter, avgNoInter, maxNoInter);
double avg =
    ratioInter * avgInter + (1.0 - ratioInter) * avgNoInter;
printf("%f\t%f\t%f\t",
    (minNoInter < minInter ? minNoInter : minInter),
    avg,
    (maxNoInter > maxInter ? maxNoInter : maxInter));

printf("%lu\t%lu\t", countInterCC, countNoInterCC);
double avgInterCC = sumInterCC / (double)countInterCC;
printf("%f\t%f\t%f\t", minInterCC, avgInterCC, maxInterCC);
double avgNoInterCC = sumNoInterCC / (double)countNoInterCC;
printf("%f\t%f\t%f\t", minNoInterCC, avgNoInterCC, maxNoInterCC);
double avgCC =
    ratioInter * avgInterCC + (1.0 - ratioInter) * avgNoInterCC;
printf("%f\t%f\t%f\t",
    (minNoInterCC < minInterCC ? minNoInterCC : minInterCC),
    avgCC,
    (maxNoInterCC > maxInterCC ? maxNoInterCC : maxInterCC));

printf("%lu\t%lu\t", countInterCT, countNoInterCT);
double avgInterCT = sumInterCT / (double)countInterCT;
printf("%f\t%f\t%f\t", minInterCT, avgInterCT, maxInterCT);
double avgNoInterCT = sumNoInterCT / (double)countNoInterCT;
printf("%f\t%f\t%f\t", minNoInterCT, avgNoInterCT, maxNoInterCT);
double avgCT =
    ratioInter * avgInterCT + (1.0 - ratioInter) * avgNoInterCT;
printf("%f\t%f\t%f\t",
    (minNoInterCT < minInterCT ? minNoInterCT : minInterCT),

```

```

        avgCT,
        (maxNoInterCT > maxInterCT ? maxNoInterCT : maxInterCT));

printf("%lu\t%lu\t", countInterTC, countNoInterTC);
double avgInterTC = sumInterTC / (double)countInterTC;
printf("%f\t%f\t%f\t", minInterTC, avgInterTC, maxInterTC);
double avgNoInterTC = sumNoInterTC / (double)countNoInterTC;
printf("%f\t%f\t%f\t", minNoInterTC, avgNoInterTC, maxNoInterTC);
double avgTC =
    ratioInter * avgInterTC + (1.0 - ratioInter) * avgNoInterTC;
printf("%f\t%f\t%f\t",
    (minNoInterTC < minInterTC ? minNoInterTC : minInterTC),
    avgTC,
    (maxNoInterTC > maxInterTC ? maxNoInterTC : maxInterTC));

printf("%lu\t%lu\t", countInterTT, countNoInterTT);
double avgInterTT = sumInterTT / (double)countInterTT;
printf("%f\t%f\t%f\t", minInterTT, avgInterTT, maxInterTT);
double avgNoInterTT = sumNoInterTT / (double)countNoInterTT;
printf("%f\t%f\t%f\t", minNoInterTT, avgNoInterTT, maxNoInterTT);
double avgTT =
    ratioInter * avgInterTT + (1.0 - ratioInter) * avgNoInterTT;
printf("%f\t%f\t%f\t",
    (minNoInterTT < minInterTT ? minNoInterTT : minInterTT),
    avgTT,
    (maxNoInterTT > maxInterTT ? maxNoInterTT : maxInterTT));

}

}

int main(int argc, char** argv) {

    Qualify3DDynamic();

    return 0;
}

```

## 8.2 Results


In this subsection I give the results of the qualification for each case. These results are commented in the next section.



### 8.2.1 2D static


| percPairInter  | countInter     | countNoInter   | minInter       | avgInter   |
|----------------|----------------|----------------|----------------|------------|
|                | maxInter       | minNoInter     | avgNoInter     | maxNoInter |
| minTotal       | avgTotal       | maxTotal       | countInterCC   |            |
| countNoInterCC | minInterCC     | avgInterCC     | maxInterCC     |            |
| minNoInterCC   | avgNoInterCC   | maxNoInterCC   | minTotalCC     |            |
| avgTotalCC     | maxTotalCC     | countInterCT   | countNoInterCT |            |
| minInterCT     | avgInterCT     | maxInterCT     | minNoInterCT   |            |
| avgNoInterCT   | maxNoInterCT   | minTotalCT     | avgTotalCT     |            |
| maxTotalCT     | countInterTC   | countNoInterTC | minInterTC     |            |
| avgInterTC     | maxInterTC     | minNoInterTC   | avgNoInterTC   |            |
| maxNoInterTC   | minTotalTC     | avgTotalTC     | maxTotalTC     |            |
| countInterTT   | countNoInterTT | minInterTT     | avgInterTT     |            |

|     | maxInterTT | minNoInterTT | avgNoInterTT | maxNoInterTT |
|-----|------------|--------------|--------------|--------------|
|     | minTotalTT | avgTotalTT   | maxTotalTT   |              |
| 0.1 | 46412      | 153580       | 0.616883     | 1.657549     |
|     | 0.166667   | 0.837315     | 6.388889     | 0.166667     |
|     | 6.388889   | 12818        | 36632        | 1.234043     |
|     | 3.181818   | 0.222222     | 0.744752     | 4.048780     |
|     | 0.882780   | 4.048780     | 11682        | 38364        |
|     | 1.615855   | 3.596774     | 0.175676     | 0.844797     |
|     | 0.175676   | 0.921903     | 6.333333     | 11728        |
|     | 0.671141   | 1.610385     | 2.816667     | 0.183099     |
|     | 6.388889   | 0.183099     | 0.924369     | 6.388889     |
|     | 10184      | 40088        | 0.616883     | 1.171295     |
|     | 0.904338   | 5.785714     | 0.166667     | 0.931033     |
|     | 5.785714   |              |              |              |
| 0.2 | 46928      | 153066       | 0.719178     | 1.657465     |
|     | 0.279070   | 0.837966     | 6.400000     | 0.279070     |
|     | 6.400000   | 12868        | 37134        | 1.500000     |
|     | 2.981481   | 0.305556     | 0.744184     | 3.128205     |
|     | 1.020382   | 3.128205     | 11840        | 38248        |
|     | 1.615471   | 2.250000     | 0.279070     | 0.844854     |
|     | 0.279070   | 0.998977     | 6.400000     | 12034        |
|     | 1.062500   | 1.610490     | 2.344262     | 0.317073     |
|     | 6.266667   | 0.317073     | 0.999876     | 6.266667     |
|     | 10186      | 39688        | 0.719178     | 1.170918     |
|     | 0.910212   | 5.928571     | 0.323944     | 0.962353     |
|     | 5.928571   |              |              |              |
| 0.3 | 46670      | 153318       | 0.566502     | 1.654960     |
|     | 0.160000   | 0.835920     | 6.266667     | 0.160000     |
|     | 6.266667   | 12720        | 37350        | 0.797203     |
|     | 4.323077   | 0.297297     | 0.744088     | 3.275000     |
|     | 1.158239   | 4.323077     | 11940        | 37896        |
|     | 1.615371   | 2.278689     | 0.279070     | 0.849089     |
|     | 0.279070   | 1.078973     | 6.266667     | 11736        |
|     | 0.844037   | 1.610313     | 3.055556     | 0.160000     |
|     | 6.266667   | 0.160000     | 1.073484     | 6.266667     |
|     | 10274      | 39798        | 0.566502     | 1.170530     |
|     | 0.902358   | 6.266667     | 0.230769     | 0.982809     |
|     | 6.266667   |              |              |              |
| 0.4 | 47332      | 152666       | 0.877778     | 1.660218     |
|     | 0.162500   | 0.837145     | 6.266667     | 0.162500     |
|     | 6.266667   | 13204        | 36732        | 1.469136     |
|     | 2.763636   | 0.162500     | 0.745593     | 3.051282     |
|     | 1.297700   | 3.051282     | 11852        | 38294        |
|     | 1.615809   | 2.344828     | 0.295455     | 0.848284     |
|     | 0.295455   | 1.155294     | 6.266667     | 12002        |
|     | 1.009901   | 1.610637     | 2.049180     | 0.320513     |
|     | 6.200000   | 0.320513     | 1.152438     | 6.200000     |
|     | 10274      | 39582        | 0.877778     | 1.170931     |
|     | 0.901881   | 5.928571     | 0.205882     | 1.009501     |
|     | 5.928571   |              |              |              |
| 0.5 | 46252      | 153738       | 0.420091     | 1.657266     |
|     | 0.177419   | 0.837769     | 6.266667     | 0.177419     |
|     | 6.266667   | 12790        | 36844        | 1.290323     |
|     | 2.800000   | 0.288889     | 0.746203     | 3.051282     |
|     | 1.435986   | 3.051282     | 11702        | 38544        |
|     | 1.615246   | 2.639344     | 0.200000     | 0.849703     |
|     | 0.200000   | 1.232475     | 6.266667     | 11568        |
|     | 0.724409   | 1.610654     | 2.383333     | 0.226415     |
|     | 6.266667   | 0.226415     | 1.229687     | 6.266667     |
|     | 10192      | 40062        | 0.887640     | 1.170491     |
|     | 0.900031   | 5.928571     | 0.177419     | 1.035261     |
|     | 5.928571   |              |              |              |


|     |          |          |          |          |          |          |
|-----|----------|----------|----------|----------|----------|----------|
| 0.6 | 46726    | 153270   | 0.784314 | 1.660095 | 2.907407 |          |
|     | 0.180328 |          | 0.838758 | 6.266667 | 0.180328 | 1.331560 |
|     |          | 6.266667 | 13016    | 36726    | 1.500000 | 2.125790 |
|     | 2.907407 | 0.260000 |          | 0.749614 | 3.615385 | 0.260000 |
|     |          | 1.575320 | 3.615385 | 11946    | 38082    | 1.096774 |
|     | 1.615989 | 2.114754 |          | 0.288889 | 0.848005 | 6.266667 |
|     |          | 0.288889 | 1.308796 | 6.266667 | 11606    | 38426    |
|     | 1.000000 | 1.610769 |          | 2.467742 | 0.180328 | 0.847312 |
|     |          | 6.266667 | 0.180328 | 1.305387 | 6.266667 |          |
|     | 10158    | 40036    | 0.784314 | 1.171602 | 1.863636 | 0.272727 |
|     |          | 0.903525 | 5.785714 | 0.272727 | 1.064371 |          |
|     | 5.785714 |          |          |          |          |          |
| 0.7 | 46528    | 153472   | 0.800000 | 1.659042 | 3.018868 |          |
|     | 0.213115 |          | 0.838176 | 6.266667 | 0.213115 | 1.412782 |
|     |          | 6.266667 | 13016    | 37092    | 0.811688 | 2.123809 |
|     | 3.018868 | 0.254902 |          | 0.749233 | 4.675000 | 0.254902 |
|     |          | 1.711436 | 4.675000 | 11584    | 38102    | 0.979167 |
|     | 1.616240 | 2.372881 |          | 0.295455 | 0.844277 | 6.266667 |
|     |          | 0.295455 | 1.384651 | 6.266667 | 11736    | 38348    |
|     | 0.853211 | 1.609627 |          | 2.866667 | 0.213115 | 0.850611 |
|     |          | 6.266667 | 0.213115 | 1.381922 | 6.266667 |          |
|     | 10192    | 39930    | 0.800000 | 1.171043 | 2.448718 | 0.222222 |
|     |          | 0.903032 | 5.857143 | 0.222222 | 1.090640 |          |
|     | 5.857143 |          |          |          |          |          |
| 0.8 | 46534    | 153462   | 0.886364 | 1.657115 | 4.557692 |          |
|     | 0.220339 |          | 0.836960 | 6.266667 | 0.220339 | 1.493084 |
|     |          | 6.266667 | 12910    | 36950    | 1.318966 | 2.125076 |
|     | 4.557692 | 0.315789 |          | 0.746742 | 3.390244 | 0.315789 |
|     |          | 1.849409 | 4.557692 | 11652    | 38442    | 1.074468 |
|     | 1.616396 | 2.322034 |          | 0.220339 | 0.847616 | 6.200000 |
|     |          | 0.220339 | 1.462640 | 6.200000 | 11636    | 38192    |
|     | 1.068966 | 1.610109 |          | 2.135593 | 0.265306 | 0.845112 |
|     |          | 6.266667 | 0.265306 | 1.457110 | 6.266667 |          |
|     | 10336    | 39878    | 0.886364 | 1.171437 | 1.803030 | 0.323944 |
|     |          | 0.902475 | 5.785714 | 0.323944 | 1.117644 |          |
|     | 5.785714 |          |          |          |          |          |
| 0.9 | 46332    | 153660   | 0.815534 | 1.661000 | 4.400000 |          |
|     | 0.203390 |          | 0.838067 | 6.466667 | 0.203390 | 1.578707 |
|     |          | 6.466667 | 13112    | 36486    | 1.326531 | 2.124772 |
|     | 4.400000 | 0.288889 |          | 0.744488 | 3.051282 | 0.288889 |
|     |          | 1.986743 | 4.400000 | 11538    | 38816    | 1.000000 |
|     | 1.615996 | 2.048387 |          | 0.203390 | 0.845152 | 6.266667 |
|     |          | 0.203390 | 1.538911 | 6.266667 | 11520    | 38442    |
|     | 1.108434 | 1.610439 |          | 2.620690 | 0.252632 | 0.843114 |
|     |          | 6.466667 | 0.252632 | 1.533707 | 6.466667 |          |
|     | 10162    | 39916    | 0.815534 | 1.171013 | 1.935065 | 0.305556 |
|     |          | 0.911854 | 5.857143 | 0.305556 | 1.145097 |          |
|     | 5.857143 |          |          |          |          |          |

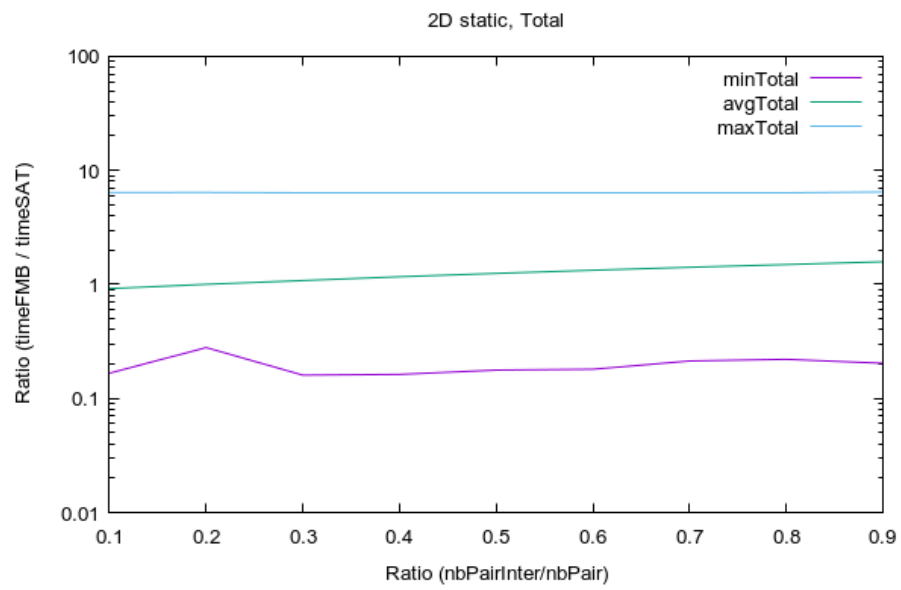

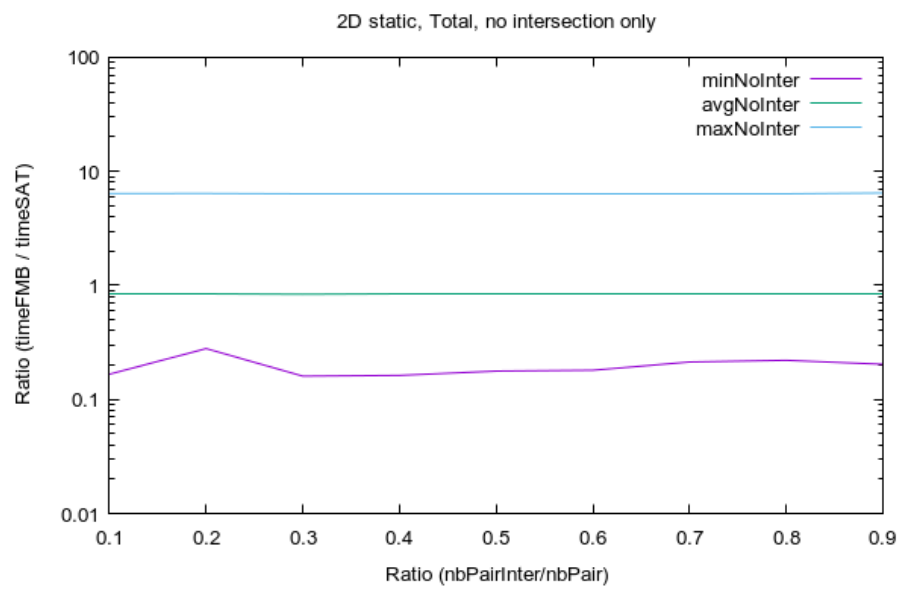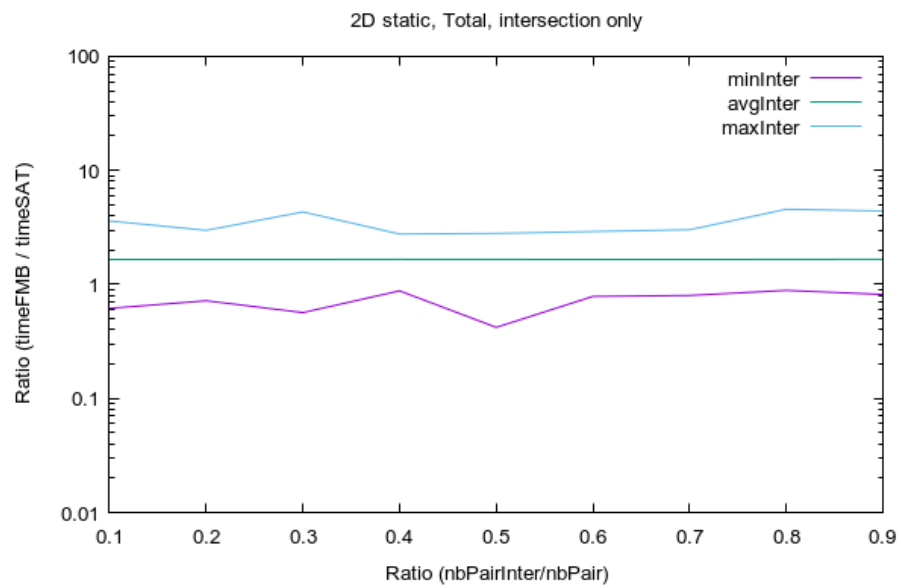

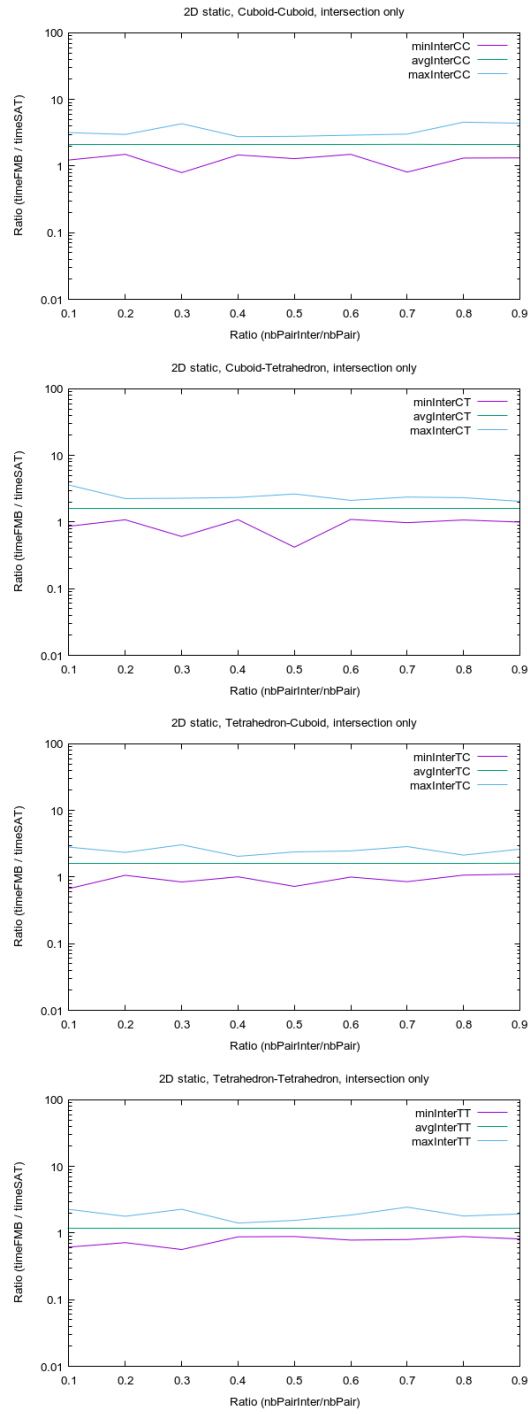



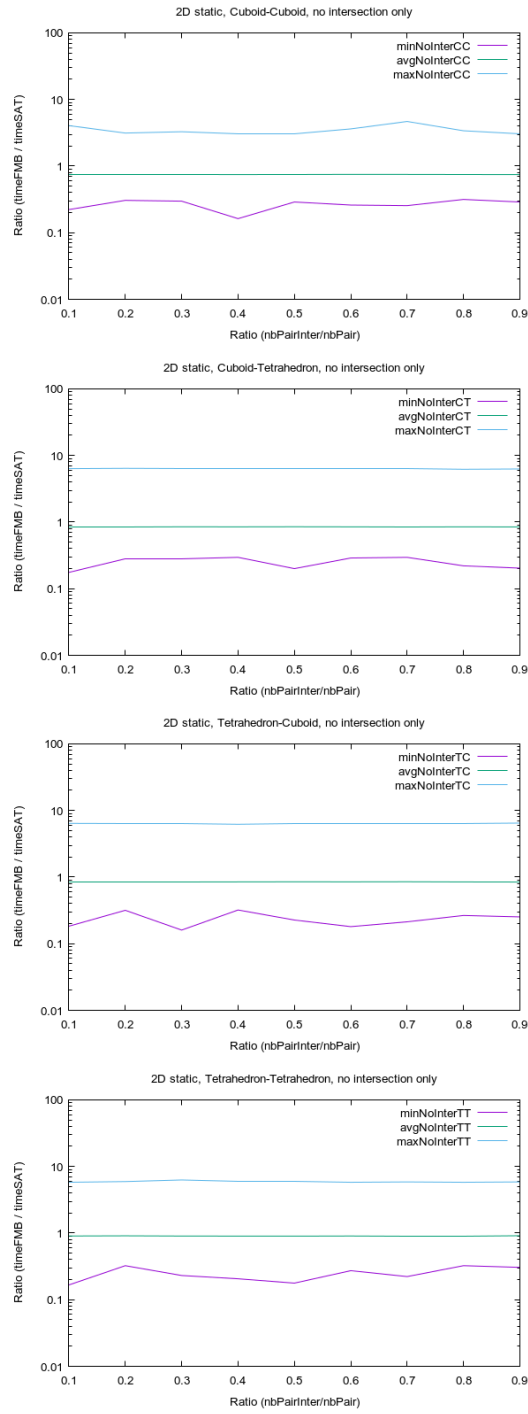




## 8.2.2 3D static


| percPairInter  | countInter     |          | countNoInter   |          | minInter       | avgInter   |
|----------------|----------------|----------|----------------|----------|----------------|------------|
|                | maxInter       |          | minNoInter     |          | avgNoInter     | maxNoInter |
| minTotal       | avgTotal       |          | maxTotal       |          | countInterCC   |            |
| countNoInterCC | minInterCC     |          | avgInterCC     |          | maxInterCC     |            |
| minNoInterCC   | avgNoInterCC   |          | maxNoInterCC   |          | minTotalCC     |            |
| avgTotalCC     | maxTotalCC     |          | countInterCT   |          | countNoInterCT |            |
| minInterCT     | avgInterCT     |          | maxInterCT     |          | minNoInterCT   |            |
| avgNoInterCT   | maxNoInterCT   |          | minTotalCT     |          | avgTotalCT     |            |
| maxTotalCT     | countInterTC   |          | countNoInterTC |          | minInterTC     |            |
| avgInterTC     | maxInterTC     |          | minNoInterTC   |          | avgNoInterTC   |            |
| maxNoInterTC   | minTotalTC     |          | avgTotalTC     |          | maxTotalTC     |            |
| countInterTT   | countNoInterTT |          | minInterTT     |          | avgInterTT     |            |
| maxInterTT     | minNoInterTT   |          | avgNoInterTT   |          | maxNoInterTT   |            |
| minTotalTT     | avgTotalTT     |          | maxTotalTT     |          |                |            |
| 0.1            | 31476          | 168524   | 0.170931       | 0.494268 | 1.161458       |            |
| 0.036827       | 0.508954       |          | 9.161290       | 0.036827 | 0.507485       |            |
|                | 9.161290       | 10692    | 39084          | 0.546685 | 0.740880       |            |
| 1.161458       | 0.065463       |          | 0.365958       | 3.013889 | 0.065463       |            |
|                | 0.403450       | 3.013889 | 7806           | 42344    | 0.206122       |            |
| 0.414209       | 0.878477       |          | 0.045608       | 0.494690 | 9.000000       |            |
|                | 0.045608       | 0.486642 | 9.000000       | 7826     | 42110          |            |
| 0.228484       | 0.414822       |          | 0.645624       | 0.044304 | 0.497443       |            |
|                | 9.161290       | 0.044304 | 0.489181       | 9.161290 |                |            |
| 5152           | 44986          | 0.170931 | 0.224448       | 0.330037 | 0.036827       |            |
|                | 0.657390       | 8.260870 | 0.036827       | 0.614096 |                |            |
| 8.260870       |                |          |                |          |                |            |
| 0.2            | 31272          | 168728   | 0.147396       | 0.495383 | 0.983402       |            |
| 0.036723       | 0.511060       |          | 9.483871       | 0.036723 | 0.507925       |            |
|                | 9.483871       | 10756    | 39306          | 0.623457 | 0.740706       |            |
| 0.983240       | 0.065463       |          | 0.370161       | 3.965986 | 0.065463       |            |
|                | 0.444270       | 3.965986 | 7588           | 42420    | 0.271233       |            |
| 0.414222       | 0.710267       |          | 0.043339       | 0.496994 | 8.843750       |            |
|                | 0.043339       | 0.480439 | 8.843750       | 7790     | 42138          |            |
| 0.200695       | 0.414515       |          | 0.983402       | 0.044586 | 0.496832       |            |
|                | 9.483871       | 0.044586 | 0.480369       | 9.483871 |                |            |
| 5138           | 44864          | 0.147396 | 0.224292       | 0.270960 | 0.036723       |            |
|                | 0.661167       | 8.250000 | 0.036723       | 0.573792 |                |            |
| 8.250000       |                |          |                |          |                |            |
| 0.3            | 31438          | 168562   | 0.183603       | 0.494386 | 0.900369       |            |
| 0.036212       | 0.508618       |          | 9.129032       | 0.036212 | 0.504349       |            |
|                | 9.129032       | 10622    | 39316          | 0.486352 | 0.740696       |            |
| 0.900369       | 0.065022       |          | 0.366612       | 2.909091 | 0.065022       |            |
|                | 0.478837       | 2.909091 | 7954           | 42388    | 0.269283       |            |
| 0.414584       | 0.588840       |          | 0.044262       | 0.494289 | 8.875000       |            |
|                | 0.044262       | 0.470378 | 8.875000       | 7824     | 41994          |            |
| 0.269179       | 0.414899       |          | 0.571843       | 0.044335 | 0.493158       |            |
|                | 9.129032       | 0.044335 | 0.469680       | 9.129032 |                |            |
| 5038           | 44864          | 0.183603 | 0.224510       | 0.272040 | 0.036212       |            |
|                | 0.661073       | 8.208333 | 0.036212       | 0.530104 |                |            |
| 8.208333       |                |          |                |          |                |            |
| 0.4            | 31522          | 168478   | 0.181193       | 0.489008 | 0.990842       |            |
| 0.036620       | 0.511956       |          | 8.625000       | 0.036620 | 0.502777       |            |
|                | 8.625000       | 10394    | 39340          | 0.636656 | 0.741145       |            |
| 0.990842       | 0.064302       |          | 0.370763       | 2.950355 | 0.064302       |            |
|                | 0.518916       | 2.950355 | 7792           | 42080    | 0.273826       |            |
| 0.414141       | 0.557522       |          | 0.044094       | 0.495137 | 8.625000       |            |
|                | 0.044094       | 0.462738 | 8.625000       | 7840     | 41792          |            |
| 0.270862       | 0.414862       |          | 0.573529       | 0.044728 | 0.499492       |            |
|                | 8.375000       | 0.044728 | 0.465640       | 8.375000 |                |            |





|     |          |          |          |          |          |          |
|-----|----------|----------|----------|----------|----------|----------|
|     | 5496     | 45266    | 0.181193 | 0.224080 | 0.284326 | 0.036620 |
|     |          | 0.661806 | 8.250000 | 0.036620 | 0.486716 |          |
|     | 8.250000 |          |          |          |          |          |
| 0.5 | 31346    | 168654   | 0.181499 | 0.493568 | 0.877586 |          |
|     | 0.036517 | 0.510896 |          | 8.935484 | 0.036517 | 0.502232 |
|     |          | 8.935484 | 10622    | 39620    | 0.644951 | 0.740633 |
|     | 0.877586 | 0.065611 |          | 0.367311 | 3.083916 | 0.065611 |
|     |          | 0.553972 | 3.083916 | 7790     | 42516    | 0.259119 |
|     | 0.414673 | 0.596154 |          | 0.044850 | 0.494958 | 8.593750 |
|     |          | 0.044850 | 0.454816 | 8.593750 | 7734     | 41772    |
|     | 0.270525 | 0.414724 |          | 0.574780 | 0.042254 | 0.496662 |
|     |          | 8.935484 | 0.042254 | 0.455693 | 8.935484 |          |
|     | 5200     | 44746    | 0.181499 | 0.224347 | 0.276904 | 0.036517 |
|     |          | 0.666462 | 8.125000 | 0.036517 | 0.445404 |          |
|     | 8.125000 |          |          |          |          |          |
| 0.6 | 31646    | 168354   | 0.175000 | 0.492506 | 1.241509 |          |
|     | 0.035912 | 0.512378 |          | 8.967742 | 0.035912 | 0.500454 |
|     |          | 8.967742 | 10648    | 39044    | 0.648734 | 0.740433 |
|     | 1.241509 | 0.064877 |          | 0.368633 | 3.048951 | 0.064877 |
|     |          | 0.591713 | 3.048951 | 7984     | 42024    | 0.271003 |
|     | 0.414160 | 0.570162 |          | 0.044335 | 0.496820 | 8.687500 |
|     |          | 0.044335 | 0.447224 | 8.687500 | 7758     | 42236    |
|     | 0.270380 | 0.414504 |          | 0.573295 | 0.044586 | 0.497677 |
|     |          | 8.967742 | 0.044586 | 0.447773 | 8.967742 |          |
|     | 5256     | 45050    | 0.175000 | 0.224377 | 0.484222 | 0.035912 |
|     |          | 0.665253 | 7.920000 | 0.035912 | 0.400728 |          |
|     | 7.920000 |          |          |          |          |          |
| 0.7 | 31480    | 168520   | 0.181435 | 0.493408 | 0.869811 |          |
|     | 0.036466 | 0.512449 |          | 9.387097 | 0.036466 | 0.499120 |
|     |          | 9.387097 | 10576    | 39314    | 0.573913 | 0.740847 |
|     | 0.869811 | 0.062635 |          | 0.368561 | 3.277027 | 0.062635 |
|     |          | 0.629161 | 3.277027 | 7922     | 42110    | 0.269333 |
|     | 0.414724 | 0.638235 |          | 0.043760 | 0.500615 | 8.843750 |
|     |          | 0.043760 | 0.440491 | 8.843750 | 7878     | 42606    |
|     | 0.273333 | 0.414704 |          | 0.683824 | 0.045677 | 0.498194 |
|     |          | 9.387097 | 0.045677 | 0.439751 | 9.387097 |          |
|     | 5104     | 44490    | 0.181435 | 0.224295 | 0.283272 | 0.036466 |
|     |          | 0.664448 | 8.416667 | 0.036466 | 0.356341 |          |
|     | 8.416667 |          |          |          |          |          |
| 0.8 | 30898    | 169102   | 0.182030 | 0.491303 | 0.921811 |          |
|     | 0.035665 | 0.510769 |          | 9.281250 | 0.035665 | 0.495196 |
|     |          | 9.281250 | 10284    | 39208    | 0.574230 | 0.740270 |
|     | 0.858456 | 0.065169 |          | 0.366940 | 2.969388 | 0.065169 |
|     |          | 0.665604 | 2.969388 | 7622     | 42314    | 0.267568 |
|     | 0.414434 | 0.921811 |          | 0.043956 | 0.501325 | 8.741935 |
|     |          | 0.043956 | 0.431812 | 8.741935 | 7856     | 42528    |
|     | 0.263091 | 0.414506 |          | 0.831004 | 0.043548 | 0.490800 |
|     |          | 9.281250 | 0.043548 | 0.429765 | 9.281250 |          |
|     | 5136     | 45052    | 0.182030 | 0.224334 | 0.266350 | 0.035665 |
|     |          | 0.663662 | 8.250000 | 0.035665 | 0.312199 |          |
|     | 8.250000 |          |          |          |          |          |
| 0.9 | 31818    | 168182   | 0.184272 | 0.493482 | 1.134441 |          |
|     | 0.035714 | 0.510785 |          | 9.064516 | 0.035714 | 0.495213 |
|     |          | 9.064516 | 10804    | 39136    | 0.651540 | 0.740489 |
|     | 1.134441 | 0.064877 |          | 0.369992 | 2.979167 | 0.064877 |
|     |          | 0.703439 | 2.979167 | 7768     | 41786    | 0.267473 |
|     | 0.414426 | 0.558174 |          | 0.044335 | 0.497496 | 9.064516 |
|     |          | 0.044335 | 0.422733 | 9.064516 | 7922     | 42308    |
|     | 0.271871 | 0.414667 |          | 0.612069 | 0.042857 | 0.494389 |
|     |          | 9.064516 | 0.042857 | 0.422640 | 9.064516 |          |
|     | 5324     | 44952    | 0.184272 | 0.224853 | 0.286571 | 0.035714 |
|     |          | 0.661145 | 8.291667 | 0.035714 | 0.268482 |          |

8.291667

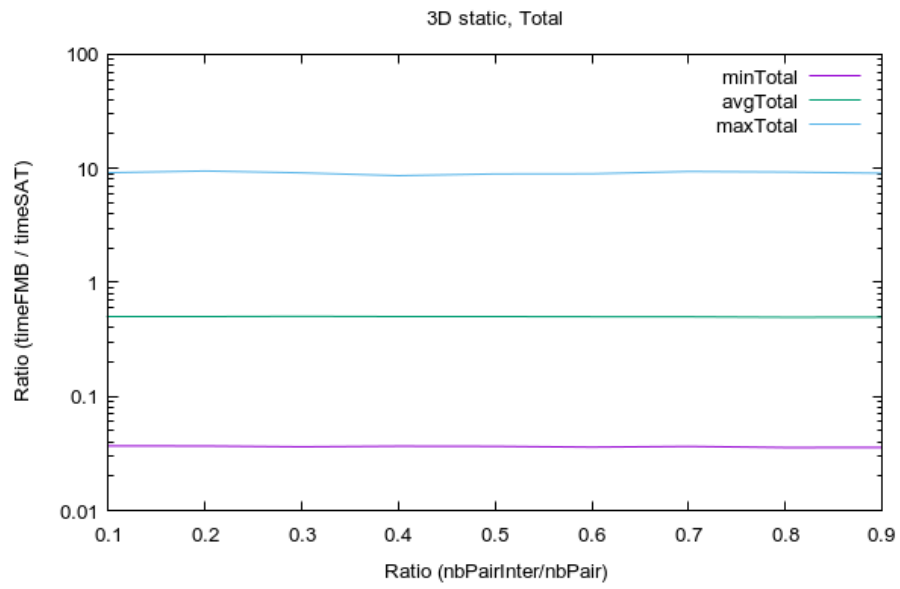

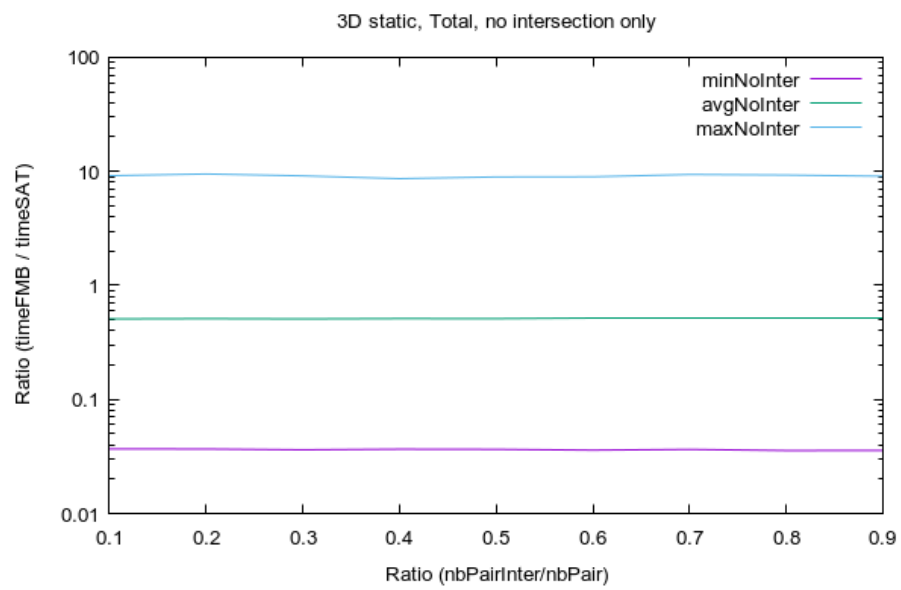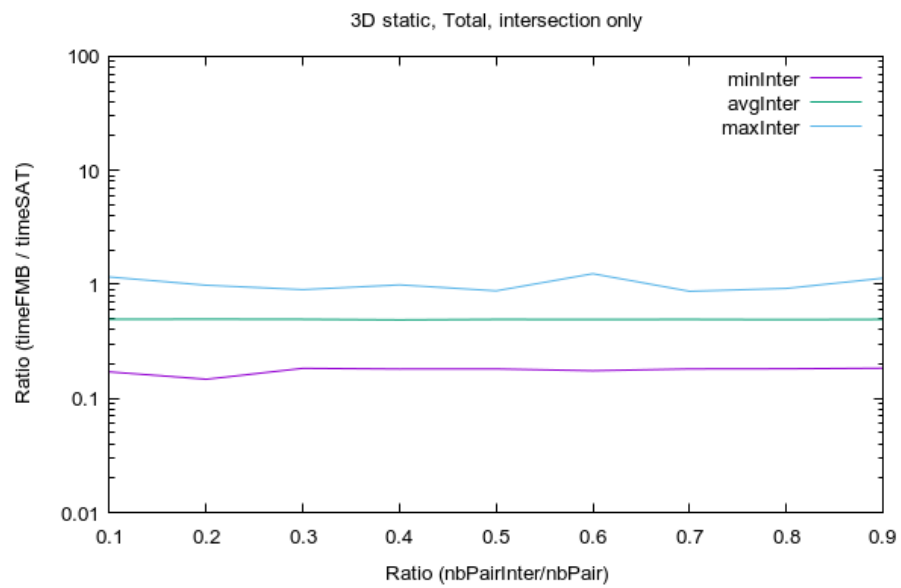

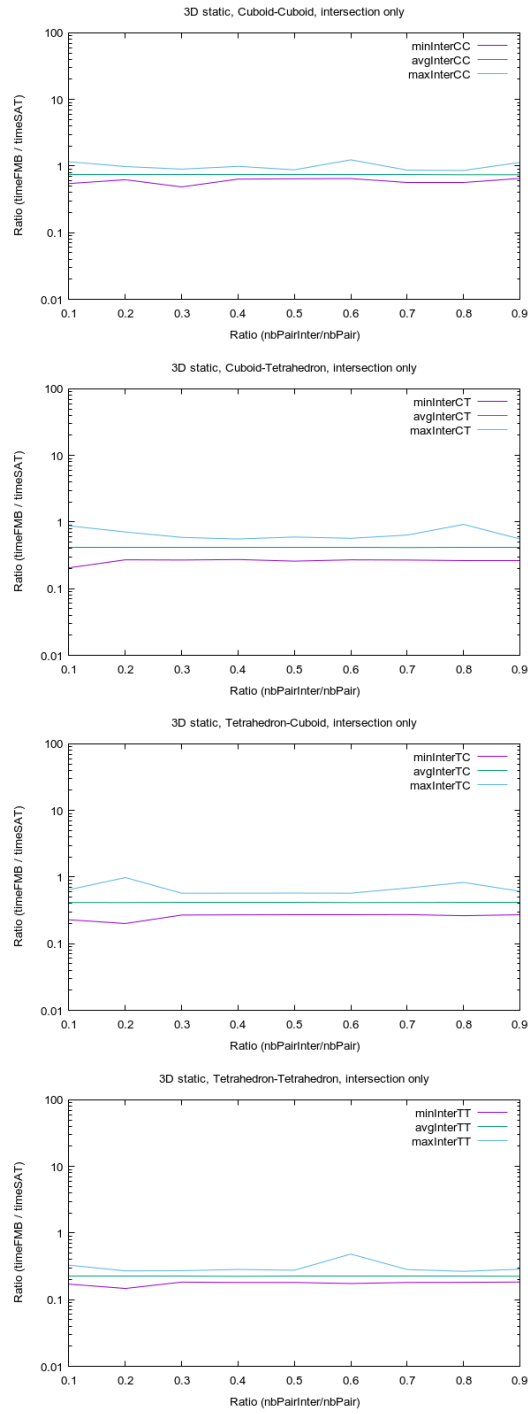

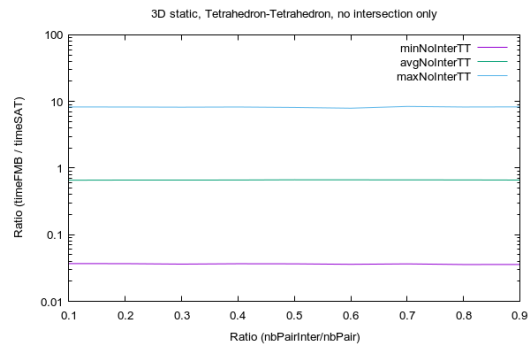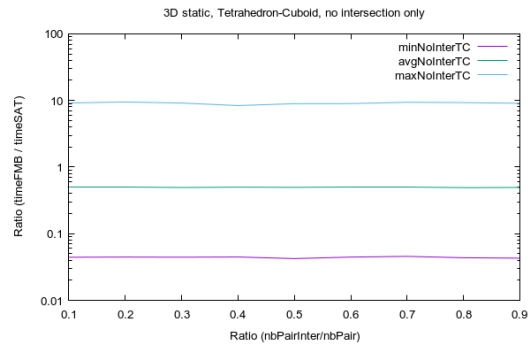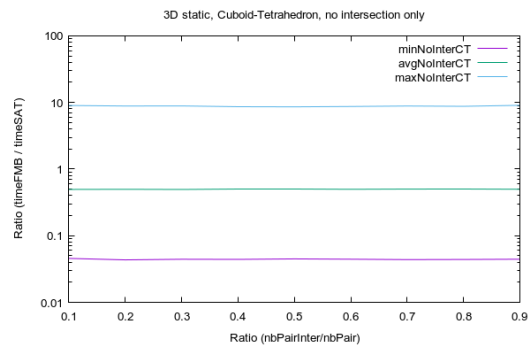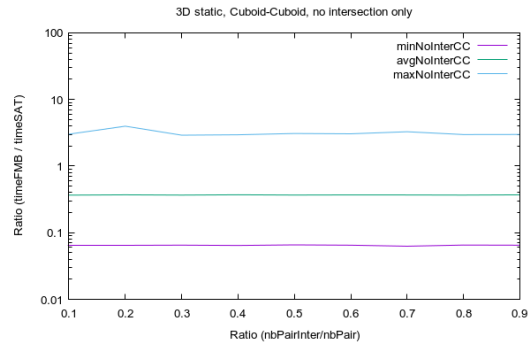

### 8.2.3 2D dynamic


|     | percPairInter  | countInter     |           | countNoInter   |           | minInter       | avgInter   |  |
|-----|----------------|----------------|-----------|----------------|-----------|----------------|------------|--|
|     |                | maxInter       |           | minNoInter     |           | avgNoInter     | maxNoInter |  |
|     | minTotal       | avgTotal       |           | maxTotal       |           | countInterCC   |            |  |
|     | countNoInterCC | minInterCC     |           | avgInterCC     |           | maxInterCC     |            |  |
|     | minNoInterCC   | avgNoInterCC   |           | maxNoInterCC   |           | minTotalCC     |            |  |
|     | avgTotalCC     | maxTotalCC     |           | countInterCT   |           | countNoInterCT |            |  |
|     | minInterCT     | avgInterCT     |           | maxInterCT     |           | minNoInterCT   |            |  |
|     | avgNoInterCT   | maxNoInterCT   |           | minTotalCT     |           | avgTotalCT     |            |  |
|     | maxTotalCT     | countInterTC   |           | countNoInterTC |           | minInterTC     |            |  |
|     | avgInterTC     | maxInterTC     |           | minNoInterTC   |           | avgNoInterTC   |            |  |
|     | maxNoInterTC   | minTotalTC     |           | avgTotalTC     |           | maxTotalTC     |            |  |
|     | countInterTT   | countNoInterTT |           | minInterTT     |           | avgInterTT     |            |  |
|     | maxInterTT     | minNoInterTT   |           | avgNoInterTT   |           | maxNoInterTT   |            |  |
|     | minTotalTT     | avgTotalTT     |           | maxTotalTT     |           |                |            |  |
| 0.1 | 74540          | 125456         | 1.072581  |                | 2.016891  |                | 4.849624   |  |
|     | 0.140187       | 1.113797       |           | 17.115385      | 0.140187  |                | 1.204107   |  |
|     |                | 17.115385      | 19906     | 29830          | 1.454237  |                | 2.539910   |  |
|     | 4.849624       | 0.166667       |           | 1.072354       | 14.172414 |                | 0.166667   |  |
|     |                | 1.219109       | 14.172414 | 18888          | 31332     | 1.250883       |            |  |
|     | 1.974600       | 3.676259       |           | 0.140187       | 1.114282  |                |            |  |
|     | 13.583333      | 0.140187       |           | 1.200314       | 13.583333 | 18610          |            |  |
|     | 31518          | 1.072581       | 1.973950  | 3.461538       | 0.146789  |                |            |  |
|     | 1.120753       | 17.115385      |           | 0.146789       | 1.206073  |                |            |  |
|     | 17.115385      | 17136          | 32776     | 1.111111       | 1.502579  | 2.439024       |            |  |
|     |                | 0.161290       | 1.144364  | 10.521739      | 0.161290  |                |            |  |
|     | 1.180185       | 10.521739      |           |                |           |                |            |  |
| 0.2 | 74066          | 125930         | 1.194656  |                | 2.017957  |                | 2.954198   |  |
|     | 0.125000       | 1.126331       |           | 13.652174      | 0.125000  |                | 1.304657   |  |
|     |                | 13.652174      | 19986     | 30416          | 1.723077  |                | 2.539556   |  |
|     | 2.954198       | 0.170455       |           | 1.077619       | 12.740741 |                | 0.170455   |  |
|     |                | 1.370006       | 12.740741 | 18430          | 31182     | 1.360825       |            |  |
|     | 1.974826       | 2.571429       |           | 0.125000       | 1.137328  |                |            |  |
|     | 13.652174      | 0.125000       |           | 1.304827       | 13.652174 | 18590          |            |  |
|     | 31314          | 1.353535       | 1.974034  | 2.699301       | 0.127119  |                |            |  |
|     | 1.134871       | 13.500000      |           | 0.127119       | 1.302704  |                |            |  |
|     | 13.500000      | 17060          | 33018     | 1.194656       | 1.501356  | 1.833333       |            |  |
|     |                | 0.161616       | 1.152721  | 10.291667      | 0.161616  |                |            |  |
|     | 1.222448       | 10.291667      |           |                |           |                |            |  |
| 0.3 | 74530          | 125464         | 1.115207  |                | 2.014464  |                | 4.582090   |  |
|     | 0.142857       | 1.114772       |           | 13.625000      | 0.142857  |                | 1.384680   |  |
|     |                | 13.625000      | 19818     | 30264          | 1.616505  |                | 2.539830   |  |
|     | 4.582090       | 0.170213       |           | 1.058833       | 13.137931 |                | 0.170213   |  |
|     |                | 1.503132       | 13.137931 | 18506          | 31020     | 1.215116       |            |  |
|     | 1.975186       | 3.128571       |           | 0.144144       | 1.143663  |                |            |  |
|     | 13.625000      | 0.144144       |           | 1.393120       | 13.625000 | 18780          |            |  |
|     | 31510          | 1.223256       | 1.974334  | 3.394161       | 0.146789  |                |            |  |
|     | 1.103604       | 13.615385      |           | 0.146789       | 1.364823  |                |            |  |
|     | 13.615385      | 17426          | 32670     | 1.115207       | 1.501943  | 1.913043       |            |  |
|     |                | 0.142857       | 1.149931  | 10.521739      | 0.142857  |                |            |  |
|     | 1.255535       | 10.521739      |           |                |           |                |            |  |
| 0.4 | 74532          | 125462         | 1.078704  |                | 2.013686  |                | 4.640845   |  |
|     | 0.119048       | 1.121286       |           | 14.560000      | 0.119048  |                | 1.478246   |  |
|     |                | 14.560000      | 19744     | 30016          | 1.484848  |                | 2.540887   |  |
|     | 3.740458       | 0.119048       |           | 1.090234       | 12.750000 |                | 0.119048   |  |
|     |                | 1.670495       | 12.750000 | 18362          | 31348     | 1.166667       |            |  |
|     | 1.975340       | 4.640845       |           | 0.146789       | 1.129813  |                |            |  |
|     | 13.416667      | 0.146789       |           | 1.468024       | 13.416667 | 18910          |            |  |
|     | 31358          | 1.141631       | 1.974553  | 2.652174       | 0.124031  |                |            |  |
|     | 1.115450       | 14.560000      |           | 0.124031       | 1.459091  |                |            |  |









|     |           |           |           |           |           |          |
|-----|-----------|-----------|-----------|-----------|-----------|----------|
|     | 14.560000 | 17516     | 32740     | 1.078704  | 1.501870  | 2.297468 |
|     | 0.157895  |           | 1.147179  | 10.291667 | 0.157895  |          |
|     | 1.289055  | 10.291667 |           |           |           |          |
| 0.5 | 74572     | 125416    | 0.959698  | 2.014620  | 3.803030  |          |
|     | 0.145455  | 1.122265  |           | 15.806452 | 0.145455  | 1.568442 |
|     |           | 15.806452 | 19986     | 30064     | 1.860335  | 2.539512 |
|     | 3.803030  | 0.170000  |           | 1.050379  | 15.806452 | 0.170000 |
|     |           | 1.794945  | 15.806452 | 18488     | 31280     | 1.104603 |
|     | 1.974474  | 2.950355  |           | 0.145455  | 1.142531  |          |
|     | 13.333333 | 0.145455  |           | 1.558502  | 13.333333 | 18624    |
|     | 31754     | 1.247619  | 1.973859  | 3.333333  | 0.145455  |          |
|     | 1.134469  | 14.200000 |           | 0.145455  | 1.554164  |          |
|     | 14.200000 | 17474     | 32318     | 0.959698  | 1.500189  | 2.125786 |
|     | 0.153846  |           | 1.157532  | 10.346154 | 0.153846  |          |
|     | 1.328861  | 10.346154 |           |           |           |          |
| 0.6 | 74242     | 125748    | 1.227488  | 2.015532  | 2.931973  |          |
|     | 0.130435  | 1.126601  |           | 14.200000 | 0.130435  | 1.659959 |
|     |           | 14.200000 | 19898     | 30308     | 1.964912  | 2.539975 |
|     | 2.931973  | 0.183908  |           | 1.077178  | 12.821429 | 0.183908 |
|     |           | 1.954857  | 12.821429 | 18712     | 31802     | 1.371134 |
|     | 1.974901  | 2.671533  |           | 0.130435  | 1.141280  |          |
|     | 14.200000 | 0.130435  |           | 1.641453  | 14.200000 | 18334    |
|     | 30836     | 1.316832  | 1.973841  | 2.649635  | 0.140496  |          |
|     | 1.144666  | 13.250000 |           | 0.140496  | 1.642171  |          |
|     | 13.250000 | 17298     | 32802     | 1.227488  | 1.500401  | 1.778481 |
|     | 0.142857  |           | 1.141052  | 11.200000 | 0.142857  |          |
|     | 1.356662  | 11.200000 |           |           |           |          |
| 0.7 | 74212     | 125778    | 1.114679  | 2.016154  | 3.326087  |          |
|     | 0.121739  | 1.118372  |           | 13.375000 | 0.121739  | 1.746820 |
|     |           | 13.375000 | 19812     | 30132     | 1.515748  | 2.540043 |
|     | 3.137405  | 0.133803  |           | 1.053011  | 12.892857 | 0.133803 |
|     |           | 2.093934  | 12.892857 | 18430     | 31462     | 1.231660 |
|     | 1.975607  | 3.326087  |           | 0.125000  | 1.128547  |          |
|     | 13.291667 | 0.125000  |           | 1.721489  | 13.291667 | 18766    |
|     | 31822     | 1.353846  | 1.974756  | 2.901235  | 0.121739  |          |
|     | 1.124348  | 13.375000 |           | 0.121739  | 1.719634  |          |
|     | 13.375000 | 17204     | 32362     | 1.114679  | 1.501442  | 2.388535 |
|     | 0.160000  |           | 1.163462  | 10.521739 | 0.160000  |          |
|     | 1.400048  | 10.521739 |           |           |           |          |
| 0.8 | 74464     | 125532    | 0.900000  | 2.018728  | 4.259542  |          |
|     | 0.121429  | 1.113242  |           | 13.416667 | 0.121429  | 1.837631 |
|     |           | 13.416667 | 20182     | 30158     | 1.883333  | 2.540169 |
|     | 4.259542  | 0.152174  |           | 1.059715  | 13.259259 | 0.152174 |
|     |           | 2.244078  | 13.259259 | 18494     | 31582     | 1.274882 |
|     | 1.975098  | 3.635036  |           | 0.121429  | 1.112056  |          |
|     | 13.375000 | 0.121429  |           | 1.802490  | 13.375000 | 18580    |
|     | 31308     | 0.900000  | 1.973406  | 2.716312  | 0.146789  |          |
|     | 1.127207  | 13.416667 |           | 0.146789  | 1.804167  |          |
|     | 13.416667 | 17208     | 32484     | 1.154589  | 1.502994  | 2.527363 |
|     | 0.159574  |           | 1.150630  | 12.578947 | 0.159574  |          |
|     | 1.432521  | 12.578947 |           |           |           |          |
| 0.9 | 74412     | 125578    | 0.977860  | 2.014325  | 4.353383  |          |
|     | 0.125000  | 1.132980  |           | 14.500000 | 0.125000  | 1.926191 |
|     |           | 14.500000 | 19812     | 29902     | 1.283019  | 2.539859 |
|     | 4.353383  | 0.125000  |           | 1.099858  | 13.370370 | 0.125000 |
|     |           | 2.395859  | 13.370370 | 18516     | 31374     | 0.977860 |
|     | 1.974208  | 3.905109  |           | 0.144144  | 1.137957  |          |
|     | 14.500000 | 0.144144  |           | 1.890583  | 14.500000 | 18620    |
|     | 31198     | 1.275304  | 1.973773  | 2.627737  | 0.135135  |          |
|     | 1.131695  | 13.640000 |           | 0.135135  | 1.889565  |          |
|     | 13.640000 | 17464     | 33104     | 1.200000  | 1.503904  | 3.132911 |
|     | 0.163265  |           | 1.159392  | 10.608696 | 0.163265  |          |


1.469453

10.608696

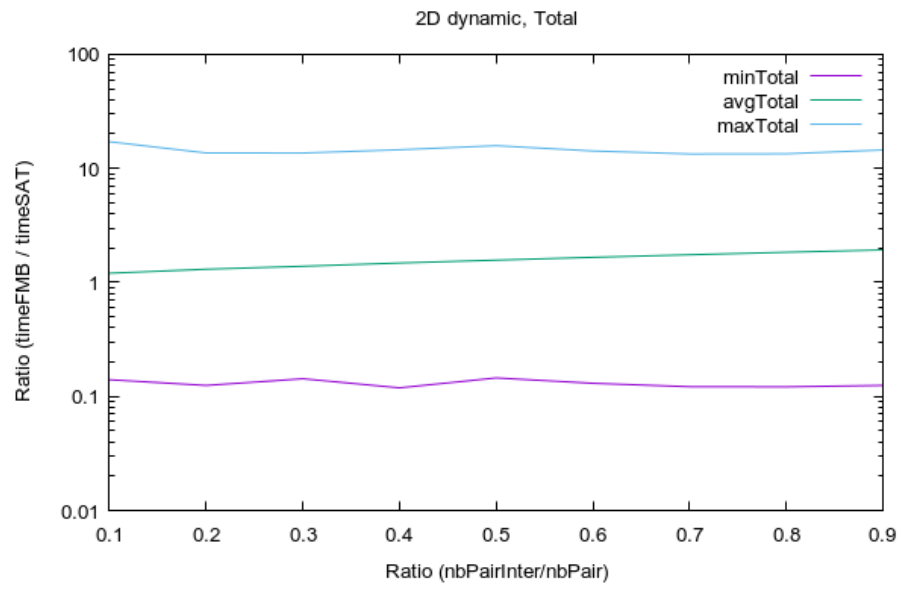

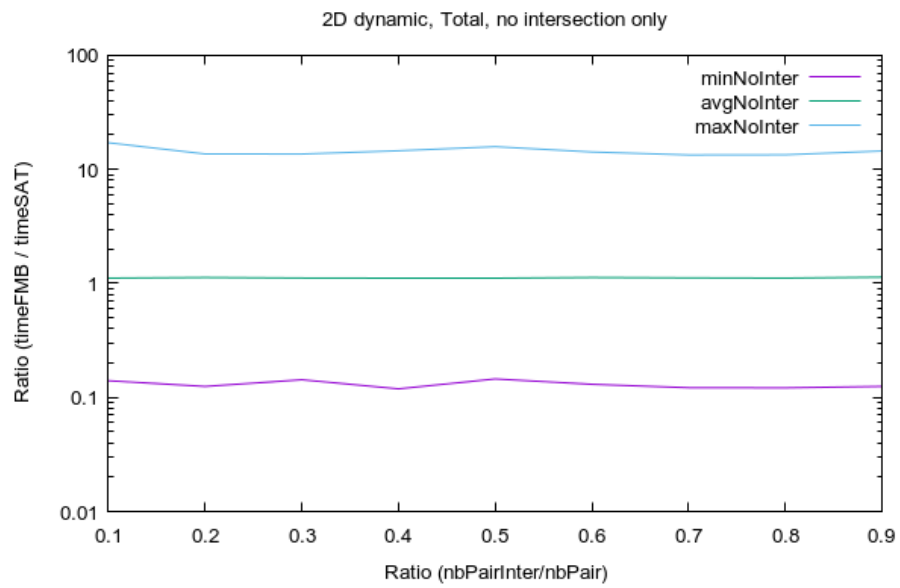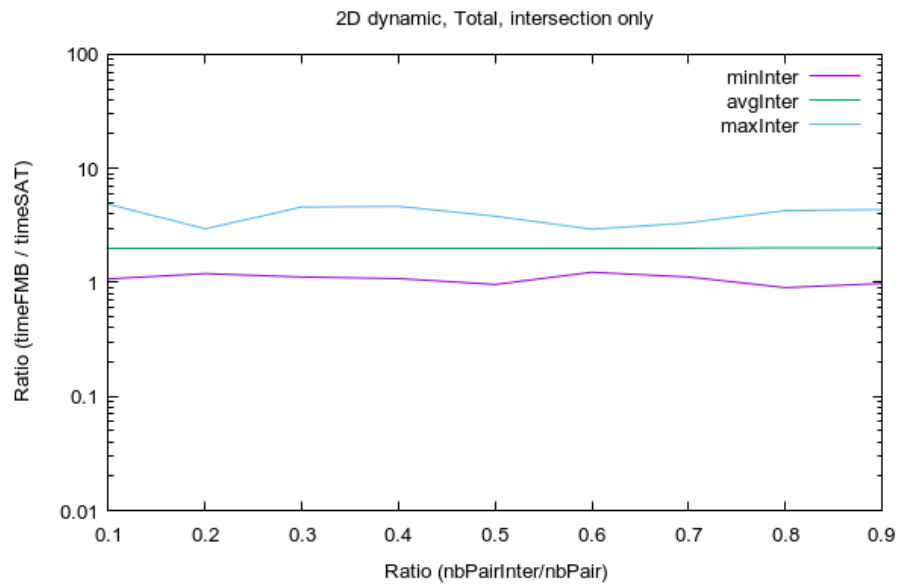

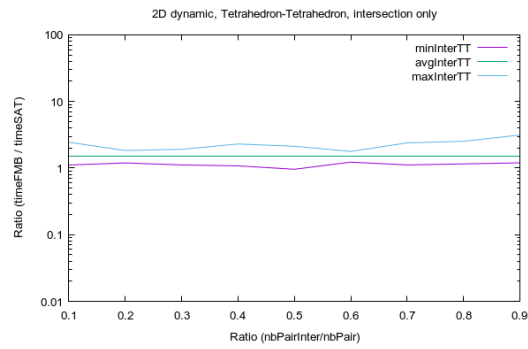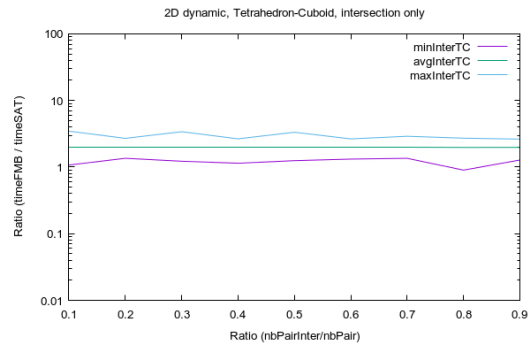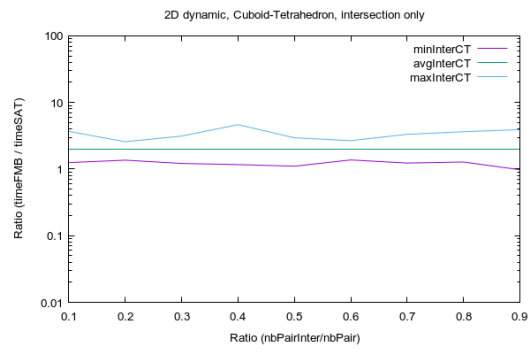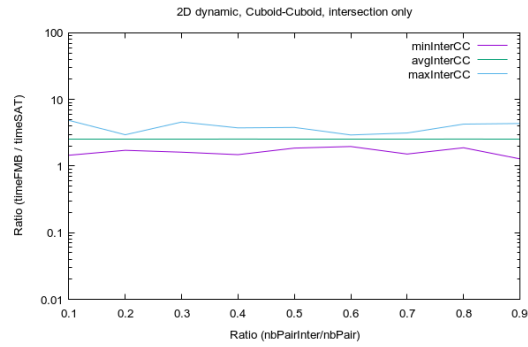

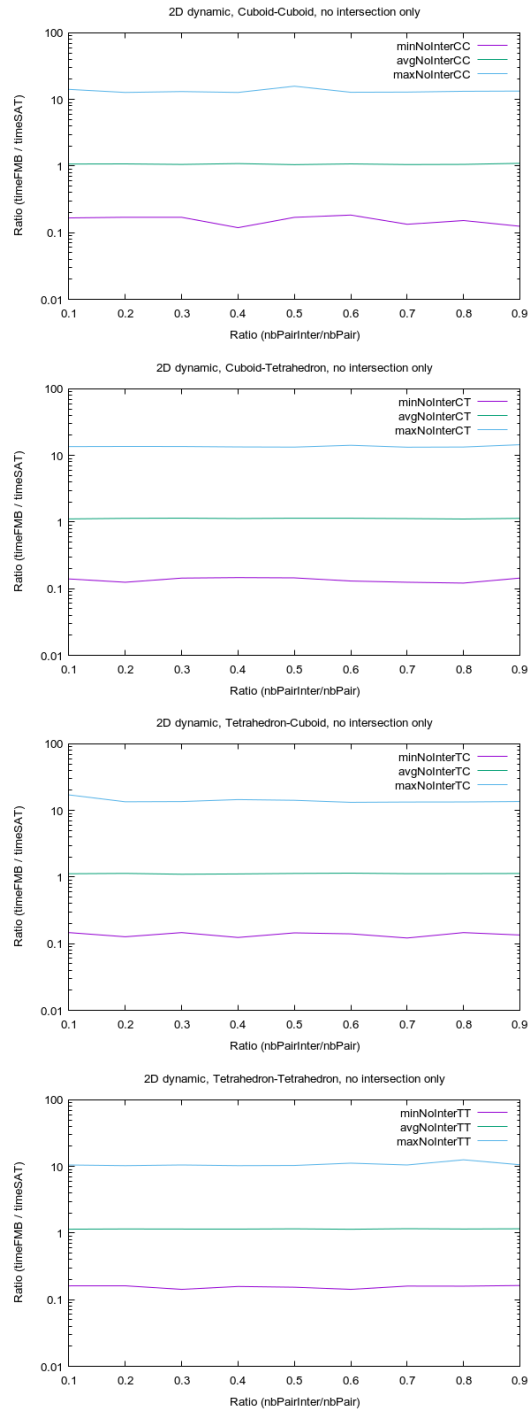


## 8.2.4 3D dynamic

|     | percPairInter  | countInter     |           | countNoInter   |           | minInter       | avgInter   |  |
|-----|----------------|----------------|-----------|----------------|-----------|----------------|------------|--|
|     |                | maxInter       |           | minNoInter     |           | avgNoInter     | maxNoInter |  |
|     | minTotal       | avgTotal       |           | maxTotal       |           | countInterCC   |            |  |
|     | countNoInterCC | minInterCC     |           | avgInterCC     |           | maxInterCC     |            |  |
|     | minNoInterCC   | avgNoInterCC   |           | maxNoInterCC   |           | minTotalCC     |            |  |
|     | avgTotalCC     | maxTotalCC     |           | countInterCT   |           | countNoInterCT |            |  |
|     | minInterCT     | avgInterCT     |           | maxInterCT     |           | minNoInterCT   |            |  |
|     | avgNoInterCT   | maxNoInterCT   |           | minTotalCT     |           | avgTotalCT     |            |  |
|     | maxTotalCT     | countInterTC   |           | countNoInterTC |           | minInterTC     |            |  |
|     | avgInterTC     | maxInterTC     |           | minNoInterTC   |           | avgNoInterTC   |            |  |
|     | maxNoInterTC   | minTotalTC     |           | avgTotalTC     |           | maxTotalTC     |            |  |
|     | countInterTT   | countNoInterTT |           | minInterTT     |           | avgInterTT     |            |  |
|     | maxInterTT     | minNoInterTT   |           | avgNoInterTT   |           | maxNoInterTT   |            |  |
|     | minTotalTT     | avgTotalTT     |           | maxTotalTT     |           |                |            |  |
| 0.1 | 51948          | 148052         | 0.288525  | 1.600453       |           | 3.265092       |            |  |
|     | 0.024929       | 0.729255       |           | 28.428571      | 0.024929  |                | 0.816375   |  |
|     | 28.428571      | 15776          | 34120     | 1.538105       | 2.615324  |                |            |  |
|     | 3.265092       | 0.039615       | 0.630705  |                | 13.700893 | 0.039615       |            |  |
|     | 0.829167       | 13.700893      | 13168     | 36682          | 0.466667  |                |            |  |
|     | 1.393738       | 2.559970       | 0.025566  | 0.728236       |           |                |            |  |
|     | 22.836735      | 0.025566       | 0.794786  | 22.836735      | 12996     |                |            |  |
|     | 37414          | 0.466285       | 1.391845  | 2.476120       | 0.027888  |                |            |  |
|     | 0.728085       | 22.836735      | 0.027888  | 0.794461       |           |                |            |  |
|     | 22.836735      | 10008          | 39836     | 0.288525       | 0.543547  | 0.948420       |            |  |
|     | 0.024929       | 0.815702       | 28.428571 | 0.024929       |           |                |            |  |
|     | 0.788487       | 28.428571      |           |                |           |                |            |  |
| 0.2 | 52660          | 147340         | 0.292249  | 1.602534       | 4.039062  |                |            |  |
|     | 0.025754       | 0.726991       | 29.342857 | 0.025754       | 0.902099  |                |            |  |
|     | 29.342857      | 16088          | 34022     | 1.617647       | 2.615509  |                |            |  |
|     | 4.039062       | 0.039958       | 0.647699  | 13.535398      | 0.039958  |                |            |  |
|     | 1.041261       | 13.535398      | 13294     | 36748          | 0.457932  |                |            |  |
|     | 1.395088       | 2.474041       | 0.026237  | 0.723097       |           |                |            |  |
|     | 23.625000      | 0.026237       | 0.857495  | 23.625000      | 13094     |                |            |  |
|     | 36700          | 0.470976       | 1.391214  | 3.104478       | 0.028998  |                |            |  |
|     | 0.721707       | 22.720000      | 0.028998  | 0.855608       |           |                |            |  |
|     | 22.720000      | 10184          | 39870     | 0.292249       | 0.544803  | 0.742556       |            |  |
|     | 0.025754       | 0.803105       | 29.342857 | 0.025754       |           |                |            |  |
|     | 0.751444       | 29.342857      |           |                |           |                |            |  |
| 0.3 | 52318          | 147682         | 0.292898  | 1.601704       | 3.961538  |                |            |  |
|     | 0.025679       | 0.730448       | 30.176471 | 0.025679       | 0.991825  |                |            |  |
|     | 30.176471      | 15946          | 33640     | 0.948944       | 2.614666  |                |            |  |
|     | 3.961538       | 0.039054       | 0.645531  | 13.513158      | 0.039054  |                |            |  |
|     | 1.236272       | 13.513158      | 13232     | 37072          | 0.466318  |                |            |  |
|     | 1.391362       | 2.467814       | 0.028235  | 0.719220       |           |                |            |  |
|     | 20.840000      | 0.028235       | 0.920863  | 20.840000      | 13050     |                |            |  |
|     | 37026          | 0.456954       | 1.394344  | 2.605748       | 0.026616  |                |            |  |
|     | 0.722152       | 22.800000      | 0.026616  | 0.923809       |           |                |            |  |
|     | 22.800000      | 10090          | 39944     | 0.292898       | 0.544875  | 0.741851       |            |  |
|     | 0.025679       | 0.820075       | 30.176471 | 0.025679       |           |                |            |  |
|     | 0.737515       | 30.176471      |           |                |           |                |            |  |
| 0.4 | 52344          | 147656         | 0.288499  | 1.597924       | 3.397775  |                |            |  |
|     | 0.025436       | 0.725079       | 30.828571 | 0.025436       | 1.074217  |                |            |  |
|     | 30.828571      | 15988          | 33996     | 2.109453       | 2.614919  |                |            |  |
|     | 3.397775       | 0.039236       | 0.622718  | 14.696970      | 0.039236  |                |            |  |
|     | 1.419598       | 14.696970      | 13054     | 37214          | 0.469599  |                |            |  |
|     | 1.391394       | 2.555973       | 0.026616  | 0.715950       |           |                |            |  |
|     | 22.795918      | 0.026616       | 0.986128  | 22.795918      | 12960     |                |            |  |
|     | 36512          | 0.464771       | 1.391468  | 2.563286       | 0.026718  |                |            |  |
|     | 0.723789       | 22.019608      | 0.026718  | 0.990861       |           |                |            |  |



|     |           |           |           |           |           |          |
|-----|-----------|-----------|-----------|-----------|-----------|----------|
|     | 22.019608 | 10342     | 39934     | 0.288499  | 0.545130  | 0.746852 |
|     | 0.025436  |           | 0.821905  | 30.828571 | 0.025436  |          |
|     | 0.711195  | 30.828571 |           |           |           |          |
| 0.5 | 52456     | 147544    | 0.285071  | 1.602763  | 3.194542  |          |
|     | 0.025660  | 0.732794  |           | 30.514286 | 0.025660  | 1.167778 |
|     |           | 30.514286 | 15942     | 34190     | 1.858919  | 2.615660 |
|     | 3.194542  | 0.040000  |           | 0.634864  | 13.819820 | 0.040000 |
|     |           | 1.625262  | 13.819820 | 13284     | 36524     | 0.467855 |
|     | 1.395456  | 2.505319  |           | 0.026257  | 0.740025  |          |
|     | 23.833333 | 0.026257  |           | 1.067740  | 23.833333 | 13146    |
|     | 36496     | 0.469677  | 1.395234  | 2.443858  | 0.026296  |          |
|     | 0.722588  | 23.489796 |           | 0.026296  | 1.058911  |          |
|     | 23.489796 | 10084     | 40334     | 0.285071  | 0.545090  | 0.762179 |
|     |           | 0.025660  | 0.818494  | 30.514286 | 0.025660  |          |
|     | 0.681792  | 30.514286 |           |           |           |          |
| 0.6 | 52558     | 147442    | 0.284326  | 1.606739  | 3.268930  |          |
|     | 0.025907  | 0.721223  |           | 28.888889 | 0.025907  | 1.252533 |
|     |           | 28.888889 | 16210     | 34030     | 1.690750  | 2.615304 |
|     | 3.268930  | 0.039236  |           | 0.644433  | 13.619469 | 0.039236 |
|     |           | 1.826956  | 13.619469 | 13136     | 36914     | 0.467658 |
|     | 1.391212  | 2.713663  |           | 0.026100  | 0.695584  |          |
|     | 24.021277 | 0.026100  |           | 1.112961  | 24.021277 | 13142    |
|     | 37184     | 0.468952  | 1.392790  | 2.519490  | 0.026355  |          |
|     | 0.723739  | 23.204082 |           | 0.026355  | 1.125170  |          |
|     | 23.204082 | 10070     | 39314     | 0.284326  | 0.543587  | 0.801034 |
|     |           | 0.025907  | 0.809386  | 28.888889 | 0.025907  |          |
|     | 0.649906  | 28.888889 |           |           |           |          |
| 0.7 | 52672     | 147328    | 0.288889  | 1.598365  | 3.779299  |          |
|     | 0.026012  | 0.717967  |           | 29.416667 | 0.026012  | 1.334245 |
|     |           | 29.416667 | 16050     | 34004     | 1.686330  | 2.614795 |
|     | 3.779299  | 0.037376  |           | 0.611985  | 13.684685 | 0.037376 |
|     |           | 2.013952  | 13.684685 | 13344     | 36730     | 0.468731 |
|     | 1.392435  | 2.832593  |           | 0.026100  | 0.722128  |          |
|     | 23.708333 | 0.026100  |           | 1.191343  | 23.708333 | 12912    |
|     | 36750     | 0.421024  | 1.391122  | 2.541791  | 0.026012  |          |
|     | 0.704014  | 21.137255 |           | 0.026012  | 1.184989  |          |
|     | 21.137255 | 10366     | 39844     | 0.288889  | 0.547828  | 0.957672 |
|     |           | 0.026178  | 0.817449  | 29.416667 | 0.026178  |          |
|     | 0.628714  | 29.416667 |           |           |           |          |
| 0.8 | 52274     | 147726    | 0.282595  | 1.599488  | 3.557336  |          |
|     | 0.023985  | 0.723269  |           | 29.028571 | 0.023985  | 1.424244 |
|     |           | 29.028571 | 15900     | 33794     | 1.881828  | 2.615188 |
|     | 3.557336  | 0.039749  |           | 0.627566  | 13.558036 | 0.039749 |
|     |           | 2.217663  | 13.558036 | 12964     | 37014     | 0.471279 |
|     | 1.394053  | 2.649926  |           | 0.026799  | 0.723188  |          |
|     | 23.125000 | 0.026799  |           | 1.259880  | 23.125000 | 13178    |
|     | 37040     | 0.467126  | 1.393887  | 2.482890  | 0.027301  |          |
|     | 0.714758  | 23.770833 |           | 0.027301  | 1.258061  |          |
|     | 23.770833 | 10232     | 39878     | 0.282595  | 0.546228  | 0.933824 |
|     |           | 0.023985  | 0.812353  | 29.028571 | 0.023985  |          |
|     | 0.599453  | 29.028571 |           |           |           |          |
| 0.9 | 52830     | 147170    | 0.285622  | 1.600873  | 3.447076  |          |
|     | 0.025473  | 0.730697  |           | 30.529412 | 0.025473  | 1.513855 |
|     |           | 30.529412 | 16092     | 33588     | 2.127107  | 2.614492 |
|     | 2.766014  | 0.038895  |           | 0.661782  | 13.606195 | 0.038895 |
|     |           | 2.419221  | 13.606195 | 13448     | 36772     | 0.463859 |
|     | 1.391804  | 3.447076  |           | 0.025622  | 0.704062  |          |
|     | 22.840000 | 0.025622  |           | 1.323030  | 22.840000 | 13080    |
|     | 36930     | 0.466881  | 1.391964  | 2.458709  | 0.026336  |          |
|     | 0.715223  | 23.163265 |           | 0.026336  | 1.324290  |          |
|     | 23.163265 | 10210     | 39880     | 0.285622  | 0.546310  | 0.735691 |
|     |           | 0.025473  | 0.827627  | 30.529412 | 0.025473  |          |





0.574442





30.529412

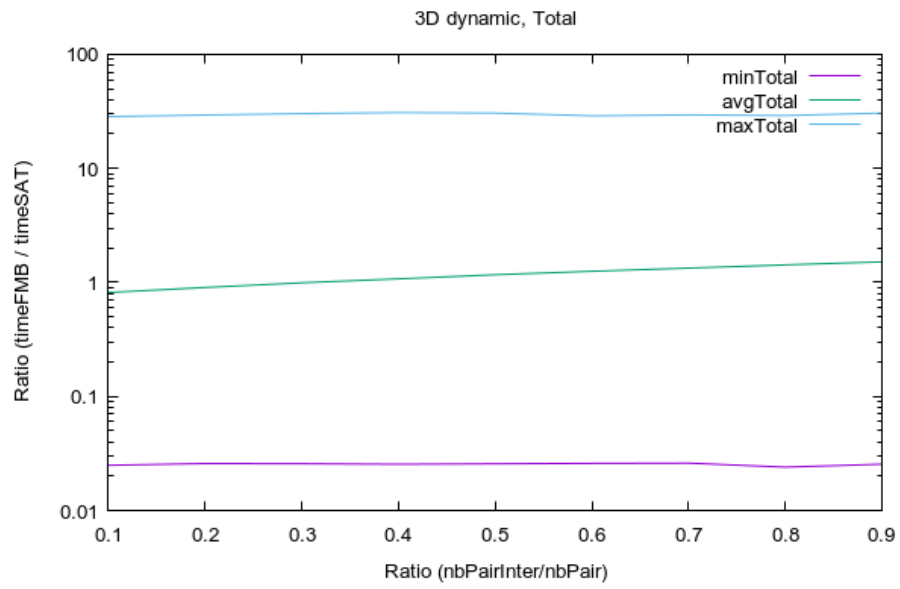



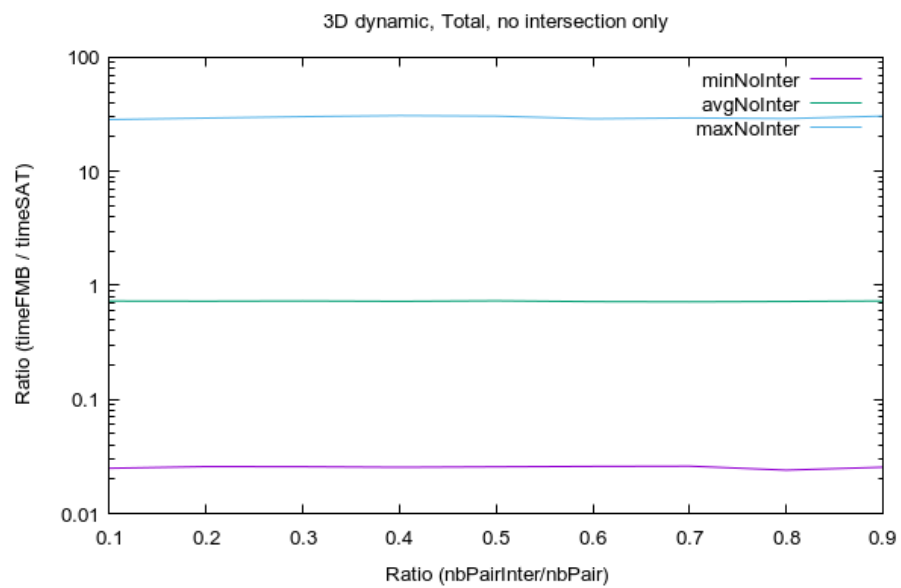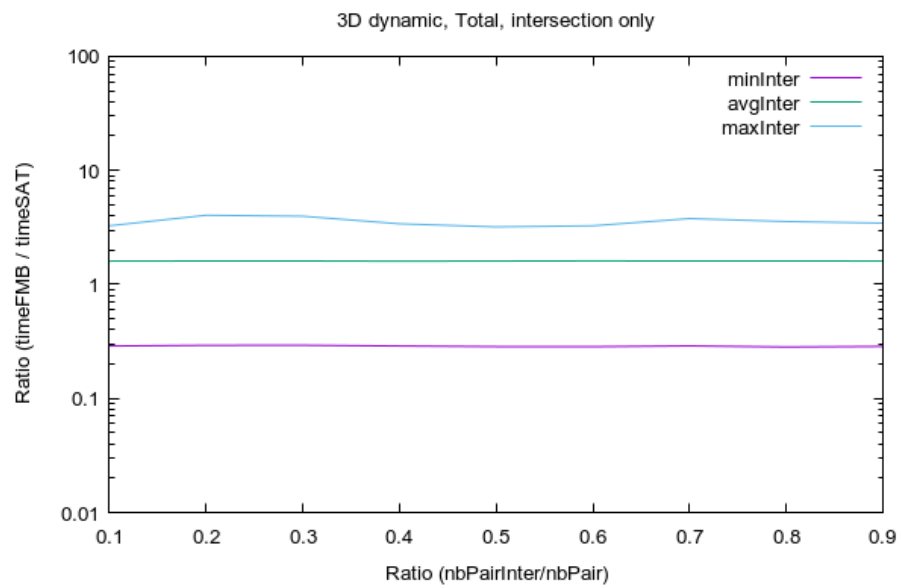

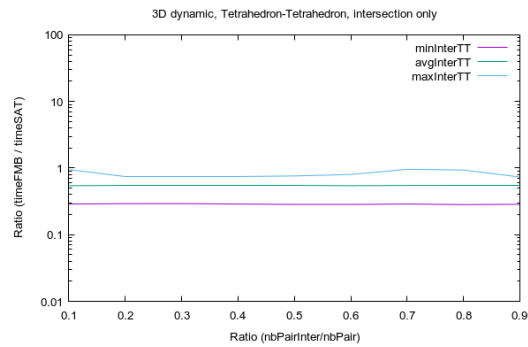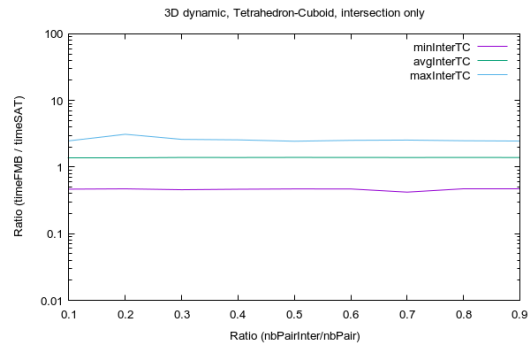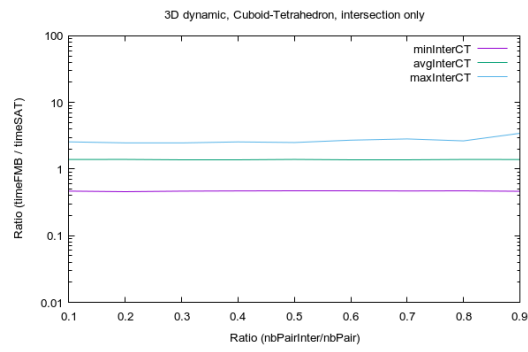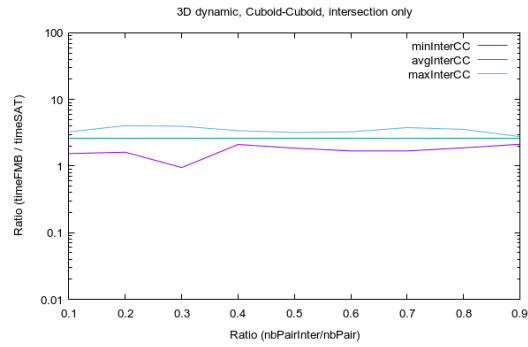

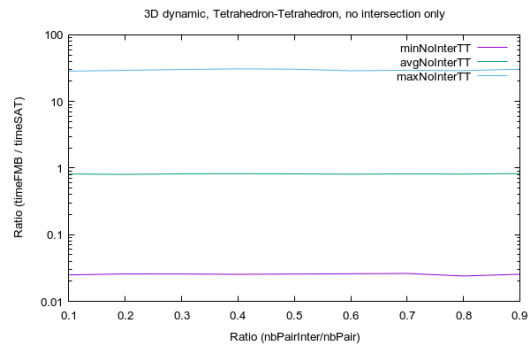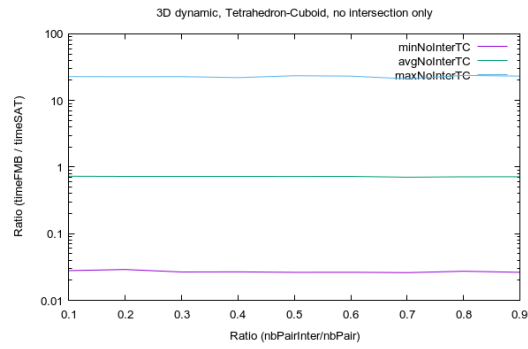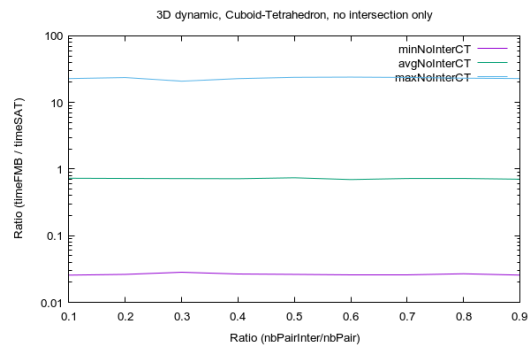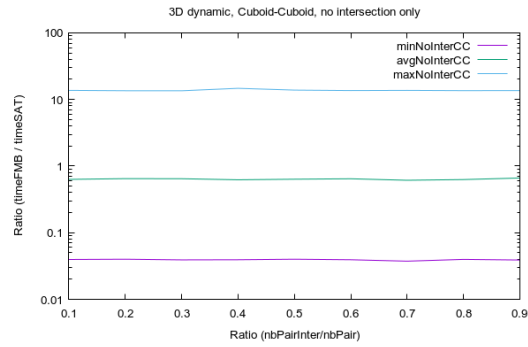

## 9 Conclusion

The validation proves that the FMB algorithm correctly identifies intersection of pairs of Frames in accordance with the results of the SAT algorithm.

The qualification shows that the FMB is 1.2 to 1.8 times slower than the SAT algorithm in the 2D dynamic case. However it is around 2 times faster in the 3D static case, and up to 1.25 times faster in 3D dynamic and up to 1.1 times faster in the 2D static case if the percentage of tested pairs in intersection is less than, respectively, around 40% and 25%.

On one given pair of Frame, the relative speed of the FMB algorithm varies widely, from around 20 times slower to 50 times faster. This is explained by the way the 2 algorithms works: they both make the assumption that the Frames are intersecting and run through a series of tests to try to prove it wrong. This leads to best cases and worst cases for both algorithm: a non intersecting detected right from the first test, or one detected by the last test. These best and worst cases are different for the two algorithms as the tests they performed are completely different. But in average, the FMB algorithm has the advantage for all but the 2D dynamic case.

## 10 Annex

### 10.1 Runtime environment

Results introduce in this paper have been produced by compiling and running the corresponding algorithms in the following environment:

```
uname -v

#40~18.04.1-Ubuntu SMP Thu Nov 14 12:06:39 UTC 2019

=====

lshw -short
```

| H/W path | Device       | Class  | Description                        |
|----------|--------------|--------|------------------------------------|
|          |              | system | VC65-C1                            |
| /0       |              | bus    | VC65-C1                            |
| /0/0     |              | memory | 64KiB BIOS                         |
| /0/2f    |              | memory | 16GiB System Memory                |
| /0/2f/0  |              | memory | [empty]                            |
| /0/2f/1  |              | memory | 16GiB SODIMM DDR4 Synchronous 2400 |
|          | MHz (0.4 ns) |        |                                    |

|                 |            |               |                                    |
|-----------------|------------|---------------|------------------------------------|
| /0/39           |            | memory        | 384KiB L1 cache                    |
| /0/3a           |            | memory        | 1536KiB L2 cache                   |
| /0/3b           |            | memory        | 12MiB L3 cache                     |
| /0/3c           |            | processor     | Intel(R) Core(TM) i7-8700T CPU @   |
| 2.40GHz         |            |               |                                    |
| /0/100          |            | bridge        | 8th Gen Core Processor Host Bridge |
| /DRAM Registers |            |               |                                    |
| /0/100/2        |            | display       | Intel Corporation                  |
| /0/100/12       |            | generic       | Cannon Lake PCH Thermal Controller |
| /0/100/14       |            | bus           | Cannon Lake PCH USB 3.1 xHCI Host  |
| Controller      |            |               |                                    |
| /0/100/14/0     | usb1       | bus           | xHCI Host Controller               |
| /0/100/14/0/5   |            | input         | ELECOM Wired Keyboard              |
| /0/100/14/0/6   |            | input         | PTZ-630                            |
| /0/100/14/0/7   |            | generic       | USB2.0-CRW                         |
| /0/100/14/0/e   |            | communication | Bluetooth wireless interface       |
| /0/100/14/1     | usb2       | bus           | xHCI Host Controller               |
| /0/100/14.2     |            | memory        | RAM memory                         |
| /0/100/14.3     | wlo1       | network       | Wireless-AC 9560 [Jefferson Peak]  |
| /0/100/16       |            | communication | Cannon Lake PCH HECI Controller    |
| /0/100/17       |            | storage       | Cannon Lake PCH SATA AHCI          |
| Controller      |            |               |                                    |
| /0/100/1f       |            | bridge        | Intel Corporation                  |
| /0/100/1f.3     |            | multimedia    | Cannon Lake PCH cAVS               |
| /0/100/1f.4     |            | bus           | Cannon Lake PCH SMBus Controller   |
| /0/100/1f.5     |            | bus           | Cannon Lake PCH SPI Controller     |
| /0/100/1f.6     | eno2       | network       | Ethernet Connection (7) I219-V     |
| /0/1            | scsi0      | storage       |                                    |
| /0/1/0.0.0      | /dev/sda   | disk          | 128GB HFS128G39TND-N21             |
| /0/1/0.0.0/1    |            | volume        | 99MiB Windows FAT volume           |
| /0/1/0.0.0/2    | /dev/sda2  | volume        | 15MiB reserved partition           |
| /0/1/0.0.0/3    | /dev/sda3  | volume        | 83GiB Windows NTFS volume          |
| /0/1/0.0.0/4    | /dev/sda4  | volume        | 499MiB Windows NTFS volume         |
| /0/1/0.0.0/5    | /dev/sda5  | volume        | 35GiB EXT4 volume                  |
| /0/2            | scsi2      | storage       |                                    |
| /0/2/0.0.0      | /dev/sdb   | disk          | 500GB ST500LM034-2GH17             |
| /0/2/0.0.0/1    | /dev/sdb1  | volume        | 463GiB EXT4 volume                 |
| /0/2/0.0.0/2    | /dev/sdb2  | volume        | 499MiB Windows FAT volume          |
| /0/3            | scsi5      | storage       |                                    |
| /0/3/0.0.0      | /dev/cdrom | disk          | BD-RE BU50N                        |
| /1              |            | power         | To Be Filled By O.E.M.             |

=====

lscpu

```

Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Byte Order:        Little Endian
CPU(s):            12
On-line CPU(s) list: 0-11
Thread(s) per core: 2
Core(s) per socket: 6
Socket(s):         1
NUMA node(s):      1
Vendor ID:          GenuineIntel
CPU family:         6
Model:              158
Model name:         Intel(R) Core(TM) i7-8700T CPU @ 2.40GHz
Stepping:           10
CPU MHz:            1672.330
CPU max MHz:        4000.0000

```

```

CPU min MHz:      800.0000
BogoMIPS:         4800.00
Virtualization:   VT-x
L1d cache:       32K
L1i cache:       32K
L2 cache:        256K
L3 cache:        12288K
NUMA node0 CPU(s): 0-11
Flags:            fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge
                  mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe
                  syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts
                  rep_good nopl xtopology nonstop_tsc cpuid aperfmperf tsc_known_freq pni
                  pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr
                  pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                  xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb
                  invpcid_single pti ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept
                  vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid
                  rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt xsavec xgetbv1
                  xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp
                  md_clear flush_l1d

```

=====

```
gcc -v
```

```
Using built-in specs.
```

```
COLLECT_GCC=gcc
```

```
COLLECT_LTO_WRAPPER=/usr/lib/gcc/x86_64-linux-gnu/7/lto-wrapper
```

```
OFFLOAD_TARGET_NAMES=nvptx-none
```

```
OFFLOAD_TARGET_DEFAULT=1
```

```
Target: x86_64-linux-gnu
```

```

Configured with: ../src/configure -v --with-pkgversion='Ubuntu 7.4.0-1
ubuntu18.04.1' --with-bugurl=file:///usr/share/doc/gcc-7/README.Bugs
--enable-languages=c,ada,c++,go,brig,d,fortran,objc,obj-c++ --prefix=/
usr --with-gcc-major-version-only --program-suffix=-7 --program-prefix=
x86_64-linux-gnu- --enable-shared --enable-linker-build-id --libexecdir
=/usr/lib --without-included-gettext --enable-threads=posix --libdir=/
usr/lib --enable-nls --with-sysroot=/ --enable-clocale=gnu --enable-
libstdcxx-debug --enable-libstdcxx-time=yes --with-default-libstdcxx-abi
=new --enable-gnu-unique-object --disable-vtable-verify --enable-libmpx
--enable-plugin --enable-default-pie --with-system-zlib --with-target-
system-zlib --enable-objc-gc=auto --enable-multiarch --disable-werror --
with-arch=32=i686 --with-abi=m64 --with-multilib-list=m32,m64,mx32 --
enable-multilib --with-tune=generic --enable-offload-targets=nvptx-none
--without-cuda-driver --enable-checking=release --build=x86_64-linux-gnu
--host=x86_64-linux-gnu --target=x86_64-linux-gnu

```

```
Thread model: posix
```

```
gcc version 7.4.0 (Ubuntu 7.4.0-1ubuntu1~18.04.1)
```

## 10.2 SAT implementation

In this section I introduce the code of the implementation of the SAT algorithm, used to validate and qualify the FMB algorithm.

### 10.2.1 Header

```

#ifndef __SAT_H_
#define __SAT_H_

#include <stdbool.h>
#include <string.h>
#include "frame.h"

// ----- Functions declaration -----

// Test for intersection between 2D Frame 'that' and 2D Frame 'tho'
// Return true if the two Frames are intersecting, else false
bool SATTestIntersection2D(
    const Frame2D* const that,
    const Frame2D* const tho);

// Test for intersection between moving 2D Frame 'that' and 2D
// Frame 'tho'
// Return true if the two Frames are intersecting, else false
bool SATTestIntersection2DTime(
    const Frame2DTime* const that,
    const Frame2DTime* const tho);

// Test for intersection between 3D Frame 'that' and 3D Frame 'tho'
// Return true if the two Frames are intersecting, else false
bool SATTestIntersection3D(
    const Frame3D* const that,
    const Frame3D* const tho);

// Test for intersection between moving 3D Frame 'that' and 3D
// Frame 'tho'
// Return true if the two Frames are intersecting, else false
bool SATTestIntersection3DTime(
    const Frame3DTime* const that,
    const Frame3DTime* const tho);

#endif

```

## 10.2.2 Body

```

#include "sat.h"

// ----- Macros -----

#define EPSILON 0.0000001

// ----- Functions declaration -----

// Check the intersection constraint along one axis for 3D Frames
bool CheckAxis3D(
    const Frame3D* const that,
    const Frame3D* const tho,
    const double* const axis);

// Check the intersection constraint along one axis for moving 3D Frames
bool CheckAxis3DTime(
    const Frame3DTime* const that,
    const Frame3DTime* const tho,
    const double* const axis,
    const double* const relSpeed);

// ----- Functions implementation -----

```

```

// Test for intersection between 2D Frame 'that' and 2D Frame 'tho'
// Return true if the two Frames are intersecting, else false
bool SATTestIntersection2D(
    const Frame2D* const that,
    const Frame2D* const tho) {

    // Declare a variable to loop on Frames and commonalize code
    const Frame2D* frameEdge = that;

    // Loop to commonalize code when checking SAT based on that's edges
    // and then tho's edges
    for (int iFrame = 2;
        iFrame--;) {

        // Shortcuts
        FrameType frameEdgeType = frameEdge->type;
        const double* frameEdgeCompA = frameEdge->comp[0];
        const double* frameEdgeCompB = frameEdge->comp[1];

        // Declare a variable to memorize the number of edges, by default 2
        int nbEdges = 2;

        // Declare a variable to memorize the third edge in case of
        // tetrahedron
        double thirdEdge[2];

        // If the frame is a tetrahedron
        if (frameEdgeType == FrameTetrahedron) {

            // Initialise the third edge
            thirdEdge[0] = frameEdgeCompB[0] - frameEdgeCompA[0];
            thirdEdge[1] = frameEdgeCompB[1] - frameEdgeCompA[1];

            // Correct the number of edges
            nbEdges = 3;

        }

        // Loop on the frame's edges
        for (int iEdge = nbEdges;
            iEdge--;) {

            // Get the current edge
            const double* edge =
                (iEdge == 2 ? thirdEdge : frameEdge->comp[iEdge]);

            // Declare variables to memorize the boundaries of projection
            // of the two frames on the current edge
            double bdgBoxA[2];
            double bdgBoxB[2];

            // Declare two variables to loop on Frames and commonalize code
            const Frame2D* frame = that;
            double* bdgBox = bdgBoxA;

            // Loop on Frames
            for (int iFrame = 2;
                iFrame--;) {

                // Shortcuts
                const double* frameOrig = frame->orig;

```



```

const double* frameCompA = frame->comp[0];
const double* frameCompB = frame->comp[1];
FrameType frameType = frame->type;

// Get the number of vertices of frame
int nbVertices = (frameType == FrameTetrahedron ? 3 : 4);

// Declare a variable to memorize if the current vertex is
// the first in the loop, used to initialize the boundaries
bool firstVertex = true;

// Loop on vertices of the frame
for (int iVertex = nbVertices;
     iVertex--;) {

    // Get the vertex
    double vertex[2];
    vertex[0] = frameOrig[0];
    vertex[1] = frameOrig[1];
    switch (iVertex) {
        case 3:
            vertex[0] += frameCompA[0] + frameCompB[0];
            vertex[1] += frameCompA[1] + frameCompB[1];
            break;
        case 2:
            vertex[0] += frameCompA[0];
            vertex[1] += frameCompA[1];
            break;
        case 1:
            vertex[0] += frameCompB[0];
            vertex[1] += frameCompB[1];
            break;
        default:
            break;
    }

    // Get the projection of the vertex on the normal of the edge
    // Orientation of the normal doesn't matter, so we
    // use arbitrarily the normal (edge[1], -edge[0])
    double proj = vertex[0] * edge[1] - vertex[1] * edge[0];

    // If it's the first vertex
    if (firstVertex == true) {

        // Initialize the boundaries of the projection of the
        // Frame on the edge
        bdgBox[0] = proj;
        bdgBox[1] = proj;

        // Update the flag to memorize we did the first vertex
        firstVertex = false;
    }

    // Else, it's not the first vertex
    } else {

        // Update the boundaries of the projection of the Frame on
        // the edge
        if (bdgBox[0] > proj)
            bdgBox[0] = proj;

        if (bdgBox[1] < proj)
            bdgBox[1] = proj;
    }
}

```

```

    }

}

// Switch the frame to check the vertices of the second Frame
frame = tho;
bdgBox = bdgBoxB;

}

// If the projections of the two frames on the edge are
// not intersecting
if (bdgBoxB[1] < bdgBoxA[0] ||
    bdgBoxA[1] < bdgBoxB[0]) {

    // There exists an axis which separates the Frames,
    // thus they are not in intersection
    return false;

}

}

// Switch the frames to test against the second Frame's edges
frameEdge = tho;

}

// If we reaches here, it means the two Frames are intersecting
return true;

}

// Test for intersection between moving 2D Frame 'that' and 2D
// Frame 'tho'
// Return true if the two Frames are intersecting, else false
bool SATTestIntersection2DTime(
    const Frame2DTime* const that,
    const Frame2DTime* const tho) {

    // Declare a variable to loop on Frames and commonalize code
    const Frame2DTime* frameEdge = that;

    // Declare a variable to memorize the speed of tho relative to that
    double relSpeed[2];
    relSpeed[0] = tho->speed[0] - that->speed[0];
    relSpeed[1] = tho->speed[1] - that->speed[1];

    // Loop to commonalize code when checking SAT based on that's edges
    // and then tho's edges
    for (int iFrame = 2;
        iFrame--;) {

        // Shortcuts
        FrameType frameEdgeType = frameEdge->type;
        const double* frameEdgeCompA = frameEdge->comp[0];
        const double* frameEdgeCompB = frameEdge->comp[1];

        // Declare a variable to memorize the number of edges, by default 2
        int nbEdges = 2;

```

```

// Declare a variable to memorize the third edge in case of
// tetrahedron
double thirdEdge[2];

// If the frame is a tetrahedron
if (frameEdgeType == FrameTetrahedron) {

    // Initialise the third edge
    thirdEdge[0] = frameEdgeCompB[0] - frameEdgeCompA[0];
    thirdEdge[1] = frameEdgeCompB[1] - frameEdgeCompA[1];

    // Correct the number of edges
    nbEdges = 3;

}

// If the current frame is the second frame
if (iFrame == 1) {

    // Add one more edge to take into account the movement
    // of the relative to that
    ++nbEdges;

}

// Loop on the frame's edges
for (int iEdge = nbEdges;
     iEdge--;) {

    // Get the current edge
    const double* edge =
        (iEdge == 3 ? relSpeed :
         (iEdge == 2 ?
          (frameEdgeType == FrameTetrahedron ? thirdEdge : relSpeed) :
          frameEdge->comp[iEdge]));

    // Declare variables to memorize the boundaries of projection
    // of the two frames on the current edge
    double bdgBoxA[2];
    double bdgBoxB[2];

    // Declare two variables to loop on Frames and commonalize code
    const Frame2DTime* frame = that;
    double* bdgBox = bdgBoxA;

    // Loop on Frames
    for (int iFrame = 2;
         iFrame--;) {

        // Shortcuts
        const double* frameOrig = frame->orig;
        const double* frameCompA = frame->comp[0];
        const double* frameCompB = frame->comp[1];
        FrameType frameType = frame->type;

        // Get the number of vertices of frame
        int nbVertices = (frameType == FrameTetrahedron ? 3 : 4);

        // Declare a variable to memorize if the current vertex is
        // the first in the loop, used to initialize the boundaries
        bool firstVertex = true;

```

```

// Loop on vertices of the frame
for (int iVertex = nbVertices;
     iVertex--;) {

    // Get the vertex
    double vertex[2];
    vertex[0] = frameOrig[0];
    vertex[1] = frameOrig[1];
    switch (iVertex) {
        case 3:
            vertex[0] += frameCompA[0] + frameCompB[0];
            vertex[1] += frameCompA[1] + frameCompB[1];
            break;
        case 2:
            vertex[0] += frameCompA[0];
            vertex[1] += frameCompA[1];
            break;
        case 1:
            vertex[0] += frameCompB[0];
            vertex[1] += frameCompB[1];
            break;
        default:
            break;
    }

    // Get the projection of the vertex on the normal of the edge
    // Orientation of the normal doesn't matter, so we
    // use arbitrarily the normal (edge[1], -edge[0])
    double proj = vertex[0] * edge[1] - vertex[1] * edge[0];

    // If it's the first vertex
    if (firstVertex == true) {

        // Initialize the boundaries of the projection of the
        // Frame on the edge
        bdgBox[0] = proj;
        bdgBox[1] = proj;

        // Update the flag to memorize we did the first vertex
        firstVertex = false;
    }

    // Else, it's not the first vertex
    } else {

        // Update the boundaries of the projection of the Frame on
        // the edge
        if (bdgBox[0] > proj)
            bdgBox[0] = proj;

        if (bdgBox[1] < proj)
            bdgBox[1] = proj;
    }

    // If we are checking the second frame's vertices
    if (frame == tho) {

        // Check also the vertices moved by the relative speed
        vertex[0] += relSpeed[0];
        vertex[1] += relSpeed[1];

        proj = vertex[0] * edge[1] - vertex[1] * edge[0];
    }
}

```

```

        if (bdgBox[0] > proj)
            bdgBox[0] = proj;

        if (bdgBox[1] < proj)
            bdgBox[1] = proj;
    }

}

// Switch the frame to check the vertices of the second Frame
frame = tho;
bdgBox = bdgBoxB;

}

// If the projections of the two frames on the edge are
// not intersecting
if (bdgBoxB[1] < bdgBoxA[0] ||
    bdgBoxA[1] < bdgBoxB[0]) {

    // There exists an axis which separates the Frames,
    // thus they are not in intersection
    return false;

}

}

// Switch the frames to test against the second Frame's edges
frameEdge = tho;

}

// If we reaches here, it means the two Frames are intersecting
return true;

}

// Test for intersection between 3D Frame 'that' and 3D Frame 'tho'
// Return true if the two Frames are intersecting, else false
bool SATTestIntersection3D(
    const Frame3D* const that,
    const Frame3D* const tho) {

    // Declare two variables to memorize the opposite edges in case
    // of tetrahedron
    double oppEdgesThat[3][3];
    double oppEdgesTho[3][3];

    // Declare two variables to memorize the number of edges, by default 3
    int nbEdgesThat = 3;
    int nbEdgesTho = 3;

    // If the first Frame is a tetrahedron
    if (that->type == FrameTetrahedron) {

        // Shortcuts
        const double* frameCompA = that->comp[0];
        const double* frameCompB = that->comp[1];
        const double* frameCompC = that->comp[2];
    }
}

```

```

// Initialise the opposite edges
oppEdgesThat[0][0] = frameCompB[0] - frameCompA[0];
oppEdgesThat[0][1] = frameCompB[1] - frameCompA[1];
oppEdgesThat[0][2] = frameCompB[2] - frameCompA[2];

oppEdgesThat[1][0] = frameCompB[0] - frameCompC[0];
oppEdgesThat[1][1] = frameCompB[1] - frameCompC[1];
oppEdgesThat[1][2] = frameCompB[2] - frameCompC[2];

oppEdgesThat[2][0] = frameCompC[0] - frameCompA[0];
oppEdgesThat[2][1] = frameCompC[1] - frameCompA[1];
oppEdgesThat[2][2] = frameCompC[2] - frameCompA[2];

// Correct the number of edges
nbEdgesThat = 6;
}

// If the second Frame is a tetrahedron
if (tho->type == FrameTetrahedron) {

    // Shortcuts
    const double* frameCompA = tho->comp[0];
    const double* frameCompB = tho->comp[1];
    const double* frameCompC = tho->comp[2];

    // Initialise the opposite edges
    oppEdgesTho[0][0] = frameCompB[0] - frameCompA[0];
    oppEdgesTho[0][1] = frameCompB[1] - frameCompA[1];
    oppEdgesTho[0][2] = frameCompB[2] - frameCompA[2];

    oppEdgesTho[1][0] = frameCompB[0] - frameCompC[0];
    oppEdgesTho[1][1] = frameCompB[1] - frameCompC[1];
    oppEdgesTho[1][2] = frameCompB[2] - frameCompC[2];

    oppEdgesTho[2][0] = frameCompC[0] - frameCompA[0];
    oppEdgesTho[2][1] = frameCompC[1] - frameCompA[1];
    oppEdgesTho[2][2] = frameCompC[2] - frameCompA[2];

    // Correct the number of edges
    nbEdgesTho = 6;
}

// Declare variables to loop on Frames and commonalize code
const Frame3D* frame = that;
const double (*oppEdgesA)[3] = oppEdgesThat;

// Loop to commonalize code when checking SAT based on that's edges
// and then tho's edges
for (int iFrame = 2;
     iFrame--;) {

    // Shortcuts
    FrameType frameType = frame->type;
    const double* frameCompA = frame->comp[0];
    const double* frameCompB = frame->comp[1];
    const double* frameCompC = frame->comp[2];

    // Declare a variable to memorize the number of faces, by default 3
    int nbFaces = 3;

```

```

// Declare a variable to memorize the normal to faces
// Arrangement is normFaces[iFace][iAxis]
double normFaces[4][3];

// Initialise the normal to faces
normFaces[0][0] =
    frameCompA[1] * frameCompB[2] -
    frameCompA[2] * frameCompB[1];
normFaces[0][1] =
    frameCompA[2] * frameCompB[0] -
    frameCompA[0] * frameCompB[2];
normFaces[0][2] =
    frameCompA[0] * frameCompB[1] -
    frameCompA[1] * frameCompB[0];

normFaces[1][0] =
    frameCompA[1] * frameCompC[2] -
    frameCompA[2] * frameCompC[1];
normFaces[1][1] =
    frameCompA[2] * frameCompC[0] -
    frameCompA[0] * frameCompC[2];
normFaces[1][2] =
    frameCompA[0] * frameCompC[1] -
    frameCompA[1] * frameCompC[0];

normFaces[2][0] =
    frameCompC[1] * frameCompB[2] -
    frameCompC[2] * frameCompB[1];
normFaces[2][1] =
    frameCompC[2] * frameCompB[0] -
    frameCompC[0] * frameCompB[2];
normFaces[2][2] =
    frameCompC[0] * frameCompB[1] -
    frameCompC[1] * frameCompB[0];

// If the frame is a tetrahedron
if (frameType == FrameTetrahedron) {

    // Shortcuts
    const double* oppEdgeA = oppEdgesA[0];
    const double* oppEdgeB = oppEdgesA[1];

    // Initialise the normal to the opposite face
    normFaces[3][0] =
        oppEdgeA[1] * oppEdgeB[2] -
        oppEdgeA[2] * oppEdgeB[1];
    normFaces[3][1] =
        oppEdgeA[2] * oppEdgeB[0] -
        oppEdgeA[0] * oppEdgeB[2];
    normFaces[3][2] =
        oppEdgeA[0] * oppEdgeB[1] -
        oppEdgeA[1] * oppEdgeB[0];

    // Correct the number of faces
    nbFaces = 4;
}

// Loop on the frame's faces
for (int iFace = nbFaces;
    iFace--;) {

```

```

// Check against the current face's normal
bool isIntersection =
    CheckAxis3D(
        that,
        tho,
        normFaces[iFace]);

// If the axis is separating the Frames
if (isIntersection == false) {

    // The Frames are not in intersection,
    // terminate the test
    return false;

}

}

// Switch the frame to test against the second Frame
frame = tho;
oppEdgesA = oppEdgesTho;

}

// Loop on the pair of edges between the two frames
for (int iEdgeThat = nbEdgesThat;
     iEdgeThat--;) {

    // Get the first edge
    const double* edgeThat =
        (iEdgeThat < 3 ?
         that->comp[iEdgeThat] :
         oppEdgesThat[iEdgeThat - 3]);

    for (int iEdgeTho = nbEdgesTho;
         iEdgeTho--;) {

        // Get the second edge
        const double* edgeTho =
            (iEdgeTho < 3 ?
             tho->comp[iEdgeTho] :
             oppEdgesTho[iEdgeTho - 3]);

        // Get the cross product of the two edges
        double axis[3];
        axis[0] = edgeThat[1] * edgeTho[2] - edgeThat[2] * edgeTho[1];
        axis[1] = edgeThat[2] * edgeTho[0] - edgeThat[0] * edgeTho[2];
        axis[2] = edgeThat[0] * edgeTho[1] - edgeThat[1] * edgeTho[0];

        // Check against the cross product of the two edges
        bool isIntersection =
            CheckAxis3D(
                that,
                tho,
                axis);

        // If the axis is separating the Frames
        if (isIntersection == false) {

            // The Frames are not in intersection,
            // terminate the test

```



```

        return false;

    }

}

}

// If we reaches here, it means the two Frames are intersecting
return true;

}

// Test for intersection between moving 3D Frame 'that' and 3D
// Frame 'tho'
// Return true if the two Frames are intersecting, else false
bool SATTestIntersection3DTime(
    const Frame3DTime* const that,
    const Frame3DTime* const tho) {

    // Declare two variables to memorize the opposite edges in case
    // of tetrahedron
    double oppEdgesThat[3][3];
    double oppEdgesTho[3][3];

    // Declare a variable to memorize the speed of tho relative to that
    double relSpeed[3];
    relSpeed[0] = tho->speed[0] - that->speed[0];
    relSpeed[1] = tho->speed[1] - that->speed[1];
    relSpeed[2] = tho->speed[2] - that->speed[2];

    // Declare two variables to memorize the number of edges, by default 3
    int nbEdgesThat = 3;
    int nbEdgesTho = 3;

    // If the first Frame is a tetrahedron
    if (that->type == FrameTetrahedron) {

        // Shortcuts
        const double* frameCompA = that->comp[0];
        const double* frameCompB = that->comp[1];
        const double* frameCompC = that->comp[2];

        // Initialise the opposite edges
        oppEdgesThat[0][0] = frameCompB[0] - frameCompA[0];
        oppEdgesThat[0][1] = frameCompB[1] - frameCompA[1];
        oppEdgesThat[0][2] = frameCompB[2] - frameCompA[2];

        oppEdgesThat[1][0] = frameCompB[0] - frameCompC[0];
        oppEdgesThat[1][1] = frameCompB[1] - frameCompC[1];
        oppEdgesThat[1][2] = frameCompB[2] - frameCompC[2];

        oppEdgesThat[2][0] = frameCompC[0] - frameCompA[0];
        oppEdgesThat[2][1] = frameCompC[1] - frameCompA[1];
        oppEdgesThat[2][2] = frameCompC[2] - frameCompA[2];

        // Correct the number of edges
        nbEdgesThat = 6;
    }

    // If the second Frame is a tetrahedron

```

```

if (tho->type == FrameTetrahedron) {

    // Shortcuts
    const double* frameCompA = tho->comp[0];
    const double* frameCompB = tho->comp[1];
    const double* frameCompC = tho->comp[2];

    // Initialise the opposite edges
    oppEdgesTho[0][0] = frameCompB[0] - frameCompA[0];
    oppEdgesTho[0][1] = frameCompB[1] - frameCompA[1];
    oppEdgesTho[0][2] = frameCompB[2] - frameCompA[2];

    oppEdgesTho[1][0] = frameCompB[0] - frameCompC[0];
    oppEdgesTho[1][1] = frameCompB[1] - frameCompC[1];
    oppEdgesTho[1][2] = frameCompB[2] - frameCompC[2];

    oppEdgesTho[2][0] = frameCompC[0] - frameCompA[0];
    oppEdgesTho[2][1] = frameCompC[1] - frameCompA[1];
    oppEdgesTho[2][2] = frameCompC[2] - frameCompA[2];

    // Correct the number of edges
    nbEdgesTho = 6;
}

// Declare variables to loop on Frames and commonalize code
const Frame3DTime* frame = that;
const double (*oppEdgesA)[3] = oppEdgesThat;

// Loop to commonalize code when checking SAT based on that's edges
// and then tho's edges
for (int iFrame = 2;
     iFrame--;) {

    // Shortcuts
    FrameType frameType = frame->type;
    const double* frameCompA = frame->comp[0];
    const double* frameCompB = frame->comp[1];
    const double* frameCompC = frame->comp[2];

    // Declare a variable to memorize the number of faces, by default 3
    int nbFaces = 3;

    // Declare a variable to memorize the normal to faces
    // Arrangement is normFaces[iFace][iAxis]
    double normFaces[10][3];

    // Initialise the normal to faces
    normFaces[0][0] =
        frameCompA[1] * frameCompB[2] -
        frameCompA[2] * frameCompB[1];
    normFaces[0][1] =
        frameCompA[2] * frameCompB[0] -
        frameCompA[0] * frameCompB[2];
    normFaces[0][2] =
        frameCompA[0] * frameCompB[1] -
        frameCompA[1] * frameCompB[0];

    normFaces[1][0] =
        frameCompA[1] * frameCompC[2] -
        frameCompA[2] * frameCompC[1];
    normFaces[1][1] =

```

```

        frameCompA[2] * frameCompC[0] -
        frameCompA[0] * frameCompC[2];
normFaces[1][2] =
        frameCompA[0] * frameCompC[1] -
        frameCompA[1] * frameCompC[0];

normFaces[2][0] =
        frameCompC[1] * frameCompB[2] -
        frameCompC[2] * frameCompB[1];
normFaces[2][1] =
        frameCompC[2] * frameCompB[0] -
        frameCompC[0] * frameCompB[2];
normFaces[2][2] =
        frameCompC[0] * frameCompB[1] -
        frameCompC[1] * frameCompB[0];

// If the frame is a tetrahedron
if (frameType == FrameTetrahedron) {

    // Shortcuts
    const double* oppEdgeA = oppEdgesA[0];
    const double* oppEdgeB = oppEdgesA[1];

    // Initialise the normal to the opposite face
    normFaces[3][0] =
        oppEdgeA[1] * oppEdgeB[2] -
        oppEdgeA[2] * oppEdgeB[1];
    normFaces[3][1] =
        oppEdgeA[2] * oppEdgeB[0] -
        oppEdgeA[0] * oppEdgeB[2];
    normFaces[3][2] =
        oppEdgeA[0] * oppEdgeB[1] -
        oppEdgeA[1] * oppEdgeB[0];

    // Correct the number of faces
    nbFaces = 4;
}

// If we are checking the frame 'tho'
if (frame == tho) {

    // Add the normal to the virtual faces created by the speed
    // of tho relative to that

    normFaces[nbFaces][0] =
        relSpeed[1] * frameCompA[2] -
        relSpeed[2] * frameCompA[1];
    normFaces[nbFaces][1] =
        relSpeed[2] * frameCompA[0] -
        relSpeed[0] * frameCompA[2];
    normFaces[nbFaces][2] =
        relSpeed[0] * frameCompA[1] -
        relSpeed[1] * frameCompA[0];
    if (fabs(normFaces[nbFaces][0]) > EPSILON ||
        fabs(normFaces[nbFaces][1]) > EPSILON ||
        fabs(normFaces[nbFaces][2]) > EPSILON)
        ++nbFaces;

    normFaces[nbFaces][0] =
        relSpeed[1] * frameCompB[2] -
        relSpeed[2] * frameCompB[1];

```

```

normFaces[nbFaces][1] =
    relSpeed[2] * frameCompB[0] -
    relSpeed[0] * frameCompB[2];
normFaces[nbFaces][2] =
    relSpeed[0] * frameCompB[1] -
    relSpeed[1] * frameCompB[0];
if (fabs(normFaces[nbFaces][0]) > EPSILON ||
    fabs(normFaces[nbFaces][1]) > EPSILON ||
    fabs(normFaces[nbFaces][2]) > EPSILON)
    ++nbFaces;

normFaces[nbFaces][0] =
    relSpeed[1] * frameCompC[2] -
    relSpeed[2] * frameCompC[1];
normFaces[nbFaces][1] =
    relSpeed[2] * frameCompC[0] -
    relSpeed[0] * frameCompC[2];
normFaces[nbFaces][2] =
    relSpeed[0] * frameCompC[1] -
    relSpeed[1] * frameCompC[0];
if (fabs(normFaces[nbFaces][0]) > EPSILON ||
    fabs(normFaces[nbFaces][1]) > EPSILON ||
    fabs(normFaces[nbFaces][2]) > EPSILON)
    ++nbFaces;

if (frameType == FrameTetrahedron) {

    const double* oppEdgeA = oppEdgesA[0];
    const double* oppEdgeB = oppEdgesA[1];
    const double* oppEdgeC = oppEdgesA[2];

    normFaces[nbFaces][0] =
        relSpeed[1] * oppEdgeA[2] -
        relSpeed[2] * oppEdgeA[1];
    normFaces[nbFaces][1] =
        relSpeed[2] * oppEdgeA[0] -
        relSpeed[0] * oppEdgeA[2];
    normFaces[nbFaces][2] =
        relSpeed[0] * oppEdgeA[1] -
        relSpeed[1] * oppEdgeA[0];
    if (fabs(normFaces[nbFaces][0]) > EPSILON ||
        fabs(normFaces[nbFaces][1]) > EPSILON ||
        fabs(normFaces[nbFaces][2]) > EPSILON)
        ++nbFaces;

    normFaces[nbFaces][0] =
        relSpeed[1] * oppEdgeB[2] -
        relSpeed[2] * oppEdgeB[1];
    normFaces[nbFaces][1] =
        relSpeed[2] * oppEdgeB[0] -
        relSpeed[0] * oppEdgeB[2];
    normFaces[nbFaces][2] =
        relSpeed[0] * oppEdgeB[1] -
        relSpeed[1] * oppEdgeB[0];
    if (fabs(normFaces[nbFaces][0]) > EPSILON ||
        fabs(normFaces[nbFaces][1]) > EPSILON ||
        fabs(normFaces[nbFaces][2]) > EPSILON)
        ++nbFaces;

    normFaces[nbFaces][0] =
        relSpeed[1] * oppEdgeC[2] -
        relSpeed[2] * oppEdgeC[1];

```

```

        normFaces[nbFaces][1] =
            relSpeed[2] * oppEdgeC[0] -
            relSpeed[0] * oppEdgeC[2];
        normFaces[nbFaces][2] =
            relSpeed[0] * oppEdgeC[1] -
            relSpeed[1] * oppEdgeC[0];
        if (fabs(normFaces[nbFaces][0]) > EPSILON ||
            fabs(normFaces[nbFaces][1]) > EPSILON ||
            fabs(normFaces[nbFaces][2]) > EPSILON)
            ++nbFaces;
    }
}

// Loop on the frame's faces
for (int iFace = nbFaces;
     iFace--;) {

    // Check against the current face's normal
    bool isIntersection =
        CheckAxis3DTime(
            that,
            tho,
            normFaces[iFace],
            relSpeed);

    // If the axis is separating the Frames
    if (isIntersection == false) {

        // The Frames are not in intersection,
        // terminate the test
        return false;
    }
}

// Switch the frame to test against the second Frame
frame = tho;
oppEdgesA = oppEdgesTho;
}

// Loop on the pair of edges between the two frames
for (int iEdgeThat = nbEdgesThat;
     iEdgeThat--;) {

    // Get the first edge
    const double* edgeThat =
        (iEdgeThat < 3 ?
         that->comp[iEdgeThat] :
         oppEdgesThat[iEdgeThat - 3]);

    for (int iEdgeTho = nbEdgesTho + 1;
         iEdgeTho--;) {

        // Get the second edge
        const double* edgeTho =
            (iEdgeTho == nbEdgesTho ?
             relSpeed :
             (iEdgeTho < 3 ?
              tho->comp[iEdgeTho] :

```

```

        oppEdgesTho[iEdgeTho - 3]));

// Get the cross product of the two edges
double axis[3];
axis[0] = edgeThat[1] * edgeTho[2] - edgeThat[2] * edgeTho[1];
axis[1] = edgeThat[2] * edgeTho[0] - edgeThat[0] * edgeTho[2];
axis[2] = edgeThat[0] * edgeTho[1] - edgeThat[1] * edgeTho[0];

// Check against the cross product of the two edges
bool isIntersection =
    CheckAxis3DTime(
        that,
        tho,
        axis,
        relSpeed);

// If the axis is separating the Frames
if (isIntersection == false) {

    // The Frames are not in intersection,
    // terminate the test
    return false;

}

}

}

// If we reaches here, it means the two Frames are intersecting
return true;

}

// Check the intersection constraint for Frames 'that' and 'tho'
// relatively to 'axis'
bool CheckAxis3D(
    const Frame3D* const that,
    const Frame3D* const tho,
    const double* const axis) {

    // Declare variables to memorize the boundaries of projection
    // of the two frames on the current edge
    double bdgBoxA[2];
    double bdgBoxB[2];

    // Declare two variables to loop on Frames and commonalize code
    const Frame3D* frame = that;
    double* bdgBox = bdgBoxA;

    // Loop on Frames
    for (int iFrame = 2;
        iFrame--;) {

        // Shortcuts
        const double* frameOrig = frame->orig;
        const double* frameCompA = frame->comp[0];
        const double* frameCompB = frame->comp[1];
        const double* frameCompC = frame->comp[2];
        FrameType frameType = frame->type;

        // Get the number of vertices of frame

```

```

int nbVertices = (frameType == FrameTetrahedron ? 4 : 8);

// Declare a variable to memorize if the current vertex is
// the first in the loop, used to initialize the boundaries
bool firstVertex = true;

// Loop on vertices of the frame
for (int iVertex = nbVertices;
     iVertex--;) {

    // Get the vertex
    double vertex[3];
    vertex[0] = frameOrig[0];
    vertex[1] = frameOrig[1];
    vertex[2] = frameOrig[2];
    switch (iVertex) {
        case 7:
            vertex[0] +=
                frameCompA[0] + frameCompB[0] + frameCompC[0];
            vertex[1] +=
                frameCompA[1] + frameCompB[1] + frameCompC[1];
            vertex[2] +=
                frameCompA[2] + frameCompB[2] + frameCompC[2];
            break;
        case 6:
            vertex[0] += frameCompB[0] + frameCompC[0];
            vertex[1] += frameCompB[1] + frameCompC[1];
            vertex[2] += frameCompB[2] + frameCompC[2];
            break;
        case 5:
            vertex[0] += frameCompA[0] + frameCompC[0];
            vertex[1] += frameCompA[1] + frameCompC[1];
            vertex[2] += frameCompA[2] + frameCompC[2];
            break;
        case 4:
            vertex[0] += frameCompA[0] + frameCompB[0];
            vertex[1] += frameCompA[1] + frameCompB[1];
            vertex[2] += frameCompA[2] + frameCompB[2];
            break;
        case 3:
            vertex[0] += frameCompC[0];
            vertex[1] += frameCompC[1];
            vertex[2] += frameCompC[2];
            break;
        case 2:
            vertex[0] += frameCompB[0];
            vertex[1] += frameCompB[1];
            vertex[2] += frameCompB[2];
            break;
        case 1:
            vertex[0] += frameCompA[0];
            vertex[1] += frameCompA[1];
            vertex[2] += frameCompA[2];
            break;
        default:
            break;
    }

    // Get the projection of the vertex on the axis
    double proj =
        vertex[0] * axis[0] +
        vertex[1] * axis[1] +

```

```

        vertex[2] * axis[2];

// If it's the first vertex
if (firstVertex == true) {

    // Initialize the boundaries of the projection of the
    // Frame on the edge
    bdgBox[0] = proj;
    bdgBox[1] = proj;

    // Update the flag to memorize we did the first vertex
    firstVertex = false;

// Else, it's not the first vertex
} else {

    // Update the boundaries of the projection of the Frame on
    // the edge
    if (bdgBox[0] > proj)
        bdgBox[0] = proj;

    if (bdgBox[1] < proj)
        bdgBox[1] = proj;

}

}

// Switch the frame to check the vertices of the second Frame
frame = tho;
bdgBox = bdgBoxB;

}

// If the projections of the two frames on the edge are
// not intersecting
if (bdgBoxB[1] < bdgBoxA[0] ||
    bdgBoxA[1] < bdgBoxB[0]) {

    // There exists an axis which separates the Frames,
    // thus they are not in intersection
    return false;

}

// If we reaches here the two Frames are in intersection
return true;

}

// Check the intersection constraint for Frames 'that' and 'tho'
// relatively to 'axis'
bool CheckAxis3DTime(
    const Frame3DTime* const that,
    const Frame3DTime* const tho,
    const double* const axis,
    const double* const relSpeed) {

    // Declare variables to memorize the boundaries of projection
    // of the two frames on the current edge
    double bdgBoxA[2];
    double bdgBoxB[2];

```



```

// Declare two variables to loop on Frames and commonalize code
const Frame3DTime* frame = that;
double* bdgBox = bdgBoxA;

// Loop on Frames
for (int iFrame = 2;
     iFrame--;) {

    // Shortcuts
    const double* frameOrig = frame->orig;
    const double* frameCompA = frame->comp[0];
    const double* frameCompB = frame->comp[1];
    const double* frameCompC = frame->comp[2];
    FrameType frameType = frame->type;

    // Get the number of vertices of frame
    int nbVertices = (frameType == FrameTetrahedron ? 4 : 8);

    // Declare a variable to memorize if the current vertex is
    // the first in the loop, used to initialize the boundaries
    bool firstVertex = true;

    // Loop on vertices of the frame
    for (int iVertex = nbVertices;
         iVertex--;) {

        // Get the vertex
        double vertex[3];
        vertex[0] = frameOrig[0];
        vertex[1] = frameOrig[1];
        vertex[2] = frameOrig[2];
        switch (iVertex) {
            case 7:
                vertex[0] +=
                    frameCompA[0] + frameCompB[0] + frameCompC[0];
                vertex[1] +=
                    frameCompA[1] + frameCompB[1] + frameCompC[1];
                vertex[2] +=
                    frameCompA[2] + frameCompB[2] + frameCompC[2];
                break;
            case 6:
                vertex[0] += frameCompB[0] + frameCompC[0];
                vertex[1] += frameCompB[1] + frameCompC[1];
                vertex[2] += frameCompB[2] + frameCompC[2];
                break;
            case 5:
                vertex[0] += frameCompA[0] + frameCompC[0];
                vertex[1] += frameCompA[1] + frameCompC[1];
                vertex[2] += frameCompA[2] + frameCompC[2];
                break;
            case 4:
                vertex[0] += frameCompA[0] + frameCompB[0];
                vertex[1] += frameCompA[1] + frameCompB[1];
                vertex[2] += frameCompA[2] + frameCompB[2];
                break;
            case 3:
                vertex[0] += frameCompC[0];
                vertex[1] += frameCompC[1];
                vertex[2] += frameCompC[2];
                break;
            case 2:

```

```

        vertex[0] += frameCompB[0];
        vertex[1] += frameCompB[1];
        vertex[2] += frameCompB[2];
        break;
    case 1:
        vertex[0] += frameCompA[0];
        vertex[1] += frameCompA[1];
        vertex[2] += frameCompA[2];
        break;
    default:
        break;
}

// Get the projection of the vertex on the axis
double proj =
    vertex[0] * axis[0] +
    vertex[1] * axis[1] +
    vertex[2] * axis[2];

// If it's the first vertex
if (firstVertex == true) {

    // Initialize the boundaries of the projection of the
    // Frame on the edge
    bdgBox[0] = proj;
    bdgBox[1] = proj;

    // Update the flag to memorize we did the first vertex
    firstVertex = false;

// Else, it's not the first vertex
} else {

    // Update the boundaries of the projection of the Frame on
    // the edge
    if (bdgBox[0] > proj)
        bdgBox[0] = proj;

    if (bdgBox[1] < proj)
        bdgBox[1] = proj;

}

// If we are checking the second frame's vertices
if (frame == tho) {

    // Check also the vertices moved by the relative speed
    vertex[0] += relSpeed[0];
    vertex[1] += relSpeed[1];
    vertex[2] += relSpeed[2];

    proj =
        vertex[0] * axis[0] +
        vertex[1] * axis[1] +
        vertex[2] * axis[2];

    if (bdgBox[0] > proj)
        bdgBox[0] = proj;

    if (bdgBox[1] < proj)
        bdgBox[1] = proj;
}

```

```

    }

}

// Switch the frame to check the vertices of the second Frame
frame = tho;
bdgBox = bdgBoxB;

}

// If the projections of the two frames on the edge are
// not intersecting
if (bdgBoxB[1] < bdgBoxA[0] ||
    bdgBoxA[1] < bdgBoxB[0]) {

    // There exists an axis which separates the Frames,
    // thus they are not in intersection
    return false;

}

// If we reaches here the two Frames are in intersection
return true;

}

```

### 10.3 Makefile

In this section I introduce the Makefile used to compile the code given in the previous sections. It also includes command used to run the unit tests, validation and qualification, and to generate the documentation.

```

COMPILER=gcc
OPTIMIZATION=-O3

all : compile run plot getRuntimeEnvironment doc

install :
    sudo apt-get install gnuplot

compile : main unitTests validation qualification

main : main2D main2DTime main3D main3DTime

main2D:
    cd 2D; make main; cd -

main2DTime:
    cd 2DTime; make main; cd -

main3D:
    cd 3D; make main; cd -

main3DTime:
    cd 3DTime; make main; cd -

unitTests : unitTests2D unitTests2DTime unitTests3D unitTests3DTime

unitTests2D:

```

```

        cd 2D; make unitTests; cd -

unitTests2DTime:
    cd 2DTime; make unitTests; cd -

unitTests3D:
    cd 3D; make unitTests; cd -

unitTests3DTime:
    cd 3DTime; make unitTests; cd -

validation : validation2D validation2DTime validation3D validation3DTime

validation2D:
    cd 2D; make validation; cd -

validation2DTime:
    cd 2DTime; make validation; cd -

validation3D:
    cd 3D; make validation; cd -

validation3DTime:
    cd 3DTime; make validation; cd -

qualification : qualification2D qualification2DTime qualification3D
                qualification3DTime

qualification2D:
    cd 2D; make qualification; cd -

qualification2DTime:
    cd 2DTime; make qualification; cd -

qualification3D:
    cd 3D; make qualification; cd -

qualification3DTime:
    cd 3DTime; make qualification; cd -

clean : clean2D clean2DTime clean3D clean3DTime

clean2D:
    cd 2D; make clean; cd -

clean2DTime:
    cd 2DTime; make clean; cd -

clean3D:
    cd 3D; make clean; cd -

clean3DTime:
    cd 3DTime; make clean; cd -

valgrind : valgrind2D valgrind2DTime valgrind3D valgrind3DTime

valgrind2D:
    cd 2D; make valgrind; cd -

valgrind2DTime:
    cd 2DTime; make valgrind; cd -

```

```

valgrind3D:
    cd 3D; make valgrind; cd -

valgrind3DTime:
    cd 3DTime; make valgrind; cd -

run : run2D run2DTime run3D run3DTime

run2D:
    cd 2D; ./main > ../Results/main2D.txt; ./unitTests > ../Results/
    unitTests2D.txt; ./validation > ../Results/validation2D.txt;
    grep failed ../Results/validation2D.txt; ./qualification > ../
    Results/qualification2D.txt; grep failed ../Results/
    qualification2D.txt; cd -

run3D:
    cd 3D; ./main > ../Results/main3D.txt; ./unitTests > ../Results/
    unitTests3D.txt; ./validation > ../Results/validation3D.txt;
    grep failed ../Results/validation3D.txt; ./qualification > ../
    Results/qualification3D.txt; grep failed ../Results/
    qualification3D.txt; cd -

run2DTime:
    cd 2DTime; ./main > ../Results/main2DTime.txt; ./unitTests > ../
    Results/unitTests2DTime.txt; ./validation > ../Results/
    validation2DTime.txt; grep failed ../Results/validation2DTime.
    txt; ./qualification > ../Results/qualification2DTime.txt; grep
    failed ../Results/qualification2DTime.txt; cd -

run3DTime:
    cd 3DTime; ./main > ../Results/main3DTime.txt; ./unitTests > ../
    Results/unitTests3DTime.txt; ./validation > ../Results/
    validation3DTime.txt; grep failed ../Results/validation3DTime.
    txt; ./qualification > ../Results/qualification3DTime.txt; grep
    failed ../Results/qualification3DTime.txt; cd -

plot: cleanPlot plot2D plot2DTime plot3D plot3DTime

cleanPlot:
    rm Results/*.png

plot2D:
    cd Results; gnuplot qualification2D.gnu < qualification2D.txt; cd -

plot2DTime:
    cd Results; gnuplot qualification2DTime.gnu < qualification2DTime.
    txt; cd -

plot3D:
    cd Results; gnuplot qualification3D.gnu < qualification3D.txt; cd -

plot3DTime:
    cd Results; gnuplot qualification3DTime.gnu < qualification3DTime.
    txt; cd -

doc:
    cd Doc; make latex; cd -

getRuntimeEnvironment:
    echo "uname -v\n" > runtimeEnv.txt; uname -v >> runtimeEnv.txt; echo
    "\n=====\n" >> runtimeEnv.txt; echo "lshw -short\n" >>
    runtimeEnv.txt; sudo lshw -short >> runtimeEnv.txt; echo "\n

```

```

=====\\n" >> runtimeEnv.txt; echo "lscpu\\n" >> runtimeEnv
.txt; lscpu >> runtimeEnv.txt; echo "\\n=====\\n" >>
runtimeEnv.txt; echo "gcc -v\\n" >> runtimeEnv.txt; gcc -v 1>>
runtimeEnv.txt 2>> runtimeEnv.txt

```

### 10.3.1 2D static

```

all : main unitTests validation qualification

COMPILER?=gcc
OPTIMIZATION?=-O3
BUILD_ARG=$(OPTIMIZATION) -I../SAT -I../Frame

main : main.o fmb2d.o frame.o Makefile
      $(COMPILER) -o main main.o fmb2d.o frame.o

main.o : main.c fmb2d.h ../Frame/frame.h Makefile
      $(COMPILER) -c main.c $(BUILD_ARG)

unitTests : unitTests.o fmb2d.o frame.o Makefile
      $(COMPILER) -o unitTests unitTests.o fmb2d.o frame.o $(LINK_ARG)

unitTests.o : unitTests.c fmb2d.h ../Frame/frame.h Makefile
      $(COMPILER) -c unitTests.c $(BUILD_ARG)

validation : validation.o fmb2d.o sat.o frame.o Makefile
      $(COMPILER) -o validation validation.o fmb2d.o sat.o frame.o

validation.o : validation.c fmb2d.h ../SAT/sat.h ../Frame/frame.h Makefile
      $(COMPILER) -c validation.c $(BUILD_ARG)

qualification : qualification.o fmb2d.o sat.o frame.o Makefile
      $(COMPILER) -o qualification qualification.o fmb2d.o sat.o frame.o $
      (LINK_ARG)

qualification.o : qualification.c fmb2d.h ../SAT/sat.h ../Frame/frame.h
      Makefile
      $(COMPILER) -c qualification.c $(BUILD_ARG)

fmb2d.o : fmb2d.c fmb2d.h ../Frame/frame.h Makefile
      $(COMPILER) -c fmb2d.c $(BUILD_ARG)

sat.o : ../SAT/sat.c ../SAT/sat.h ../Frame/frame.h Makefile
      $(COMPILER) -c ../SAT/sat.c $(BUILD_ARG)

frame.o : ../Frame/frame.c ../Frame/frame.h Makefile
      $(COMPILER) -c ../Frame/frame.c $(BUILD_ARG)

clean :
      rm -f *.o main unitTests validation qualification

valgrind :
      valgrind -v --track-origins=yes --leak-check=full \
      --gen-suppressions=yes --show-leak-kinds=all ./main

```

### 10.3.2 3D static

```

all : main unitTests validation qualification

```

```

COMPILER?=gcc
OPTIMIZATION?=-O3
BUILD_ARG=$(OPTIMIZATION) -I../SAT -I../Frame

main : main.o fmb3d.o frame.o Makefile
      $(COMPILER) -o main main.o fmb3d.o frame.o

main.o : main.c fmb3d.h ../Frame/frame.h Makefile
      $(COMPILER) -c main.c $(BUILD_ARG)

unitTests : unitTests.o fmb3d.o frame.o Makefile
      $(COMPILER) -o unitTests unitTests.o fmb3d.o frame.o $(LINK_ARG)

unitTests.o : unitTests.c fmb3d.h ../Frame/frame.h Makefile
      $(COMPILER) -c unitTests.c $(BUILD_ARG)

validation : validation.o fmb3d.o sat.o frame.o Makefile
      $(COMPILER) -o validation validation.o fmb3d.o sat.o frame.o

validation.o : validation.c fmb3d.h ../SAT/sat.h ../Frame/frame.h Makefile
      $(COMPILER) -c validation.c $(BUILD_ARG)

qualification : qualification.o fmb3d.o sat.o frame.o Makefile
      $(COMPILER) -o qualification qualification.o fmb3d.o sat.o frame.o $(LINK_ARG)

qualification.o : qualification.c fmb3d.h ../SAT/sat.h ../Frame/frame.h
      Makefile
      $(COMPILER) -c qualification.c $(BUILD_ARG)

fmb3d.o : fmb3d.c fmb3d.h ../Frame/frame.h Makefile
      $(COMPILER) -c fmb3d.c $(BUILD_ARG)

sat.o : ../SAT/sat.c ../SAT/sat.h ../Frame/frame.h Makefile
      $(COMPILER) -c ../SAT/sat.c $(BUILD_ARG)

frame.o : ../Frame/frame.c ../Frame/frame.h Makefile
      $(COMPILER) -c ../Frame/frame.c $(BUILD_ARG)

clean :
      rm -f *.o main unitTests validation qualification

valgrind :
      valgrind -v --track-origins=yes --leak-check=full \
      --gen-suppressions=yes --show-leak-kinds=all ./main

```

### 10.3.3 2D dynamic

```

all : main unitTests validation qualification

COMPILER?=gcc
OPTIMIZATION?=-O3
BUILD_ARG=$(OPTIMIZATION) -I../SAT -I../Frame

main : main.o fmb2dt.o frame.o Makefile
      $(COMPILER) -o main main.o fmb2dt.o frame.o

main.o : main.c fmb2dt.h ../Frame/frame.h Makefile
      $(COMPILER) -c main.c $(BUILD_ARG)

unitTests : unitTests.o fmb2dt.o frame.o Makefile

```

```

$(COMPILER) -o unitTests unitTests.o fmb2dt.o frame.o $(LINK_ARG)

unitTests.o : unitTests.c fmb2dt.h ../Frame/frame.h Makefile
$(COMPILER) -c unitTests.c $(BUILD_ARG)

validation : validation.o fmb2dt.o sat.o frame.o Makefile
$(COMPILER) -o validation validation.o fmb2dt.o sat.o frame.o

validation.o : validation.c fmb2dt.h ../SAT/sat.h ../Frame/frame.h Makefile
$(COMPILER) -c validation.c $(BUILD_ARG)

qualification : qualification.o fmb2dt.o sat.o frame.o Makefile
$(COMPILER) -o qualification qualification.o fmb2dt.o sat.o frame.o
$(LINK_ARG)

qualification.o : qualification.c fmb2dt.h ../SAT/sat.h ../Frame/frame.h
Makefile
$(COMPILER) -c qualification.c $(BUILD_ARG)

fmb2dt.o : fmb2dt.c fmb2dt.h ../Frame/frame.h Makefile
$(COMPILER) -c fmb2dt.c $(BUILD_ARG)

sat.o : ../SAT/sat.c ../SAT/sat.h ../Frame/frame.h Makefile
$(COMPILER) -c ../SAT/sat.c $(BUILD_ARG)

frame.o : ../Frame/frame.c ../Frame/frame.h Makefile
$(COMPILER) -c ../Frame/frame.c $(BUILD_ARG)

clean :
rm -f *.o main unitTests validation qualification

valgrind :
valgrind -v --track-origins=yes --leak-check=full \
--gen-suppressions=yes --show-leak-kinds=all ./main

```

### 10.3.4 3D dynamic

```

all : main unitTests validation qualification

COMPILER?=gcc
OPTIMIZATION?=-O3
BUILD_ARG=$(OPTIMIZATION) -I../SAT -I../Frame

main : main.o fmb3dt.o frame.o Makefile
$(COMPILER) -o main main.o fmb3dt.o frame.o

main.o : main.c fmb3dt.h ../Frame/frame.h Makefile
$(COMPILER) -c main.c $(BUILD_ARG)

unitTests : unitTests.o fmb3dt.o frame.o Makefile
$(COMPILER) -o unitTests unitTests.o fmb3dt.o frame.o $(LINK_ARG)

unitTests.o : unitTests.c fmb3dt.h ../Frame/frame.h Makefile
$(COMPILER) -c unitTests.c $(BUILD_ARG)

validation : validation.o fmb3dt.o sat.o frame.o Makefile
$(COMPILER) -o validation validation.o fmb3dt.o sat.o frame.o

validation.o : validation.c fmb3dt.h ../SAT/sat.h ../Frame/frame.h Makefile
$(COMPILER) -c validation.c $(BUILD_ARG)

```



```

qualification : qualification.o fmb3dt.o sat.o frame.o Makefile
                $(COMPILER) -o qualification qualification.o fmb3dt.o sat.o frame.o
                $(LINK_ARG)

qualification.o : qualification.c fmb3dt.h ../SAT/sat.h ../Frame/frame.h
                Makefile
                $(COMPILER) -c qualification.c $(BUILD_ARG)

fmb3dt.o : fmb3dt.c fmb3dt.h ../Frame/frame.h Makefile
                $(COMPILER) -c fmb3dt.c $(BUILD_ARG)

sat.o : ../SAT/sat.c ../SAT/sat.h ../Frame/frame.h Makefile
                $(COMPILER) -c ../SAT/sat.c $(BUILD_ARG)

frame.o : ../Frame/frame.c ../Frame/frame.h Makefile
                $(COMPILER) -c ../Frame/frame.c $(BUILD_ARG)

clean :
        rm -f *.o main unitTests validation qualification

valgrind :
        valgrind -v --track-origins=yes --leak-check=full \
        --gen-suppressions=yes --show-leak-kinds=all ./main

```

### 10.3.5 Doc

```

latex:
        pdflatex -synctex=1 -interaction=nonstopmode -shell-escape fmb.tex

```

## References

- [1] J.J.-B. Fourier. Oeuvres II. Paris, 1890
- [2] T.S. Motzkin. *Beiträge zur Theorie der linearen Ungleichungen*. Thesis, 1936. Reprinted in: *Theodore S. Motzkin: selected papers* (D.Cantor et al., eds.), Birkhäuser, Boston, 1983.