

```
kali-linux-2026.2-virtualbox-amd64 [Running] - Oracle VirtualBox
File Machine View Input Devices Help

kali@kali: ~
Session Actions Edit View Help

kali@kali:~$ nikto --help
Unknown option: help

Options:
  -Add-header      Add HTTP headers (can be used multiple times, one per header pair)
  -ask+           yes Ask about each (default)
                  no Don't ask, don't send
                  auto Don't ask, just send
  -check6         Check if IPv6 is working (connects to ipv6.google.com or value set in nikto.conf)
  -Cgidirs+       Scan these CGI dirs: "none", "all", or values like "/cgi/ /cgi-a/"
  -config+        Use this config file
  -Display+       Turn on/off display outputs:
                  1 Show redirects
                  2 Show cookies received
                  3 Show all 200/OK responses
                  4 Show URLs which require authentication
                  D Debug output
                  E Display all HTTP errors
                  P Print progress to STDOUT
                  S Scrub output of IPs and hostnames
                  V Verbose output
  -dbcheck        Check database and other key files for syntax errors
  -evasion+       Encoding technique:
                  1 Random URI encoding (non-UTF8)
                  2 Directory self-reference (../)
                  3 Premature URL ending
                  4 Prepend long random string
                  5 Fake parameter
                  6 TAB as request spacer
                  7 Change the case of the URL
                  8 Use Windows directory separator (\)
                  A Use a carriage return (0x0d) as a request spacer
                  B Use binary value 0x00 as a request spacer
  -Followredirects Follow 3xx redirects to new location
  -Format+        Save file (-o) format:
                  csv      Comma-separated-value
                  json     JSON Format
                  htm      HTML Format
                  sql      Generic SQL (see docs for schema)
                  txt      Plain text
                  xml      XML Format
                  (if not specified the format will be taken from the file extension passed to -output)

  -Help           This help information
  -host+          Target host/URL
  -id+            Host authentication to use, format is id:pass or id:pass:realm
  -ipv4           IPv4 Only
```



```
kali-linux-2026.2-virtualbox-amd64 [Running] - Oracle VirtualBox
File Machine View Input Devices Help

kali@kali: ~
Session Actions Edit View Help

kali@kali:~$ nikto --help
sql      Generic SQL (see docs for schema)
txt      Plain text
xml      XML Format
(if not specified the format will be taken from the file extension passed to -output)

  -Help           This help information
  -host+          Target host/URL
  -id+            Host authentication to use, format is id:pass or id:pass:realm
  -ipv4           IPv4 Only
  -ipv6           IPv6 Only
  -key+           Client certificate key file
  -list-plugins   List all available plugins, perform no testing
  -maxtime+       Maximum testing time per host (e.g., 1h, 60m, 3600s)
  -mutate+        Guess additional file names:
                  1 Test all files with all root directories
                  2 Guess for password file names
                  3 Enumerate user names via Apache (/user type requests)
                  4 Enumerate user names via cgiwrap (/cgi-bin/cgiwrap/user type requests)
                  6 Attempt to guess directory names from the supplied dictionary file

  -mutate-options Provide information for mutates
  -nocheck        Don't check for updates on startup
  -nocookies      Do not use cookies from responses in requests
  -nointeractive  Disables interactive features
  -nolookup       Disables DNS lookups
  -nossl          Disables the use of SSL
  -noslash        Strip trailing slash from URL (e.g., '/admin/' to '/admin')
  -no404          Disables nikto attempting to guess a 404 page
  -Option         Over-ride an option in nikto.conf, can be issued multiple times
  -output+        Write output to this file ('.' for auto-name)
  -Pause+         Pause between tests (seconds)
  -Platform+      Platform of target (nix, win, all)
  -Plugins+       List of plugins to run (default: ALL)
  -port+          Port to use (default 80)
  -RSACert+       Client certificate file
  -root+          Prepend root value to all requests, format is /directory
  -Save           Save positive responses to this directory ('.' for auto-name)
  -ssl           Force ssl mode on port
  -tuning+        Scan tuning:
                  1 Interesting File / Seen in logs
                  2 Misconfiguration / Default File
                  3 Information Disclosure
                  4 Injection (XSS/Script/HTML)
                  5 Remote File Retrieval - Inside Web Root
                  6 Denial of Service
                  7 Remote File Retrieval - Server Wide
                  8 Command Execution / Remote Shell
                  9 SQL Injection
                  0 File Upload
                  a Authentication Bypass
                  b Software Identification
                  c Remote Source Inclusion
```

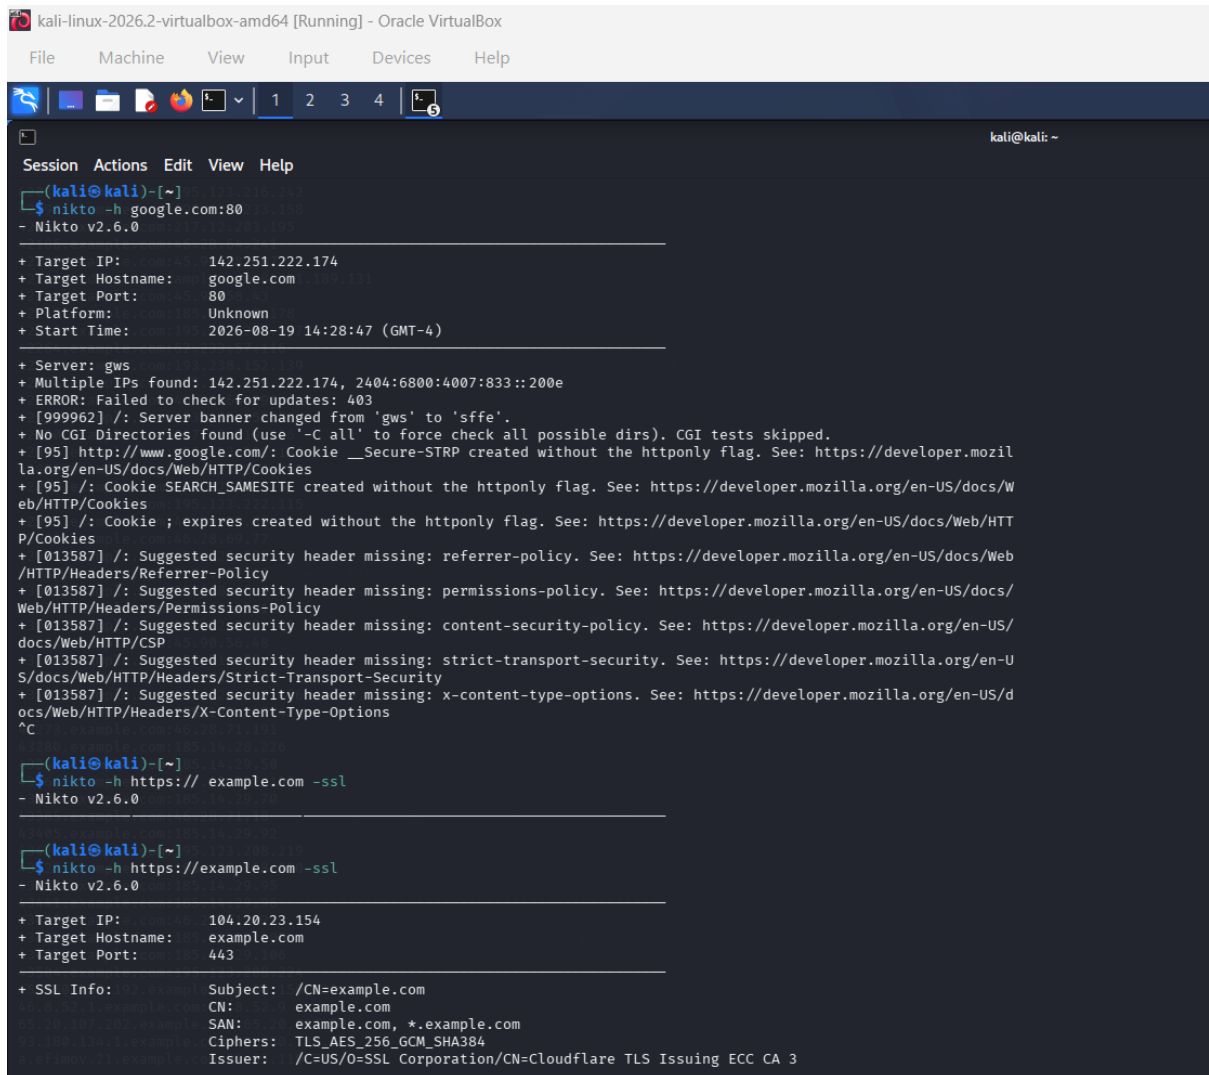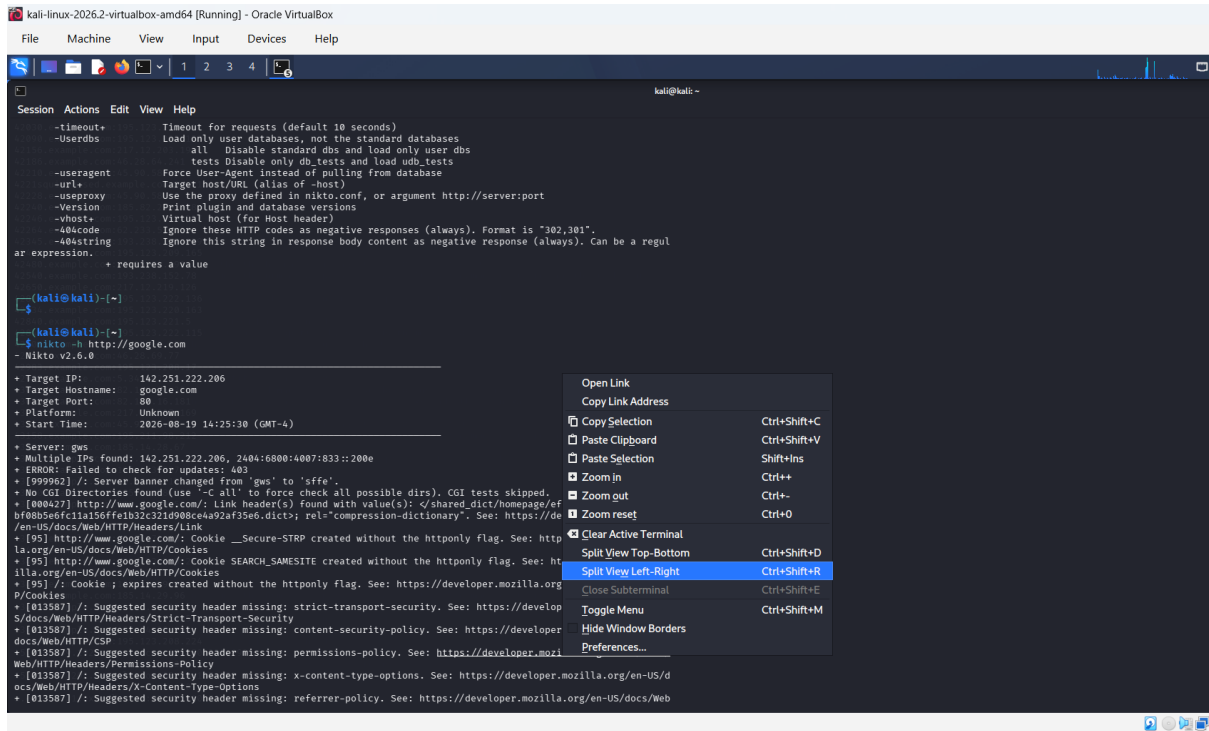

Session Actions Edit View Help

(kali@kali)~

\$ nikto -h https:// example.com -ssl

- Nikto v2.6.0

(kali@kali)~

\$ nikto -h https://example.com -ssl

- Nikto v2.6.0

+ Target IP: 104.20.23.154
+ Target Hostname: example.com
+ Target Port: 443

+ SSL Info: Subject: /CN=example.com
CN: example.com
SAN: example.com, *.example.com
Ciphers: TLS_AES_256_GCM_SHA384
Issuer: /C=US/O=SSL_Corporation/CN=Cloudflare TLS Issuing ECC CA 3

+ Platform: Unknown
+ Start Time: 2026-08-19 14:31:40 (GMT-4)

+ Server: cloudflare
+ Multiple IPs found: 104.20.23.154, 172.66.147.243, 2606:4700:83b5:72db:f23b:4a2:ef6b:ff98
+ ERROR: Failed to check for updates: 403
+ [999106] /: Cloudflare detected via cf-ray header. Recommend proxying via Burp or mitmproxy to avoid TLS fingerprint blocks. See: <https://github.com/sullo/nikto/wiki/Using-a-Proxy>
+ No CGI Directories found (use '-C all' to force check all possible dirs). CGI tests skipped.
+ [999966] /: The Content-Encoding header is set to "deflate" which may mean that the server is vulnerable to the BREACH attack. See: <http://breachattack.com/>
+ [013587] /: Suggested security header missing: referrer-policy. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Referrer-Policy>
+ [013587] /: Suggested security header missing: strict-transport-security. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Strict-Transport-Security>
+ [013587] /: Suggested security header missing: content-security-policy. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/CSP>
+ [013587] /: Suggested security header missing: permissions-policy. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/Permissions-Policy>
+ [013587] /: Suggested security header missing: x-content-type-options. See: <https://developer.mozilla.org/en-US/docs/Web/HTTP/Headers/X-Content-Type-Options>
+ ERROR: *** Error limit (20) reached for host, giving up. Last error: opening stream: ssl connect failed. ***
+ ERROR: *** Consider using mitmproxy to avoid TLS fingerprinting. ***
- STATUS: Completed 112 requests (~2% complete, ~12.7 minutes left): currently in plugin 'Site Files'
- STATUS: Running average: Not enough data.
+ Scan terminated: 20 errors and 7 items reported on the remote host
+ End Time: 2026-08-19 14:31:51 (GMT-4) (11 seconds)

+ 1 host(s) tested

(kali@kali)~

\$