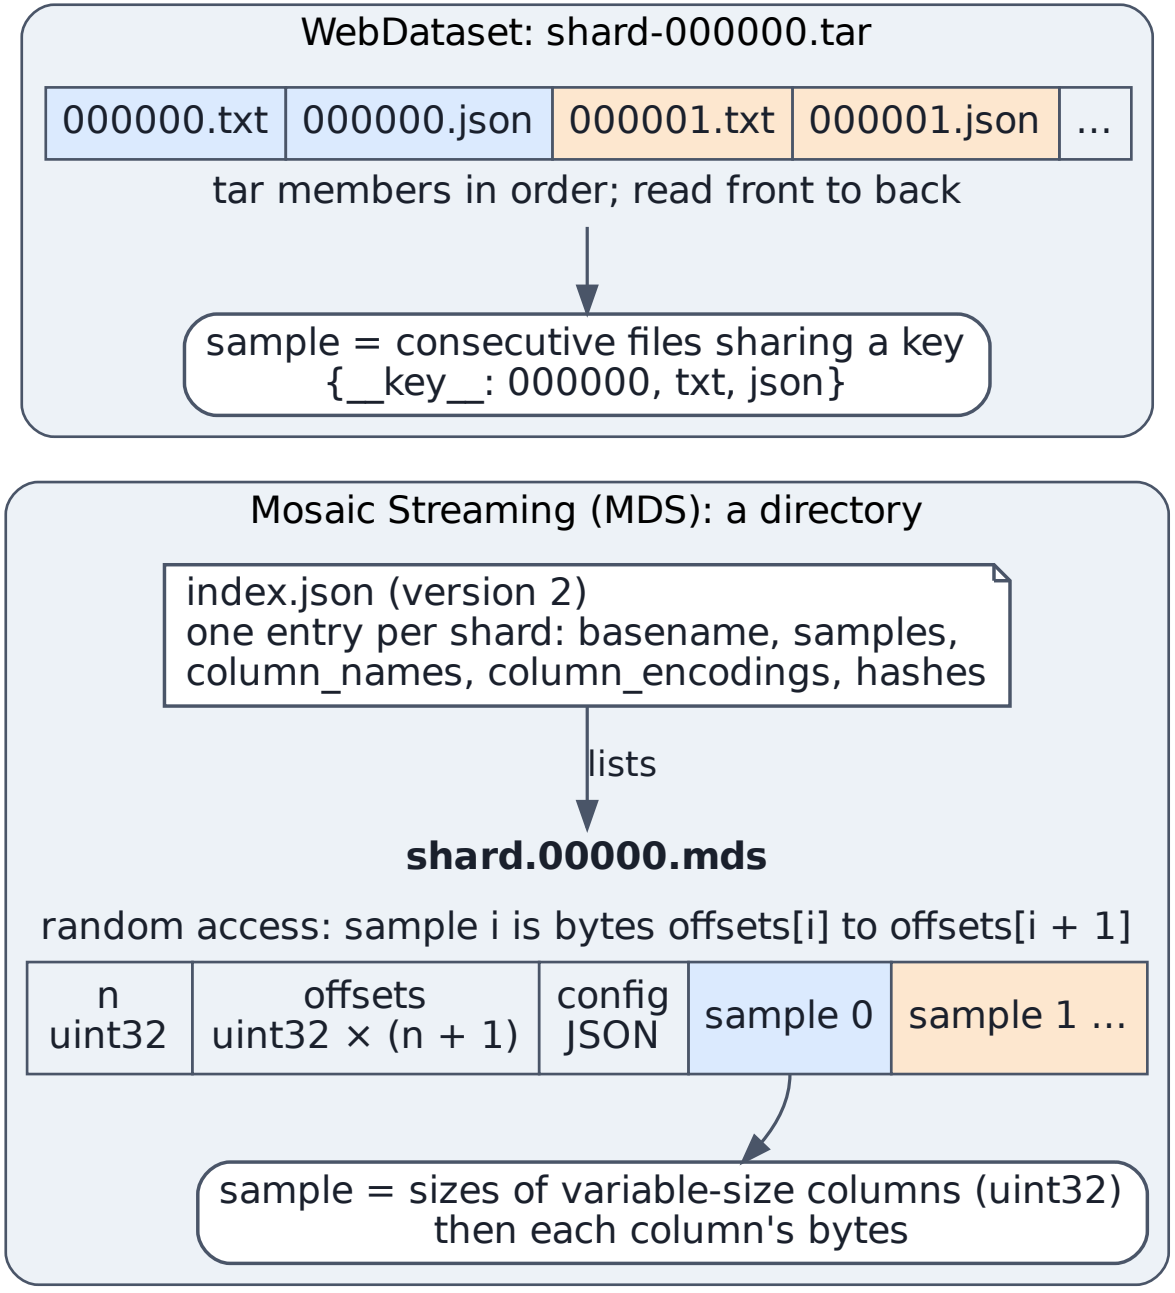
WebDataset: shard-000000.tar
000000.txt
000000.json
000001.txt
000001.json
...
tar members in order; read front to back
sample = consecutive files sharing a key
{__key__: 000000, txt, json}
Mosaic Streaming (MDS): a directory
index.json (version 2)
one entry per shard: basename, samples,
column_names, column_encodings, hashes
lists
shard.00000.mds
random access: sample i is bytes offsets[i] to offsets[i + 1]
n
uint32
offsets
uint32 × (n + 1)
config
JSON
sample 0
sample 1 ...
sample = sizes of variable-size columns (uint32)
then each column's bytes