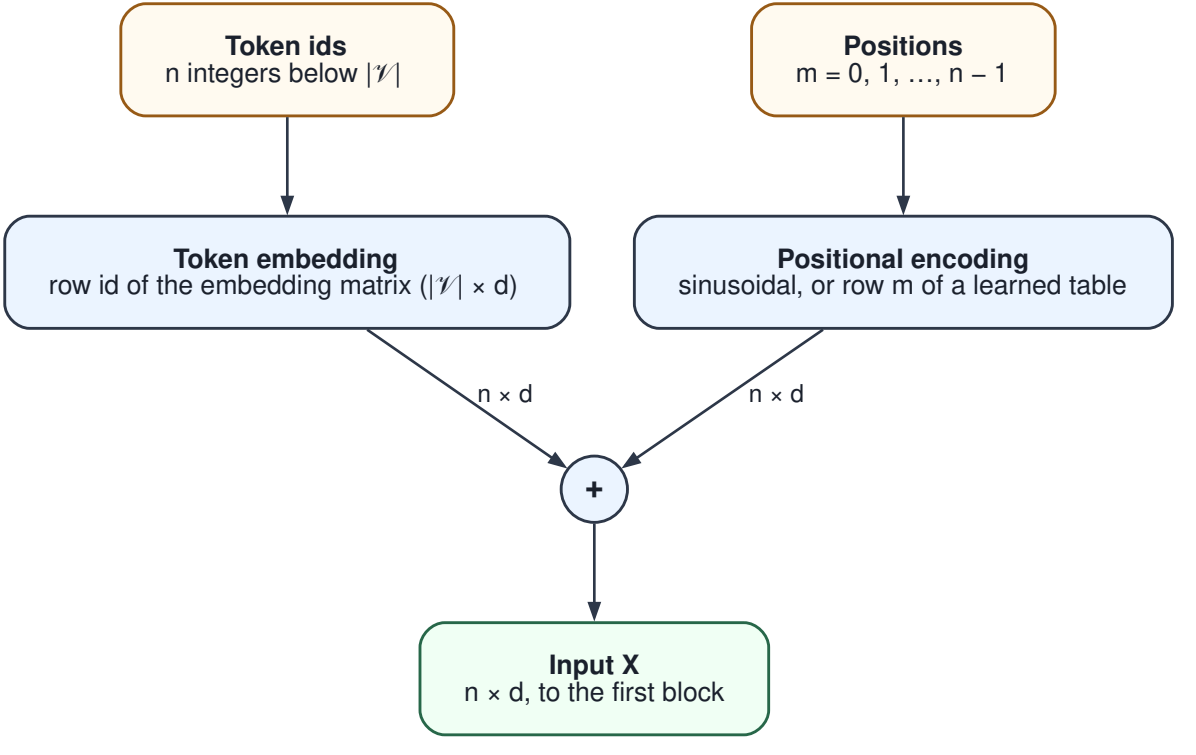
Token ids
n integers below |𝒱|
Positions
m = 0, 1, …, n – 1
Token embedding
row id of the embedding matrix (|𝒱| × d)
Positional encoding
sinusoidal, or row m of a learned table
n × d
n × d
+
Input X
n × d, to the first block