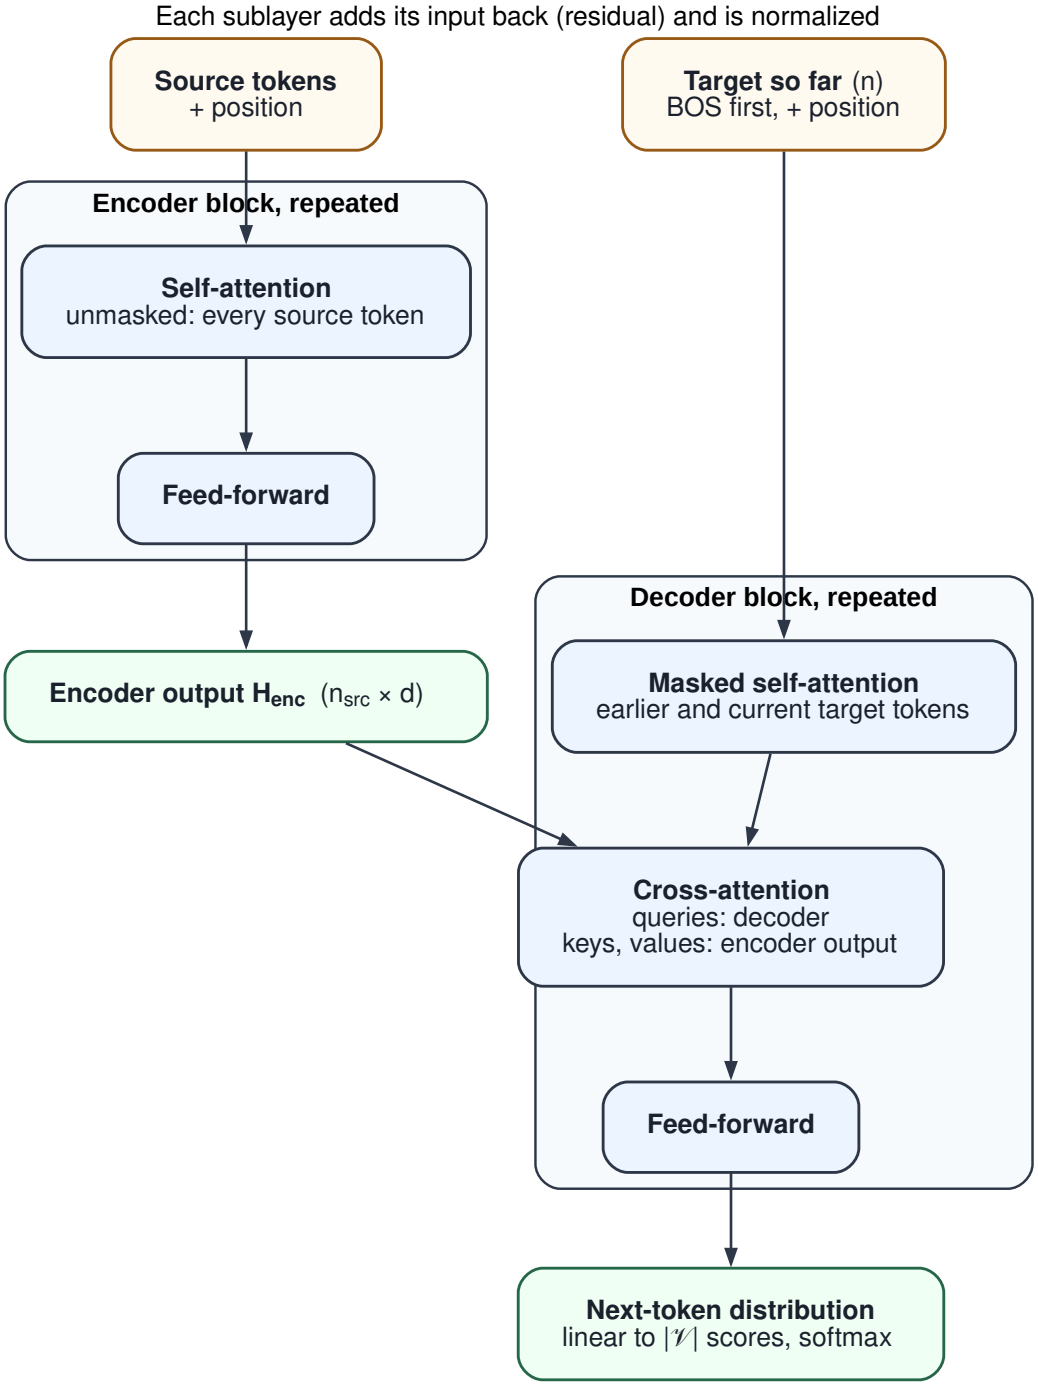
Each sublayer adds its input back (residual) and is normalized
Source tokens
+ position
Target so far (n)
BOS first, + position
Encoder block, repeated
Self-attention
unmasked: every source token
Feed-forward
Encoder output H_{enc} (n_{src} × d)
Decoder block, repeated
Masked self-attention
earlier and current target tokens
Cross-attention
queries: decoder
keys, values: encoder output
Feed-forward
Next-token distribution
linear to $|\mathcal{V}|$ scores, softmax