Getting Started with Create React App

This project was bootstrapped with Create React App.

Available Scripts

In the project directory, you can run:

npm start

Runs the app in the development mode.

Open http://localhost:3000 to view it in your browser.

The page will reload when you make changes.

You may also see any lint errors in the console.

npm test

Launches the test runner in the interactive watch mode.

See the section about running tests for more information.

npm run build

Builds the app for production to the build folder.

It correctly bundles React in production mode and optimizes the build for the best performance.

The build is minified and the filenames include the hashes.

Your app is ready to be deployed!

See the section about deployment for more information.

npm run eject

Note: this is a one-way operation. Once you eject, you can't go back!

If you aren't satisfied with the build tool and configuration choices, you can eject at any time. This command will remove the single build dependency from your project.

Instead, it will copy all the configuration files and the transitive dependencies (webpack, Babel, ESLint, etc) right into your project so you have full control over them. All of the commands except eject will still work, but they will point to the copied scripts so you can tweak them. At this point you're on your own.

You don't have to ever use eject. The curated feature set is suitable for small and middle deployments, and you shouldn't feel obligated to use this feature. However we understand that this tool wouldn't be useful if you couldn't customize it when you are ready for it.

Learn More

You can learn more in the Create React App documentation.

To learn React, check out the React documentation.

Code Splitting

This section has moved here: https://facebook.github.io/create-react-app/docs/code-splitting

Analyzing the Bundle Size

This section has moved here: https://facebook.github.io/create-react-app/docs/analyzing-the-bundle-size

Making a Progressive Web App

This section has moved here: https://facebook.github.io/create-react-app/docs/making-a-progressive-web-app

Advanced Configuration

This section has moved here: https://facebook.github.io/create-react-app/docs/advanced-configuration

Deployment

This section has moved here: https://facebook.github.io/create-react-app/docs/deployment

npm run build fails to minify

This section has moved here: https://facebook.github.io/create-react-app/docs/troubleshooting#npm-run-build-fails-to-minify

```
crwn-clothing
 - .git
   — COMMIT_EDITMSG
    HEAD
    config
    description
      — applypatch-msg.sample

    — commit-msg.sample

       — fsmonitor-watchman.sample
       – post–update.sample
        - pre-applypatch.sample
        - pre-commit<sub>s</sub>ample
       pre-merge-commit.sample
        - pre-push.sample
       - pre-rebase.sample
        – pre−receive.sample
       - prepare-commit-msg.sample
        push-to-checkout.sample

    update.sample

     index
      info
      └ exclude
```





```
    browserslist

       browserslist-lint
      — css-blank-pseudo
      — css-has-pseudo
      css-prefers-color-scheme
      — cssesc
       – detect
       — detect-port
       — detective
      ⊢ ejs
       escodegen
      — esgenerate
      — eslint
      — esparse
       - esvalidate
      — he
      — html-minifier-terser
      import-local-fixture
      — is-docker
       – jake
      – jest
       – js-yaml
      — jsesc
       — json5
       - loose-envify
       lz-string
      — mime
      — mkdirp
      — multicast-dns
      — nanoid
      ─ parser
      — proto-loader-gen-types
      — react-scripts
      ├ regjsparser
       resolve
      — rimraf
       rollup
       sass
       - semver
      ⊢ svgo
      tailwind
      — tailwindcss
      — terser
      — uuid
      webpack
      ─ webpack-dev-server
      └ which
    - .cache
      .eslintcache
       babel-loader
0037ea3fbc2a93a054c00cef6dce271421762ba0c22a7443cb1eb26b25a086ee.json
00d8e6adcd090e6696a6a49776ab18becd881a0f6bd75c9ef124e26291f361d4.json
```

02cb83d4450a866c9349028b02bcdd23101f3915b600310c5e4914b2e3b296a3.json
0c7fd7363683756222034c6acafdb77552dfdd966177596ed5029d54fbdca111.json
0f8759b78610347dbf2c7b2185f3536b5e0032bbb0a4fdf23c5c3a69e4dc59d2.json
10acc5b71e4e1caef714f680ce44b65b1ec5b5648a243dec5f434a306a79bcb0.json
13679536adc9a350b920fce1bf8ef23d5130a2d3dbdef7fcd974f36673e70089.json
147033b2b47622e83f619aa152810e2dabb358747b753d650e696d0e5aa1a163.json
14a0ca8ddba7cdef4f6aa215228728f9053a20fba14ea6e50424ad3fd8efb23f.json
15101016f7fe9bfd0a1cb178bfaf29a5b6adb7087eb3e552ca1ce5458408d53e.json
16012495669e60e945147db0e6e2ba3de8bb98086b2a95110a89dea189dfcbf1.json
16df0b0f2e0d77fb68139a0aac824d3043efefeb54ca387844688650234708fe.json
177fd74ed9ed3f6a41f45555da897b384a6af661f63ef328e547a90c875eb890.json
1800ce77e2f9bccac4fe12ec2552ceb60a95ef14ebf4d4e8db7c8efe2cda86b1.json
183fc51049cc3fc26bd525cbb3985cef4fbd774ea7fca7c267776e3f462ad8e5.json

l 1 1 1 1 1 1 1

32819d59f1b9d57e2ec767e8ce00929c3ad25bd1bc1b6b3d33a7e2449fc489ba.json
34bf2853c8e15a55ec9a6bd9efc10999a044f43330f3c1c62ea221dade4373fc.json
34ea5fc7f6a89cc4f1473ce5f3aa41eb8c6c9c087ab5f4c0c439e2145541b492.json
382f9dc03bb3e785bd9bb5b30f25fe418c202e6b088ab1342f0e6e38a3670a8b.json
387b6a9182ee7d6220cfb2439e0ac10f746360742e039a8345a52219a3d7eb1f.json

$ \ \ \ $ 492994235beac5ce5f22fa2893c0b730c31ed74827181247d5c8ee0f09dce42c.json
$ \ \ \ $ 4982a2cb424966d804e4bd5c28c1f97893b0102bbdb5280d682c2da981984c11.json



63394fc0cd7d7ac6266dc4f60b5c2f557bc00ea1efcb2f3890290ba8c52b4899.json
636dc34a39ea293775ff05e918c38e08681d0f200457fd1b74284e18232a0ad7.json
643a7025e20fb30cca9518ba69222d530c70c56b9578810ec91cccb4a9f8cb22.json
644352ea6a37831efa05797f5154ef1142241adc8de383f64faff062f76ff7ea.json

77a0132579e3e7024c48877b9136b7776f81342696449ec5b60282cb4ab8bf2a.json
786d00049220d3ee5ca27e07c49ca009d7ec5bb49e89ca7f28f16cb3bf2f2df3.json
789b6b7745b9c38e1d86aeb6dcafb0871011251e6456f4ec45e1d8a1d06a10a6.json
7a1772ec032d74546aa9a922e636601d687c22515200948c4bd10299dde400d6.json

	├─
7fc536186	
 80431fd66	├─ eb4347daac4f918f98d559a77812745955da9e122d6b7da024c4b141.json
80611b515	├─ 5970dd6bae9a4ef862ac7f7ceda9952b79498b6b58e58faff232940a.json
806b87248	
80ff99f98	├─ 864ffc78d6b4f226f235516fbc3f3764b598a6911fb2d591ada3cf78.json └─
81469f074	├─ 19c07c33ba5b3e5c6a4ad4361a93f8f8280fab496316b7c30595ec10.json └─
1 1 1	 ld533226217f6ff21efe1c6c9bb414e4be0282da0a7b66987e983802.json ∟
82a277160	 0073d7cf1e6f4194f7b7c0e6c4cb683f66fcd73a7e3d7e340c8ec682.json ∟
82d61bfd8	
857d7d01k	 5551219cb13ec493d73e42fc3a960baa3e02801deadb39d7defa6813.json ∟
863bf5636	e4a4dbf17c4e25cc57d13e2fcd94e120c94fe25c6b7ed3ab74687876.json
876f5f1d7	74e94bb05c08f09a5d9c265e196274b860404b632a4cdfb51488eda9.json
87ebe7ca1	lbbef43ece50cc837bbbc0ee7cb45218b25dabd5f585f241c7e78889.json ∟
888c71db9	0ddb6213ace7e661fb67dee242ab69d709876db950916bc9db312eee.json ∟
88fe91d3a	n accff4d5ec01882dd36dd5af6a39a43cb73770fd4074e48b8de6fe12.json ∟
8b173ea50	 0e8523081245d17c7e0d47670b88f4154b2ab7f477de78d7bc9f51c6.json ∟
8bd7f7639	054e84b49005613e26081d8c930074483bc3f1e9bf501fd584554e10.json ∟
8c0ccbbab	74e98e6c50b6742caa6e37078f652f0b4c316fdeb06a6127b8238f7.json
8c9f818f1	f91c834b401f1005defd87b524715b94a82357360c4e615ae1db4407.json
8d7e0fb08	 3e686e77247360f603046857001040e950033d6faed08fe43304539d.json ∟
8dcd53b05	57731bfed3d3a3b346afba54b74e4581c66a5dfc10162fdb6fdc9a37.json
8e0387efc	c6b594436ca1c34fe67480986428e78776a134f1e06adc8c86a534b3.json
90920aa21	f93681fd81c4cff5ef4d51f7132e7674768a5c04c93af0edb2c93b3f.json
91ba35b01	F638230bd9bc0548146f757801c8b9b7c203f1222cd52e5ad55dee15.json ∟
930a71701	f000911ea79abebf378201e0b1e20bc262d81cfe4a11faaa217d9eaa.json
9379b75do	lab32fc571e7dccdb180bfd067f96db6dfa6f428c3c5480e7f5b599e.json

 94 	
95 1	
95 1	
96 1	
96 	
96 1	5f06997e8611ac1ccbc660dd6add6e1af130b3b28b6e75f48ebd6d126466392.json
97 1	
98 1	
98 1	
 9a 	
9a	
 9k	
9k	
 9k 	
 9k	
 90 	
90 1	
 9€ 	
 9€	
91 1	
a(
a2	
a2	
a3	
a ²	
a5	
 a5	

a59542bfae6f53547c393274261df1a85dac721f8a11c9bb64862fded41540a4.json
a6db4835eaf6d481d94eae473aea8424cdd8650a84f60e10eb2d8565bcb2c8e9.json
a86e6065a370d643ef038b713e92d8a5aabbc58bd3a705d115622f8b5eb66c65.json
a9c397ac22050f1ad276f9387539973cf8bb04728b657a4673240ea112e11fdd.json

b7f10b681b1c773ef923ecdd1b4b9589bcbeba0651ece8ffca0a2f492626020c.json
ba35a35273377921705a3320d0345e187a05fc411e05430b91841cc52957e885.json
bafce0824cfa118bf741a774b73e619d7f2480553a16d58385c1d518e0009dbd.json
bb1c5bcf09ebf6748d664a5c76ce3851774f8176a7999a7f0f1c5496b65ed234.json
bfd885fc88b9ae7a9fafc34e82c849efb741394869af46c67b76980b792e3726.json

c82bba5b29dafc66de51880cd7682a25c82bff65e24543b646357ef8a3e116fa.json	
cb202309d3db508729aaa01a9659e710eb55057818b8a73df07010c613525a0f.json	
cdb95249b91ffb391dcf4ba9fbeb0212174a26aa9753e1862c16b9c73078f965.json	
l	
cf5a76ab708be367f5fe754a93f07929d759f32eb36002b857db248efca2c863.json	
d01e0bfa8672731e20ade0c4e7ece7a94fed03e4b7d0dcca6cc078d773e2f0e5.json	
d0585832fccb820c31723bcbbace0db6cd63cda1debd3c353c320b01427ebe4f.json	
d253c962eed49fc95531bebc40667d41ff644b348b2b6e631a652b6010eb176a.json	
d28c536ee26442973149de417e74fffc7104e9b4664162c731876f36ab0ce5f4.json	
d2d7e06f8b8e13978c3b55a2ca46886421c0d9f12b2e5e7794ca9d6dc71adcef.json	
d335c9cf252f962bc937e8f929d32c17578b993a3aa855025fd3ff7c7d6a354c.json	
d4241100314c2ab9667c18758186d272e28d6fa7faafbd2118d77ed1fd140cea.json	
d5cb6d718a2010700665973191d73892f6abc3cd30ae5233d614121ceca7a8d4.json	

d87d5490e8691287d7765a1167beaed3d7d3199437007e0e8fd43b17e93ea354.json
l
dca99ef91ca3eea553516c048b351012d09338727ca4f8de11fd1a2eb936cbc1.json
dcad8b0855c412dd10e96ee82d32da74ddf2630c6a660279bba220d1c8e2e741.json
dced64ed52bf4f5daec013875ce6ce338e9b8ddb784e0dffc0d9c27b29e4c8f8.json
dd41a595cd5f307ed64162d54826fb061466bfa5a7437fb3e73ea3130415a9f5.json
dfb6bee2ac670dce6038c7c12d22b408574dff525256f539d82ae8d2d150faab.json
e399d38bf83fe2e89b9dfe9acb44a9778608f6fa98b061802a150793f475a71f.json
e3a5dfa9c2c08fd458856d41ca9a2b395f253eb08e0e40e20760a74e70b44461.json
e64fb4f6620e054d7e041f1592aa2250c3a5f2458acae8a4097dc23fddede6f9.json
e76ace7f104f27105382601bc5bfa1d3276d677dd8a6efdae6fb59e397c06017.json
e786853d0963aa54cc130b058fe8df7fc89081f3cc6bdc9d7763d2bd06dfd52b.json
e8e065c31bea002b6105e224d24ad2cbe6364d5c4cc0f81e6b76de362e09fa30.json
e972d41d880ab3b2f34d44c115a8cb312f0c3ad6de5e48c8ab17da786ffc4dd8.json
e974ed0dc7ef6d9ed7f41cf838f92d183c098c532770d17b8c34d7454bf83a5b.json
e990cfe67a83a417a28ad29c777293070988b2d54d43ff568fa0846b249d3fb9.json
e9a971b7d9b52c79c83d867adeaccd79ca85325f2ab1f45c8065cb2de9661937.json
ea52067d179a3d0d3518b6c89ddc6cd514d71a6296cec5da31582c8ed28eae07.json
eb6f1aa26ee1965a1e60a36f874be7179dc8149fc117a95a4d6e5a065030f383.json
ec2ca472f3c62518e38fd92746d88128e0f2ac0b999da1edea64106a7c290d93.json
ed1bc5481161336b8cc5517911e934a365d6d61462345661476b0d043e03c4a8.json
ed3d6b5d57a7d6863d9795276c6ba383e91d0414ca1d8fb60a1720c545888f57.json
ed9fe21ac411d5b5b4e98e61112e9595ba49b5d9c92e2a87c5f71000c6f6f767.json

e	
e [.]	
f(
f(
f:	
f f	
f f	
f f	
I f	
f!	
f(
f f	
l fl l	
fl I	
fl I	
f(-
f	ed000686b452e5cb328ce3b70345ccfc9571d2f0ea38407093459b67e616d6c.json default-development 0.pack

```
- 1.pack
     - 10.pack
     - 11.pack
     - 12.pack
     - 13.pack
     - 2.pack
     - 3.pack
     - 4.pack
     - 5.pack
     − 6.pack
     - 7.pack
     - 8.pack
     − 9.pack
     - index.pack
    └ index.pack.old
.yarn-integrity
@adobe
 └ css-tools
    ─ History md
    — LICENSE
    — Readme.md
     - dist
       ⊢ cjs
          — CssParseError.d.ts
           CssPosition.d.ts
           cssTools.js
           — cssTools.js.map
           - index.d.ts
            - parse
             └ index.d.ts

─ stringify

             ─ compiler.d.ts
             └ index.d.ts
          └ type.d.ts
        - esm
          ─ CssParseError.js
           – CssPosition.js
           — index.js
           - parse
            └ index.js
           stringify
             ├ compiler.js
             └ index.js
          └ type.js
       ∟ umd
          — cssTools.js
          └ cssTools.js.map
     – package.json
@ampproject

    □ remapping

─ LICENSE

     - README.md
     - dist

⊢ remapping.mjs
```

```
remapping.mjs.map
                              remapping.umd.js
                              - remapping.umd.js.map
                          └ types
                                    build-source-map-tree.d.ts
                                      — remapping.d.ts
                                      - source-map-tree.d.ts
                                        - source-map.d.ts
                                   L types.d.ts
                    node_modules
                         └ @jridgewell
                                   └ gen-mapping
                                                 LICENSE
                                                   - README.md
                                                   - dist

    — gen-mapping.mjs

                                                          — gen-mapping.mjs.map

─ gen-mapping.umd.js

                                                            - gen-mapping.umd.js.map

    types
    types

─ gen-mapping.d.ts

                                                                       sourcemap-segment.d.ts

    types.d.ts

                                              └ package.json
                    - package.json
- @babel
        - code-frame
                — LICENSE
                  README.md
                 — lib
                        └ index.js
                   – package.json
         - compat-data
               LICENSE
                  README.md
                 — corejs2-built-ins.js
                 — corejs3-shipped-proposals.js
                 — data

    — corejs2-built-ins.json

                          — corejs3-shipped-proposals.json

    □ native-modules.json

    — overlapping-plugins.json

→ plugin-bugfixes.json

                         └ plugins.json
                 native-modules.js
                — overlapping-plugins.js
                — package.json
                   – plugin-bugfixes.js
               └ plugins.js
         - core

─ LICENSE

                   README.md
                 — cjs-proxy⊾cjs
                   – lib
```

```
config
 cache-contexts.js
 cache-contexts.js.map
 – caching.js
— caching.js.map
— config−chain.js
 - config-chain.js.map
 config-descriptors.js
 config-descriptors.js.map
 – files

    ─ configuration.js

─ configuration.js.map

    import-meta-resolve.js
    import-meta-resolve.js.map
    - import.cjs
    — import.cjs.map
    — index−browser.js
    — index-browser.js.map
    – index.js
   ⊢ index.js.map
    — module-types.js
    - module-types.js.map
    – package⊾js
    — package.js.map
    – plugins.js
    – plugins.js.map
    – types.js
    — types.js.map
     - utils.js
   └ utils.js.map
 – full.is
 - full.js.map
 helpers

    ─ config-api.js

    ─ config-api.js.map

    deep−array.js

─ deep-array.js.map

     - environment.js
   └ environment.js.map
 - index.js
 - index.js.map
 – item.js
 item.js.map
 partial.js
 - partial.js.map
 – pattern-to-regex.js
 - pattern-to-regex.js.map
 - plugin.js
 plugin.js.map
 – printer.js
 - printer.js.map
 - resolve-targets-browser.js
 resolve-targets-browser.js.map
 – resolve–targets.js
```

```
- resolve-targets.js.map
   - util.js
    - util.js.map
   validation

→ option-assertions.js

      option-assertions.js.map
      – options.js
       options.js.map
       – plugins.js
      – plugins.js.map
       - removed.js
     └ removed.js.map
- errors

    ─ config-error.js

   - config-error.js.map
   - rewrite−stack−trace.js
  └ rewrite-stack-trace.js.map

    gensync-utils

   — async.js
   – async.js.map
   – fs.js
   - fs.js.map
    - functional.js
  └ functional.js.map
- index.js
 - index.js.map
 - parse.js
- parse.js.map
 parser

    index.js

  ─ index.js.map
  ∟ util
      – missing-plugin-helper.js
     └ missing-plugin-helper.js.map
- tools
  ─ build-external-helpers.js
  └ build-external-helpers.js.map
- transform—ast.js
- transform-ast.js.map
transform-file-browser.js
transform-file-browser.js.map
— transform-file.js
— transform-file.js.map
– transform.js
– transform.is.map
- transformation

    block-hoist-plugin.js

   block-hoist-plugin.js.map
   – file
     ⊢ file.js
       - file.js.map
       - generate.js
      generate.js.map
      – merge-map₊js
```

```
└ merge-map.js.map
         - index.js
         - index.js.map
         — normalize−file.js
        — normalize-file.js.map
        — normalize-opts.js
         - normalize-opts.js.map
        — plugin-pass.js
         - plugin-pass.js.map
         – util
            — clone-deep.js
           └ clone-deep.js.map
      - vendor
         — import-meta-resolve.js
        └ import-meta-resolve.js.map
   - node modules
     └ .bin
        — json5
         parser
        ∟ semver
   - package⊾json
    src

⊢ config

⊢ files

           ⊢ index-browser.ts
           └ index.ts
        resolve-targets-browser.ts
        └ resolve-targets.ts
      - transform-file-browser.ts
     └ transform-file.ts
— eslint-parser

─ LICENSE

   README.md
   - lib

— analyze-scope.cjs

     — analyze-scope.cjs.map
      – client.cjs
      - client.cjs.map
      configuration.cjs
      configuration.cjs.map
      convert
        ⊢ convertAST.cjs
        — convertAST.cjs.map
         convertComments.cjs
         convertComments.cjs.map
         convertTokens.cjs
        — convertTokens.cjs.map
         index.cjs
        └ index.cjs.map
      – experimental–worker.cjs
      experimental-worker.cjs.map
      index.cjs
      index.cjs.map
      - parse⊾cjs
```

```
parse.cjs.map
      utils
        — eslint-version.cjs

    □ eslint-version.cjs.map

    └ worker
       — ast-info.cjs
        ast-info.cjs.map
        - babel-core.cis
        - babel-core.cjs.map
        — configuration.cjs
        — configuration.cjs.map
        extract-parser-options-plugin.cjs
        extract-parser-options-plugin.cjs.map
        — handle-message.cjs
        handle-message.cjs.map
        - index.cjs

─ index.cjs.map

         - maybeParse.cjs
       node modules
     - .bin

⊢ eslint

       ∟ semver
     eslint-visitor-keys
       ─ CHANGELOG.md
        - LICENSE
        README.md
        - lib

⊢ index.js

          └ visitor-keys.json
       └ package.json
   - package.json

    generator

  LICENSE
  README.md
   - lib
     – buffer.js
     buffer.js.map
     generators
        — base₊js
        — base.js.map
        — classes.js
        — classes.js.map
        - expressions.js
        expressions.js.map
        – flow₁js
        – flow.js.map
        — index.js
        - index.js.map
        – jsx.js
         - jsx.js.map
         - methods.js
        - methods.js.map
        – modules.js
```

```
- modules.js.map
         - statements.js
         - statements.js.map
        — template-literals.js
        — template-literals.js.map
         – types.js
        - types.js.map
         typescript.js
        └ typescript.js.map
      - index.js
      - index.js.map
      - node
        index.js
        — index.js.map
         – parentheses.js
        — parentheses.js.map
         – whitespace.js
        └ whitespace.js.map
      - printer.js
      - printer.js.map
      – source–map₊js
     └ source-map.js.map

    node modules

    └ .bin
        └ isesc
   – package.json
helper-annotate-as-pure

─ LICENSE

   - README.md
  — lib
    └ index.js
   - package.json

    helper-builder-binary-assignment-operator-visitor

  LICENSE
   README.md
   - lib
    └ index.js
   - package.json

    helper-compilation-targets

─ LICENSE

  README.md
  – lib

    debug₁js

     – debug.js.map
     — filter−items.js
      - filter-items.js.map
     - index.js
      index.js.map
      – options.js
      options.js.map
      - pretty.js
      - pretty.js.map
      - targets.js
      - targets.js.map
```

```
- utils.js
     └ utils.js.map
   - node_modules
      - .bin
         browserslist
        ∟ semver
       - lru-cache
        — LICENSE
         - README.md
         – index.js
        └ package.json
      vallist
        LICENSE
         README.md
         iterator.js
         – package.json
        └ yallist.js
   - package.json

    helper-create-class-features-plugin

─ LICENSE

  README.md
   - lib

    decorators.js

      – decorators.js.map
      — features.js
      – features.js.map
     — fields.js
      — fields.js.map
      — index.js
     — index.js.map
     ⊢ misc.js

    misc.js.map

      - typescript.js
     └ typescript.js.map
   - package.json

    helper-create-regexp-features-plugin

─ LICENSE

   — README.md
   - lib
     ─ features.js
     ─ features.js.map

─ index.js

     — index.js.map
      - util.js
     └ util.js.map
   - package.json

    helper-define-polyfill-provider

    LICENSE

   README.md
   - esm
     index.browser.mjs
      - index.browser.mjs.map
      - index.node.mjs
     └ index.node.mjs.map
```

```
lib

⊢ browser

        └ dependencies.js
     — debug-utils.js
     — define-provider.js
     — imports-cache.js
      – index.js
      - meta-resolver.js
      node
       └ dependencies.js
      normalize-options.js
      – types.js
      utils.js
     └ visitors
        ⊢ entry.js
         - index.js
        ∟ usage.js
   - node modules
     └ .bin
         resolve
        ∟ semver
   – package.json
helper-environment-visitor

─ LICENSE

   README.md
   - lib
    └ index.js
   – package.json
- helper-explode-assignable-expression
  ⊢ LICENSE
  ─ README.md
   - lib
    └ index.js

    package.json

– helper-function-name

─ LICENSE

   README.md
   - lib
     ⊢ index.js
     └ index.js.map
  └ package.json
helper-hoist-variables
  ⊢ LICENSE
   — README.md
   – lib
    └ index.js
   – package.json
- helper-member-expression-to-functions
  README.md
   - lib
      — index.js
     └ index.js.map
   - package.json
```

```
helper-module-imports
   LICENSE
   - README.md
   - lib
     import-builder.js
     — import-injector.js
      index.js
     └ is-module.js
   - package.json
helper-module-transforms

─ LICENSE

   README.md
   - lib

    — dynamic-import.js

     — dynamic-import.js.map
     — get-module-name.js
     — get-module-name.js.map
      - index.js
     — index.js.map
     — normalize-and-load-metadata.js
     - normalize-and-load-metadata.js.map
      – rewrite-live-references.js
     — rewrite-live-references.js.map
      - rewrite-this.js
     └─ rewrite—this.js.map
   - package.json

    helper-optimise-call-expression

─ LICENSE

   README.md
  — lib
     └ index.js
   – package.json

    helper-plugin-utils

  README.md
   - lib
      – index.js
     └ index.js.map
   – package.json

    helper-remap-async-to-generator

─ LICENSE

  README.md
  — lib
    └ index.js
  └ package.json
helper-replace-supers

─ LICENSE

   README.md
   - lib

─ index.js

     └ index.js.map
   - package.json
 helper-simple-access
   LICENSE
```

```
- README.md
   - lib

─ index.js

     └ index.js.map
  └ package.json

    helper-skip-transparent-expression-wrappers

─ LICENSE

   — README.md
   - lib

⊢ index.js

     └ index.js.map
  └ package.json

    helper-split-export-declaration

─ LICENSE

   - README.md
  — lib
     └ index.js
  └ package.json
– helper-string-parser

─ LICENSE

  — README.md
   - lib

─ index.js

     └ index.js.map
   – package.json

    helper-validator-identifier

  README.md
   - lib

— identifier.js

─ identifier.js.map

     — index.js
     — index.js.map
      - keyword.js
     └ keyword.js.map
   - package.json
    scripts
     └ generate-identifier-regex.js

    helper-validator-option

─ LICENSE

   README.md
  — lib

    find-suggestion.js

      – find-suggestion.js.map
      — index.js
      index.js.map
      – validator.js
     └ validator.js.map
   – package.json
- helper-wrap-function


    LICENSE

   - README.md
   - lib
     ⊢ index.js
```

```
└ index.js.map
    package.json
- helpers
  LICENSE
  README.md
  - lib
     helpers
        — AsyncGenerator₁js
        AsyncGenerator.js.map
        - OverloadYield.js
        OverloadYield.js.map
        – applyDecs.js
        applyDecs.js.map
        applyDecs2203.js
        applyDecs2203.js.map
        – applyDecs2203R.js
        applyDecs2203R.js.map
        applyDecs2301.js
        applyDecs2301.js.map
        asyncGeneratorDelegate.js
        asyncGeneratorDelegate.js.map
        – asyncIterator.js
        – asyncIterator.js.map
        awaitAsyncGenerator.js
        – awaitAsyncGenerator.js.map
        – checkInRHS.js
       — checkInRHS.js.map
        defineAccessor.js
        defineAccessor.js.map
        — iterableToArrayLimit.js
       — iterableToArrayLimit.js.map

    iterableToArrayLimitLoose.js

        iterableToArrayLimitLoose.js.map
        – jsx.js
        — jsx.js.map
       — objectSpread2.js
        objectSpread2.js.map
        regeneratorRuntime.js
        - regeneratorRuntime.js.map
        - typeof⊾js
        - typeof.js.map
        wrapRegExp.js
       helpers-generated.js
     - helpers-generated.js.map
     - helpers.js
     – helpers.js.map
      - index.js
    └ index.js.map
  – package⊾json
   - scripts
     - generate-helpers.js
     - generate-regenerator-runtime.js
     – package⊾json
```

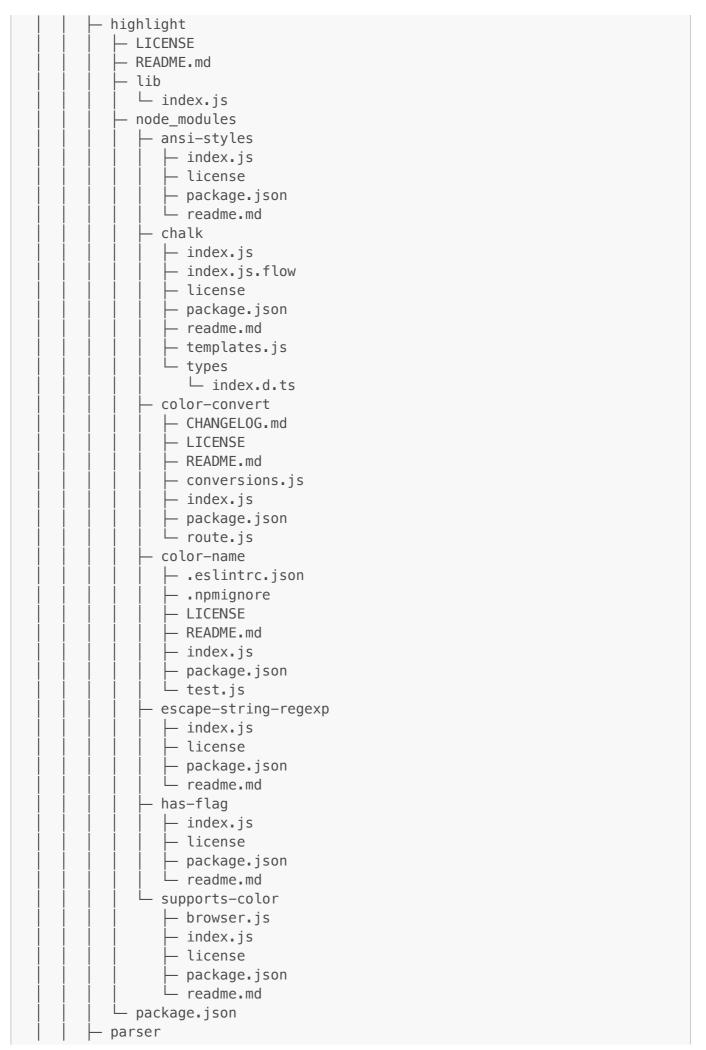

```
- CHANGELOG.md
           - LICENSE
          - README.md
          - bin
           └ babel-parser.js
          — index.cjs
           - lib

⊢ index.js

            └ index.js.map
           - package.json
           typings
            └ babel-parser.d.ts

→ plugin-bugfix-safari-id-destructuring-collision-in-function-
expression
          — LICENSE
          README.md
          — lib

⊢ index.js

            └ index.js.map
         └ package.json
       plugin-bugfix-v8-spread-parameters-in-optional-chaining
          — LICENSE
          README.md
          - lib
            ⊢ index.js
            └ index.js.map
         └ package.json

    plugin-proposal-async-generator-functions

          — LICENSE
          README.md
         — lib
            — for-await.js
            ─ for-await.js.map
              - index.js
            └ index.js.map
           - package.json

    plugin-proposal-class-properties

─ LICENSE

          - README.md
          - lib
            └ index.js
         └ package json
       plugin-proposal-class-static-block
         LICENSE
          README.md
           - lib

⊢ index.js

            └ index.js.map
         └ package.json

    plugin-proposal-decorators

         LICENSE
          - README.md
           - lib
            ⊢ index.js
```

```
- index.js.map
      - transformer-2023-01.js
     — transformer-2023-01.js.map
      - transformer-legacy.js
     └ transformer-legacy.js.map
   – package.json

    plugin-proposal-dynamic-import

  LICENSE
   README.md
   – lib
    └ index.js
  └ package.json

    plugin-proposal-export-namespace-from

  — LICENSE
   README.md
   - lib
    └ index.js
  └ package.json
plugin-proposal-json-strings
  LICENSE
  README.md
   - lib
    └ index.js
   – package.json

    plugin-proposal-logical-assignment-operators

  — LICENSE
   - README.md
   - lib
     index.js
     └ index.js.map
 └ package.json

    plugin-proposal-nullish-coalescing-operator

  — LICENSE
  README.md
   - lib
     └ index.js
 └ package.json

    plugin-proposal-numeric-separator

  LICENSE
  README.md
  — lib
    └ index.js
   – package₊json

    plugin-proposal-object-rest-spread

─ LICENSE

  README.md
   - lib
      - index.js
     └ index.js.map
   – package.json

    plugin-proposal-optional-catch-binding

   LICENSE
   README.md
   - lib
```

```
└ index.js
   - package.json

    plugin-proposal-optional-chaining

  LICENSE
  README.md
  — lib
     ⊢ index.js
     └ index.js.map
  └ package.json
plugin-proposal-private-methods
  LICENSE
  README.md
   - lib
     └ index.js
  └ package.json

    plugin-proposal-private-property-in-object

─ LICENSE

  - README.md
  — lib

─ index.js

     └ index.js.map
   - package.json
plugin-proposal-unicode-property-regex
  — LICENSE
   README.md
   - lib
    └ index.js
   – package.json

    plugin-syntax-async-generators

─ LICENSE

  ─ README.md
   - lib
    └ index.js
 └ package.json
plugin-syntax-bigint
  ─ LICENSE
  README.md
   - lib
    └ index.js
   – package.json

    plugin-syntax-class-properties

  LICENSE
  README.md
  — lib
    └ index.js
   – package.json
plugin-syntax-class-static-block

    LICENSE

   README.md
   - lib
    └ index.js
   - package.json
 plugin-syntax-decorators
   LICENSE
```

```
- README.md
   - lib

⊢ index.js

     └ index.js.map
  └ package.json
- plugin-syntax-dynamic-import
  — LICENSE
   README.md
   - lib
     └ index.js
   – package.json

    plugin-syntax-export-namespace-from

  LICENSE
   README.md
   - lib
    └ index.js
  └ package.json
plugin-syntax-flow
  LICENSE
  — README.md
  — lib
    └ index.js
  └ package.json

    plugin-syntax-import-assertions

    LICENSE

   README.md
   - lib

─ index.js

     └ index.js.map
  └ package.json
— plugin-syntax-import-meta

─ LICENSE

   - README.md
  — lib
    └ index.js
   – package.json
plugin-syntax-json-strings

─ LICENSE

   README.md
  — lib
    └ index.js
  └ package.json
– plugin-syntax-jsx
  LICENSE
   README.md
   - lib
     └ index.js
  └ package.json

    plugin-syntax-logical-assignment-operators

  LICENSE
   - README.md
   - lib
     └ index.js
   - package.json
```

```
plugin-syntax-nullish-coalescing-operator
   LICENSE
   - README.md
   - lib
     └ index.js
   – package.json

    plugin-syntax-numeric-separator

  LICENSE
   README.md
   – lib
     └ index.js
  └ package.json

    plugin-syntax-object-rest-spread

  LICENSE
   - README.md
   — lib
     └ index.js
  └ package.json

    plugin-syntax-optional-catch-binding

  LICENSE
   README.md
   - lib
     └ index.js
   - package.json

    plugin-syntax-optional-chaining

  — LICENSE
   README.md
   - lib
     └ index.js
  └ package.json

    plugin-syntax-private-property-in-object

─ LICENSE

   - README.md
   — lib
    └ index.js
   – package.json

    plugin-syntax-top-level-await

  LICENSE
   README.md
   – lib
     └ index.js
  └ package.json
plugin-syntax-typescript

─ LICENSE

   README.md
   - lib
     ⊢ index.js
     └ index.js.map
  └ package.json

    plugin-transform-arrow-functions

  LICENSE
   - README.md
   - lib
     — index.js
```

```
└ index.js.map
   - package.json

    plugin-transform-async-to-generator

  LICENSE
   — README.md
  — lib

⊢ index.js

     └ index.js.map
  └ package.json

    plugin-transform-block-scoped-functions

  LICENSE
   README.md
   - lib
     └ index.js
  └ package.json

    plugin-transform-block-scoping

─ LICENSE

   - README.md
   - lib

— annex−B_3_3.js

     — annex-B_3_3.js.map
      – index.js
     — index.js.map
      - loop.js
     ─ loop.js.map
      - validation.js
     └ validation.js.map
   - package.json

    plugin-transform-classes

─ LICENSE

  — README.md
   - lib

─ index.js

─ index.js.map

      inline-createSuper-helpers.js
     inline-createSuper-helpers.js.map
      - transformClass.js
     └ transformClass.js.map
   - package.json

    plugin-transform-computed-properties

  LICENSE
  README.md
  — lib
     index.js
    └ index.js.map
   – package.json
plugin-transform-destructuring

    LICENSE

   README.md
   - lib
     ⊢ index.js
     └ index.js.map
   – package.json
 plugin-transform-dotall-regex
```

```
- LICENSE
   - README.md
   - lib
    └ index.js
  └ package.json
plugin-transform-duplicate-keys
   LICENSE
   – README.md
   - lib
    └ index.js
   – package.json

    plugin-transform-exponentiation-operator

  LICENSE
   README.md
   - lib
    └ index.js
  — package.json
plugin-transform-flow-strip-types

─ LICENSE

  README.md
  — lib
     – index.js
    └ index.js.map
  └ package.json
plugin-transform-for-of
  LICENSE
   - README.md
  – lib

─ index.js

     index.js.map

─ no-helper-implementation.js

     no-helper-implementation.js.map
   – package.json
plugin-transform-function-name
  LICENSE
   README.md
   - lib
    └ index.js
   – package.json
plugin-transform-literals
  LICENSE
  README.md
  — lib
    └ index.js
 └ package.json

    plugin-transform-member-expression-literals

    LICENSE

   - README.md
   - lib
    └ index.js
   - package.json
 plugin-transform-modules-amd
  — LICENSE
   - README.md
```

```
lib
     ⊢ index.js
     └ index.js.map
  └ package.json

    plugin-transform-modules-commonjs

─ LICENSE

   README.md
   - lib
     ─ dynamic-import.js
     ─ dynamic-import.js.map
       - index.js
     └ index.js.map
   – package.json

    plugin-transform-modules-systemjs

  — LICENSE
   README.md
   — lib

⊢ index.js

     └ index.js.map
  └ package.json
plugin-transform-modules-umd
  LICENSE
   README.md
   - lib
     └ index.js
  └ package.json

    plugin-transform-named-capturing-groups-regex

  LICENSE
   README.md
   — lib
     ⊢ index.js
     └ index.js.map
   – package.json
plugin-transform-new-target

─ LICENSE

   README.md
   - lib
    └ index.js
   – package.json

    plugin-transform-object-super

─ LICENSE

   README.md
   — lib
     └ index.js
  └ package.json
plugin-transform-parameters

─ LICENSE

   - README.md
   - lib

⊢ index.js

       - index.js.map
       – params.js
       - params.js.map
       - rest.js
```

```
- rest.js.map
       - shadow-utils.js
      └ shadow-utils.js.map
   └ package.json

→ plugin-transform-property-literals

─ LICENSE

    - README.md
    - lib
     └ index.js
    – package.json

    plugin-transform-react-constant-elements

   LICENSE
   — README.md
    - lib
       - index.js
      └ index.js.map
  └ package.json
plugin-transform-react-display-name
   LICENSE
   README.md
   — lib
     └ index.js
  └ package.json
- plugin-transform-react-jsx

    LICENSE

    - README.md
    - lib

    □ create-plugin.js

      — create-plugin.js.map
      ─ development.js

─ development.js.map

      — index.js
      └ index.js.map
  └ package.json

    plugin-transform-react-jsx-development

─ LICENSE

    README.md
    - lib
     └ index.js
    – package⊾json

    plugin-transform-react-pure-annotations

─ LICENSE

   README.md
   — lib
     └ index.js
    – package.json
plugin-transform-regenerator

    LICENSE

    README.md
    – lib
      ⊢ index.js
      └ index.js.map
    – package.json
  plugin-transform-reserved-words
```

```
LICENSE
   - README.md
   - lib
    └ index.js
   - package.json
plugin-transform-runtime
   LICENSE
   - README.md
   - lib
     ─ browser.js
        browser.js.map
         — index.js
       └ index.js.map
      - helpers.js
      - helpers.js.map
     — index.js
    └ index.js.map
   - node modules
    └ .bin
       ∟ semver
   - package.json
    src
    └ get-runtime-path
        ─ browser.ts
        └ index.ts
 plugin-transform-shorthand-properties

─ LICENSE

   - README.md
  — lib
    └ index.js
   – package.json

    plugin-transform-spread

─ LICENSE

   README.md
   - lib
      - index.js
    └ index.js.map
   – package.json

    plugin-transform-sticky-regex

  LICENSE
  README.md
  — lib
    └ index.js
 └ package.json
plugin-transform-template-literals

─ LICENSE

   - README.md
   - lib
    └ index.js
   - package.json
 plugin-transform-typeof-symbol
   LICENSE
   - README.md
```

```
lib
     └ index.js
   - package.json

    plugin-transform-typescript

  — LICENSE
   README.md
   - lib

    const-enum₁js

      – const−enum.js.map
      – enum.js
      - enum.js.map
      - index.js
      — index.js.map
      - namespace⊾js
     └ namespace.js.map
   - package.json

    plugin-transform-unicode-escapes

   LICENSE
   — README.md
   - lib
     └ index.js
   - package.json
plugin-transform-unicode-regex
   LICENSE
   README.md
   - lib
     └ index.js
   – package.json
preset-env
  — LICENSE
  — README.md
   data
      — built-in-modules.js
      – built-in-modules.json.js
      – built-ins.js
     — built-ins.json.js
      — core−js−compat.js
      – corejs2-built-ins.js
      corejs2-built-ins.json.js
      – package⊾json
      plugins.js
      — plugins.json.js
     └ unreleased-labels.js
   - lib

— available-plugins.js

      available-plugins.js.map
      debug.js
      debug.js.map
      — filter−items.js
      - filter-items.js.map
      get-option-specific-excludes.js
      get-option-specific-excludes.js.map
      - index.js
```

```
index.js.map
      module-transformations.js
     module-transformations.js.map
     — normalize-options.js
     normalize-options.js.map
     – options.js
      - options.js.map
      plugins-compat-data.js
      - plugins-compat-data.js.map
      polyfills
        — babel-polyfill.js
        — babel-polyfill.js.map
        — regenerator.js
       regenerator.js.map
         - utils.js
       └ utils.js.map
     — shipped-proposals.js
     shipped-proposals.js.map
      - targets-parser.js
    └ targets-parser.js.map
   - node modules
    └ .bin
       ∟ semver
  – package.json
- preset-modules
   - LICENSE

    README.md

   - lib
     — index.js

    □ plugins

        — transform-async-arrows-in-class
          └ index.is

    transform-edge-default-parameters

          └ index.js
        transform-edge-function-name
          └ index.js
        transform-jsx-spread
          └ index.js

    transform-safari-block-shadowing

         └ index.js
        — transform-safari-for-shadowing
          └ index.js
       └ index.js
   - package⊾json
  - src

⊢ index.js

     plugins
        — transform-async-arrows-in-class
          └ index.js
         transform-edge-default-parameters
          └ index.js

    transform-edge-function-name

          └ index.js
```

```
    transform-jsx-spread

           └ index.js

    transform-safari-block-shadowing

           └ index.js

    transform-safari-for-shadowing

           └ index.js

    transform-tagged-template-caching

           └ index.js
- preset-react
  LICENSE
   README.md
   - lib

⊢ index.js

     └ index.js.map
 └ package.json
- preset-typescript
  LICENSE
   README.md
   - lib

─ index.js

    └ index.js.map
   – package.json
– regjsgen
  LICENSE-MIT.txt
  — README.md
   – package.json
 └ regjsgen.js
runtime

─ LICENSE

   README.md
  — helpers

    AsyncGenerator.js

      – AwaitValue₊js
     — OverloadYield.js
     applyDecoratedDescriptor.js
     applyDecs.js
     applyDecs2203.js
      applyDecs2203R.js
     applyDecs2301.js
     — arrayLikeToArray.js
     arrayWithHoles.js

— arrayWithoutHoles.js

— assertThisInitialized.js

      asyncGeneratorDelegate.js
     asyncIterator.js
      asyncToGenerator.js
     — awaitAsyncGenerator.js
     checkInRHS.js
      checkPrivateRedeclaration.js
     classApplyDescriptorDestructureSet.js

⊢ classApplyDescriptorGet.js

      classApplyDescriptorSet.js
      classCallCheck.js
      classCheckPrivateStaticAccess.js
```

```
- classCheckPrivateStaticFieldDescriptor.js
classExtractFieldDescriptor.js
– classNameTDZError₊js
classPrivateFieldDestructureSet.js
classPrivateFieldGet.js
classPrivateFieldInitSpec.js

    classPrivateFieldLooseBase.js

classPrivateFieldLooseKey.js
classPrivateFieldSet.js
— classPrivateMethodGet.js
classPrivateMethodInitSpec.js
classPrivateMethodSet.js
classStaticPrivateFieldDestructureSet.js
classStaticPrivateFieldSpecGet.js
classStaticPrivateFieldSpecSet.js
classStaticPrivateMethodGet.js
classStaticPrivateMethodSet.js
construct.js
— createClass.js
createForOfIteratorHelper.js
createForOfIteratorHelperLoose.js
createSuper.js
– decorate.js
– defaults.js
– defineAccessor.js
defineEnumerableProperties.js
– defineProperty.js
- esm
   — AsyncGenerator⊾js
   AwaitValue.js
  OverloadYield.js
   applyDecoratedDescriptor.js
   applyDecs.js
   – applyDecs2203.js
  applyDecs2203R.js

→ applyDecs2301.js

   — arrayLikeToArray.js
   - arrayWithHoles.js
   – arrayWithoutHoles.js
   assertThisInitialized.js
  asyncGeneratorDelegate.js
  — asyncIterator.js
   asyncToGenerator.js
   — awaitAsyncGenerator.js
   checkInRHS.js
   checkPrivateRedeclaration.js
  classApplyDescriptorDestructureSet.js
   classApplyDescriptorGet.js

— classApplyDescriptorSet.js

  — classCallCheck₊js
   classCheckPrivateStaticAccess.js
   classCheckPrivateStaticFieldDescriptor.js
   classExtractFieldDescriptor.js
   classNameTDZError.js
```

```
classPrivateFieldDestructureSet.js
classPrivateFieldGet.js
 classPrivateFieldInitSpec.js
— classPrivateFieldLooseBase.js

    classPrivateFieldLooseKey.js

classPrivateFieldSet.js
– classPrivateMethodGet.js
classPrivateMethodInitSpec.js
classPrivateMethodSet.js
classStaticPrivateFieldDestructureSet.js
classStaticPrivateFieldSpecGet.js
classStaticPrivateFieldSpecSet.js
classStaticPrivateMethodGet.js
— classStaticPrivateMethodSet.js
 - construct.js
 - createClass.js
— createForOfIteratorHelper.js
createForOfIteratorHelperLoose.js
– createSuper.js
— decorate.js
defaults.js
– defineAccessor⊾js
defineEnumerableProperties.js

— defineProperty.js

— extends.js
– get.js
— getPrototypeOf.js
– identity.js
– inherits.js
— inheritsLoose.js
initializerDefineProperty.js
 - initializerWarningHelper.js
instanceof.js
interopRequireDefault.js
interopRequireWildcard.js
— isNativeFunction.js
isNativeReflectConstruct.js
 - iterableToArray.js
 - iterableToArrayLimit.js
– iterableToArrayLimitLoose₊js
— įsx.įs
– maybeArrayLike.js
newArrowCheck.js
nonIterableRest.js
 - nonIterableSpread.js
— objectDestructuringEmpty₁js
objectSpread.js
objectSpread2.js
objectWithoutProperties.js
— objectWithoutPropertiesLoose.js
 – package.json

    possibleConstructorReturn.js

 - readOnlyError.js
 - regeneratorRuntime.js
```

```
- set.js
   setPrototypeOf.js
   skipFirstGeneratorNext.js
   — slicedToArray.js
   slicedToArrayLoose₁js
   — superPropBase.js
   taggedTemplateLiteral.js

    taggedTemplateLiteralLoose.js

   – tdz.js
   - temporalRef.js
   temporalUndefined.js
   – toArray.js
   — toConsumableArray₊js
  ─ toPrimitive.js
   toPropertyKey.js
   – typeof⊾js
  — unsupportedIterableToArray.js
   wrapAsyncGenerator.js
   — wrapNativeSuper₊js
   — wrapRegExp.js
  └ writeOnlyError.js
- extends.js
- get.js
getPrototypeOf.js
- identity.js
– inherits.js
- inheritsLoose.js
initializerDefineProperty.js
- initializerWarningHelper₊js
— instanceof.js
interopRequireDefault.js
interopRequireWildcard.js
isNativeFunction.js
isNativeReflectConstruct.js
— iterableToArray.js
— iterableToArrayLimit.js
iterableToArrayLimitLoose.js
- jsx.js
– maybeArrayLike.js
newArrowCheck.js
nonIterableRest.js
– nonIterableSpread.js
— objectDestructuringEmpty₁js
objectSpread.js
objectSpread2.js
objectWithoutProperties.js
objectWithoutPropertiesLoose.js
possibleConstructorReturn.js
- readOnlyError⊾js
– regeneratorRuntime₊js
- set.js
setPrototypeOf.js
– skipFirstGeneratorNext.js
slicedToArray.js
```

```
slicedToArrayLoose.js
      superPropBase.js
      taggedTemplateLiteral.js
     taggedTemplateLiteralLoose.js
     – tdz.js
     – temporalRef.js
      temporalUndefined.js
     – toArray.js
      – toConsumableArray₊js
     – toPrimitive.js
      toPropertyKey.js
      – typeof.js
     unsupportedIterableToArray.js
     — wrapAsyncGenerator.js
      wrapNativeSuper.js
      - wrapRegExp.js
    └ writeOnlyError.js
    package.json
    regenerator
    └ index.js
template
  LICENSE
  README.md
   - lib
    — builder.js
     - builder.js.map
      – formatters.js
     - formatters.js.map
      – index.js
     — index.js.map
     literal.js
     – literal.js.map
      – options.js
     – options.js.map
     – parse.js
      – parse.js.map
      – populate.js
      - populate.js.map
      – string.js
    └ string.js.map
   node_modules
    └ .bin
       ∟ parser
   – package.json
 traverse
  LICENSE
   README.md
   - lib
     ─ cache.js
     cache.js.map
      - context.js
      - context.js.map
      - hub.js
      - hub.js.map
```

```
index.js
index.js.map
path
  — ancestry.js
  ancestry.js.map
  – comments.js
  – comments.js.map
  context.js
  - context.js.map
  – conversion.js
  conversion.js.map
  – evaluation.js
  evaluation.js.map
  — family.js
  - family.js.map
  — index.js
  — index.js.map
  inference
    ⊢ index.js

─ index.js.map

     inferer-reference.js
     inferer-reference.js.map
     – inferers.js

─ inferers.js.map

     - util.js
    └ util.js.map
   introspection.js
  introspection.js.map
   - lib

    hoister.js

    ⊢ hoister.js.map

     - removal-hooks.js

    ⊢ removal-hooks.js.map

    virtual-types-validator.js

    - virtual—types.js
    └ virtual-types.js.map
  — modification.js
  - modification.js.map
  – removal.js
  - removal.js.map
  replacement.js
 └ replacement.js.map

    scope

  binding.js
  binding.js.map
 — index.js
  - index.js.map
 └ lib
    ⊢ renamer.js
    └ renamer.js.map
- traverse-node.js
- traverse-node.js.map
types.js
```

```
– types.js.map
      - visitors.js
    └ visitors.js.map
   - node_modules
    └ .bin
       ∟ parser
   - package.json
types
 LICENSE
  README.md
   - lib
     asserts
        — assertNode.js
         - assertNode.js.map
       └ generated

⊢ index.js

          └ index.js.map
      ast-types
       └ generated
            index.js
          └ index.js.map
      builders

─ flow
          — createFlowUnionType.js
          — createFlowUnionType.js.map
            createTypeAnnotationBasedOnTypeof.js
          createTypeAnnotationBasedOnTypeof.js.map

    generated

          — index.js

─ index.js.map

          — uppercase.js
          └ uppercase.js.map
         - react
           ─ buildChildren.js
          └ buildChildren.js.map

    typescript

            createTSUnionType.js
          └ createTSUnionType.js.map
         – validateNode.js
        └ validateNode.js.map
      clone
        — clone.js
        — clone.js.map
        cloneDeep.js
        cloneDeep.js.map
        cloneDeepWithoutLoc.js

─ cloneDeepWithoutLoc.js.map

        — cloneNode.js

— cloneNode.js.map

        cloneWithoutLoc.js
       └ cloneWithoutLoc.js.map
      comments
        addComment.js
         addComment.js.map
```

```
addComments.js
  addComments.js.map
  inheritInnerComments.js
  — inheritInnerComments.js.map
  inheritLeadingComments.js
  — inheritLeadingComments.js.map
  inheritTrailingComments.js
  inheritTrailingComments.js.map
  inheritsComments.js
  inheritsComments.js.map
  - removeComments.js
 └ removeComments.js.map
constants
  generated
      - index.js
    └ index.js.map
  — index.js
 └ index.js.map
- converters
 ensureBlock.js
  ensureBlock.js.map
  gatherSequenceExpressions.js
  gatherSequenceExpressions.js.map
  toBindingIdentifierName.js
  toBindingIdentifierName.js.map
  toBlock.js
 toBlock.js.map
  toComputedKey.js
  toComputedKey.js.map
  — toExpression.js
  toExpression.js.map
  – toIdentifier.js
  - toIdentifier.js.map
  — toKeyAlias.js
  — toKeyAlias.js.map
  toSequenceExpression.js
  toSequenceExpression.js.map
  - toStatement.js
  toStatement.js.map
   valueToNode.js
 └ valueToNode.js.map

    definitions

  — core.js
  — core.js.map
  deprecated—aliases.js
  deprecated-aliases.js.map
  experimental.js
  experimental.js.map
  - flow⊾js
  – flow.js.map
   - index.js
  - index.js.map
  - jsx.js
   - jsx.js.map
```

```
– misc.js
   - misc.js.map
   placeholders.js
  – placeholders.js.map
   typescript.js
  — typescript.js.map
   – utils.js
 └ utils.js.map
index-legacy.d.ts
index.d.ts
- index.js
index.js.flow
index.js.map

    modifications

    appendToMemberExpression.js

   appendToMemberExpression.js.map
  — flow
      removeTypeDuplicates.js

    □ removeTypeDuplicates.js.map

  — inherits.js
  — inherits.js.map
   prependToMemberExpression.js
  prependToMemberExpression.js.map
  — removeProperties.js
  removeProperties.js.map
  removePropertiesDeep.js
   removePropertiesDeep.js.map
  └ typescript

⊢ removeTypeDuplicates.js

    □ removeTypeDuplicates.js.map

retrievers

    — getBindingIdentifiers.js

  getBindingIdentifiers.js.map
   getOuterBindingIdentifiers.js

    □ getOuterBindingIdentifiers.js.map

    traverse

  — traverse.js
   - traverse.js.map
   - traverseFast.js
  └ traverseFast.js.map
- utils
  — deprecationWarning.js
  deprecationWarning.js.map
  inherit.js
   inherit.js.map
   react

    ─ cleanJSXElementLiteralChild.js

     └ cleanJSXElementLiteralChild.js.map

— shallowEqual.js

  └ shallowEqual.js.map
validators
   buildMatchMemberExpression.js
   buildMatchMemberExpression.js.map
   generated
```

```
– index.js
            └ index.js.map
           - is.js
          – is₊js₊map
          isBinding.js
          – isBinding.js.map
          isBlockScoped.js
           isBlockScoped.js.map
           - isImmutable.js
          isImmutable.js.map
          - isLet.js
          - isLet.js.map
          — isNode.js
          — isNode.js.map
          isNodesEquivalent.js
          isNodesEquivalent.js.map
          isPlaceholderType.js
          isPlaceholderType.js.map
          – isReferenced.is
          – isReferenced.js.map
          isScope.js
          - isScope.js.map
          isSpecifierDefault.js
          isSpecifierDefault.js.map
           - isType.js
          - isType.js.map
           isValidES3Identifier.js
          isValidES3Identifier.js.map
           isValidIdentifier.js
          isValidIdentifier.js.map
          – isVar.js
          - isVar.js.map
          – matchesPattern.js
          matchesPattern.js.map
          react

    isCompatTag.js


─ isCompatTag.js.map
              isReactComponent.js
            └ isReactComponent.js.map
           - validate.js
         └ validate.js.map
    – package₌json
@bcoe
.editorconfig

    gitattributes

    CHANGELOG.md

    LICENSE.md

    LICENSE.txt
    README.md
     - dist
      └ lib
          — CHANGELOG.md
          LICENSE.md
```

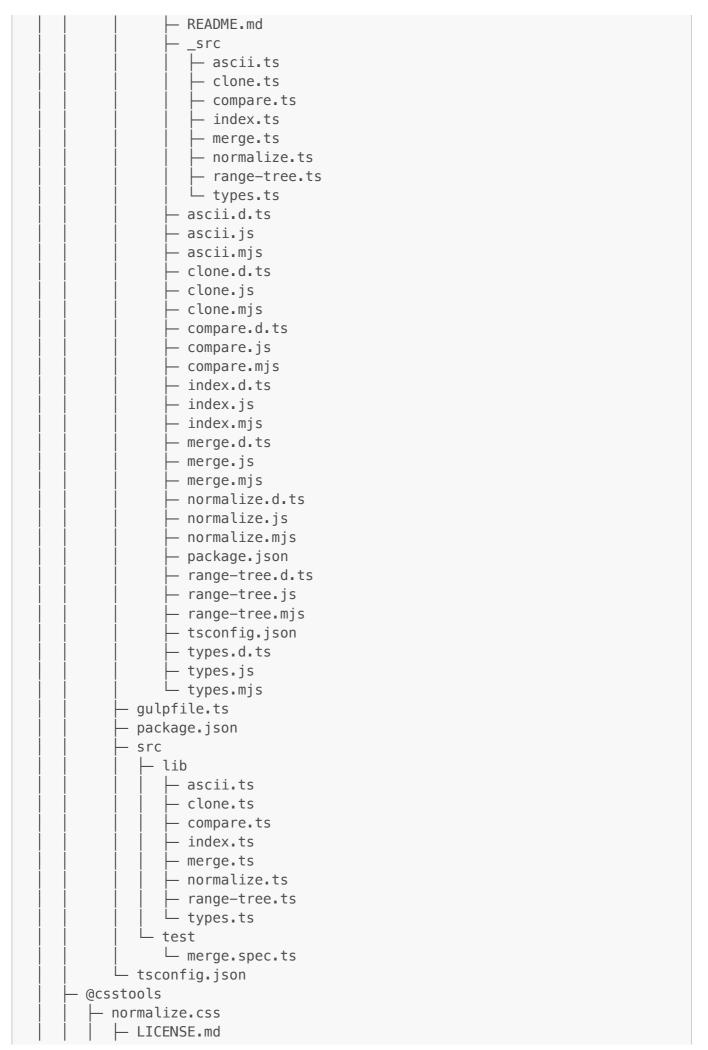

```
README.md
   - normalize.css
   opinionated.css
  └ package.json
– postcss-cascade-layers
  ─ CHANGELOG.md
   LICENSE.md
  — README.md
   - dist

→ adjust-selector-specificity.d.ts

      clean-blocks.d.ts
      constants.d.ts
      desugar-and-parse-layer-names.d.ts
     — desugar-nested-layers.d.ts
      - get-conditional-atrule-ancestor.d.ts
      get-layer-atrule-ancestor.d.ts
     index.cjs
      - index.d.ts
     - index.mjs
     is-processable-layer-rule.d.ts
     - model.d.ts
      - options.d.ts
     record-layer-order.d.ts
      - some-in-tree.d.ts
      - sort-root-nodes.d.ts
      split-important-styles.d.ts
   - package.json

    postcss-color-function

  CHANGELOG.md
   LICENSE.md
  — README.md
  – dist
     — convert-a98-rgb-to-srgb.d.ts
     convert-cie-xyz-50-to-srgb.d.ts
     - convert-cie-xyz-65-to-srgb.d.ts
     convert-display-p3-to-srgb.d.ts
     convert-prophoto-rgb-to-srgb.d.ts
      convert-rec2020-to-srgb.d.ts
      convert-srgb-linear-to-srgb.d.ts
      convert-srgb-to-srgb.d.ts
     - css-color-4
        — conversions.d.ts
        — deltaE0K.d.ts
        - map-gamut.d.ts
         multiply-matrices.d.ts
        └ utilities.d.ts
      - has-fallback-decl.d.ts
      has-supports-at-rule-ancestor.d.ts
      – index.cis
      - index.d.ts
      index.mjs
      modified-value.d.ts

    on−css−function.d.ts

    package.json
```

```
postcss-font-format-keywords
  — CHANGELOG.md
   LICENSE.md
  README.md
  — dist
     — index.cjs
      - index.d.ts
     └ index.mjs
   – package.json
– postcss-hwb-function

⊢ CHANGELOG.md

   - INSTALL.md
   LICENSE.md
  README.md
   - dist

    has-supports-at-rule-ancestor.d.ts

      - hwb.d.ts
     - index.cjs
     — index.d.ts
      - index.mjs
     └ on-css-function.d.ts
   - package.json
- postcss-ic-unit

⊢ CHANGELOG.md

   LICENSE.md
   README.md
  – dist
     — has-supports-at-rule-ancestor.d.ts
     index.cjs
      - index.d.ts
     └ index.mjs
 └ package.json

    postcss-is-pseudo-class

  ─ CHANGELOG.md
   LICENSE.md
   README.md
   - dist

─ index.cjs

      - index.d.ts
      - index.mjs
     └ split-selectors

    ⊢ complex

           child-adjacent-child.d.ts
           └ is-in-compound.d.ts
        — complex.d.ts
         — compound-selector-order.d.ts
        └ split-selectors.d.ts
   – package.json
postcss-nested-calc

    □ CHANGELOG.md

   LICENSE.md
   - README.md
   - dist
     ⊢ index.cjs
```

```
- index.d.ts
       - index.mjs
     └ occurrences.d.ts
  └ package.json

    postcss-normalize-display-values

    ⊢ CHANGELOG.md

   LICENSE.md
   README.md
   - dist
     ⊢ index.cjs
      - index.d.ts
       index.mjs

    mappings.d.ts

   - package⊾json

    postcss-oklab-function

⊢ CHANGELOG.md

   LICENSE.md
   - README.md
   — dist
     — convert-oklab-to-display-p3.d.ts
      convert-oklab-to-srgb.d.ts
      convert-oklch-to-display-p3.d.ts
      convert-oklch-to-srgb.d.ts
      - css-color-4
         — conversions.d.ts
         deltaE0K.d.ts
         — map-gamut.d.ts
         multiply-matrices.d.ts
        └ utilities.d.ts
      — has-fallback-decl.d.ts
      – has-supports-at-rule-ancestor.d.ts
      — index.cjs
      - index.d.ts
      — index.mjs
      - modified-values.d.ts
     └ on-css-function.d.ts
   – package.json

    postcss-progressive-custom-properties

  ─ CHANGELOG.md
   LICENSE.md
   README.md
   – dist

⊢ custom

        └ double-position-gradients.d.ts
      index.cis
      - index.d.ts
      — index.mis
      match.d.ts
       - matchers.d.ts

    □ support-conditions-from-values.d.ts

    - package.json
 postcss-stepped-value-functions
   CHANGELOG.md
   LICENSE.md
```

```
- README.md
   - dist

⊢ index.cjs

      — index.d.ts
      — index.mjs
      — mod.d.ts
      - rem.d.ts
      - round.d.ts
     └ utils.d.ts
   – package.json

    postcss-text-decoration-shorthand

─ CHANGELOG.md

   LICENSE.md
   README.md
   - dist
     — index.cjs
      - index.d.ts
     └ index.mjs
  └ package.json

    postcss-trigonometric-functions

  ─ CHANGELOG.md
   - LICENSE.md
   README.md
   – dist
     — acos.d.ts
      - asin.d.ts
      - atan.d.ts
      - atan2.d.ts
      - cos.d.ts
      - index.cjs
     — index.d.ts
     — index.mjs
      - sin.d.ts
      - tan.d.ts
     └ utils.d.ts
   - package.json
- postcss-unset-value
  ─ CHANGELOG.md
   LICENSE.md
   README.md
   – dist
     index.cjs
     — index.d.ts
      - index.mjs

    □ property-def.d.ts

   – package.json
- selector-specificity
  ─ CHANGELOG.md
   LICENSE.md
   README.md
   dist
      — index.cjs
      - index.d.ts
     └ index.mjs
```

```
└ package.json
@eslint
— eslintrc
   LICENSE
    — README.md
    conf
       — config-schema.js
      └ environments.js
    – dist

⊢ eslintrc-universal.cjs

      — eslintrc-universal.cjs.map
        - eslintrc.cjs
      └ eslintrc.cjs.map
     - lib
       cascading-config-array-factory.js
       — config-array
         — config-array.js
          config-dependency.js
          extracted-config.js
          – ignore–pattern.js
          – index.js
         └ override-tester.js
       config-array-factory.js
       - flat-compat.js
       — index-universal.js
        - index.js
      ∟ shared
         — ajv.js
          - config-ops.js
          — config-validator.js
          deprecation-warnings.js
          — naming.js
           - relative-module-resolver.js

    types.js

    node modules


      └ js-yaml

    argparse

          — CHANGELOG.md
          - LICENSE
          README.md
          — argparse.js
          — lib
            — sub.js
            └ textwrap.js

    package.json


        globals
          — globals.json
          - index.d.ts
          — index.js
           - license
           - package.json
         └ readme.md
        js-yaml
```

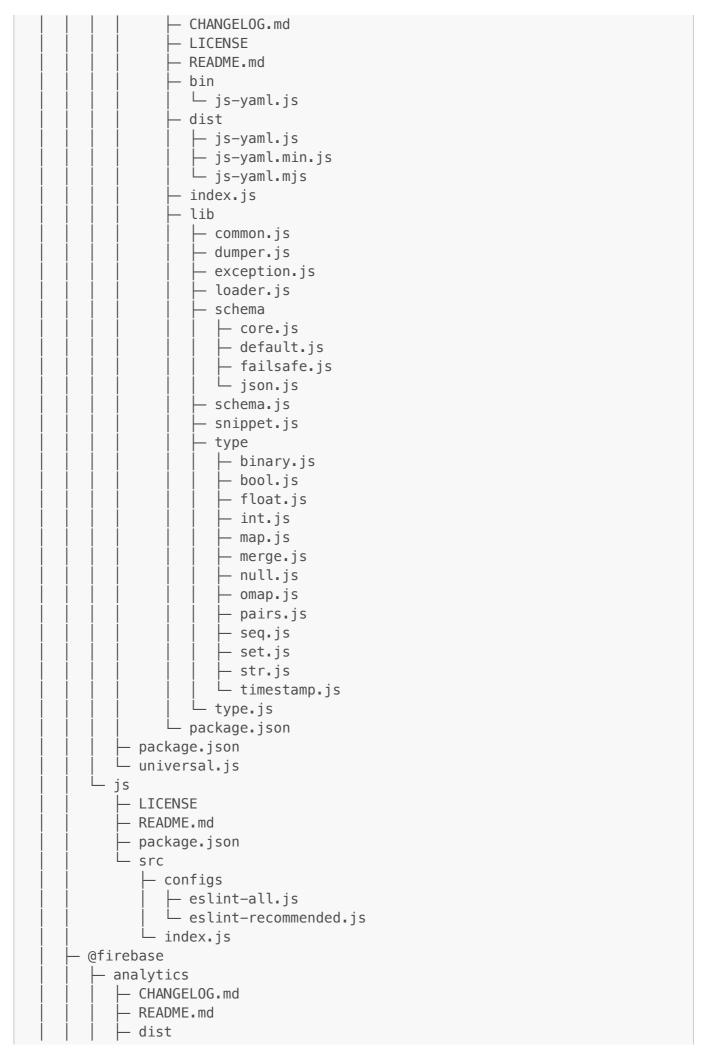

```
analytics-public.d.ts
analytics.d.ts
- esm
  — index.esm.js
   - index.esm.js.map
  — index.esm2017.js
  - index.esm2017.js.map
  – package.json
   - src
    — api.d.ts
      - api.test.d.ts
      constants.d.ts
      - errors.d.ts
      factory.d.ts
      functions.d.ts
      - functions.test.d.ts
     get-config.d.ts
     - get-config.test.d.ts
      - helpers.d.ts
     helpers.test.d.ts
     — index.d.ts
      - index.test.d.ts
     initialize-analytics.d.ts
     initialize-analytics.test.d.ts
     ─ logger.d.ts
      - public-types.d.ts
    └ types.d.ts
   testing

─ get-fake-firebase-services.d.ts

     — gtag-script-util.d.ts
     integration-tests
       └ integration.d.ts
    └ setup.d.ts
- index.cjs.js
index.cjs.js.map
- src
  – api.d.ts
   - api.test.d.ts
   constants.d.ts
   - errors.d.ts
  — factory.d.ts
  — functions.d.ts
  — functions.test.d.ts
  - get-config.d.ts
  get-config.test.d.ts
  helpers.d.ts
  - helpers.test.d.ts
   index.d.ts
   - index.test.d.ts
  initialize-analytics.d.ts
   initialize-analytics.test.d.ts
   - logger.d.ts
   public-types.d.ts
   - tsdoc-metadata.json
```

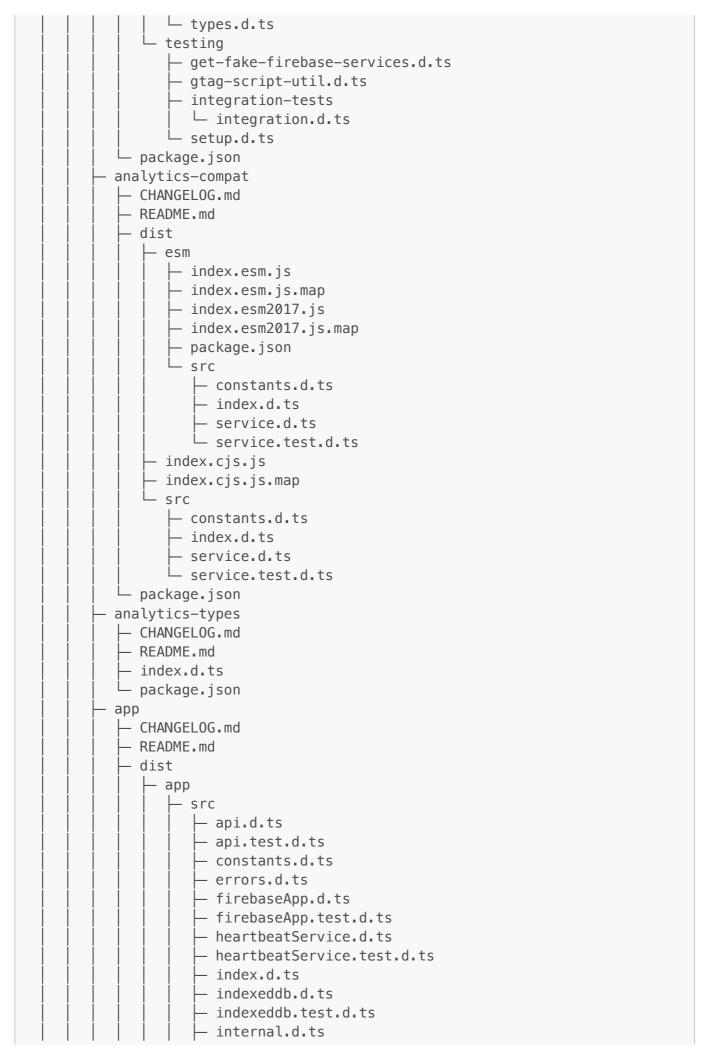

```
internal.test.d.ts
            logger.d.ts
            platformLoggerService.d.ts
            platformLoggerService.test.d.ts
           - public-types.d.ts
           registerCoreComponents.d.ts
            - tsdoc-metadata.json
          └ types.d.ts
         - test
          ⊢ setup.d.ts
          └ util.d.ts
      app-public.d.ts
      app.d.ts
      - esm
         app
           - src
              — api.d.ts
              - api.test.d.ts
              - constants.d.ts
              - errors.d.ts
              — firebaseApp.d.ts
               firebaseApp.test.d.ts
              heartbeatService.d.ts
              - heartbeatService.test.d.ts
              index.d.ts
               indexeddb.d.ts
               indexeddb.test.d.ts
               - internal.d.ts
               internal.test.d.ts
               - logger.d.ts
              platformLoggerService.d.ts
              platformLoggerService.test.d.ts
              - public-types.d.ts
               registerCoreComponents.d.ts
              └ types.d.ts
           test
               - setup.d.ts
             └ util.d.ts
        - index.esm2017.js
        - index.esm2017.js.map
        — index.esm5.js
        - index.esm5.js.map
       └ package.json
      - index.cjs.js
    └ index.cjs.js.map
  – package⊾json
app-check
  CHANGELOG.md
  README.md
  - dist
     — app-check-public.d.ts
      app-check.d.ts
      - esm

─ index.esm.js
```

```
- index.esm.js.map
   - index.esm2017.js
   - index.esm2017.js.map
  — package.json
  - src

— api.d.ts

      – api.test.d.ts
      - client.d.ts
      - client.test.d.ts
      constants.d.ts
      - debug.d.ts
      - debug.test.d.ts
     — errors.d.ts
      factory.d.ts
      - index.d.ts
     indexeddb.d.ts
      – internal-api.d.ts
      - internal-api.test.d.ts
      - logger.d.ts
      - proactive-refresh.d.ts
      - proactive-refresh.test.d.ts
      - providers.d.ts
      providers.test.d.ts
      public-types.d.ts
      recaptcha.d.ts
      recaptcha.test.d.ts
      - state.d.ts
      - storage.d.ts
      - storage.test.d.ts
      - types.d.ts
     └ util.d.ts
   - test
      – setup.d.ts
     └ util.d.ts
- index.cjs.js
- index.cjs.js.map
- src
  — api.d.ts
   - api.test.d.ts
   - client.d.ts
  - client.test.d.ts
  - constants.d.ts
  — debug.d.ts
   - debug.test.d.ts
   - errors.d.ts
  – factory.d.ts
  - index.d.ts
   indexeddb.d.ts
   - internal-api.d.ts
  internal-api.test.d.ts
   logger.d.ts
   - proactive-refresh.d.ts
   proactive-refresh.test.d.ts
   - providers.d.ts
```

```
- providers.test.d.ts
         - public-types.d.ts
         recaptcha.d.ts
         - recaptcha.test.d.ts
         - state.d.ts
         - storage.d.ts
         storage.test.d.ts
         - tsdoc-metadata.json
         - types.d.ts
        └ util.d.ts
      - test
         setup.d.ts
        └ util.d.ts
   - package⊾json
 app-check-compat
  ─ CHANGELOG.md
  README.md
  – dist
     — esm
        index.esm.js
        index.esm.js.map
         - index.esm2017.js
         — index.esm2017.js.map
         – package.json
        ∟ src
           ⊢ errors.d.ts
            - index.d.ts
            - service.d.ts
           └ service.test.d.ts
     — index.cjs.js
     — index.cjs.js.map
     ∟ src
        ─ errors.d.ts
         - index.d.ts
         - service.d.ts
        └ service.test.d.ts
   – package.json

    app-check-interop-types

    ─ CHANGELOG.md

  README.md
   - index.d.ts
  └ package.json
app-check-types
  — CHANGELOG.md
  README.md
   - index.d.ts
  └ package.json
app-compat
  ─ CHANGELOG.md
   README.md
   – dist
      app-compat-public.d.ts
      app-compat.d.ts
```

```
- index.esm2017.js
         index.esm2017.js.map
         - index.esm5.js
         - index.esm5.js.map
         package.json
         - src
            - errors.d.ts
            - firebaseApp.d.ts
            firebaseNamespace.d.ts
            - firebaseNamespaceCore.d.ts
            - index.d.ts
            index.lite.d.ts
            - lite

⊢ firebaseAppLite.d.ts

              └ firebaseNamespaceLite.d.ts
            - logger.d.ts
           — public-types.d.ts
             registerCoreComponents.d.ts
           └ types.d.ts
         test
           firebaseAppCompat.test.d.ts
            - setup.d.ts
           └ util.d.ts
      - index.cjs.js
      - index.cjs.js.map
      - index.lite.esm5.js
      index.lite.esm5.js.map
      - index.lite.js
      - index.lite.js.map
      - src
        — errors.d.ts
        — firebaseApp.d.ts
         firebaseNamespace.d.ts
        firebaseNamespaceCore.d.ts
         - index.d.ts
         - index.lite.d.ts
         - lite
           ─ firebaseAppLite.d.ts
           └ firebaseNamespaceLite.d.ts
         - logger.d.ts
        - public-types.d.ts
        — registerCoreComponents.d.ts
         – tsdoc−metadata.json
        └ types.d.ts
     ∟ test
        firebaseAppCompat.test.d.ts
         - setup.d.ts
        └ util.d.ts
   – package.json
app-types

⊢ CHANGELOG.md

   - README.md
   index.d.ts
    package.json
```

```
└ private.d.ts
auth

— CHANGELOG.md

 README.md
 — cordova
   └ package.json
 - dist
   auth-public.d.ts
     auth.d.ts
    - browser-cjs
      index-983fc86c.js

─ index-983fc86c.js.map

       - index.cordova.d.ts
       - index.d.ts
       - index.doc.d.ts
       - index.js
       — index.js.map
       - index.node.d.ts
       — index.rn.d.ts
        index.shared.d.ts
       - index.webworker.d.ts
        - internal
         └ index.d.ts
       — internal.js
       — internal.js.map
        - scripts
         └ run_node_tests.d.ts
       - src
          — api
             — account_management

    □ account.d.ts

                account.test.d.ts
                 email_and_password.d.ts
                — email_and_password.test.d.ts
                 - mfa.d.ts
                — mfa.test.d.ts
                 - profile.d.ts
                └ profile.test.d.ts

    authentication

    □ create_auth_uri.d.ts

                — create_auth_uri.test.d.ts
                — custom_token.d.ts
                — custom_token.test.d.ts
                email_and_password.d.ts
                email_and_password.test.d.ts
                — email_link.d.ts
                — email_link.test.d.ts
                 idp.d.ts
                — idp.test.d.ts
                — mfa.d.ts
                - mfa.test.d.ts
                 recaptcha.d.ts
                — recaptcha.test.d.ts
                 - sign_up.d.ts
```

— sign_up.test.d.ts
│
— sms.test.d.ts
token.d.ts
└─ token.test.d.ts
— errors.d.ts
— index.d.ts
— index.test.d.ts
└─ project_config
<pre>— get_project_config.d.ts</pre>
└─ get_project_config.test.d.ts
— core
— action_code_url.d.ts
— action_code_url.test.d.ts
— auth
│
auth_event_manager.test.d.ts
│
— auth_impl.test.d.ts
— emulator.d.ts
— emulator.test.d.ts
— firebase_internal.d.ts
— firebase_internal.test.d.ts
— initialize.d.ts
— initialize.test.d.ts
— middleware.d.ts
— middleware.test.d.ts
register.d.ts
— credentials
— auth_credential.d.ts
email.d.ts
index.d.ts
— oauth.d.ts
— oauth.test.d.ts
phone.d.ts
phone.test.d.ts
— saml.d.ts
— sami.d.ts — sami.test.d.ts
errors.d.ts
errors.d.ts errors.test.d.ts
— errors.test.d.ts — index.d.ts
! !
— persistence
in_memory.d.ts
in_memory.test.d.ts
index.d.ts
persistence_user_manager.d.ts
persistence_user_manager.test.d.ts
— providers
— email.d.ts
— email.test.d.ts
— facebook.d.ts
— facebook.test.d.ts
│
69 / 917

<pre>— federated.test.d.ts</pre>
<pre>— github.d.ts</pre>
<pre>— github.test.d.ts</pre>
— google.d.ts
<pre>— google.test.d.ts</pre>
<pre>- oauth.d.ts</pre>
<pre>— oauth.test.d.ts</pre>
— saml.d.ts
— saml.test.d.ts
— twitter.d.ts
- twitter.d.ts
strategies
<pre>— abstract_popup_redirect_operation.d.ts</pre>
<pre>— abstract_popup_redirect_operation.test.d.ts</pre>
<pre>— action_code_settings.d.ts</pre>
<pre>— action_code_settings.test.d.ts</pre>
<pre>— anonymous.d.ts</pre>
<pre>— anonymous.test.d.ts</pre>
— credential.d.ts
<pre>— credential.test.d.ts</pre>
<pre>— custom_token.d.ts</pre>
<pre>- custom_token.test.d.ts</pre>
— email.d.ts
— email.test.d.ts
<pre>- email_and_password.d.ts</pre>
<pre>- email_and_password.test.d.ts</pre>
- email_link.d.ts
_
<pre>— email_link.test.d.ts</pre>
— idp.d.ts
<pre>— idp.test.d.ts</pre>
<pre>— redirect.d.ts</pre>
<pre>— redirect.test.d.ts</pre>
iser
<pre>— account_info.d.ts</pre>
<pre>— account_info.test.d.ts</pre>
<pre>— additional_user_info.d.ts</pre>
<pre>- additional_user_info.test.d.ts</pre>
<pre>- id_token_result.d.ts</pre>
- id_token_result.test.d.ts
<pre>- invalidation.d.ts</pre>
<pre>- invatidation.test.d.ts</pre>
— link unlink.d.ts
_
— link_unlink.test.d.ts
<pre>— proactive_refresh.d.ts</pre>
<pre>— proactive_refresh.test.d.ts</pre>
<pre>— reauthenticate.d.ts</pre>
<pre>— reauthenticate.test.d.ts</pre>
<pre>— reload.d.ts</pre>
<pre>— reload.test.d.ts</pre>
<pre>— token_manager.d.ts</pre>
<pre>— token_manager.test.d.ts</pre>
<pre>- user_credential_impl.d.ts</pre>
<pre>- user_credential_impl.test.d.ts</pre>
<pre>- user_impl.d.ts</pre>

usor implement details
user_impl.test.d.ts
user_metadata.d.ts
└ util
— assert.d.ts
— assert.test.d.ts
— browser.d.ts
— browser.test.d.ts
— delay.d.ts
<pre>— delay.test.d.ts</pre>
— emulator.d.ts
<pre>— emulator.test.d.ts</pre>
<pre>— event_id.d.ts</pre>
<pre>— event_id.test.d.ts</pre>
<pre>— fetch_provider.d.ts</pre>
— handler.d.ts
<pre>instantiator.d.ts</pre>
<pre>— instantiator.test.d.ts</pre>
— location.d.ts
— log.d.ts
— navigator.d.ts
— providers.d.ts
resolver.d.ts
— time.d.ts
<pre>- validate_origin.d.ts</pre>
<pre>- validate_origin.test.d.ts</pre>
- version.d.ts
version.test.d.ts
index.d.ts
mfa
index.d.ts
— mfa_assertion.d.ts
— mfa_error.d.ts
— mfa_info.d.ts
— mfa_info.test.d.ts
— mfa_resolver.d.ts
<u> </u>
— mfa_resolver.test.d.ts
— mfa_session.d.ts
— mfa_session.test.d.ts
— mfa_user.d.ts
└ mfa_user.test.d.ts
model
— application_verifier.d.ts
— auth.d.ts
— enum_maps.d.ts
— enums.d.ts
— id_token.d.ts
<pre>popup_redirect.d.ts</pre>
— public_types.d.ts
└ user.d.ts
platform_browser
— auth.test.d.ts
— auth_window.d.ts
— iframe

— gapi.iframes.d.ts
— gapi.test.d.ts
iframe.d.ts
iframe.test.d.ts
└ index.d.ts
├ load_js.d.ts
- load_js.test.d.ts
<u> </u>
— messagechannel
— index.d.ts
— promise.d.ts
— promise.test.d.ts
— receiver.d.ts
<pre>receiver.test.d.ts</pre>
<pre>— sender.d.ts</pre>
└ sender.test.d.ts
├─ mfa
└ assertions
├ phone.d.ts
_ phone.test.d.ts
⊢ persistence
browser.d.ts
browser.test.d.ts
indexed_db.d.ts
indexed_db.test.d.ts
!!
- local_storage.d.ts
- local_storage.test.d.ts
— session_storage.d.ts
└─ session_storage.test.d.ts
<pre>popup_redirect.d.ts</pre>
<pre>popup_redirect.test.d.ts</pre>
<pre>providers</pre>
— phone.d.ts
└ phone.test.d.ts
├ recaptcha
├─ recaptcha.d.ts
— recaptcha_loader.d.ts
— recaptcha_loader.test.d.ts
recaptcha_mock.d.ts
recaptcha_mock.test.d.ts
recaptcha_werifier.d.ts
recaptcha_verifier.test.d.ts
- strategies
— phone.d.ts
— phone.test.d.ts
— popup.d.ts
— popup.test.d.ts
— redirect.d.ts
└─ redirect.test.d.ts
└ util
— popup.d.ts
<pre>popup.test.d.ts</pre>
└─ worker.d.ts
platform_cordova
— plugins.d.ts
72 / 917

```
popup_redirect
         - events.d.ts
         - events.test.d.ts
        — popup_redirect.d.ts
        popup redirect.test.d.ts
        - utils.d.ts
        └ utils.test.d.ts
      strategies
       └ redirect.d.ts
   - platform node
    └ index.d.ts

    □ platform_react_native

     └ persistence
        — react_native.d.ts
        └─ react native.test.d.ts
test

⊢ helpers

     — api
       └ helper.d.ts
     — delay.d.ts
     |- erroring_unavailable_persistence.d.ts
      - fake_service_worker.d.ts

    id_token_response.d.ts

     — iframe_event.d.ts
     integration
        — emulator_rest_helpers.d.ts
         - helpers.d.ts
       └ settings.d.ts
     — jwt.d.ts
     — mock_auth.d.ts
     mock auth credential.d.ts
     mock_fetch.d.ts
     — mock_fetch.test.d.ts
     mock_popup_redirect_resolver.d.ts
     redirect_persistence.d.ts
     └ timeout_stub.d.ts
   integration
     flows
        — anonymous.test.d.ts
        custom.local.test.d.ts
        — email.test.d.ts
        — idp.local.test.d.ts
        middleware_test_generator.d.ts
         oob.local.test.d.ts

    □ phone.test.d.ts

     └ webdriver
        — anonymous.test.d.ts
         compat
          └ firebaseui.test.d.ts
         persistence.test.d.ts
         - popup.test.d.ts
         redirect.test.d.ts
        └ util
           — auth_driver.d.ts
```

```
functions.d.ts
              - idp_page.d.ts
               - js_load_condition.d.ts
              - test_runner.d.ts
              - test server.d.ts
             └ ui page.d.ts
- cordova
  index.cordova.d.ts
  - index.d.ts
  index.doc.d.ts
  - index.js
  - index.js.map
  - index.node.d.ts
  - index.rn.d.ts
  - index.shared.d.ts
  - index.webworker.d.ts
  internal
   └ index.d.ts
  internal.js
  — internal.js.map
  popup_redirect-fb618799.js
  popup_redirect-fb618799.js.map
  - scripts
    └─ run_node_tests.d.ts
  - src
     – api
        account_management

─ account.d.ts

           account.test.d.ts
           — email_and_password.d.ts
          email and password.test.d.ts
           — mfa.d.ts
           - mfa.test.d.ts
           - profile.d.ts
          └ profile.test.d.ts

    authentication

           — create_auth_uri.d.ts
           — create_auth_uri.test.d.ts
           — custom_token.d.ts
           — custom_token.test.d.ts
           email_and_password.d.ts
          — email_and_password.test.d.ts
          ─ email_link.d.ts
           — email_link.test.d.ts
            idp.d.ts
           idp.test.d.ts
           — mfa.d.ts
           mfa.test.d.ts
           recaptcha.d.ts
           recaptcha.test.d.ts
           - sign_up.d.ts
           - sign_up.test.d.ts
           - sms.d.ts
           - sms.test.d.ts
```

— token.d.ts
└─ token.test.d.ts
— errors.d.ts
— index.d.ts
<pre>— index.test.d.ts</pre>
└ project_config
<pre> — get_project_config.d.ts </pre>
<pre>_ get_project_config.test.d.ts</pre>
core
— action_code_url.d.ts
— action_code_url.test.d.ts
— auth
☐ auth_event_manager.d.ts
- auth_event_manager.test.d.ts
- auth_impl.d.ts
- auth_impl.test.d.ts
emulator.d.ts
emulator.test.d.ts
!!
— firebase_internal.d.ts
├─ firebase_internal.test.d.ts
initialize.d.ts
— initialize.test.d.ts
— middleware.d.ts
— middleware.test.d.ts
└ register.d.ts
— credentials
— auth_credential.d.ts
— email.d.ts
— email.test.d.ts
index.d.ts
│
— oauth.test.d.ts
<pre>phone.test.d.ts</pre>
└─ saml.test.d.ts
— errors.d.ts
— errors.test.d.ts
— index.d.ts
— persistence
in_memory.d.ts
in_memory.test.d.ts
index.d.ts
— persistence_user_manager.d.ts
persistence_user_manager.test.d.ts
— providers
⊢ email.d.ts
— email.test.d.ts
- facebook.d.ts
- facebook.test.d.ts
- federated.d.ts
- federated.test.d.ts
— github.d.ts
— github.test.d.ts
75 / 017

<pre>- google.d.ts - google.test.d.ts - oauth.d.ts - oauth.test.d.ts - saml.d.ts - saml.test.d.ts - twitter.d.ts - twitter.test.d.ts - abstract_popup_redirect_operation.d.ts - abstract_popup_redirect_operation.test.d.ts - action_code_settings.d.ts - action_code_settings.test.d.ts - anonymous.d.ts - anonymous.test.d.ts - credential.d.ts - credential.test.d.ts - custom_token.d.ts - custom_token.test.d.ts - email.d.ts - email.test.d.ts - email_and_password.d.ts</pre>
<u> </u>
<pre>— email_and_password.test.d.ts — email_link.d.ts</pre>
- email_link.test.d.ts
idp.d.ts
idp.test.d.ts
redirect.d.ts
redirect.test.d.ts
— user
├ account_info.d.ts
<pre>— account_info.test.d.ts</pre>
— additional_user_info.d.ts
— additional_user_info.test.d.ts
id_token_result.tost_d_to
<pre> id_token_result.test.d.ts invalidation.d.ts </pre>
— invalidation.test.d.ts — link_unlink.d.ts
Link unlink.test.d.ts
proactive_refresh.d.ts
proactive_refresh.test.d.ts
— reauthenticate.d.ts
— reauthenticate.test.d.ts
⊢ reload.d.ts
reload.test.d.ts
token_manager.d.ts
<pre>token_manager.test.d.ts user_credential_impl.d.ts</pre>
user_credential_impl.test.d.ts
user_impl.d.ts
user_impl.test.d.ts
user_metadata.d.ts
L util

assert	.d.ts .test.d.ts
	r.test.d.ts
	test.d.ts
	or.test.d.ts
	id.d.ts
	id.test.d.ts
	provider.d.ts
handle	r.d.ts
instan	tiator.d.ts
i i i i i i i i i i i i i i i instan	tiator.test.d.ts
	on.d.ts
	ts
naviga	
provid	
resolv	
time.d	
	te_origin.d.ts
	te_origin.test.d.ts
- varia	
	n.test.d.ts
index.d.ts	ii testiui ts
— mfa	
index.d.t	
mfa_asser	
	ver.test.d.ts
	on.test.d.ts
	lest.u.TS
	an usuifian d ta
	on_verifier.d.ts
	4.4-
enums.d.t	
id_token.	
popup_red	
public_ty	pes.d.ts
user.d.ts	
platform_bro	
auth.test	
	ow.d.ts
	frames.d.ts
	est.d.ts
	.d.ts
	77 / 017

index.d.ts
- load_js.d.ts - load_js.test.d.ts - messagechannel - index.d.ts - promise.d.ts - promise.d.ts - promise.test.d.ts - receiver.d.ts - receiver.d.ts - sender.d.ts - sender.test.d.ts - mfa - lassertions - phone.d.ts - phone.test.d.ts - persistence - browser.d.ts - indexed_db.d.ts - indexed_db.d.ts - indexed_db.test.d.ts - local_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - recaptcha - recaptcha - recaptcha_mock.d.ts
- load_js.test.d.ts - messagechannel - index.d.ts - promise.d.ts - promise.test.d.ts - receiver.d.ts - receiver.d.ts - receiver.d.ts - sender.d.ts - sender.test.d.ts - mfa - assertions - phone.d.ts - phone.test.d.ts - persistence - browser.d.ts - indexed_db.d.ts - indexed_db.d.ts - indexed_db.test.d.ts - local_storage.d.ts - local_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - popup_redirect.test.d.ts - providers - phone.d.ts - phone.d.ts - recaptcha - recaptcha_loader.d.ts - recaptcha_mock.d.ts
- messagechannel - index.d.ts - promise.test.d.ts - promise.test.d.ts - receiver.d.ts - receiver.test.d.ts - sender.d.ts - sender.test.d.ts - mfa - assertions - phone.d.ts - phone.d.ts - phone.test.d.ts - indexed_db.d.ts - indexed_db.d.ts - local_storage.d.ts - local_storage.test.d.ts - session_storage.test.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - providers - phone.d.ts - phone.d.ts - providers - phone.test.d.ts - recaptcha - recaptcha_loader.d.ts - recaptcha_loader.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts
index.d.ts
promise.d.ts - promise.test.d.ts - receiver.d.ts - receiver.test.d.ts - sender.d.ts - sender.test.d.ts - phone.d.ts - phone.d.ts - phone.d.ts - prowser.d.ts - browser.d.ts - indexed_db.d.ts - indexed_db.test.d.ts - local_storage.d.ts - local_storage.d.ts - session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - providers - phone.d.ts - phone.test.d.ts - recaptcha - recaptcha - recaptcha - recaptcha - recaptcha mock.d.ts - recaptcha mock.test.d.ts - recaptcha mock.d.ts - recaptcha mock.d.ts - recaptcha mock.test.d.ts - recaptcha mock.test.d.ts
promise.test.d.ts
- receiver.d.ts - receiver.test.d.ts - sender.d.ts - sender.test.d.ts - mfa - assertions - phone.d.ts - phone.test.d.ts - persistence - browser.d.ts - indexed_db.d.ts - indexed_db.d.ts - local_storage.d.ts - local_storage.d.ts - session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - providers - phone.d.ts - phone.d.ts - providers - phone.test.d.ts - recaptcha - recaptcha_loader.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts - recaptcha_mock.test.d.ts
- receiver.d.ts - receiver.test.d.ts - sender.d.ts - sender.test.d.ts - mfa - assertions - phone.d.ts - phone.test.d.ts - persistence - browser.d.ts - indexed_db.d.ts - indexed_db.d.ts - local_storage.d.ts - local_storage.d.ts - session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - providers - phone.d.ts - phone.d.ts - providers - phone.test.d.ts - recaptcha - recaptcha_loader.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts - recaptcha_mock.test.d.ts
receiver.test.d.ts
- sender.d.ts - mfa - assertions - phone.d.ts - phone.d.ts - persistence - browser.d.ts - indexed_db.d.ts - indexed_db.d.ts - local_storage.d.ts - local_storage.d.ts - session_storage.test.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - providers - phone.d.ts - phone.d.ts - recaptcha - recaptcha_loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts
— sender.test.d.ts — mfa — assertions — phone.d.ts — phone.d.ts — persistence — browser.d.ts — indexed_db.d.ts — indexed_db.test.d.ts — local_storage.d.ts — local_storage.d.ts — session_storage.test.d.ts — session_storage.test.d.ts — popup_redirect.d.ts — popup_redirect.d.ts — popup_redirect.d.ts — providers — phone.d.ts — phone.d.ts — recaptcha — recaptcha_loader.d.ts — recaptcha_loader.test.d.ts — recaptcha_mock.d.ts — recaptcha_mock.test.d.ts
— mfa
☐ assertions ☐ phone.d.ts ☐ phone.test.d.ts ☐ browser.d.ts ☐ indexed_db.d.ts ☐ indexed_db.test.d.ts ☐ local_storage.d.ts ☐ session_storage.test.d.ts ☐ session_storage.test.d.ts ☐ popup_redirect.d.ts ☐ popup_redirect.d.ts ☐ phone.d.ts ☐ phone.d.ts ☐ phone.test.d.ts ☐ recaptcha ☐ recaptcha_loader.d.ts ☐ recaptcha_mock.d.ts ☐ recaptcha_mock.test.d.ts ☐ recaptcha_mock.test.d.ts ☐ recaptcha_mock.test.d.ts ☐ recaptcha_mock.test.d.ts ☐ recaptcha_mock.test.d.ts ☐ recaptcha_mock.test.d.ts
<pre></pre>
<pre>phone.test.d.ts persistence browser.d.ts browser.test.d.ts indexed_db.d.ts local_storage.d.ts local_storage.d.ts session_storage.d.ts session_storage.test.d.ts popup_redirect.d.ts popup_redirect.d.ts providers phone.d.ts phone.test.d.ts recaptcha recaptcha_loader.d.ts recaptcha_loader.test.d.ts recaptcha_mock.d.ts recaptcha_mock.test.d.ts recaptcha_mock.test.d.ts</pre>
<pre>- persistence - browser.d.ts - browser.test.d.ts - indexed_db.d.ts - indexed_db.test.d.ts - local_storage.d.ts - local_storage.d.ts - session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.test.d.ts - providers - phone.d.ts - phone.d.ts - recaptcha - recaptcha - recaptcha_loader.d.ts - recaptcha_loader.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts</pre>
<pre></pre>
<pre>- browser.test.d.ts - indexed_db.d.ts - indexed_db.test.d.ts - local_storage.d.ts - local_storage.d.ts - session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.test.d.ts - providers - phone.d.ts - phone.test.d.ts - recaptcha - recaptcha.d.ts - recaptcha_loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_loader.test.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts</pre>
<pre>- indexed_db.d.ts - indexed_db.test.d.ts - local_storage.d.ts - local_storage.d.ts - session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.test.d.ts - providers - phone.d.ts - phone.d.ts - recaptcha - recaptcha_loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts</pre>
- indexed_db.test.d.ts - local_storage.d.ts - local_storage.d.ts - session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.test.d.ts - providers - phone.d.ts - phone.test.d.ts - recaptcha - recaptcha-loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_loader.test.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts
- local_storage.d.ts - local_storage.d.ts - session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.test.d.ts - providers - phone.d.ts - phone.test.d.ts - recaptcha - recaptcha_loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts
<pre> - local_storage.test.d.ts - session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.test.d.ts - providers - phone.d.ts - phone.test.d.ts - recaptcha - recaptcha.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts</pre>
- session_storage.d.ts - session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.test.d.ts - providers - phone.d.ts - phone.test.d.ts - recaptcha - recaptcha - recaptcha_loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts
- session_storage.test.d.ts - popup_redirect.d.ts - popup_redirect.test.d.ts - providers - phone.d.ts - phone.test.d.ts - recaptcha - recaptcha.d.ts - recaptcha_loader.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts
<pre></pre>
- popup_redirect.test.d.ts - providers - phone.d.ts - phone.test.d.ts - recaptcha - recaptcha_loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts
<pre>— providers</pre>
<pre></pre>
<pre>phone.test.d.ts</pre>
- recaptcha - recaptcha.d.ts - recaptcha_loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts
<pre>- recaptcha.d.ts - recaptcha_loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts</pre>
<pre>- recaptcha_loader.d.ts - recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts</pre>
<pre>- recaptcha_loader.test.d.ts - recaptcha_mock.d.ts - recaptcha_mock.test.d.ts</pre>
│
recaptcha_mock.test.d.ts
recaptcha_verifier.test.d.ts
strategies
popup.d.ts
redirect.test.d.ts
popup.test.d.ts
worker.d.ts
popup_redirect
events.test.d.ts
78/017

```
- popup_redirect.d.ts
         - popup_redirect.test.d.ts
         - utils.d.ts
       └ utils.test.d.ts
     strategies
       └ redirect.d.ts

    platform node

    └ index.d.ts
  - platform_react_native
    ∟ persistence
         - react_native.d.ts
       └─ react native.test.d.ts
test
  helpers
     — api
      └ helper.d.ts
     — delay.d.ts
     — erroring_unavailable_persistence.d.ts
     — fake service worker.d.ts
     — id_token_response.d.ts
     iframe_event.d.ts
     integration
       — emulator_rest_helpers.d.ts
       helpers.d.ts
       └ settings.d.ts
     — jwt.d.ts
     mock_auth.d.ts
     mock auth credential.d.ts
     mock_fetch.d.ts
     — mock_fetch.test.d.ts
     mock popup redirect resolver.d.ts
      redirect_persistence.d.ts
    └ timeout_stub.d.ts
 └ integration

─ flows

        anonymous.test.d.ts
        custom.local.test.d.ts
        — email.test.d.ts
        — idp.local.test.d.ts
        — middleware_test_generator.d.ts
        - oob.local.test.d.ts
       └ phone.test.d.ts
     – webdriver
        anonymous.test.d.ts
        compat
         └ firebaseui.test.d.ts
         persistence.test.d.ts
        - popup.test.d.ts
         redirect.test.d.ts
       └ util
          — auth_driver.d.ts
            functions.d.ts
           - idp_page.d.ts
           - js_load_condition.d.ts
```

```
- test_runner.d.ts
               - test server.d.ts
              └ ui_page.d.ts
- esm2017
  index-e3f1fbba.js
  - index-e3f1fbba.js.map
   - index.cordova.d.ts
   - index.d.ts
   - index.doc.d.ts
   – index.js
  - index.js.map
   - index.node.d.ts
   - index.rn.d.ts
   index.shared.d.ts
   - index.webworker.d.ts
   internal
    └ index.d.ts
  - internal.js
  internal.js.map
  scripts
    └─ run_node_tests.d.ts
   - src
     — api

    □ account_management

    □ account.d.ts

            account.test.d.ts
            — email_and_password.d.ts
           — email_and_password.test.d.ts
           — mfa.d.ts
            — mfa.test.d.ts
            - profile.d.ts
           └ profile.test.d.ts

    authentication

— create_auth_uri.d.ts

           create_auth_uri.test.d.ts
           ─ custom_token.d.ts
           — custom_token.test.d.ts
           — email_and_password.d.ts
           — email_and_password.test.d.ts
           — email_link.d.ts
           — email_link.test.d.ts
           — idp.d.ts
           — idp.test.d.ts
           — mfa.d.ts
            — mfa.test.d.ts
            — recaptcha.d.ts
            recaptcha.test.d.ts
            - sign_up.d.ts
            — sign_up.test.d.ts
           — sms.d.ts
            - sms.test.d.ts
             - token.d.ts

    token.test.d.ts

          errors.d.ts
```

l design de la company de la c
index.d.ts
index.test.d.ts
└─ project_config
<pre>— get_project_config.d.ts</pre>
└─ get_project_config.test.d.ts
— core
— action_code_url.d.ts
— action_code_url.test.d.ts
— auth
│
│
— auth_impl.test.d.ts
— emulator.d.ts
— emulator.test.d.ts
— firebase_internal.d.ts
— firebase_internal.test.d.ts
— initialize.d.ts
— initialize.test.d.ts
— middleware.d.ts
— middleware.test.d.ts
│
— credentials
│
— email.d.ts
— email.test.d.ts
index.d.ts
— oauth.d.ts
— oauth.test.d.ts
— phone.d.ts
phone.test.d.ts
— saml.d.ts
│
errors.d.ts
- errors.test.d.ts
index.d.ts
— persistence
— in_memory.d.ts
— in_memory.test.d.ts
— index.d.ts
<pre>persistence_user_manager.d.ts</pre>
│
├─ providers
— email.d.ts
— email.test.d.ts
— facebook.d.ts
— facebook.test.d.ts
— federated.d.ts
— federated.test.d.ts
— github.d.ts
— github.test.d.ts
— google.d.ts
— google.test.d.ts
│
81 / 017

— oauth.test.d.ts
— saml.d.ts
— saml.test.d.ts
— twitter.d.ts
└ twitter.test.d.ts
strategies
<pre>— abstract_popup_redirect_operation.d.ts</pre>
<pre>abstract_popup_redirect_operation.test.d.ts</pre>
— action_code_settings.d.ts
— action_code_settings.test.d.ts
anonymous.d.ts
— anonymous.test.d.ts
— credential.d.ts
— credential.d.ts — credential.test.d.ts
— custom_token.d.ts
- custom_token.test.d.ts
— email.d.ts
— email.test.d.ts
— email_and_password.d.ts
— email_and_password.test.d.ts
— email_link.d.ts
— email_link.test.d.ts
— idp.d.ts
— idp.test.d.ts
— redirect.d.ts
└ redirect.test.d.ts
user
— account_info.d.ts
- account_info.test.d.ts
— additional_user_info.d.ts
— additional_user_info.test.d.ts
— id_token_result.d.ts
- id_token_result.test.d.ts
invalidation.d.ts
— invalidation.test.d.ts
— link_unlink.d.ts
- link_unlink.test.d.ts
! —
<pre>proactive_refresh.d.ts</pre>
<pre>proactive_refresh.test.d.ts</pre>
— reauthenticate.d.ts
— reauthenticate.test.d.ts
- reload.d.ts
— reload.test.d.ts
— token_manager.d.ts
<pre>— token_manager.test.d.ts</pre>
<pre>— user_credential_impl.d.ts</pre>
<pre>user_credential_impl.test.d.ts</pre>
— user_impl.d.ts
<pre>user_impl.test.d.ts</pre>
└ user_metadata.d.ts
util
— assert.d.ts
— assert.test.d.ts
— browser.d.ts
82 / 917

- browser.test.d.ts - delay.d.ts - delay.d.ts - emulator.d.ts - emulator.test.d.ts - event_id.d.ts - event_id.test.d.ts - event_id.test.d.ts - event_id.test.d.ts - handler.d.ts - instantiator.d.ts - location.d.ts - location.d.ts - log.d.ts - navigator.d.ts - providers.d.ts - resolver.d.ts - validate_origin.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - version.d.ts - wersion.d.ts - index.d.ts - mfa_assertion.d.ts - mfa_error.d.ts - mfa_error.d.ts - mfa_ersolver.d.ts - mfa_resolver.test.d.ts - mfa_resolver.test.d.ts - mfa_user.d.ts - auth.d.ts - enum_maps.d.ts - enum_maps.d.ts - popup_redirect.d.ts - public_types.d.ts - palform_browser - auth.test.d.ts - palform_browser - auth.test.d.ts - gapi.test.d.ts - iframe - gapi.d.ts - iframe.d.ts - index.d.ts -		
delay.test.d.ts emulator.d.ts emulator.d.ts event_id.d.ts event_id.test.d.ts event_id.test.d.ts event_id.test.d.ts etch_provider.d.ts handler.d.ts instantiator.d.ts elocation.d.ts elocat		
- emulator.d.ts - event_id.d.ts - event_id.d.ts - event_id.d.ts - event_id.d.ts - fettch_provider.d.ts - handler.d.ts - instantiator.d.ts - instantiator.d.ts - location.d.ts - log.d.ts - log.d.ts - navigator.d.ts - resolver.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - validate_origin.test.d.ts - version.test.d.ts - index.d.ts - mfa - index.d.ts - mfa - info.d.ts - mfa_info.d.ts - mfa_info.test.d.ts - mfa_resolver.d.ts - mfa_resolver.d.ts - mfa_session.test.d.ts - mfa_session.test.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - auth.d.ts - enum_maps.d.ts - enum_maps.d.ts - enum_maps.d.ts - public_types.d.ts - user.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - gapi.test.d.ts - gapi.test.d.ts - iframe.d.ts - gapi.test.d.ts - iframe.d.ts		
- emulator.test.d.ts - event_id.d.ts - event_id.test.d.ts - fetch_provider.d.ts - handler.d.ts - instantiator.d.ts - location.d.ts - location.d.ts - log.d.ts - navigator.d.ts - providers.d.ts - resolver.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - wersion.d.ts - wersion.d.ts - mfa - index.d.ts - mfa - index.d.ts - mfa_error.d.ts - mfa_error.d.ts - mfa_ersolver.d.ts - mfa_resolver.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enum.d.ts - popup_redirect.d.ts - if rame.d.ts - if rame.d.ts - if rame.d.ts - if rame.d.ts - if rame.test.d.ts		
- event_id.d.ts - event_id.test.d.ts - fetch_provider.d.ts - handler.d.ts - instantiator.d.ts - instantiator.test.d.ts - location.d.ts - log.d.ts - resolver.d.ts - resolver.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - version.d.ts - version.d.ts - version.d.ts - index.d.ts - mfa - index.d.ts - mfa_assertion.d.ts - mfa_error.d.ts - mfa_error.d.ts - mfa_ersolver.d.ts - mfa_ersolver.d.ts - mfa_ersolver.d.ts - mfa_ersolver.d.ts - mfa_ersolver.d.ts - mfa_ersolver.d.ts - mfa_ersolver.test.d.ts - mfa_ersolver.test.d.ts - mfa_ersolver.test.d.ts - mfa_brest.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - enum.d.ts - enum.d.ts - enum.d.ts - enum.d.ts - enum.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth_test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.test.d.ts - gapi.test.d.ts - iframe.d.ts - index.d.ts - iframe.d.ts		
- event_id.test.d.ts - fetch_provider.d.ts - handler.d.ts - instantiator.d.ts - instantiator.test.d.ts - log.d.ts - navigator.d.ts - providers.d.ts - resolver.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - version.test.d.ts - index.d.ts - mfa - index.d.ts - mfa_info.d.ts - mfa_info.d.ts - mfa_info.d.ts - mfa_resolver.d.ts - mfa_ersolver.d.ts - mfa_ersolver.d.ts - mfa_ersolver.test.d.ts - mfa_ersolver.test.d.ts - mfa_ersolver.test.d.ts - mfa_ession.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - auth.d.ts - enum.angs.d.ts - enum.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.test.d.ts - gapi.test.d.ts - iframe.d.ts		
- fetch_provider.d.ts - handler.d.ts - instantiator.d.ts - instantiator.d.ts - log.d.ts - log.d.ts - providers.d.ts - providers.d.ts - resolver.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - validate_origin.test.d.ts - version.d.ts - version.d.ts - index.d.ts - mfa - index.d.ts - mfa_error.d.ts - mfa_error.d.ts - mfa_resolver.d.ts - mfa_resolver.d.ts - mfa_resolver.d.ts - mfa_session.d.ts - mfa_session.d.ts - mfa_session.test.d.ts - mfa_session.d.ts - mfa_test.d.ts - auth.d.ts - enum_maps.d.ts - enum.d.ts - id_token.d.ts - public_types.d.ts - user.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.frames.d.ts - gapi.frames.d.ts - iframe.d.ts - index.d.ts - i		
- handler.d.ts - instantiator.d.ts - instantiator.test.d.ts - log.d.ts - log.d.ts - providers.d.ts - resolver.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - version.d.ts - wersion.test.d.ts - index.d.ts - mfa - index.d.ts - mfa_assertion.d.ts - mfa_aresolver.d.ts - mfa_resolver.d.ts - mfa_resolver.d.ts - mfa_session.test.d.ts - mfa_session.test.d.ts - mfa_session.test.d.ts - mfa_resolver.test.d.ts - mfa_session.test.d.ts - mfa_session.test.d.ts - mfa_session.test.d.ts - mfa_session.test.d.ts - mfa_tesolver.test.d.ts - mfa_tesolver.test.d.ts - mfa_tesolver.d.ts - mfa_tesolver.test.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enum_maps.d.ts - enum_maps.d.ts - enum_maps.d.ts - enum_maps.d.ts - ind_token.d.ts - public_types.d.ts - user.d.ts - public_types.d.ts - iframe - gapi.d.ts - gapi.test.d.ts - iframe.d.ts - index.d.ts - index.		
instantiator.test.d.ts	! ! ! ! ! ! -	
- instantiator.test.d.ts - location.d.ts - log.d.ts - navigator.d.ts - providers.d.ts - resolver.d.ts - time.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - validate_origin.test.d.ts - vasion.test.d.ts - index.d.ts - index.d.ts - mfa - index.d.ts - mfa_assertion.d.ts - mfa_aror.d.ts - mfa_info.d.ts - mfa_info.d.ts - mfa_resolver.d.ts - mfa_resolver.test.d.ts - mfa_session.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enums.d.ts - enums.d.ts - public_types.d.ts - public_types.d.ts - public_types.d.ts - putner.d.ts - platform_browser - auth.test.d.ts - platform_browser - auth.test.d.ts - iframe - gapi.iframes.d.ts - gapi.iframes.d.ts - gapi.iframe.d.ts - iframe.test.d.ts		
- log.d.ts - navigator.d.ts - providers.d.ts - providers.d.ts - resolver.d.ts - time.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - version.d.ts - version.d.ts - index.d.ts - index.d.ts - mfa - index.d.ts - mfa_assertion.d.ts - mfa_assertion.d.ts - mfa_info.d.ts - mfa_info.test.d.ts - mfa_resolver.d.ts - mfa_resolver.test.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.test.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_aps.d.ts - enums.d.ts - enums.d.ts - popup_redirect.d.ts - public_types.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.dts - gapi.iframes.d.ts - gapi.iframes.d.ts - gapi.iframe.test.d.ts - iframe.test.d.ts	instantiator.test.d.ts	
- navigator.d.ts - providers.d.ts - resolver.d.ts - validate_origin.test.d.ts - validate_origin.test.d.ts - version.d.ts - version.test.d.ts - index.d.ts - mfa - index.d.ts - mfa_assertion.d.ts - mfa_info.d.ts - mfa_info.d.ts - mfa_resolver.d.ts - mfa_resolver.d.ts - mfa_resolver.test.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - enum_maps.d.ts - enum_maps.d.ts - enum_cape.d.ts - popup_redirect.d.ts - public_types.d.ts - platform_browser - auth.test.d.ts - iframe - gapi.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - iframe.d.ts - iframe.test.d.ts - index.d.ts - iframe.test.d.ts - index.d.ts - iframe.test.d.ts		
- providers.d.ts - resolver.d.ts - time.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - version.d.ts - version.d.ts - index.d.ts - index.d.ts - infa_assertion.d.ts - infa_error.d.ts - infa_info.d.ts - infa_resolver.d.ts - infa_resolver.test.d.ts - infa_session.d.ts - infa_session.d.ts - infa_session.test.d.ts - infa_user.d.ts - infa_user.d.ts - infa_user.d.ts - auth.d.ts - enum_maps.d.ts - enum_maps.d.ts - id_token.d.ts - id_token.d.ts - id_token.d.ts - public_types.d.ts - user.d.ts - user.d.ts - infa_info.dest.d.ts - infa_info.test.d.ts - infa_info.test.d.ts - infa_user.test.d.ts - auth.d.ts - enum_maps.d.ts - enum_maps.d.ts - info.test.d.ts - info.test.d.ts - info.test.d.ts - info.test.d.ts - info.test.d.ts - info.test.d.ts - infame - info.test.d.ts - infame.d.ts - infame.test.d.ts - infame.test.d.ts - index.d.ts		
resolver.d.ts time.d.ts validate_origin.d.ts validate_origin.test.d.ts version.d.ts version.test.d.ts index.d.ts index.d.ts infa index.d.ts infa_assertion.d.ts infa_info.d.ts infa_resolver.d.ts infa_resolver.d.ts infa_session.test.d.ts infa_user.d.ts infully infu	navigator.d.ts	
<pre>time.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - version.d.ts - version.test.d.ts - index.d.ts - mfa - index.d.ts - mfa_assertion.d.ts - mfa_areor.d.ts - mfa_info.d.ts - mfa_resolver.d.ts - mfa_resolver.d.ts - mfa_session.d.ts - mfa_session.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - enum_aps.d.ts - enum_aps.d.ts - enum_sol.ts - id_token.d.ts - public_types.d.ts - public_types.d.ts - auth_window.d.ts - iframe - gapi.iframes.d.ts - gapi.iframes.d.ts - gapi.test.d.ts - gapi.iframe.d.ts - iframe.test.d.ts - ifra</pre>		
- validate_origin.d.ts - validate_origin.test.d.ts - version.d.ts - version.test.d.ts - index.d.ts - index.d.ts - mfa - index.d.ts - mfa_error.d.ts - mfa_error.d.ts - mfa_info.d.ts - mfa_resolver.d.ts - mfa_resolver.d.ts - mfa_session.d.ts - mfa_session.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enum_s.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - auth.test.d.ts - auth_window.d.ts - iframe - gapi.drs - gapi.frames.d.ts - iframe.d.ts	resolver.d.ts	
- validate_origin.test.d.ts - version.d.ts - version.test.d.ts - index.d.ts - index.d.ts - mfa - index.d.ts - mfa_assertion.d.ts - mfa_areror.d.ts - mfa_info.d.ts - mfa_info.test.d.ts - mfa_resolver.d.ts - mfa_resolver.test.d.ts - mfa_session.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enum_s.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - pafform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.frames.d.ts - iframe.d.ts		
resion.d.ts resion.test.d.ts resion.test.d.ts resion.d.ts	walidate_origin.d.ts	
<pre>learn test.d.ts learn midex.d.ts le</pre>		
- index.d.ts - mfa - index.d.ts - mfa_assertion.d.ts - mfa_info.d.ts - mfa_info.d.ts - mfa_resolver.d.ts - mfa_resolver.d.ts - mfa_session.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enum_maps.d.ts - popup_redirect.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.vindow.d.ts - iframe - gapi.d.ts - gapi.frames.d.ts - gapi.frames.d.ts - japi.est.d.ts - japi.est.d.ts - japi.est.d.ts - japi.est.d.ts - iframe.d.ts - iframe.d.ts - iframe.d.ts - iframe.d.ts - index.d.ts		
- mfa - index.d.ts - mfa_error.d.ts - mfa_info.d.ts - mfa_info.test.d.ts - mfa_resolver.d.ts - mfa_resolver.test.d.ts - mfa_session.test.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enum_s.d.ts - id_token.d.ts - public_types.d.ts - public_types.d.ts - auth.test.d.ts - auth.window.d.ts - iframe - gapi.d.ts - gapi.d.ts - gapi.iframes.d.ts - gapi.test.d.ts - iframe.d.ts - iframe.d.ts - iframe.test.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts		
index.d.ts		
- mfa_assertion.d.ts - mfa_info.d.ts - mfa_info.d.ts - mfa_info.test.d.ts - mfa_resolver.d.ts - mfa_session.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.test.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enum.sd.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.frames.d.ts - japi.test.d.ts - japi.test.d.ts - iframe.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts		
- mfa_info.d.ts - mfa_info.test.d.ts - mfa_resolver.d.ts - mfa_resolver.test.d.ts - mfa_session.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.test.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enums.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - iframe.d.ts - iframe.d.ts - iframe.d.ts - iframe.d.ts - iframe.d.ts - iframe.test.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts		
- mfa_info.d.ts - mfa_info.test.d.ts - mfa_resolver.d.ts - mfa_session.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - enum_maps.d.ts - enum_s.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - auth.est.d.ts - auth.est.d.ts - auth.est.d.ts - jframe - gapi.d.ts - jframe.d.ts		
- mfa_info.test.d.ts - mfa_resolver.d.ts - mfa_resolver.test.d.ts - mfa_session.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.test.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enum_s.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.iframes.d.ts - gapi.test.d.ts - iframe.d.ts - iframe.d.ts - iframe.d.ts - iframe.d.ts - iframe.d.ts - iframe.test.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - load_js.d.ts		
<pre></pre>		
<pre></pre>		
- mfa_session.d.ts - mfa_user.d.ts - mfa_user.test.d.ts - model - application_verifier.d.ts - enum_maps.d.ts - enum_maps.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.iframes.d.ts - gapi.test.d.ts - iframe.d.ts		
- mfa_user.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enums.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - iframe.d.ts - iframe.d.ts - iframe.d.ts - iframe.test.d.ts - index.d.ts - index.d.ts - index.d.ts - load_js.d.ts		
<pre></pre>	mfa_session.test.d.ts	
- model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enums.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - gapi.test.d.ts - iframe.d.ts - iframe.test.d.ts - index.d.ts - index.d.ts - index.d.ts - load_js.d.ts		
<pre>- application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enums.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - iframe.d.ts - iframe.test.d.ts - iframe.test.d.ts - index.d.ts - index.d.ts - load_js.d.ts</pre>	mfa_user.test.d.ts	
- auth.d.ts - enum_maps.d.ts - enums.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - gapi.test.d.ts - iframe.d.ts - iframe.test.d.ts - iframe.test.d.ts - index.d.ts - load_js.d.ts		
- enum_maps.d.ts - enums.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - gapi.test.d.ts - iframe.d.ts - iframe.test.d.ts - iframe.test.d.ts - index.d.ts - index.d.ts - load_js.d.ts		
- enums.d.ts - id_token.d.ts - popup_redirect.d.ts - public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - gapi.test.d.ts - iframe.d.ts - iframe.test.d.ts - index.d.ts - index.d.ts - load_js.d.ts		
<pre> id_token.d.ts</pre>	_ ! ! ! ! ! !	
<pre></pre>		
<pre>- public_types.d.ts - user.d.ts - platform_browser - auth.test.d.ts - auth_window.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - gapi.test.d.ts - iframe.d.ts - iframe.test.d.ts - index.d.ts - load_js.d.ts</pre>		
<pre></pre>	_ ! ! ! ! ! ! !	
<pre></pre>		
- auth_window.d.ts - iframe - gapi.d.ts - gapi.iframes.d.ts - gapi.test.d.ts - iframe.d.ts - iframe.test.d.ts - index.d.ts - load_js.d.ts		
iframe.test.d.ts index.d.ts lilililililililililililililililililili		
	Load_js.d.ts	

— load_js.test.d.ts
— messagechannel
index.d.ts
├─ promise.d.ts
<pre> promise.test.d.ts </pre>
— receiver.d.ts
├─ receiver.test.d.ts
— sender.d.ts
└─ sender.test.d.ts
— mfa
☐ assertions
phone.d.ts
_ phone.test.d.ts
— persistence
browser.d.ts
browser.test.d.ts
indexed_db.d.ts
indexed_db.test.d.ts
session_storage.test.d.ts
— popup_redirect.d.ts
— popup_redirect.test.d.ts
— providers
phone.d.ts
☐ phone.test.d.ts
— recaptcha
recaptcha.d.ts
recaptcha_loader.d.ts
recaptcha_loader.test.d.ts
recaptcha_mock.d.ts
recaptcha_mock.test.d.ts
recaptcha_verifier.d.ts
recaptcha_verifier.test.d.ts
— strategies
phone.d.ts
phone.test.d.ts
popup.d.ts
popup.test.d.ts
redirect.d.ts
│
└─ util
├─ popup.d.ts
— popup.test.d.ts
└─ worker.d.ts
— platform_cordova
— plugins.d.ts
— popup_redirect
events.d.ts
— events.test.d.ts
— popup_redirect.d.ts
<pre>popup_redirect.test.d.ts</pre>
│
84 / 017

```
└ utils.test.d.ts
       strategies
       └ redirect.d.ts
   - platform node
    └ index.d.ts

    platform react native

    └ persistence
        — react native.d.ts
       └ react_native.test.d.ts
test
  helpers
     ⊢ api
      └ helper.d.ts
     ─ delay.d.ts
     erroring_unavailable_persistence.d.ts
     fake_service_worker.d.ts

    id_token_response.d.ts

     — iframe_event.d.ts
     integration
       — emulator_rest_helpers.d.ts
        — helpers.d.ts
       └ settings.d.ts

─ jwt.d.ts

     — mock_auth.d.ts
     mock_auth_credential.d.ts
     — mock_fetch.d.ts
     mock_fetch.test.d.ts
     — mock_popup_redirect_resolver.d.ts
      redirect_persistence.d.ts
    └ timeout_stub.d.ts
 └ integration

─ flows

        anonymous.test.d.ts
        custom.local.test.d.ts
         - email.test.d.ts
        idp.local.test.d.ts
        — middleware_test_generator.d.ts
         oob.local.test.d.ts

    □ phone.test.d.ts

      – webdriver
        anonymous.test.d.ts
        — compat
          └ firebaseui.test.d.ts
         - persistence.test.d.ts
        - popup.test.d.ts
         redirect.test.d.ts
       └ util
           auth_driver.d.ts
           – functions.d.ts
            - idp_page.d.ts
            - js_load_condition.d.ts
            - test_runner.d.ts
            - test_server.d.ts
           └ ui_page.d.ts
```

2005
esm5
— index-1c9baa03.js
— index-1c9baa03.js.map
— index.cordova.d.ts
— index.d.ts
<pre>index.doc.d.ts</pre>
index.js index.js
— index.js.map
— index.node.d.ts
— index.rn.d.ts
— index.shared.d.ts
— index.webworker.d.ts
— internal
index.d.ts
!
— internal.js
— internal.js.map
— scripts
└─ run_node_tests.d.ts
- src
— api
— account_management
— account.d.ts
account.test.d.ts
— email_and_password.d.ts
email_and_password.test.d.ts
mfa.d.ts
mfa.test.d.ts
profile.d.ts
profile.test.d.ts
— profite.test.d.ts
!!!
create_auth_uri.d.ts
create_auth_uri.test.d.ts
custom_token.d.ts
custom_token.test.d.ts
│
email_link.d.ts
— email_link.test.d.ts
idp.d.ts
idp.test.d.ts
mfa.d.ts
mfa.test.d.ts
recaptcha.d.ts
recaptchaitest.d.ts
ms.test.d.ts
token.d.ts
token.test.d.ts
— errors.d.ts
— index.d.ts
— index.test.d.ts
project_config
86/017

<pre>— get_project_config.d.ts</pre>
<pre>— get_project_config.test.d.ts</pre>
5 — 5
core — action_code_url.d.ts
- action_code_url.test.d.ts
auth
— auth_event_manager.d.ts
— auth_event_manager.test.d.ts
- auth_impl.d.ts
— auth_impl.test.d.ts
— emulator.d.ts
— emulator.test.d.ts
— firebase_internal.d.ts
<pre>— firebase_internal.test.d.ts</pre>
— initialize.d.ts
— initialize.test.d.ts
— middleware.d.ts
— middleware.test.d.ts
└ register.d.ts
— credentials
— auth_credential.d.ts
— email.d.ts
— email.test.d.ts
— index.d.ts
— oauth.d.ts
— oauth.test.d.ts
— phone.d.ts
— phone.test.d.ts
— saml.d.ts
└─ saml.test.d.ts └─ errors.d.ts
errors.test.d.ts
index.d.ts
— persistence
in_memory.d.ts
- in_memory.test.d.ts
— index.d.ts
— persistence_user_manager.d.ts
persistence_user_manager.test.d.ts
— providers
— email.d.ts
— email.test.d.ts
— facebook.d.ts
— facebook.test.d.ts
— federated.d.ts
— federated.test.d.ts
— github.d.ts
— github.test.d.ts
— google.d.ts
<pre>— google.test.d.ts — oauth.d.ts</pre>
— oauth.d.ts — oauth.test.d.ts
- saml.d.ts
— saml.test.d.ts
87 / 017

+,,;++op d +o
twitter.d.ts
twitter.test.d.ts
— strategies
— abstract_popup_redirect_operation.d.ts
<pre>abstract_popup_redirect_operation.test.d.ts</pre>
<pre>— action_code_settings.d.ts</pre>
<pre>— action_code_settings.test.d.ts</pre>
— anonymous.d.ts
│ ├─ anonymous.test.d.ts
├─ credential.d.ts
— credential.test.d.ts
custom_token.d.ts
custom_token.test.d.ts
— email.d.ts
— email.test.d.ts
<pre>— email_and_password.d.ts</pre>
— email_and_password.test.d.ts
- email_link.d.ts
- email_link.test.d.ts
idp.d.ts
idp.test.d.ts
redirect.d.ts
redirect.test.d.ts
— user
- account_info.d.ts
- account_info.test.d.ts
additional_user_info.d.ts
additional_user_info.test.d.ts
id_token_result.d.ts
id_token_result.test.d.ts
invalidation.d.ts
invalidation.test.d.ts
— link_unlink.d.ts
— link_unlink.test.d.ts
proactive_refresh.d.ts
proactive_refresh.test.d.ts
reauthenticate.d.ts
reauthenticate.test.d.ts
— readifienticate.test.d.ts — reload.d.ts
Feloadidits Feloaditestidits
— retoad.test.d.ts — token_manager.d.ts
!!
token_manager.test.d.ts
user_credential_impl.d.ts
user_credential_impl.test.d.ts
user_impl.d.ts
user_impl.test.d.ts
└─ user_metadata.d.ts
util
— assert.d.ts
— assert.test.d.ts
- browser.d.ts
- browser.test.d.ts
— delay.d.ts
— delay.test.d.ts
88 / 017

- ewulator.test.d.ts - event_id.d.ts - event_id.ts - event_id.ts - event_id.ts - event_id.ts - fetch_provider.d.ts - handler.d.ts - instantiator.d.ts - instantiator.d.ts - log.d.ts - log.d.ts - log.d.ts - navigator.d.ts - providers.d.ts - resolver.d.ts - time.d.ts - validate_origin.d.ts - validate_origin.test.d.ts - version.d.ts - version.d.ts - version.ts - mfa - index.d.ts - mfa - index.d.ts - mfa_assertion.d.ts - mfa_eror.d.ts - mfa_info.d.ts - mfa_info.d.ts - mfa_resolver.test.d.ts - mfa_resolver.test.d.ts - mfa_session.test.d.ts - mfa_session.test.d.ts - mfa_user.d.ts - mfa_user.d.ts - mfa_user.d.ts - model - application_verifier.d.ts - auth.d.ts - enum_maps.d.ts - enum_maps.d.ts - enum_mach.ts - public_types.d.ts - public_types.d.ts - public_types.d.ts - gapi.d.ts - gapi.d.ts - gapi.d.ts - gapi.d.ts - gapi.frame.d.ts - iframe - gapi.frame.d.ts - iframe.d.ts - iframe.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - iframe.d.ts - index.d.ts
--

receiver.test.d.ts	
assertions	
phone.test.d.ts	
browser.test.d.ts	
indexed_db.test.d.ts	
Local_storage.test.d.ts	
session_storage.d.ts	
session_storage.test.d.ts	
popup_redirect.test.d.ts	
providers	
phone.test.d.ts	
recaptcha	
recaptcha.d.ts	
recaptcha_loader.d.ts	
recaptcha_loader.test.d.ts	
recaptcha_mock.d.ts	
recaptcha_mock.test.d.ts	
recaptcha_verifier.d.ts	
recaptcha_verifier.test.d.ts	
phone.test.d.ts	
popup.test.d.ts	
redirect.test.d.ts	
popup.test.d.ts	
platform_cordova	
popup_redirect	
events.d.ts	
events.test.d.ts	
popup_redirect.d.ts	
popup_redirect.test.d.ts	
utils.test.d.ts	
strategies	
90 / 917	

```
platform_node
       └ index.d.ts
       platform_react_native
       └ persistence
          react native.d.ts
          └ react_native.test.d.ts
   - test
     helpers
       ⊢ api
         └ helper.d.ts
        — delay.d.ts
       — erroring_unavailable_persistence.d.ts
        — fake_service_worker.d.ts

    id_token_response.d.ts

        - iframe event.d.ts
       integration
          — emulator_rest_helpers.d.ts
           - helpers.d.ts
          └ settings.d.ts
       ─ jwt.d.ts
        — mock_auth.d.ts
        — mock_auth_credential.d.ts
        — mock_fetch.d.ts
       mock_fetch.test.d.ts
       mock_popup_redirect_resolver.d.ts
         redirect_persistence.d.ts
       └ timeout_stub.d.ts
      - integration

─ flows

           anonymous.test.d.ts
           L custom.local.test.d.ts
           — email.test.d.ts
           - idp.local.test.d.ts
           — middleware_test_generator.d.ts
           oob.local.test.d.ts

    □ phone.test.d.ts

         - webdriver
          anonymous.test.d.ts
           compat
            └ firebaseui.test.d.ts
           - persistence.test.d.ts
           — popup.test.d.ts
           — redirect.test.d.ts
          ∟ util
              — auth driver.d.ts
               - functions.d.ts
              - idp_page.d.ts
               - js_load_condition.d.ts
               - test_runner.d.ts
               - test_server.d.ts
             └ ui_page.d.ts
- index.cordova.d.ts
- index.d.ts
- index.doc.d.ts
```

```
- index.node.d.ts
- index.rn.d.ts
- index.shared.d.ts
index.webworker.d.ts
index.webworker.esm5.js
index.webworker.esm5.js.map
- internal
 └ index.d.ts
- node
  \vdash index-d8f4f216.js
  — index-d8f4f216.js.map
   index.cordova.d.ts
   - index.d.ts
   - index.doc.d.ts
   - index.js
   index.js.map
  — index.node.d.ts
   - index.rn.d.ts
   - index.shared.d.ts
   index.webworker.d.ts
   internal
    └ index.d.ts
  ⊢ internal.js
  — internal.js.map
   - scripts
     └─ run_node_tests.d.ts
   - src
     — api

    □ account_management

           — account.d.ts
            account.test.d.ts
            — email_and_password.d.ts
            email_and_password.test.d.ts
            — mfa.d.ts
            - mfa.test.d.ts
            - profile.d.ts
           └ profile.test.d.ts

    authentication

           — create_auth_uri.d.ts
           — create_auth_uri.test.d.ts
           — custom_token.d.ts
           custom_token.test.d.ts
           — email_and_password.d.ts
            — email_and_password.test.d.ts
            email_link.d.ts
            - email_link.test.d.ts
            — idp.d.ts
            - idp.test.d.ts
            mfa.d.ts
            — mfa.test.d.ts
            recaptcha.d.ts
            recaptcha.test.d.ts
            – sign_up.d.ts
            - sign_up.test.d.ts
```

├─ sms.d.ts
— sms.test.d.ts
— token.d.ts
└ token.test.d.ts
— errors.d.ts
— index.d.ts
— index.test.d.ts
└─ project_config
get_project_config.test.d.ts
core
├─ action_code_url.d.ts
- action_code_url.test.d.ts
auth
— auth_event_manager.test.d.ts
auth_impl.d.ts
— auth_impl.test.d.ts
— emulator.d.ts
— emulator.test.d.ts
firebase_internal.d.ts
— firebase_internal.test.d.ts
— initialize.d.ts
— initialize.test.d.ts
— middleware.d.ts
— middleware.test.d.ts
│
— credentials
— auth_credential.d.ts
— email.d.ts
— email.test.d.ts
│
— oauth.d.ts
— oauth.test.d.ts
— phone.d.ts
— phone.test.d.ts
— saml.d.ts
_ saml.test.d.ts
— errors.d.ts
- errors.test.d.ts
index.d.ts
— persistence
in_memory.d.ts
in_memory.test.d.ts
index.d.ts
persistence_user_manager.d.ts
persistence_user_manager.test.d.ts
providers
!!!
email.test.d.ts
— facebook.d.ts
— facebook.test.d.ts
— federated.d.ts
│
93 / 917

— github.d.ts
│
│
│
— oauth.d.ts
oauth.test.d.ts
saml.d.ts
saml.test.d.ts
— twitter.d.ts
twitter.test.d.ts
- strategies
— action_code_settings.d.ts
action_code_settings.test.d.ts
anonymous.d.ts
anonymous.test.d.ts
— credential.d.ts
— credential.test.d.ts
custom_token.d.ts
custom_token.test.d.ts
│
— email.test.d.ts
email_and_password.d.ts
<pre>— email_and_password.test.d.ts</pre>
— email_link.d.ts
— email_link.test.d.ts
idp.d.ts
idp.test.d.ts
redirect.d.ts
redirect.test.d.ts
account_info.d.ts
account_info.test.d.ts
— additional_user_info.d.ts
│
id_token_result.d.ts
id_token_result.test.d.ts
│
│
— link_unlink.d.ts
<pre>link_unlink.test.d.ts</pre>
proactive_refresh.d.ts
proactive_refresh.test.d.ts
reauthenticate.d.ts
reauthenticate.test.d.ts
reload.d.ts
— reload.test.d.ts
token_manager.d.ts
— token_manager.test.d.ts
·
user_credential_impl.d.ts
│
user_impl.d.ts
— user_impl.test.d.ts
04 / 017

└─ user_metadata.d.ts
└ util
<pre>— assert.d.ts</pre>
<pre>— assert.test.d.ts</pre>
— browser.d.ts
— browser.test.d.ts
— delay.d.ts
— delay.test.d.ts
— emulator.d.ts
— emulator.test.d.ts
- event_id.d.ts
- event_id.test.d.ts
! —
<pre>— fetch_provider.d.ts — handler.d.ts</pre>
— instantiator.d.ts
instantiator.test.d.ts
— location.d.ts
— log.d.ts
— navigator.d.ts
— providers.d.ts
— resolver.d.ts
— time.d.ts
<pre>- validate_origin.d.ts</pre>
<pre>validate_origin.test.d.ts</pre>
<pre>version.d.ts</pre>
└ version.test.d.ts
- index.d.ts
- mfa
index.d.ts
— mfa_assertion.d.ts
— mfa_error.d.ts
— mfa_info.d.ts
— mfa_info.test.d.ts
! —
— mfa_resolver.d.ts
— mfa_resolver.test.d.ts
— mfa_session.d.ts
<pre>mfa_session.test.d.ts</pre>
— mfa_user.d.ts
└ mfa_user.test.d.ts
- model
<pre>— application_verifier.d.ts</pre>
— auth.d.ts
— enum_maps.d.ts
— enums.d.ts
— id_token.d.ts
<pre>— popup_redirect.d.ts</pre>
<pre>public_types.d.ts</pre>
user.d.ts
- platform_browser
— auth.test.d.ts
— auth_window.d.ts
— iframe
├─ gapi.d.ts
│ ├─ gapi.iframes.d.ts
05 / 017

iframe.d.ts	
iframe.test.d.ts	
index.d.ts	
messagechannel	
receiver.d.ts	
receiver.test.d.ts	
sender.test.d.ts	
assertions	
browser.test.d.ts	
indexed_db.d.ts	
indexed_db.test.d.ts	
session_storage.d.ts	
session_storage.test.d.ts	
popup_redirect.d.ts	
phone.test.d.ts	
recaptcha.d.ts	
recaptcha_loader.test.d.ts	
recaptcha_mock.test.u.ts	
recaptcha_verifier.test.d.ts	
strategies	
phone.test.d.ts	
popup.d.ts	
popup.test.d.ts	
redirect.d.ts	
redirect.test.d.ts	
L util	
popup.test.d.ts	
worker.d.ts	
platform_cordova	
plugins.d.ts	

```
- events.d.ts
         - events.test.d.ts
        — popup_redirect.d.ts
        — popup_redirect.test.d.ts
        - utils.d.ts
       └ utils.test.d.ts

    strategies

       └ redirect.d.ts

    platform node

    └ index.d.ts
   - platform_react_native
    ∟ persistence
        react_native.d.ts

    □ react_native.test.d.ts

- test
 ⊢ helpers
    ├ api
      └ helper.d.ts
     — delay.d.ts
     — erroring_unavailable_persistence.d.ts
    fake_service_worker.d.ts
     id_token_response.d.ts

─ iframe_event.d.ts

─ integration

       — emulator_rest_helpers.d.ts
         - helpers.d.ts
       └ settings.d.ts
    ─ jwt.d.ts
     - mock_auth.d.ts
     mock_auth_credential.d.ts
    mock fetch.d.ts
    mock_fetch.test.d.ts
    mock_popup_redirect_resolver.d.ts
      redirect_persistence.d.ts
    └ timeout_stub.d.ts
  integration
     flows
        anonymous.test.d.ts
        custom.local.test.d.ts
        — email.test.d.ts
        — idp.local.test.d.ts
        middleware_test_generator.d.ts
        oob.local.test.d.ts

    □ phone.test.d.ts

     webdriver

─ anonymous.test.d.ts
        - compat
          └ firebaseui.test.d.ts
         persistence.test.d.ts
        - popup.test.d.ts
         - redirect.test.d.ts
         - util

— auth_driver.d.ts

           – functions.d.ts
```

```
- idp_page.d.ts
               - js_load_condition.d.ts
               - test_runner.d.ts
               - test_server.d.ts
              └ ui page.d.ts
node-esm
  — index−e01c0b19.js
   - index-e01c0b19.js.map
   - index.cordova.d.ts
   - index.d.ts
   - index.doc.d.ts
   - index.js
  – index.js.map
   - index.node.d.ts
   - index.rn.d.ts
   index.shared.d.ts
  — index.webworker.d.ts
   - internal
    └ index.d.ts
  internal.js
  — internal.js.map
   – package.json
   - scripts
    └─ run_node_tests.d.ts
   - src
      – api

    □ account_management

─ account.d.ts

            account.test.d.ts
            — email_and_password.d.ts
           — email and password.test.d.ts
           — mfa.d.ts
            mfa.test.d.ts
            - profile.d.ts
           └ profile.test.d.ts

    authentication

           — create_auth_uri.d.ts
           — create_auth_uri.test.d.ts
           — custom_token.d.ts
           — custom_token.test.d.ts
           email_and_password.d.ts
           — email_and_password.test.d.ts
           — email_link.d.ts
            — email_link.test.d.ts
            idp.d.ts
            idp.test.d.ts
            — mfa.d.ts
            mfa.test.d.ts
            recaptcha.d.ts
           recaptcha.test.d.ts
            - sign_up.d.ts
            - sign_up.test.d.ts
            - sms.d.ts
            - sms.test.d.ts
```

— token.d.ts
└─ token.test.d.ts
- errors.d.ts
index.d.ts
<pre>index.test.d.ts</pre>
└ project_config
<pre>— get_project_config.d.ts</pre>
get_project_config.test.d.ts
- core
— action_code_url.d.ts
— action_code_url.test.d.ts
— auth
- auth_event_manager.test.d.ts
auth_impl.d.ts
- auth_impl.test.d.ts
— emulator.d.ts
— emulator.test.d.ts
— firebase_internal.d.ts
!! -
├─ firebase_internal.test.d.ts
initialize.d.ts
— initialize.test.d.ts
— middleware.d.ts
— middleware.test.d.ts
└─ register.d.ts
— credentials
— auth_credential.d.ts
— email.d.ts
— email.test.d.ts
index.d.ts
— oauth.d.ts
— oauth.test.d.ts
— phone.d.ts
<pre>phone.test.d.ts</pre>
— saml.d.ts
└─ saml.test.d.ts
- errors.d.ts
- errors.test.d.ts
index.d.ts
— persistence
in_memory.d.ts
in_memory.test.d.ts
— index.d.ts
<pre>persistence_user_manager.d.ts</pre>
persistence_user_manager.test.d.ts
— providers
— email.d.ts
— email.test.d.ts
— facebook.d.ts
— facebook.test.d.ts
— federated.d.ts
— federated.test.d.ts
— github.d.ts
├ github.test.d.ts
00 / 017

— google.d.ts
— google.test.d.ts
— oauth.d.ts
— oauth.test.d.ts
├─ saml.d.ts
— saml.test.d.ts
— twitter.d.ts
L twitter.test.d.ts
— strategies
<pre>— abstract_popup_redirect_operation.d.ts</pre>
<pre> abstract_popup_redirect_operation.test.d.ts</pre>
— action_code_settings.d.ts
— action_code_settings.test.d.ts
— anonymous.d.ts
— anonymous.test.d.ts
— credential.d.ts
— credential.test.d.ts
- custom_token.d.ts
custom_token.test.d.ts
— email.d.ts
— email.test.d.ts
— email_and_password.d.ts
— email_and_password.test.d.ts
- email_link.d.ts
- email_link.test.d.ts
!!! —
idp.d.ts
<pre>— idp.test.d.ts — redirect.d.ts</pre>
redirect.test.d.ts
— user
— account_info.d.ts
<pre>— account_info.test.d.ts — additional_user_info.d.ts</pre>
!!
— additional_user_info.test.d.ts
id_token_result.d.ts
— id_token_result.test.d.ts
— invalidation.d.ts
invalidation.test.d.ts
- link_unlink.d.ts
link_unlink.test.d.ts
— proactive_refresh.d.ts
<pre>proactive_refresh.test.d.ts</pre>
— reauthenticate.d.ts
— reauthenticate.test.d.ts
— reload.d.ts
— reload.test.d.ts
— token_manager.d.ts
— token_manager.test.d.ts
— user_credential_impl.d.ts
— user_credential_impl.test.d.ts
— user_impl.d.ts
— user_impl.test.d.ts
user_metadata.d.ts
└ util
100 / 917

	test.d.ts
	.test.d.ts
	.ts
	est.d.ts
	r.d.ts
emulato	r.test.d.ts
event i	d.d.ts
event i	d.test.d.ts
	rovider.d.ts
handler	
	iator.d.ts
	iator.test.d.ts
l l l l l l l locatio	
l l l l l l l log.d.t	
	e_origin.d.ts
	e_origin.test.d.ts
	.test.d.ts
index.d.ts	
index.d.ts	
mfa_info.t	
mfa_resolv	
	er.test.d.ts
│	
	n.test.d.ts
	.ts
	est.d.ts
	n_verifier.d.ts
	d.ts
enums.d.ts	
id_token.d	ts
popup_redi	
user.d.ts	
platform_brow	ser
auth.test.	
auth_windo	
	ts
	rames.d.ts
gapi.it	
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	101 / 917

☐ iframe.test.d.ts
- index.d.ts
— load_js.d.ts
<pre>— load_js.test.d.ts</pre>
— messagechannel
index.d.ts
├─ promise.d.ts
├─ promise.test.d.ts
├─ receiver.d.ts
├─ receiver.test.d.ts
├─ sender.d.ts
└─ sender.test.d.ts
— mfa
└─ assertions
— phone.d.ts
_ phone.test.d.ts
— persistence
⊢ browser.d.ts
browser.test.d.ts
indexed_db.d.ts
indexed_db.test.d.ts
local_storage.d.ts
local_storage.test.d.ts
= session_storage.d.ts
session_storage.test.d.ts
— popup_redirect.d.ts
— popup_redirect.test.d.ts
providers
hovers
phone.test.d.ts
·
— recaptcha
⊢ recaptcha.d.ts
- recaptcha_loader.d.ts
recaptcha_loader.test.d.ts
recaptcha_mock.d.ts
recaptcha_mock.test.d.ts
├─ recaptcha_verifier.d.ts
└─ recaptcha_verifier.test.d.ts
— strategies
├─ phone.d.ts
— phone.test.d.ts
popup.d.ts
popup.test.d.ts
├─ redirect.d.ts
redirect.test.d.ts
└ util
├ popup.d.ts
— popup.test.d.ts
└ worker.d.ts
- platform_cordova
⊢ plugins.d.ts
— popup_redirect
events.d.ts
- events.test.d.ts
102 / 917

```
- popup_redirect.d.ts
         - popup_redirect.test.d.ts
         - utils.d.ts
       └ utils.test.d.ts
     strategies
       └ redirect.d.ts

    platform node

    └ index.d.ts
  - platform_react_native
    ∟ persistence
         - react_native.d.ts
       └─ react native.test.d.ts
test
  helpers
     — api
      └ helper.d.ts
     — delay.d.ts
     — erroring_unavailable_persistence.d.ts
     — fake service worker.d.ts
     — id_token_response.d.ts
     iframe_event.d.ts
     integration
       — emulator_rest_helpers.d.ts
       helpers.d.ts
       └ settings.d.ts
     — jwt.d.ts
     mock_auth.d.ts
     mock auth credential.d.ts
     mock_fetch.d.ts
     — mock_fetch.test.d.ts
     mock popup redirect resolver.d.ts
      redirect_persistence.d.ts
    └ timeout_stub.d.ts
 └ integration

─ flows

        anonymous.test.d.ts
        custom.local.test.d.ts
        — email.test.d.ts
        — idp.local.test.d.ts
        — middleware_test_generator.d.ts
        - oob.local.test.d.ts
       └ phone.test.d.ts
     – webdriver
        anonymous.test.d.ts
        compat
         └ firebaseui.test.d.ts
         persistence.test.d.ts
        - popup.test.d.ts
         redirect.test.d.ts
       └ util
          — auth_driver.d.ts
           functions.d.ts
           - idp_page.d.ts
           - js_load_condition.d.ts
```

```
- test_runner.d.ts
               - test server.d.ts
              └ ui_page.d.ts
- rn
  — index.cordova.d.ts
   - index.d.ts
   - index.doc.d.ts
   - index.js
   - index.js.map
  - index.node.d.ts
   - index.rn.d.ts
   index.shared.d.ts
   index.webworker.d.ts
   - internal
    └ index.d.ts
   internal.js
  — internal.js.map
   – phone-b1fa2d6c.js
  – phone-b1fa2d6c.js.map
   scripts
    └─ run_node_tests.d.ts
   - src
     — api

    □ account_management

    □ account.d.ts

            account.test.d.ts
            — email_and_password.d.ts
           — email_and_password.test.d.ts
            — mfa.d.ts
            — mfa.test.d.ts
            - profile.d.ts
           └ profile.test.d.ts

    authentication

    □ create_auth_uri.d.ts

           create_auth_uri.test.d.ts
           ─ custom_token.d.ts
           — custom_token.test.d.ts
           — email_and_password.d.ts
           — email_and_password.test.d.ts
           — email_link.d.ts
           — email_link.test.d.ts
           — idp.d.ts
           — idp.test.d.ts
            — mfa.d.ts
            - mfa.test.d.ts
            - recaptcha.d.ts
            recaptcha.test.d.ts
            - sign_up.d.ts
            — sign_up.test.d.ts
           — sms.d.ts
            - sms.test.d.ts
             - token.d.ts

    token.test.d.ts

          errors.d.ts
```

l dendary of the
index.d.ts
— index.test.d.ts
└─ project_config
├─ get_project_config.d.ts
└─ get_project_config.test.d.ts
— core
— action_code_url.d.ts
— action_code_url.test.d.ts
│
│
│
│
auth_impl.test.d.ts
emulator.d.ts
│
firebase_internal.d.ts
firebase_internal.test.d.ts
│
│
│
│
│
— credentials
│
│
— email.test.d.ts
index.d.ts
— oauth.d.ts
— oauth.test.d.ts
phone.d.ts
phone.test.d.ts
— saml.d.ts
│
- errors.d.ts
- errors.test.d.ts
index.d.ts
— in_memory.d.ts
in_memory.test.d.ts
index.d.ts
│
persistence_user_manager.test.d.ts
├─ providers
│
facebook.d.ts
facebook.test.d.ts
— federated.d.ts
federated.test.d.ts
github.test.d.ts
— google.d.ts
│
105 / 017

— oauth.test.d.ts
— saml.d.ts
— saml.test.d.ts
— twitter.d.ts
└─ twitter.test.d.ts
— strategies
<pre>abstract_popup_redirect_operation.d.ts</pre>
<pre>— abstract_popup_redirect_operation.test.d.ts</pre>
<pre>— action_code_settings.d.ts</pre>
<pre>— action_code_settings.test.d.ts</pre>
— anonymous.d.ts
<pre>— anonymous.test.d.ts</pre>
— credential.d.ts
— credential.test.d.ts
— custom_token.d.ts
<pre>— custom_token.test.d.ts</pre>
— email.d.ts
— email.test.d.ts
— email_and_password.d.ts
— email_and_password.test.d.ts
— email_link.d.ts
— email_link.test.d.ts
idp.d.ts
idp.test.d.ts
redirect.d.ts
redirect.test.d.ts
user
- user - account_info.d.ts
!!!
<pre>— account_info.test.d.ts — additional_user_info.d.ts</pre>
!!!
- additional_user_info.test.d.ts
<pre>— id_token_result.d.ts — id_token_result.test.d.ts</pre>
invalidation.d.ts
invalidation.test.d.ts
- link_unlink.d.ts
link_unlink.test.d.ts
— proactive_refresh.d.ts
<pre>proactive_refresh.test.d.ts</pre>
— reauthenticate.d.ts
— reauthenticate.test.d.ts
— reload.d.ts
— reload.test.d.ts
— token_manager.d.ts
— token_manager.test.d.ts
user_credential_impl.d.ts
<pre>user_credential_impl.test.d.ts</pre>
user_impl.d.ts
<pre>— user_impl.test.d.ts</pre>
user_metadata.d.ts
L util
— assert.d.ts
<pre>— assert.test.d.ts</pre>
— browser.d.ts
106 / 017

browser.test.d.ts	
mfa_assertion.d.ts	
application_verifier.d.ts	
public_types.d.ts	
auth.test.d.ts	
auth_window.d.ts	
gapi.iframes.d.ts	
index.d.ts	
107 / 017	

	│
	— messagechannel
	index.d.ts
	— promise.d.ts
	promise.test.d.ts
	receiver.d.ts
	receiver.test.d.ts
	— receiver test.d.ts
	— sender.d.ts
	├─ mfa
	│
	phone.d.ts
	☐ ☐ phone.test.d.ts
	— persistence
	browser.d.ts
	│
	indexed_db.d.ts
	indexed_db.test.d.ts
	local_storage.d.ts
	<pre>— local_storage.test.d.ts</pre>
	- session_storage.d.ts
	session_storage.test.d.ts
	<pre>popup_redirect.d.ts</pre>
	popup_redirect.test.d.ts
	providers
	phone.d.ts
	hone.test.d.ts
	recaptcha
	recaptcha.d.ts
	recaptchaluits recaptchaloader.d.ts
	! ! !
	recaptcha_loader.test.d.ts
	recaptcha_mock.d.ts
	recaptcha_mock.test.d.ts
	recaptcha_verifier.d.ts
	☐ ☐ recaptcha_verifier.test.d.ts
	— strategies
	— phone.d.ts
	phone.test.d.ts
	popup.d.ts
	popup.test.d.ts
	redirect.d.ts
	└ redirect.test.d.ts
	L util
	— popup.d.ts
	— popup.test.d.ts
	worker.d.ts
	— platform_cordova
	popup_redirect
	events.d.ts events.test.d.ts
	popup_redirect.d.ts
	popup_redirect.test.d.ts
	— utils.d.ts
108 / 017	

```
└ utils.test.d.ts
       strategies
       └ redirect.d.ts
   - platform node
    └ index.d.ts

    platform react native

    └ persistence
        — react native.d.ts
       └ react_native.test.d.ts
test
  helpers
     ⊢ api
      └ helper.d.ts
     ─ delay.d.ts
     erroring_unavailable_persistence.d.ts
     fake_service_worker.d.ts

    id_token_response.d.ts

     — iframe_event.d.ts
     integration
       — emulator_rest_helpers.d.ts
        — helpers.d.ts
       └ settings.d.ts

─ jwt.d.ts

     — mock_auth.d.ts
     mock_auth_credential.d.ts
     — mock_fetch.d.ts
     mock_fetch.test.d.ts
     — mock_popup_redirect_resolver.d.ts
      redirect_persistence.d.ts
    └ timeout_stub.d.ts
 └ integration

─ flows

        anonymous.test.d.ts
        custom.local.test.d.ts
         - email.test.d.ts
        idp.local.test.d.ts
        — middleware_test_generator.d.ts
         oob.local.test.d.ts

    □ phone.test.d.ts

      – webdriver
        anonymous.test.d.ts
        — compat
          └ firebaseui.test.d.ts
         - persistence.test.d.ts
        - popup.test.d.ts
         redirect.test.d.ts
       └ util
           – auth_driver.d.ts
           – functions.d.ts
           - idp_page.d.ts
            - js_load_condition.d.ts
            - test_runner.d.ts
            - test_server.d.ts
           └ ui_page.d.ts
```

```
scripts
 └─ run node tests.d.ts
- src
 — api
    account management
       — account.d.ts
        account.test.d.ts
       email and password.d.ts
        email_and_password.test.d.ts
       — mfa.d.ts
        - mfa.test.d.ts
        - profile.d.ts
       └ profile.test.d.ts

    authentication

       — create auth uri.d.ts
       — create_auth_uri.test.d.ts
       ─ custom_token.d.ts
       custom token.test.d.ts
       email and password.d.ts
       — email_and_password.test.d.ts
       ─ email_link.d.ts
        email_link.test.d.ts
       — idp.d.ts
       — idp.test.d.ts
       — mfa.d.ts
        - mfa.test.d.ts
       recaptcha.d.ts
       — recaptcha.test.d.ts
        - sign_up.d.ts
       — sign_up.test.d.ts
       — sms.d.ts
        - sms.test.d.ts
        - token.d.ts
       └ token.test.d.ts
     - errors.d.ts
     - index.d.ts
     - index.test.d.ts
    └ project_config
       — get_project_config.d.ts
       - core
     — action_code_url.d.ts
     — action_code_url.test.d.ts
     - auth
       — auth_event_manager.d.ts
        auth_event_manager.test.d.ts
       — auth_impl.d.ts
        auth_impl.test.d.ts
       — emulator.d.ts
        emulator.test.d.ts
        - firebase_internal.d.ts
        firebase_internal.test.d.ts
        initialize.d.ts
        initialize.test.d.ts
```

— middleware.d.ts
— middleware.test.d.ts
└─ register.d.ts
— credentials
— auth_credential.d.ts
— email.d.ts
— email.test.d.ts
index.d.ts
— oauth.d.ts
— oauth.test.d.ts
phone.d.ts
phone.test.d.ts
— errors.d.ts
<pre> errors.test.d.ts index.d.ts </pre>
persistence
<pre>persistence in_memory.d.ts</pre>
in_memory.test.d.ts
— index.d.ts
persistence_user_manager.test.d.ts
providers
— email.d.ts
— email.test.d.ts
— facebook.d.ts
— facebook.test.d.ts
├─ federated.d.ts
— federated.test.d.ts
— github.d.ts
— github.test.d.ts
│ ├─ google.d.ts
google.test.d.ts
— oauth.d.ts
— oauth.test.d.ts
— saml.d.ts
- saml.test.d.ts
— twitter.d.ts
twitter.test.d.ts
— strategies
- abstract_popup_redirect_operation.d.ts
- abstract_popup_redirect_operation.test.d.ts
- action_code_settings.d.ts
- action_code_settings.test.d.ts
<pre>— anonymous.d.ts — anonymous.test.d.ts</pre>
— anonymous.test.d.ts — credential.d.ts
credential.test.d.ts
credentiatitestidits
custom_token.test.d.ts
— email.d.ts
— email.test.d.ts
- email_and_password.d.ts
111 / 017

- email_link.dts - email_link.test.d.ts - idp.d.ts - idp.test.d.ts - redirect.d.ts - redirect.d.ts - redirect.test.d.ts - redirect.d.ts - redirect.d.ts - redirect.d.ts - redirect.d.ts - redirect.d.ts - account_info.test.d.ts - additional_user_info.test.d.ts - id_token_result.d.ts - id_token_result.d.ts - invalidation.d.ts - invalidation.test.d.ts - link_unlink.test.d.ts - link_unlink.test.d.ts - proactive_refresh.d.ts - reauthenticate.d.ts - reauthenticate.d.ts - reauthenticate.test.d.ts - reload.d.ts - reload.d.ts - token_manager.d.ts - user_impl.test.d.ts - instantialor.ts - log.d.ts - navigator.d.ts - resolver.d.ts - validate_origin.test.d.ts

─ version.d.ts
└ version.test.d.ts
index.d.ts
⊢ mfa
— mfa_assertion.d.ts
mfa_error.d.ts
mfa_info.d.ts
mfa_info.test.d.ts
mfa_resolver.d.ts
- mfa_resolver.test.d.ts
mfa_session.d.ts
- mfa_session.test.d.ts
mfa_user.d.ts
_ mfa_user.test.d.ts
— model
<pre>— application_verifier.d.ts</pre>
— enum_maps.d.ts
enums.d.ts
id_token.d.ts
— popup_redirect.d.ts
<pre>public_types.d.ts</pre>
∟ user.d.ts
⊢ platform_browser
— auth.test.d.ts
│ ├─ auth_window.d.ts
iframe
│
│
— gapi.test.d.ts
iframe.d.ts
│
— index.d.ts
— load_js.d.ts
— load_js.test.d.ts
— messagechannel
index.d.ts
promise.d.ts
promise.test.d.ts
receiver.d.ts
receiver.test.d.ts
— sender.d.ts
│
mfa
☐ ☐ assertions
— phone.d.ts
phone.test.d.ts
— persistence
- browser.d.ts
- browser.test.d.ts
indexed_db.d.ts
indexed_db.test.d.ts
- local_storage.d.ts

```
- local_storage.test.d.ts
        session storage.d.ts
       - popup_redirect.d.ts
     popup redirect.test.d.ts
     - providers
        - phone.d.ts
       └ phone.test.d.ts

    recaptcha

─ recaptcha.d.ts

        recaptcha_loader.d.ts
       recaptcha_loader.test.d.ts
       recaptcha_mock.d.ts
       recaptcha_mock.test.d.ts
         recaptcha verifier.d.ts
       └ recaptcha_verifier.test.d.ts
     strategies
       phone.d.ts
        - phone.test.d.ts
        - popup.d.ts
        - popup.test.d.ts
         redirect.d.ts
       └─ redirect.test.d.ts
     - util
       popup.d.ts
        - popup.test.d.ts
       └ worker.d.ts
  platform cordova
     - plugins.d.ts
     - popup_redirect
       — events.d.ts
        - events.test.d.ts
        - popup_redirect.d.ts
        — popup_redirect.test.d.ts
        utils.d.ts
       └ utils.test.d.ts
     strategies
       └ redirect.d.ts
  - platform_node
    └ index.d.ts
  – platform_react_native
    ∟ persistence
       react_native.d.ts
       └─ react_native.test.d.ts
- test
 helpers
    — api
       └ helper.d.ts
     - delay.d.ts
     - erroring_unavailable_persistence.d.ts
      - fake_service_worker.d.ts
     id_token_response.d.ts
     - iframe_event.d.ts
     integration
```



```
phone_auth_provider.d.ts
      - platform.d.ts
      - popup_redirect.d.ts
     - popup_redirect.test.d.ts
     recaptcha verifier.d.ts
     - user.d.ts
      user_credential.d.ts
    └ wrap.d.ts
  test
    ⊢ helpers
       └ helpers.d.ts
    └ integration
       └ flows
           — anonymous.test.d.ts
            - custom.test.d.ts
           — email.test.d.ts
           — idp.test.d.ts
            - oob.test.d.ts
          └ phone.test.d.ts
- esm
  — auth-compat
     - index.d.ts
     - index.node.d.ts
      scripts
       └─ run_node_tests.d.ts
      - src
        ─ auth.d.ts
        auth.test.d.ts
        - persistence.d.ts
        phone_auth_provider.d.ts
        — platform.d.ts
        - popup_redirect.d.ts
        popup_redirect.test.d.ts
        - recaptcha_verifier.d.ts
        - user.d.ts
         - user_credential.d.ts
        └ wrap.d.ts
     test
        helpers
          └ helpers.d.ts
        └ integration
          └ flows
              — anonymous.test.d.ts
               - custom.test.d.ts
               - email.test.d.ts
               - idp.test.d.ts
               - oob.test.d.ts
              - phone.test.d.ts
  - index.node.esm.js
  index.node.esm.js.map
   - package.json
- firebase—auth.js
- firebase—auth.js.map
- index.cjs.js
```

```
- index.cjs.js.map
      - index.esm.js
      - index.esm.js.map
     — index.esm2017.js
     — index.esm2017.js.map
      - index.node.cjs.js
     └ index.node.cjs.js.map
 └ package.ison
auth-interop-types

    ⊢ CHANGELOG.md

  README.md
   index.d.ts
 └ package.json
auth-types

⊢ CHANGELOG.md


  README.md
  - index.d.ts
 └ package.json
component
  ─ CHANGELOG.md
  — README.md
   - dist
     — esm
        — index.d.ts
         - index.esm2017.js
         - index.esm2017.js.map
         - index.esm5.js
         - index.esm5.js.map
         – package.json
         - src

    ─ component.d.ts


           — component_container.d.ts
            - component_container.test.d.ts
            - constants.d.ts
            – provider.d.ts
            provider.test.d.ts
           └ types.d.ts
         - test

─ setup.d.ts

           └ util.d.ts
     – index.cjs.js
     — index.cjs.js.map
     — index.d.ts
      - src
        component.d.ts
        — component_container.d.ts
         component_container.test.d.ts
         constants.d.ts
         - provider.d.ts
         - provider.test.d.ts
         - types.d.ts
      test
        setup.d.ts
        └ util.d.ts
```

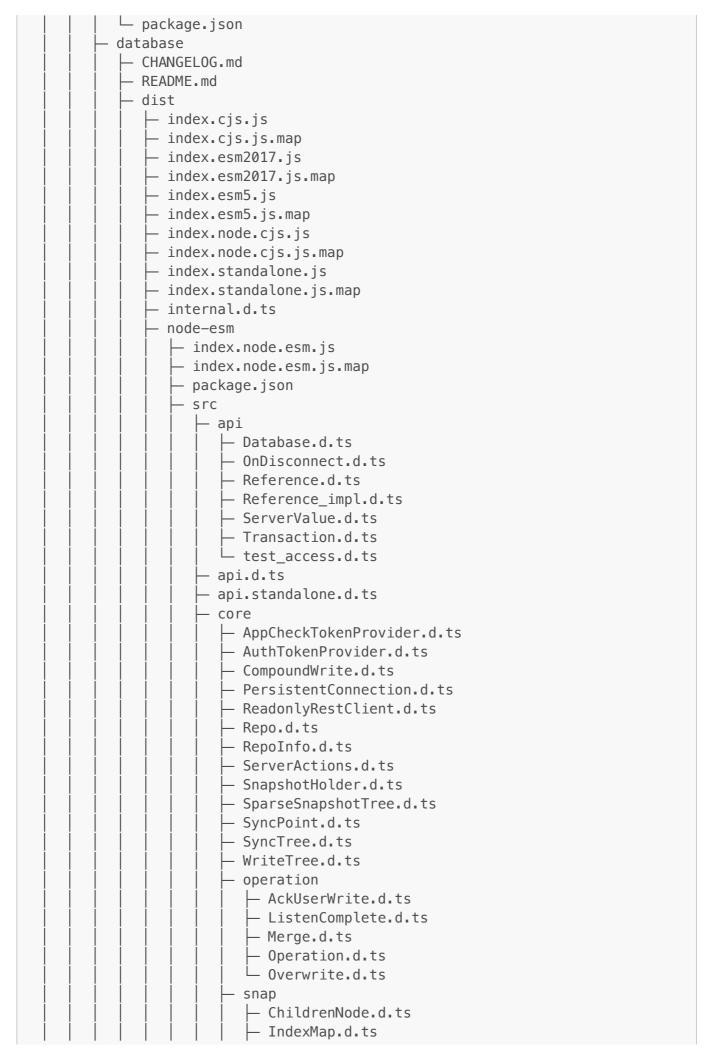

LeafNode.d.ts - Node.d.ts - childSet.d.ts - comparators.d.ts - indexes - Index.d.ts - PathIndex.d.ts - PathIndex.d.ts - PriorityIndex.d.ts - NodeFromJSON.d.ts - snap.d.ts - stats - StatsCollection.d.ts - StatsListener.d.ts - StatsManager.d.ts - StatsManager.d.ts - storage - DOMStorageWrapper.d.ts - MemoryStorage.d.ts - storage - InmutableTree.d.ts - InmutableTree.d.ts - NextPushId.d.ts - ServerValues.d.ts - SortedMap.d.ts - SortedMap.d.ts - Tree.d.ts - VisibilityMonitor.d.ts - libs - L parser.d.ts - wild.ts - validation.d.ts - version.d.ts - version.d.ts - version.d.ts - CompleteChildSource.d.ts - EventGenerator.d.ts - EventGenerator.d.ts - EventGenerator.d.ts - EventQueue.d.ts - EventQueue.d.ts - CueryParams.d.ts - View.d.ts
<pre>— EventRegistration.d.ts</pre>
— View.d.ts
<pre> ViewCache.d.ts ViewProcessor.d.ts </pre>
└─ filter ├─ IndexedFilter.d.ts
<pre>— IndexedFilter.d.ts — LimitedFilter.d.ts</pre>
— NodeFilter.d.ts
110 / 017

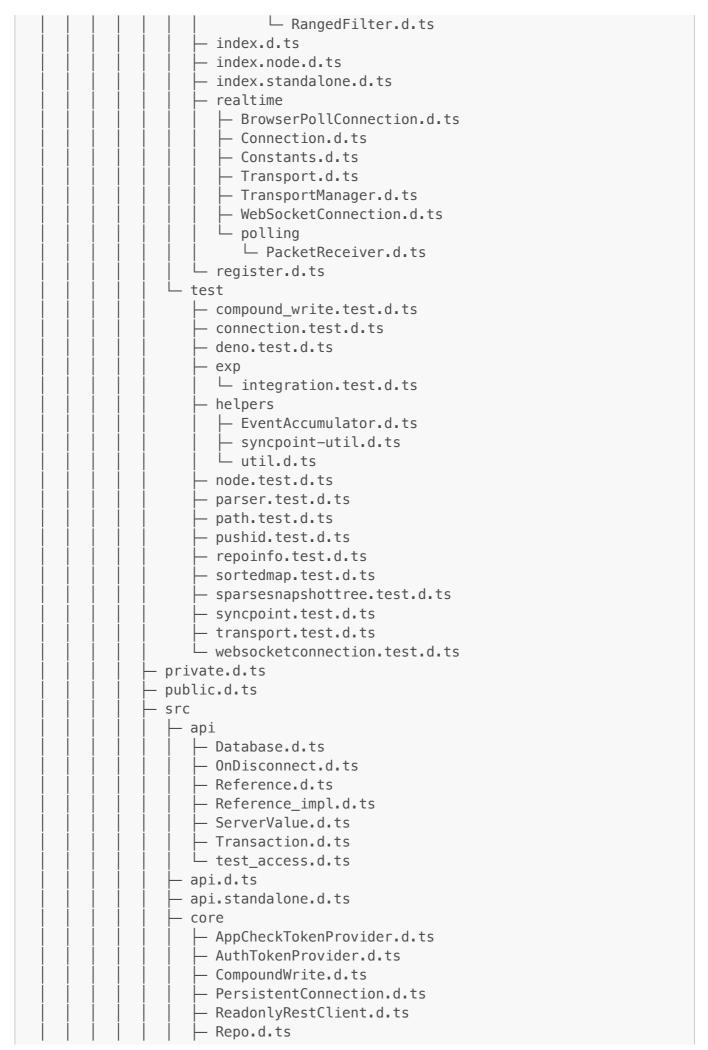

RepoInfo.d.ts	
│	
│	
☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ SparseSnapshotTree.d.ts	
SyncPoint.d.ts	
SyncTree.d.ts	
│	
— operation	
AckUserWrite.d.ts	
ListenComplete.d.ts	
Operation.d.ts	
Coverwrite.d.ts	
ChildrenNode.d.ts	
IndexMap.d.ts	
LeafNode.d.ts	
childSet.d.ts	
comparators.d.ts	
KeyIndex.d.ts PathIndex.d.ts	
PriorityIndex.d.ts	6
	5
watdefindex.d.ts	
StatsGotteetIonIdits StatsListener.d.ts	
StatsManager.d.ts	
StatsMagerialts StatsReporter.d.ts	
storage	
DOMStorageWrapper.d.	ts
storage.d.ts	
util	
NextPushId.d.ts	
OnlineMonitor.d.ts	
Path.d.ts	
ServerValues.d.ts	
SortedMap.d.ts	
Tree.d.ts	
│	ts
misc.d.ts	
│	
version.d.ts	
121 / 017	

```
CacheNode.d.ts
             Change.d.ts
             ChildChangeAccumulator.d.ts
             CompleteChildSource.d.ts
             Event.d.ts
             EventGenerator.d.ts
             - EventQueue.d.ts
             EventRegistration.d.ts
             QueryParams.d.ts
             - View.d.ts
              ViewCache.d.ts
              ViewProcessor.d.ts
             - filter
                ─ IndexedFilter.d.ts
                 LimitedFilter.d.ts
                – NodeFilter.d.ts

    □ RangedFilter.d.ts

       - index.d.ts
       - index.node.d.ts
        index.standalone.d.ts
        - realtime

    □ BrowserPollConnection.d.ts


          Connection.d.ts
           Constants.d.ts
           Transport.d.ts
           TransportManager.d.ts
           WebSocketConnection.d.ts
          pollina


    □ PacketReceiver.d.ts

        - register.d.ts
      └ tsdoc-metadata.json
   ∟ test
       — compound_write.test.d.ts
       - connection.test.d.ts
        deno.test.d.ts
        - exp

    integration.test.d.ts

       helpers
         ─ EventAccumulator.d.ts
           syncpoint-util.d.ts
         └ util.d.ts
       - node.test.d.ts
       – parser.test.d.ts
        path.test.d.ts
       - pushid.test.d.ts
       - repoinfo.test.d.ts
       - sortedmap.test.d.ts
       sparsesnapshottree.test.d.ts
       - syncpoint.test.d.ts
       - transport.test.d.ts
        websocketconnection.test.d.ts
  - package.json
database-compat
 CHANGELOG.md
```

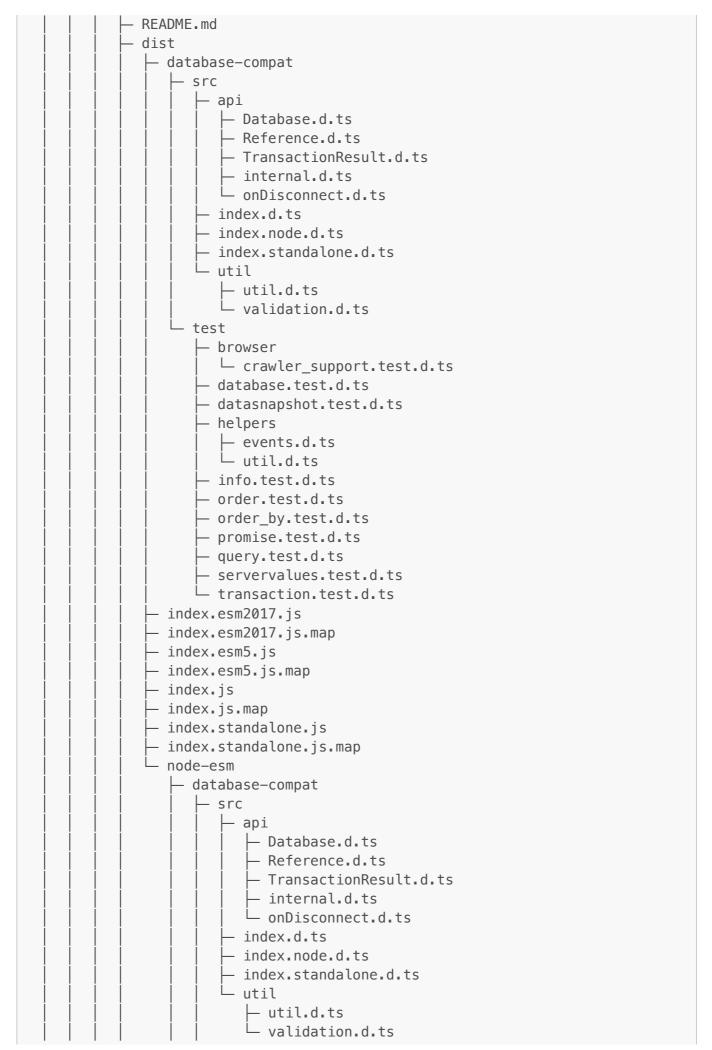

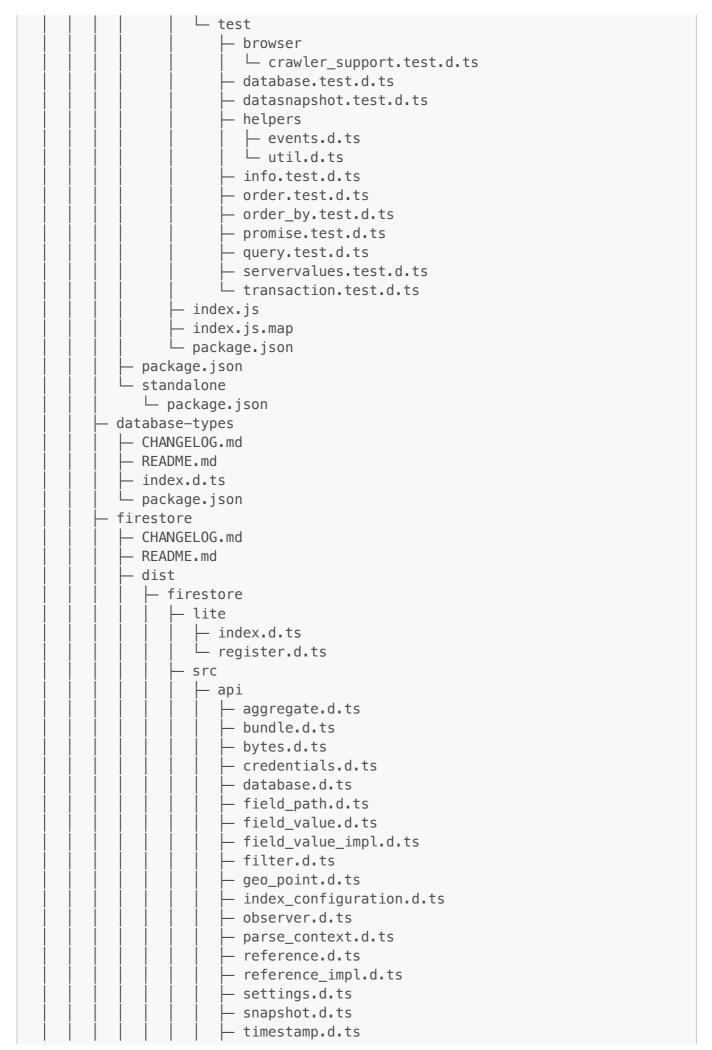

<pre>transaction_options.d.ts</pre>
write_batch.d.ts
api.d.ts
│ ├─ auth
user.d.ts
— core
│
— bound.d.ts
bundle.d.ts
!!!
bundle_impl.d.ts
component_provider.d.ts
│
─ event_manager.d.ts
│
— firestore_client.d.ts
l listen_sequence.d.ts
!!!
query.d.ts
— snapshot_version.d.ts
│
│
target.d.ts
target_id_generator.d.ts
transaction.d.ts
!!!
│
├ ├ transaction_runner.d.ts
│
│
view_snapshot.d.ts
index
!!
├── directional_index_byte_encoder.d.ts
│
<pre></pre>
index_entry.d.ts
ordered_code_writer.d.ts
index.d.ts
— index.u.ts — index.node.d.ts
index.rn.d.ts
│
│
— aggregate_types.d.ts
bytes.d.ts
components.d.ts
!!!!
│
— field_path.d.ts
│
— field_value_impl.d.ts
geo_point.d.ts
— query.d.ts
— query.u.cs — reference.d.ts
!!!
reference_impl.d.ts
│
125 / 017

— snapshot.d.ts
— timestamp.d.ts
├─ transaction.d.ts
│ ├─ transaction_options.d.ts
types.d.ts
user_data_reader.d.ts
<pre>user_data_writer.d.ts</pre>
write_batch.d.ts
Local
bundle_cache.d.ts
document_overlay_cache.d.ts
encoded_resource_path.d.ts
index_backfiller.d.ts
index_manager.d.ts
indexeddb_bundle_cache.d.ts
indexeddb_bdndte_cache.d.ts indexeddb_document_overlay_cache.d.ts
— indexeddb_document_overtay_cache.d.ts
!!
indexeddb_lru_delegate.d.ts
indexeddb_lru_delegate_impl.d.ts
indexeddb_mutation_batch_impl.d.ts
indexeddb_mutation_queue.d.ts
indexeddb_persistence.d.ts
indexeddb_remote_document_cache.d.ts
indexeddb_schema.d.ts
indexeddb_schema_converter.d.ts
<pre>indexeddb_schema_legacy.d.ts</pre>
<pre>indexeddb_sentinels.d.ts</pre>
<pre>indexeddb_target_cache.d.ts</pre>
<pre>indexeddb_transaction.d.ts</pre>
├─ local_documents_view.d.ts
│
│
│
│
├─ lru_garbage_collector.d.ts
│
<pre>memory_bundle_cache.d.ts</pre>
— memory_document_overlay_cache.d.ts
— memory_index_manager.d.ts
<pre>memory_mutation_queue.d.ts</pre>
— memory_persistence.d.ts
<pre>memory_remote_document_cache.d.ts</pre>
<pre>memory_target_cache.d.ts</pre>
— mutation_queue.d.ts
- overlayed_document.d.ts
persistence_promise.d.ts
persistence_transaction.d.ts
— query_engine.d.ts
reference_set.d.ts
remote_document_cache.d.ts
remote_document_change_buffer.d.ts
- shared_client_state.d.ts
shared_client_state_schema.d.ts
5.14. 54_5 22.15_5 24.56_5 5116.114 1.65

- shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - collections.d.ts - document.d.ts - document_comparator.d.ts - document_set.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - target_index_matcher.d.ts	
_ ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '	
field_index.d.ts	
target_index_matcher.d.ts	
transform_operation.d.ts	
type_order.d.ts	
L values.d.ts	
base64.d.ts	
byte_stream_reader.d.ts	
connection.d.ts	
connectivity_monitor.d.ts	
format_json.d.ts	
│	
text_serializer.d.ts	
browser_lite	
byte_stream_reader.d.ts	
connection.d.ts	
random_bytes.d.ts	
text_serializer.d.ts	
byte_stream_reader.d.ts	
connection.d.ts	
baseo4.u.ts	
127 / 917	

connection.d.ts	
dom.d.ts format_json.d.ts grpc_connection.d.ts load_protos.d.ts random_bytes.d.ts serializer.d.ts text_serializer.d.ts byte_stream_reader.d.ts format_json.d.ts format_json.d.ts random_bytes.d.ts serializer.d.ts load_d.ts format_json.d.ts format_json.d.ts format_json.d.ts format_json.d.ts load_d.ts load_	
remote_store.d.ts	
138 / 017	

```
remote_syncer.d.ts
       rest connection.d.ts
       - rpc_error.d.ts
      serializer.d.ts
       - stream bridge.d.ts
     - tsdoc−metadata.json
    - util
      ─ array.d.ts
      – assert.d.ts
      - async_observer.d.ts
      — async_queue.d.ts
      async_queue_impl.d.ts
      base64_decode_error.d.ts
      bundle reader.d.ts
      — bundle_reader_impl.d.ts
      — byte_stream.d.ts
      — byte string.d.ts
      — error.d.ts
      input validation.d.ts
      log.d.ts
       logic utils.d.ts
      - misc.d.ts
      - node_api.d.ts
      - obj.d.ts
      – obj_map.d.ts
      promise.d.ts
      — sorted map.d.ts
       sorted set.d.ts
     └ types.d.ts
└ test
   integration
      — api
        — aggregation.test.d.ts
         — array_transforms.test.d.ts
         — batch_writes.test.d.ts
         - bundle.test.d.ts
         — cursor.test.d.ts
         — database.test.d.ts
         — fields.test.d.ts
         — get_options.test.d.ts
         — index_configuration.test.d.ts
         humeric_transforms.test.d.ts
         — provider.test.d.ts
         — query.test.d.ts
         — server_timestamp.test.d.ts
         - smoke.test.d.ts
          transactions.test.d.ts
          - type.test.d.ts
        └ validation.test.d.ts
       api_internal
         auth.test.d.ts
         database.test.d.ts
         - idle_timeout.test.d.ts
```

├─ bootstrap.d.ts
├─ browser
<pre> </pre>
│
<pre>prime_backend.test.d.ts</pre>
— remote
L stream.test.d.ts
L util
— events_accumulator.d.ts
— firebase_export.d.ts
— helpers.d.ts
— internal_helpers.d.ts
_ settings.d.ts
⊢ lite
bootstrap.d.ts
helpers.d.ts
integration.test.d.ts
- register.d.ts
— unit
⊢ api
— aggregate.test.d.ts
bytes.test.d.ts
database.test.d.ts
— document_change.test.d.ts
field_path.test.d.ts
Field_value.test.d.ts
geo_point.test.d.ts
_ timestamp.test.d.ts
bootstrap.d.ts
core
— event_manager.test.d.ts
filter.test.d.ts
listen_sequence.test.d.ts
uery.test.d.ts
— view.test.d.ts
index
— local
counting_query_engine.d.ts
— counting_query_engine.u.ts — document_overlay_cache.test.d.ts
- document_overtay_cache.test.d.ts - encoded_resource_path.test.d.ts
— index_backTitter.test.d.ts — index_manager.test.d.ts
— local_seriatizer.test.d.ts
! ! ! —
- local_store_indexeddb.test.d.ts
lru_garbage_collector.test.d.ts
mutation_queue.test.d.ts
persistence_promise.test.d.ts
<pre>persistence_test_helpers.d.ts</pre>

- query_engine.test.d.ts - reference_set.test.d.ts - remote_document_change_buffer.test.d.ts - simple_db.test.d.ts - test_document_overlay_cache.d.ts - test_document_overlay_cache.d.ts - test_document_overlay_cache.d.ts - test_document_overlay_cache.d.ts - test_index_manager.d.ts - test_mutation_queue.d.ts - test_remote_document_cache.d.ts - test_remote_document_change_buffer.d.ts - test_remote_document_change_buffer.d.ts - test_arget_cache.d.ts - web_storage_shared_client_state.test.d.ts - document.test.d.ts - document.test.d.ts - field_index.test.d.ts - ifield_index.test.d.ts - object_value.test.d.ts - object_value.test.d.ts - best_arget_test.d.ts - target_index_matcher.test.d.ts - target_index_matcher.test.d.ts - remote - datastore.test.d.ts - remote - datastore.test.d.ts - serializer.browser.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - serializer.spec.test.d.ts - collection_spec.test.d.ts - collection_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - remote_spec.test.d.ts	<pre>persistence_transaction.test.d.ts</pre>
remote_document_cache.test.d.ts remote_document_change_buffer.test.d.ts simple_db.test.d.ts test_bundle_cache.d.ts test_bundle_cache.d.ts test_document_overlay_cache.d.ts test_manager.d.ts test_manager.d.ts test_mote_document_cache.d.ts test_remote_document_cache.d.ts test_remote_document_cache.d.ts test_remote_document_change_buffer.d.ts test_remote_document_change_buffer.d.ts test_traget_cache.d.ts web_storage_shared_client_state.test.d.ts document_set.d.ts document_set.d.ts field_index.test.d.ts hutation.test.d.ts object_value_builder.test.d.ts path.test.d.ts target_index_matcher.test.d.ts target_index_matcher.test.d.ts target_index_matcher.test.d.ts remote datastore.test.d.ts remote_event.test.d.ts serializer.belper.d.ts serializer.belper.d.ts serializer.belper.d.ts serializer.belper.d.ts serializer.belper.d.ts serializer.pec.test.d.ts describe_spec.d.ts edscribe_spec.d.ts edscribe_spec.d.ts libmo_spec.test.d.ts libmo_spec.test.d.ts liimt_spec.test.d.ts liimt_spec.test.d.ts liimt_spec.test.d.ts perf_spec.test.d.ts persistence_spec.test.d.ts	
- remote_document_cache.test.d.ts - remote_document_change_buffer.test.d.ts - simple_db.test.d.ts - target_cache.test.d.ts - test_bundle_cache.d.ts - test_document_overlay_cache.d.ts - test_mutation_queue.d.ts - test_mutation_queue.d.ts - test_target_cache.d.ts - test_target_cache.d.ts - test_target_cache.d.ts - test_target_cache.d.ts - test_target_cache.d.ts - web_storage_shared_client_state.test.d.ts - model - document.test.d.ts - document_set.test.d.ts - field_index.test.d.ts - object_value.test.d.ts - object_value_builder.test.d.ts - path.test.d.ts - target_index_matcher.test.d.ts - target_index_matcher.test.d.ts - remote - datastore.test.d.ts - remote_event.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.helper.d.ts - serializer.helper.d.ts - serializer.set.est.d.ts - serializer.set.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - perf_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts	! !
- remote_document_change_buffer.test.d.ts - simple_db.test.d.ts - target_cache.test.d.ts - test_bundle_cache.d.ts - test_index_manager.d.ts - test_index_manager.d.ts - test_remote_document_cache.d.ts - test_remote_document_change_buffer.d.ts - model - document_set.d.ts - field_index.test.d.ts - field_index.test.d.ts - mutation.test.d.ts - object_value_builder.test.d.ts - path.test.d.ts - path.test.d.ts - target.index_matcher.test.d.ts - target.index_matcher.test.d.ts - target.index_matcher.test.d.ts - remote - datastore.test.d.ts - remote_event.test.d.ts - serializer.browser.test.d.ts - serializer.howser.test.d.ts - serializer.helper.d.ts - serializer.helper.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - describe_spec.d.ts - describe_spec.test.d.ts - describe_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - remote_store_spec.test.d.ts	
- simple_db.test.d.ts - target_cache.test.d.ts - test_bundle_cache.d.ts - test_dinde_manager.d.ts - test_mutation_queue.d.ts - test_mente_document_cache.d.ts - test_remote_document_cache.d.ts - test_remote_document_cache.d.ts - test_target_cache.d.ts - test_target_cache.d.ts - test_target_cache.d.ts - web_storage_shared_client_state.test.d.ts - document.test.d.ts - document_set.test.d.ts - field_index.test.d.ts - mutation.test.d.ts - object_value.test.d.ts - object_value.builder.test.d.ts - path.test.d.ts - target.index_matcher.test.d.ts - target.index_matcher.test.d.ts - remote - datastore.test.d.ts - remote - datastore.test.d.ts - remote-event.test.d.ts - serializer.browser.test.d.ts - serializer.holper.d.ts - serializer.node.test.d.ts - serializer.spec.test.d.ts - collection_spec.test.d.ts - collection_spec.test.d.ts - index_spec.test.d.ts - index_spec.test.d.ts - index_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - perf_spec.test.d.ts - recovery_spec.test.d.ts	!!
target_cache.dest.dest test_bundle_cache.dest test_document_overlay_cache.dest test_index_manager.dest test_index_manager.dest. test_remote_document_cache.dest test_remote_document_cache.dest test_remote_document_change_buffer.dest test_remote_document_change_buffer.dest test_remote_document_change_buffer.dest test_remote_document_change_buffer.dest test_remote_document_change_buffer.dest test_remote_document_change_buffer.dest test_remote_document_change_buffer.dest test_remote_document_change_buffer.dest test_target_cache.dest document_sest.dest test_dest document_test.dest document_sest.dest test_dest document_test.dest document_sest.dest test_dest document_sest.dest test_dest document_sest.dest test_dest_dest test_dest_dest test_dest_dest test_dest_dest test_dest_dest test_dest_dest test_dest_dest test_dest_dest_dest test_dest_dest_dest test_dest_dest_dest test_dest_dest_dest_dest_dest_dest_dest_	
test_bundle_cache.d.ts test_document_overlay_cache.d.ts test_index_manager.d.ts test_mutation_queue.d.ts test_remote_document_cache.d.ts test_remote_document_change_buffer.d.ts test_target_cache.d.ts web_storage_shared_client_state.test.d.ts model document.test.d.ts field_index.test.d.ts field_index.test.d.ts mutation.test.d.ts object_value_builder.test.d.ts path.test.d.ts target_index_matcher.test.d.ts target_index_matcher.test.d.ts target_index_matcher.test.d.ts remote datastore.test.d.ts remote datastore.test.d.ts remote_event.test.d.ts serializer.browser.test.d.ts serializer.browser.test.d.ts serializer.helper.d.ts serializer.helper.d.ts serializer.node.test.d.ts collection_spec.test.d.ts collection_spec.test.d.ts limbo_spec.test.d.ts limbo_spec.test.d.ts limbo_spec.test.d.ts limbo_spec.test.d.ts limit_spec.test.d.ts limit_spec.test.d.ts orderly_spec.test.d.ts perf_spec.test.d.ts persume_token_spec.test.d.ts	!! -
test_index_manager.d.ts test_index_manager.d.ts test_index_manager.d.ts test_remote_document_cache.d.ts test_remote_document_change_buffer.d.ts test_remote_document_change_buffer.d.ts test_remote_document_change_buffer.d.ts test_remote_document_change_buffer.d.ts test_tremote_document_change_buffer.d.ts test_tremote_document_change_buffer.d.ts test_test.d.ts web_storage_shared_client_state.test.d.ts model document.test.d.ts field_index.test.d.ts field_index.test.d.ts mutation.test.d.ts object_value_builder.test.d.ts target.value_builder.test.d.ts target.test.d.ts target.test	!! -
test_index_manager.d.ts test_mutation_queue.d.ts test_remote_document_cache.d.ts test_remote_document_cache.d.ts test_target_cache.d.ts web_storage_shared_client_state.test.d.ts document.est.d.ts document_set.test.d.ts field_index.test.d.ts nutation.test.d.ts object_value_builder.test.d.ts path.test.d.ts target_index_matcher.test.d.ts target_index_matcher.test.d.ts traget_index_matcher.test.d.ts remote datastore.test.d.ts remote datastore.test.d.ts serializer.browser.test.d.ts serializer.browser.test.d.ts serializer.node.test.d.ts collection_spec.test.d.ts describe_spec.d.ts describe_spec.d.ts limbo_spec.test.d.ts limit_spec.test.d.ts limit_spec.test.d.ts orderby_spec.test.d.ts listen_spec.test.d.ts orderby_spec.test.d.ts perf_spec.test.d.ts persistence_spec.test.d.ts	!!
- test_mutation_queue.d.ts - test_remote_document_cache.d.ts - test_target_cache.d.ts - test_target_cache.d.ts - web_storage_shared_client_state.test.d.ts - model - document.test.d.ts - field_index.test.d.ts - field_index.test.d.ts - mutation.test.d.ts - object_value_builder.test.d.ts - path.test.d.ts - path.test.d.ts - target_index_matcher.test.d.ts - target_index_matcher.test.d.ts - remote - datastore.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - offline_spec.test.d.ts - persistence_spec.test.d.ts - persistence_spec.test.d.ts - persistence_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	!!
test_remote_document_change_buffer.d.ts test_tremote_document_change_buffer.d.ts test_target_cache.d.ts web_storage_shared_client_state.test.d.ts document.test.d.ts document_set.test.d.ts field_index.test.d.ts object_value.test.d.ts object_value_builder.test.d.ts target_index_matcher.test.d.ts target_index_matcher.test.d.ts remote datastore.test.d.ts remote_event.test.d.ts serializer.browser.test.d.ts serializer.node.test.d.ts serializer.node.test.d.ts serializer.node.test.d.ts serializer.node.test.d.ts serializer.node.test.d.ts serializer.node.test.d.ts serializer.node.test.d.ts serializer.node.test.d.ts ofline_spec.test.d.ts dascribe_spec.d.ts describe_spec.d.ts existence_filter_spec.test.d.ts index_spec.test.d.ts limbo_spec.test.d.ts limit_spec.test.d.ts offline_spec.test.d.ts orderby_spec.test.d.ts perf_spec.test.d.ts resume_token_spec.test.d.ts query_spec.test.d.ts query_spec.test.d.ts resume_token_spec.test.d.ts resume_token_spec.test.d.ts resume_token_spec.test.d.ts resume_token_spec.test.d.ts resume_token_spec.test.d.ts resume_token_spec.test.d.ts resume_token_spec.test.d.ts resume_token_spec.test.d.ts resume_token_spec.test.d.ts	
test_remote_document_change_buffer.d.ts test_target_cache.d.ts web_storage_shared_client_state.test.d.ts model document.test.d.ts field_index.test.d.ts mutation.test.d.ts object_value_builder.test.d.ts path.test.d.ts target_index_matcher.test.d.ts values.test.d.ts remote datastore.test.d.ts rest_connection.test.d.ts serializer.howser.test.d.ts serializer.node.test.d.ts serializer.node.test.d.ts collection_spec.test.d.ts existence_filter_spec.test.d.ts index_spec.test.d.ts index_spec.test.d.ts cindex_spec.test.d.ts himbo_spec.test.d.ts limbo_spec.test.d.ts limbo_spec.test.d.ts cindex_spec.test.d.ts himbo_spec.test.d.ts limbo_spec.test.d.ts limbo_spec.test.d.ts collection_spec.test.d.ts himbo_spec.test.d.ts collection_spec.test.d.ts himbo_spec.test.d.ts limbo_spec.test.d.ts himbo_spec.test.d.ts collection_spec.test.d.ts himbo_spec.test.d.ts himbo_spec.test.d.ts collection_spec.test.d.ts himbo_spec.test.d.ts himbo_spe	
test_target_cache.d.ts	!!
web_storage_shared_client_state.test.d.ts - model - document_set.test.d.ts - field_index.test.d.ts - field_index.test.d.ts - object_value.test.d.ts - object_value.test.d.ts - path.test.d.ts - path.test.d.ts - target_index_matcher.test.d.ts - values.test.d.ts - remote - datastore.test.d.ts - remote event.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.helper.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - collection_spec.test.d.ts - index_spec.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - resume_tcst.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - resume_tcken_spec.test.d.ts	
- model - document_set.test.d.ts - field_index.test.d.ts - field_index.test.d.ts - mutation.test.d.ts - object_value_builder.test.d.ts - path.test.d.ts - path.test.d.ts - target_index_matcher.test.d.ts - target_index_matcher.test.d.ts - remote - datastore.test.d.ts - remote - datastore.test.d.ts - serializer.browser.test.d.ts - serializer.helper.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - secollection_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - offline_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - resume_token_spec.test.d.ts	!!
- document_set.test.d.ts - field_index.test.d.ts - mutation.test.d.ts - object_value_builder.test.d.ts - path.test.d.ts - path.test.d.ts - target_index_matcher.test.d.ts - values.test.d.ts - remote - datastore.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.nede.test.d.ts - serializer.nede.test.d.ts - sepecs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - persistence_spec.test.d.ts - persistence_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - recovery_spec.test.d.ts	
field_index.test.d.ts	<pre>— document.test.d.ts</pre>
<pre>mutation.test.d.ts - object_value_builder.test.d.ts - object_value_builder.test.d.ts - path.test.d.ts - target_index_matcher.test.d.ts - target_index_matcher.test.d.ts - target_index_matcher.test.d.ts - remote - datastore.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.helper.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limb_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - orderby_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - resure_spec.test.d.ts - resure_token_spec.test.d.ts - spec_builder.d.ts</pre>	<pre>— document_set.test.d.ts</pre>
- object_value_builder.test.d.ts - object_value_builder.test.d.ts - path.test.d.ts - target_index_matcher.test.d.ts - values.test.d.ts - remote - datastore.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - orderby_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - query_spec.test.d.ts - resowery_spec.test.d.ts	<pre>— field_index.test.d.ts</pre>
- object_value_builder.test.d.ts - path.test.d.ts - target_index_matcher.test.d.ts - values.test.d.ts - remote - datastore.test.d.ts - remote-event.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limbo_spec.test.d.ts - limbo_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	<pre>— mutation.test.d.ts</pre>
- path.test.d.ts - target_index_matcher.test.d.ts - values.test.d.ts - remote - datastore.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - sepecs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - orderby_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts	<pre>— object_value.test.d.ts</pre>
- target.test.d.ts - target_index_matcher.test.d.ts - values.test.d.ts - remote - datastore.test.d.ts - remote_event.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts	<pre>— object_value_builder.test.d.ts</pre>
- target_index_matcher.test.d.ts - values.test.d.ts - remote - datastore.test.d.ts - remote_event.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - limbo_spec.test.d.ts - limbo_spec.test.d.ts - limbo_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts	
- values.test.d.ts - remote - datastore.test.d.ts - remote_event.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - persistence_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	— target.test.d.ts
- remote - datastore.test.d.ts - remote_event.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.helper.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	<pre>— target_index_matcher.test.d.ts</pre>
<pre> </pre>	└─ values.test.d.ts
- remote_event.test.d.ts - rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	— remote
- rest_connection.test.d.ts - serializer.browser.test.d.ts - serializer.node.test.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	<pre>— datastore.test.d.ts</pre>
- serializer.browser.test.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	!!
- serializer.helper.d.ts - serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	<u> </u>
serializer.node.test.d.ts - specs - bundle_spec.test.d.ts - collection_spec.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	
- specs - bundle_spec.test.d.ts - collection_spec.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	· ·
<pre>- bundle_spec.test.d.ts - collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - limit_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	└─ serializer.node.test.d.ts
- collection_spec.test.d.ts - describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	
- describe_spec.d.ts - existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - muery_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	
<pre>- existence_filter_spec.test.d.ts - index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - perf_spec.test.d.ts - recovery_spec.test.d.ts - recovery_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	· · · · · · · · · · · · · · · · · · ·
<pre>- index_spec.test.d.ts - limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	!! - !
<pre>- limbo_spec.test.d.ts - limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	
<pre>- limit_spec.test.d.ts - listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	!! - '
<pre>- listen_spec.test.d.ts - offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	!! - '
<pre>- offline_spec.test.d.ts - orderby_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	!! - '
<pre>- orderby_spec.test.d.ts - perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	!! - '
<pre>- perf_spec.test.d.ts - persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	· · · · · · · · · · · · · · · · · · ·
<pre>- persistence_spec.test.d.ts - query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	!!!
- query_spec.test.d.ts - recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	
<pre>- recovery_spec.test.d.ts - remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	
- remote_store_spec.test.d.ts - resume_token_spec.test.d.ts - spec_builder.d.ts	
<pre>- resume_token_spec.test.d.ts - spec_builder.d.ts</pre>	1 1
— spec_builder.d.ts	
	<u> </u>
	- spec_rpc_error.d.ts
spec_test_components.d.ts	

```
└─ write_spec.test.d.ts
          - util
           — array.test.d.ts
            — async_queue.test.d.ts
            — base64.test.d.ts
            — bundle.test.d.ts
            - bundle_data.d.ts
             logic utils.test.d.ts
            - misc.test.d.ts
            — node_api.test.d.ts
            — obj_map.test.d.ts
            — sorted_map.test.d.ts
           └ sorted_set.test.d.ts
      – util
         api helpers.d.ts
         equality_matcher.d.ts
         — helpers.d.ts
         - node persistence.d.ts
         - promise.d.ts
          - spec_test_helpers.d.ts
        └ test_platform.d.ts
- index.cjs.js
index.cjs.js.map
- index.d.ts
- index.esm2017.js
- index.esm2017.js.map
— index.esm5.js
— index.esm5.js.map
- index.node.cjs.js
— index.node.cjs.js.map
— index.node.mjs
- index.node.mjs.map
- index.rn.js
— index.rn.js.map
internal.d.ts
- lite

    firestore

      – lite
         - index.d.ts
        └ register.d.ts
      - src
        — api

─ aggregate.d.ts

            bundle.d.ts
            - bytes.d.ts
            credentials.d.ts
            — database.d.ts
             - field_path.d.ts
            – field_value.d.ts
            — field_value_impl.d.ts
             - filter.d.ts
            - geo_point.d.ts
             index_configuration.d.ts
             - observer.d.ts
```

<pre>parse_context.d.ts</pre>
│
— reference_impl.d.ts
— settings.d.ts
<pre></pre>
<pre>— timestamp.d.ts</pre>
— transaction.d.ts
│
│
├─ api.d.ts
│ ├─ auth
user.d.ts
core
│
— bound.d.ts
— bundle.d.ts
bundle_impl.d.ts
component_provider.d.ts
│
│
filter.d.ts
├─ firestore_client.d.ts
│
— order_by.d.ts
│
─ snapshot_version.d.ts
├─ sync_engine.d.ts
├─ sync_engine_impl.d.ts
│
<pre>target_id_generator.d.ts</pre>
— transaction.d.ts
— transaction_options.d.ts
— transaction_runner.d.ts
— types.d.ts
— version.d.ts
— view.d.ts
│
index
directional_index_byte_encoder.d.ts
firestore_index_value_writer.d.ts
index_byte_encoder.d.ts
index_entry.d.ts
│
index.d.ts
index.node.d.ts
index.rn.d.ts
- lite-api
aggregate.d.ts
aggregate_types.d.ts
bytes.d.ts
components.d.ts
database.d.ts
field_path.d.ts
— field_value.d.ts

─ field_value_impl.d.ts
<pre>— geo_point.d.ts</pre>
— query.d.ts
<pre>reference.d.ts</pre>
<pre>reference_impl.d.ts</pre>
_ settings.d.ts
— snapshot.d.ts
- timestamp.d.ts
— transaction.d.ts
— transaction_options.d.ts
types.d.ts
user_data_reader.d.ts
user_data_writer.d.ts
write batch.d.ts
— write_batch.u.ts — local
<pre>bundle_cache.d.ts</pre>
— document_overlay_cache.d.ts
- encoded_resource_path.d.ts
<pre>index_backfiller.d.ts</pre>
— index_manager.d.ts
<pre>indexeddb_bundle_cache.d.ts</pre>
<pre>indexeddb_document_overlay_cache.d.ts</pre>
<pre>indexeddb_index_manager.d.ts</pre>
<pre>indexeddb_lru_delegate.d.ts</pre>
<pre>indexeddb_lru_delegate_impl.d.ts</pre>
<pre>indexeddb_mutation_batch_impl.d.ts</pre>
<pre>indexeddb_mutation_queue.d.ts</pre>
<pre>indexeddb_persistence.d.ts</pre>
<pre>indexeddb_remote_document_cache.d.ts</pre>
<pre>indexeddb_schema.d.ts</pre>
<pre>indexeddb_schema_converter.d.ts</pre>
<pre>indexeddb_schema_legacy.d.ts</pre>
<pre>indexeddb_sentinels.d.ts</pre>
<pre>indexeddb_target_cache.d.ts</pre>
<pre>indexeddb_transaction.d.ts</pre>
<pre>local_documents_view.d.ts</pre>
local_serializer.d.ts
<pre>local_store.d.ts</pre>
<pre>─ local_store_impl.d.ts</pre>
<pre> local_view_changes.d.ts </pre>
- lru_garbage_collector.d.ts
- lru_garbage_collector_impl.d.ts
<pre>memory_bundle_cache.d.ts</pre>
— memory_document_overlay_cache.d.ts
memory_index_manager.d.ts
— memory_mutation_queue.d.ts
memory_persistence.d.ts
- memory_remote_document_cache.d.ts
— memory_target_cache.d.ts
— mutation_queue.d.ts
<pre>- mutation_queue.u.ts - overlayed_document.d.ts</pre>
persistence.d.ts
<pre>persistence.d.ts persistence_promise.d.ts</pre>
<u> </u>
─ persistence_transaction.d.ts

<pre> </pre>
remote_document_cache.d.ts
remote_document_change_buffer.d.ts
shared_client_state.d.ts
│
├─ shared_client_state_syncer.d.ts
— simple_db.d.ts
— target_cache.d.ts
│
├─ model
<pre>— aggregate_alias.d.ts</pre>
│
— document.d.ts
<pre>document_comparator.d.ts</pre>
<pre>— document_key.d.ts</pre>
— document_set.d.ts
field_index.d.ts
field_mask.d.ts
mutation.d.ts
— mutation_batch.d.ts
normalize.d.ts
by object_value.d.ts
!!!
— overlay.d.ts
path.d.ts
│
<pre>target_index_matcher.d.ts</pre>
transform_operation.d.ts
— type_order.d.ts
│
│
│
│
byte_stream_reader.d.ts
— connection.d.ts
connectivity_monitor.d.ts
— dom.d.ts
— format_json.d.ts
random_bytes.d.ts
text_serializer.d.ts
webchannel_connection.d.ts
browser_lite
— browser_tite — base64.d.ts
!!!!
byte_stream_reader.d.ts
dom.d.ts
— fetch_connection.d.ts
— format_json.d.ts
random_bytes.d.ts
│
text_serializer.d.ts
byte_stream_reader.d.ts
135 / 017

— connection.d.ts
— dom.d.ts
<pre>format_json.d.ts</pre>
— node
├─ base64.d.ts
byte_stream_reader.d.ts
├─ connection.d.ts
— dom.d.ts
— format_json.d.ts
grpc_connection.d.ts
☐ load_protos.d.ts
random_bytes.d.ts
— serializer.d.ts
text_serializer.d.ts
- node_lite
base64.d.ts
byte_stream_reader.d.ts
connection.d.ts
— dom.d.ts
random_bytes.d.ts
— random_bytes.d.ts
text_serializer.d.ts
random_bytes.d.ts
base04.d.ts byte_stream_reader.d.ts
— byte_stream_reader.d.ts
dom.d.ts
format_json.d.ts
random_bytes.d.ts
text_serializer.d.ts
rn_lite
base64.d.ts
byte_stream_reader.d.ts
connection.d.ts
dom.d.ts
format_json.d.ts
random_bytes.d.ts
├─ serializer.d.ts
☐ text_serializer.d.ts
— serializer.d.ts
└ text_serializer.d.ts
— protos
<pre>firestore_bundle_proto.d.ts</pre>
└ firestore_proto_api.d.ts
— register.d.ts
— remote
├─ backoff.d.ts
— connection.d.ts
connectivity_monitor.d.ts
connectivity_monitor_noop.d.ts
— datastore.d.ts
136 / 917

<pre>— existence_filter.d.ts</pre>
│
<pre></pre>
<pre> </pre>
remote_store.d.ts
remote_syncer.d.ts
<pre>rest_connection.d.ts</pre>
rpc_error.d.ts
serializer.d.ts
— stream_bridge.d.ts
watch_change.d.ts
util
├─ array.d.ts
- assert.d.ts
async_observer.d.ts
async_queue.d.ts
- async_queue_impl.d.ts
base64_decode_error.d.ts
bundle_reader.d.ts
- bundle_reader_impl.d.ts
byte_stream.d.ts
byte_string.d.ts
error.d.ts
input_validation.d.ts
log.d.ts
logic_utils.d.ts
misc.d.ts
- mode_api.d.ts
- node_api.d.ts - obj.d.ts
- obj.d.ts - obj_map.d.ts
— promise.d.ts
— sorted_map.d.ts
— sorted_set.d.ts
└ types.d.ts
└ test
— integration
— api
aggregation.test.d.ts
array_transforms.test.d.ts
batch_writes.test.d.ts
— bundle.test.d.ts
cursor.test.d.ts
database.test.d.ts
— fields.test.d.ts
│
index_configuration.test.d.ts
<pre>numeric_transforms.test.d.ts</pre>
— provider.test.d.ts
<pre>query.test.d.ts</pre>
— server_timestamp.test.d.ts
│
│
— type.test.d.ts
137 / 017

└─ validation.test.d.ts
— api_internal
— auth.test.d.ts
│
│
└─ transaction.test.d.ts
— bootstrap.d.ts
— browser
indexeddb.test.d.ts
☐ webchannel.test.d.ts
— prime_backend.test.d.ts
<pre> remote remote.test.d.ts </pre>
stream.test.d.ts
util
— events_accumulator.d.ts
— firebase_export.d.ts
— helpers.d.ts
<pre>internal_helpers.d.ts</pre>
└ settings.d.ts
— lite
— bootstrap.d.ts
- helpers.d.ts
<pre> integration.test.d.ts - register.d.ts </pre>
— registerialts — unit
— unit
aggregate.test.d.ts
bytes.test.d.ts
— database.test.d.ts
<pre>— document_change.test.d.ts</pre>
<pre> — field_path.test.d.ts</pre>
<pre>field_value.test.d.ts</pre>
├─ geo_point.test.d.ts
L timestamp.test.d.ts
— bootstrap.d.ts
— core
<pre>— event_manager.test.d.ts</pre>
Listen_sequence.test.d.ts
query.test.d.ts
view.test.d.ts
— index
└ ordered_code_writer.test.d.ts
— local
<pre>bundle_cache.test.d.ts</pre>
counting_query_engine.d.ts
— document_overlay_cache.test.d.ts
<pre>— encoded_resource_path.test.d.ts</pre>
<pre>index_backfiller.test.d.ts index_manager.test.d.ts</pre>
index_manager.test.d.ts indexeddb_persistence.test.d.ts
- local_serializer.test.d.ts
local_store.test.d.ts
138 / 017

local_store_indexeddb.test.d.ts lru_garbage_collector.test.d.ts mutation_queue.test.d.ts persistence_promise.test.d.ts persistence_test.helpers.d.ts persistence_test.helpers.d.ts persistence_test.helpers.d.ts persistence_test.d.ts persistence_set.test.d.ts persistence_set.test.d.ts persistence_cat.test.d.ts persistence_cat.test.d.ts persistence_cat.test.d.ts persistence_set.test.d.ts persi	
--	--

```
- resume_token_spec.test.d.ts
             - spec builder.d.ts
             - spec_rpc_error.d.ts
            - spec_test_components.d.ts
             spec test runner.d.ts
           └─ write_spec.test.d.ts
          - util
            — array.test.d.ts
             async_queue.test.d.ts
            - base64.test.d.ts
            - bundle.test.d.ts
            bundle_data.d.ts
            logic_utils.test.d.ts
            - misc.test.d.ts
            - node api.test.d.ts
            – obj_map.test.d.ts
            - sorted_map.test.d.ts
           └ sorted set.test.d.ts
      util
        — api_helpers.d.ts
         equality_matcher.d.ts
         — helpers.d.ts
         — node_persistence.d.ts
         - promise.d.ts
          - spec_test_helpers.d.ts

    test_platform.d.ts

index.browser.esm2017.js
index.browser.esm2017.js.map
- index.browser.esm5.js
index.browser.esm5.js.map
– index.cjs.js
- index.cjs.js.map
index.d.ts
— index.node.cjs.js
— index.node.cjs.js.map
index.node.mjs
- index.node.mjs.map
index.rn.esm2017.js
- index.rn.esm2017.js.map
internal.d.ts
packages
  └ firestore
      — babel-register.d.ts
      – dist
        └ lite
           └ index.browser.esm2017.d.ts
      karma.conf.d.ts
       - lite

─ index.d.ts

        └ register.d.ts
       rollup.config.d.ts
       rollup.config.debug.d.ts
       rollup.config.lite.d.ts
      rollup.shared.d.ts
```

- src - api - aggregate.d.ts - bundle.d.ts - bytes.d.ts - credentials.d.ts - database.d.ts - field_path.d.ts - field_value_d.ts - field_value_impl.d.ts - filter.d.ts - geo_point.d.ts - index_configuration.d.ts - observer.d.ts - parse_context.d.ts - reference.d.ts - reference.d.ts - reference.dis - settings.d.ts - snapshot.d.ts - transaction.d.ts - transaction.d.ts - pai.d.ts - auth - user.d.ts - core - aggregate.d.ts - bound.d.ts - bound.d.ts - bound.d.ts - core - laggregate.d.ts - component_provider.d.ts - database_info.d.ts - event_manager.d.ts - filter.d.ts - listen_sequence.d.ts - order_by.d.ts - query.d.ts - query.d.ts - snapshot_version.d.ts - sync_engine_d.ts - transaction_d.ts - transaction.d.ts

<pre> index_byte_encoder.d.ts </pre>
<pre>index_entry.d.ts</pre>
crdered_code_writer.d.ts
— index.d.ts
— index.node.d.ts
— index.rn.d.ts
├─ lite-api
├─ aggregate.d.ts
<pre>— aggregate_types.d.ts</pre>
├─ bytes.d.ts
├─ components.d.ts
— database.d.ts
<pre>field_path.d.ts</pre>
— field_value.d.ts
— field_value_impl.d.ts
geo_point.d.ts
query.d.ts
reference.d.ts
reference_impl.d.ts
├─ settings.d.ts
— snapshot.d.ts
— timestamp.d.ts
├─ transaction.d.ts
<pre>— transaction_options.d.ts</pre>
├ types.d.ts
<pre>user_data_reader.d.ts</pre>
<pre>user_data_writer.d.ts</pre>
write batch.d.ts
— local
— bundle_cache.d.ts
— document_overlay_cache.d.ts
- encoded_resource_path.d.ts
├─ index_backfiller.d.ts
<pre>index_manager.d.ts</pre>
indexeddb_bundle_cache.d.ts
indexeddb_document_overlay_cache.d.ts
├ indexeddb_index_manager.d.ts
<pre>indexeddb_lru_delegate.d.ts</pre>
<pre>indexeddb_lru_delegate_impl.d.ts</pre>
indexeddb_mutation_batch_impl.d.ts
indexeddb_mutation_queue.d.ts
indexeddb_persistence.d.ts
indexeddb_remote_document_cache.d.ts
indexeddb_remote_document_cache.d.ts
!!!
indexeddb_schema_converter.d.ts
indexeddb_schema_legacy.d.ts
— indexeddb_sentinels.d.ts
<pre>indexeddb_target_cache.d.ts</pre>
indexeddb_transaction.d.ts
├─ local_documents_view.d.ts
<pre>— local_serializer.d.ts</pre>
- local_store.d.ts
— local_store_impl.d.ts
├ local_view_changes.d.ts
coca c_v ten_endinges at ts

Trugaroage_Collector_impl.a.ts memory_bounde_cache.d.ts memory_document_overlay_cache.d.ts memory_motay_manager.d.ts memory_membe_document_cache.d.ts memory_remote_document_cache.d.ts memory_remote_document_cache.d.ts memory_target_cache.d.ts persistence_promise.d.ts persistence_promise.d.ts persistence_transaction.d.ts memore_document_cache.d.ts memore_document_cache.d.ts reference_set.d.ts remote_document_cache.d.ts shared_client_state_d.ts shared_client_state_syncer.d.ts shared_client_state_syncer.d.ts simple_db.d.ts shared_client_state_syncer.d.ts simple_db.d.ts target_data.d.ts model	
- memory_document_overlay_cache.d.ts - memory_mindex_manager.d.ts - memory_more_document_cache.d.ts - memory_resistence.d.ts - memory_resistence.d.ts - memory_resistence.d.ts - mutation_queue.d.ts - overlayed_document_cache.d.ts - persistence.d.ts - persistence.d.ts - persistence.d.ts - persistence_transaction.d.ts - query_engine.d.ts - reference_set.d.ts - remote_document_cache.d.ts - remote_document_cache.d.ts - shared_client_state_schema.d.ts - shared_client_state_schema.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_cache.d.ts - target_cache.d.ts - document.d.ts - document.d.ts - document.d.ts - document.d.ts - field_index.d.ts - field_index.d.ts - field_index.d.ts - mutation_d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - opert_value.d.ts - values.d.ts - target_index_matcher.d.ts - target_index_index_index_index_index_index_i	
memory_index_manager.d.ts	
memory_mutation_queue.d.ts	
memory_persistence.d.ts memory_trapet_cache.d.ts memory_trapet_cache.d.ts memory_trapet_cache.d.ts memory_trapet_cache.d.ts mutation_queue.d.ts persistence.d.ts persistence.d.ts persistence.d.ts persistence.d.ts persistence.d.ts persistence.transaction.d.ts query_engine.d.ts reference_set.d.ts reference_set.d.ts remote_document_cache.d.ts shared_client_state_schema.d.ts shared_client_state_schema.d.ts simple_db.d.ts simple_db.d.ts target_cache.d.ts document_cache.d.ts document_d.ts document_d.ts document_comparator.d.ts document_comparator.d.ts document_set.d.ts document_set.d.ts field_index.d.ts mutation_datch.d.ts mutation_datch.d.ts mutation_datch.d.ts mutation_datch.d.ts path.d.ts path.d.ts mutation_datch.d.ts mutation_datch.d.ts mutation_datch.d.ts path.d.ts path.d.ts target_index_matcher.d.ts target_index_matcher.d.ts target_index_matcher.d.ts target_index_matcher.d.ts target_index_matcher.d.ts target_index_matcher.d.ts type_order.d.ts type	
memory_remote_document_cache.d.ts	
- memory_target_cache.d.ts - mutation_queue.d.ts - overlayed_document.d.ts - persistence.d.ts - persistence_transaction.d.ts - persistence_transaction.d.ts - query_engine.d.ts - reference_set.d.ts - remote_document_cache.d.ts - remote_document_cache.d.ts - remote_document_cache.d.ts - shared_client_state.d.ts - shared_client_state_schema.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_cache.d.ts - target_dach.d.ts - collections.d.ts - document.d.ts - document.d.ts - document_key.d.ts - document_key.d.ts - field_mask.d.ts - field_mask.d.ts - mutation.d.ts - mutation.d.ts - mormalize.d.ts - object_value.d.ts - operation.d.ts - target_index_matcher.d.ts - targ	· · · · · · · · · · · · · · · · · · ·
- mutation_queue.d.ts - overlayed_document.d.ts - persistence.d.ts - persistence_promise.d.ts - persistence_promise.d.ts - query_engine.d.ts - reference_set.d.ts - remote_document_cache.d.ts - remote_document_change_buffer.d.ts - shared_client_state.d.ts - shared_client_state_schema.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - document.d.ts - document_comparator.d.ts - document_comparator.d.ts - document_comparator.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation.d.ts - mutation.batch.d.ts - normalize.d.ts - object_value.d.ts - object_value.d.ts - object_value.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - connectivity_monitor.d.ts - dom.d.ts - connectivity_monitor.d.ts	
- overlayed_document.d.ts - persistence.d.ts - persistence_promise.d.ts - persistence_transaction.d.ts - query_engine.d.ts - reference_set.d.ts - remote_document_cache.d.ts - remote_document_change_buffer.d.ts - shared_client_state.d.ts - shared_client_state_schema.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - collections.d.ts - document.d.ts - document_set.d.ts - document_set.d.ts - field_index.d.ts - mutation.d.ts - mutation.d.ts - mutation.d.ts - object_value.d.ts - operlay.d.ts - path.d.ts - server_timestamps.d.ts - transform_operation.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connection.d.ts - connectivity_monitor.d.ts - connection.d.ts - connectivity_monitor.d.ts - connectivity_monitor.d.ts - dom.d.ts - connectivity_monitor.d.ts	
persistence.d.ts persistence_promise.d.ts persistence_promise.d.ts persistence_transaction.d.ts query_engine.d.ts reference_set.d.ts reference_set.d.ts remote_document_ccanee.d.ts shared_client_state.d.ts shared_client_state_schema.d.ts simple_db.d.ts target_cache.d.ts target_cache.d.ts document_cmparator.d.ts document_comparator.d.ts document_key.d.ts document_key.d.ts field_index.d.ts mutation.d.ts mutation_batch.d.ts normalize.d.ts object_value.d.ts path.d.ts	_ · · · · · · · · · · · · · · · · · · ·
- persistence_promise.d.ts - persistence_transaction.d.ts - query_engine.d.ts - reference_set.d.ts - remote_document_cache.d.ts - remote_document_change_buffer.d.ts - shared_client_state.d.ts - shared_client_state_syncer.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - collections.d.ts - document_comparator.d.ts - document_key.d.ts - field_index.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation.d.ts - normalize.d.ts - object_value.d.ts - object_value.d.ts - path.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts	
- persistence_transaction.d.ts - query_engine.d.ts - reference_set.d.ts - remote_document_change_buffer.d.ts - shared_client_state_d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - simple_db.d.ts - simple_db.d.ts - target_cache.d.ts - model - aggregate_alias.d.ts - document_comparator.d.ts - document_dky.d.ts - document_key.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation_batch.d.ts - mormalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - transform_operation.d.ts - transform_operation.d.ts - type_order.d.ts - platform - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - connectivity_monitor.d.ts - dom.d.ts - connectivity_monitor.d.ts - dom.d.ts - connection.d.ts	
- query_engine.d.ts - reference_set.d.ts - remote_document_cache.d.ts - remote_dclient_state.d.ts - shared_client_state_schema.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - aggregate_alias.d.ts - document_comparator.d.ts - document_dcomparator.d.ts - document_key.d.ts - document_key.d.ts - field_index.d.ts - field_mask.d.ts - mutation_batch.d.ts - mormalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - target_index_matcher.d.ts - target_index_matcher.d.ts - type_order.d.ts - platform - base64.d.ts - connection.d.ts	_ ! ! ! ! ! ! · · · · · · · · · · · · ·
- reference_set.d.ts - remote_document_change_buffer.d.ts - shared_client_state.d.ts - shared_client_state_schema.d.ts - shared_client_state_schema.d.ts - shared_client_state_schema.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - collections.d.ts - document.d.ts - document_comparator.d.ts - document_key.d.ts - document_sey.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - transform_operation.d.ts - transform_operation.d.ts - transform_operation.d.ts - type_order.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
- remote_document_change_buffer.d.ts - shared_client_state.d.ts - shared_client_state_schema.d.ts - shared_client_state_schema.d.ts - simple_db.d.ts - simple_db.d.ts - target_cache.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - collections.d.ts - document.d.ts - document_comparator.d.ts - document_set.d.ts - field_index.d.ts - field_index.d.ts - mutation.d.ts - mutation.d.ts - normalize.d.ts - object_value.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - type_order.d.ts - type_order.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts - format_json.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
- remote_document_change_buffer.d.ts - shared_client_state.d.ts - shared_client_state_schema.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - collections.d.ts - document_comparator.d.ts - document_key.d.ts - document_sey.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - operlay.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - target_index_matcher.d.ts - target_index_matcher.d.ts - target_index_matcher.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
- shared_client_state.d.ts - shared_client_state_schema.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - collections.d.ts - document.d.ts - document_comparator.d.ts - document_key.d.ts - document_set.d.ts - field_imask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - target_index_matcher.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	· · · · · · ·
- shared_client_state_syncer.d.ts - shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - collections.d.ts - document_comparator.d.ts - document_key.d.ts - document_set.d.ts - field_index.d.ts - mutation.d.ts - mutation.d.ts - mutation.d.ts - normalize.d.ts - object_value.d.ts - object_value.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - transform_operation.d.ts - platform - base64.d.ts - browser - byte_stream_reader.d.ts - connection.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	
- shared_client_state_syncer.d.ts - simple_db.d.ts - target_cache.d.ts - target_data.d.ts - model - aggregate_alias.d.ts - document.d.ts - document_comparator.d.ts - document_key.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation.d.ts - normalize.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - type_order.d.ts - type_order.d.ts - platform - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connection.d.ts - dom.d.ts - dom.d.ts - dom.d.ts - dom.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	
simple_db.d.ts target_cache.d.ts target_data.d.ts aggregate_alias.d.ts document.d.ts document_comparator.d.ts document_key.d.ts document_set.d.ts field_index.d.ts mutation.d.ts mutation_batch.d.ts overlay.d.ts apth.d.ts server_timestamps.d.ts target_index_matcher.d.ts target_index_matcher.d.ts type_order.d.ts browser base64.d.ts byte_stream_reader.d.ts connection.d.ts connection.d.ts connection.d.ts connection.d.ts dom.d.ts dom.d.ts	
target_cache.d.ts target_data.d.ts model aggregate_alias.d.ts collections.d.ts document_d.ts document_comparator.d.ts document_set.d.ts document_set.d.ts field_index.d.ts field_mask.d.ts mutation.d.ts mutation.d.ts mormalize.d.ts object_value.d.ts path.d.ts server_timestamps.d.ts target_index_matcher.d.ts target_index_matcher.d.ts type_order.d.ts type_order.d.ts browser base64.d.ts byte_stream_reader.d.ts byte_stream_reader.d.ts connection.d.ts connection.d.	
<pre>target_data.d.ts model</pre>	· ! ! ! ! ! · · · ·
- model - aggregate_alias.d.ts - collections.d.ts - document.d.ts - document_comparator.d.ts - document_key.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
- aggregate_alias.d.ts - collections.d.ts - document_comparator.d.ts - document_key.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - browser - base64.d.ts - browser - connection.d.ts - connection.d.ts - connection.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	
- collections.d.ts - document_d.ts - document_comparator.d.ts - document_sey.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	
- document_comparator.d.ts - document_key.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	
- document_comparator.d.ts - document_key.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	
- document_key.d.ts - document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - bowser - boyte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
- document_set.d.ts - field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	_ ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '
- field_index.d.ts - field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	
- field_mask.d.ts - mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	-
- mutation.d.ts - mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - dom.d.ts - format_json.d.ts	·
- mutation_batch.d.ts - normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	!!!!!
- normalize.d.ts - object_value.d.ts - overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
- object_value.d.ts - overlay.d.ts - path.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	·
- overlay.d.ts - path.d.ts - server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
<pre></pre>	
- server_timestamps.d.ts - target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
<pre>- target_index_matcher.d.ts - transform_operation.d.ts - type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts</pre>	
<pre></pre>	
<pre>- type_order.d.ts - values.d.ts - platform - base64.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts</pre>	
- values.d.ts - platform - base64.d.ts - browser - base64.d.ts - byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
<pre></pre>	
<pre>base64.d.ts browser base64.d.ts byte_stream_reader.d.ts connection.d.ts connectivity_monitor.d.ts dom.d.ts format_json.d.ts</pre>	
<pre>browser base64.d.ts byte_stream_reader.d.ts connection.d.ts connectivity_monitor.d.ts dom.d.ts format_json.d.ts</pre>	
<pre>base64.d.ts byte_stream_reader.d.ts connection.d.ts connectivity_monitor.d.ts dom.d.ts format_json.d.ts</pre>	
<pre>- byte_stream_reader.d.ts - connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts</pre>	
<pre>- connection.d.ts - connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts</pre>	
- connectivity_monitor.d.ts - dom.d.ts - format_json.d.ts	
format_json.d.ts	·
	· · · · · · · · · · · · · · · · · · ·
	— random_bytes.d.ts

— serializer.d.ts
└─ webchannel_connection.d.ts
─ browser_lite
⊢ base64.d.ts
<pre>byte_stream_reader.d.ts</pre>
connection.d.ts
— dom.d.ts
!!!
— fetch_connection.d.ts
├─ format_json.d.ts
— random_bytes.d.ts
— serializer.d.ts
└─ text_serializer.d.ts
<pre>— byte_stream_reader.d.ts</pre>
<pre>— connection.d.ts</pre>
— dom.d.ts
<pre>— format_json.d.ts</pre>
— node
⊢ base64.d.ts
byte_stream_reader.d.ts
connection.d.ts
dom.d.ts
- format_json.d.ts
— grpc_connection.d.ts
├ load_protos.d.ts
— random_bytes.d.ts
— serializer.d.ts
└─ text_serializer.d.ts
— node_lite
─ base64.d.ts
⊢ connection.d.ts
— dom.d.ts
├ format_json.d.ts
random_bytes.d.ts
⊢ serializer.d.ts
text_serializer.d.ts
— random_bytes.d.ts
— rn
├─ base64.d.ts
byte_stream_reader.d.ts
— connection.d.ts
— dom.d.ts
├ format_json.d.ts
— random_bytes.d.ts
— serializer.d.ts
└─ text_serializer.d.ts
— rn_lite
— base64.d.ts
<pre>byte_stream_reader.d.ts</pre>
connection.d.ts
— dom.d.ts
- format_json.d.ts
random_bytes.d.ts

text_serializer.d.ts text_serializer.d.ts text_serializer.d.ts protos firestore_bundle_proto.d.ts firestore_proto_api.d.ts remote backoff.d.ts connectivity_monitor.d.ts connectivity_monitor.d.ts connectivity_monitor_noop.d.ts datastore.d.ts existence_filter.d.ts number_serializer.d.ts number_serializer.d.ts persistent_stream.d.ts remote_event.d.ts remote_syncer.d.ts remote_syncer.d.ts resc_connection.d.ts resc_connection.d.ts resc_connection.d.ts resc_connection.d.ts resc_connection.d.ts resc_connection.d.ts resc_connection.d.ts conditions cond	
serializer.d.ts text_serializer.d.ts - protos firestore_bundle_proto.d.ts - firestore_proto_api.d.ts - register.d.ts - remote backoff.d.ts - connectivity_monitor.d.ts - connectivity_monitor.nop.d.ts - datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_store.d.ts - remote_store.d.ts - rest_connection.d.ts - rest_connection.d.ts - serializer.d.ts - stream_bridge.d.ts - stream_bridge.d.ts - async_queue.d.ts - bundle_reader.d.ts - bundle_reader.d.ts - bundle_reader.d.ts - bundle_reader.d.ts - byte_stream.d.ts - byte_stream.d.ts - byte_string.d.ts - eror.d.ts - input_validation.d.ts - logi.d.ts	│
rext_serializer.d.ts - protos - firestore_bundle_proto.d.ts - firestore_proto_api.d.ts - register.d.ts - remote - backoff.d.ts - connectivity_monitor.d.ts - connectivity_monitor_noop.d.ts - datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - number_serializer.d.ts - online_state_tracker.d.ts - persistent_stream.d.ts - remote_syncer.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rpc_error.d.ts - serializer.d.ts - serializer.d.ts - serializer.d.ts - serializer.d.ts - serializer.d.ts - serializer.d.ts - saync_observer.d.ts - async_dece.d.ts - async_dece.d.ts - async_dece.d.ts - async_dece.d.ts - async_dece.d.ts - bundle_reader.d.ts - bundle_reader.impl.d.ts - byte_stream.d.ts - byte_stream.d.ts - byte_stream.d.ts - byte_string.d.ts - input_validation.d.ts - logic_utils.d.ts - misc.d.ts - misc.d.ts - obj.d.ts - obj.d.ts - obj_map.d.ts - promise.d.ts	!!!
- protos - firestore_bundle_proto.d.ts - firestore_proto_api.d.ts - register.d.ts - remote - backoff.d.ts - connectivity_monitor.d.ts - connectivity_monitor_noop.d.ts - datastore.d.ts - existence_filter.d.ts - unumber_serializer.d.ts - online_state_tracker.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_store.d.ts - rest_connection.d.ts - rest_connection.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_queue.d.ts - async_queue.d.ts - bundle_reader_impl.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_stream.d.ts - byte_string.d.ts - bundle_reader.inpl.d.ts - byte_string.d.ts - input_validation.d.ts - logic_utils.d.ts - misc.d.ts - misc.d.ts - misc.d.ts - obj_d.ts - obj_d.ts - obj_d.ts - obj_d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts	— serializer.d.ts
firestore_bundle_proto.d.ts firestore_proto_api.d.ts remote backoff.d.ts connection.d.ts connectivity_monitor.d.ts connectivity_monitor_noop.d.ts datastore.d.ts existence_filter.d.ts number_serializer.d.ts noline_state_tracker.d.ts remote_event.d.ts remote_event.d.ts remote_store.d.ts rest_connection.d.ts rect_connection.d.ts rect_	│
firestore_proto_api.d.ts - register.d.ts - remote - backoff.d.ts - connectivity_monitor.d.ts - connectivity_monitor.noop.d.ts - datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - online_state_tracker.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.dts - rest_connection.dts - serializer.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - aray.d.ts - async_queue_ints - async_queue_ints - async_queue_ints - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader.impl.d.ts - byte_stream.d.ts - byte_string.d.ts - cerror.d.ts - cerror.d.t	├─ protos
- register.d.ts - remote - backoff.d.ts - connection.d.ts - connectivity_monitor_noop.d.ts - connectivity_monitor_noop.d.ts - datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - number_serializer.d.ts - persistent_stream.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rect_connection.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - watch_change.d.ts - async_queue.d.ts - async_queue.d.ts - async_queue.d.ts - base6d_decode_error.d.ts - bundle_reader.d.ts - bundle_reader.impl.d.ts - byte_stream.d.ts - byte_stream.d.ts - byte_stream.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - log.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	<pre> </pre>
- remote - backoff.d.ts - connection.d.ts - connectivity_monitor_noop.d.ts - connectivity_monitor_noop.d.ts - datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - online_state_tracker.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.d.ts - serializer.d.ts - stream_bridge.d.ts - stream_bridge.d.ts - async_observer.d.ts - async_observer.d.ts - async_observer.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader_impl.d.ts - byte_string.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	firestore_proto_api.d.ts
backoff.d.ts	├─ register.d.ts
- connection.d.ts - connectivity_monitor.d.ts - connectivity_monitor_noop.d.ts - datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - number_serializer.d.ts - online_state_tracker.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rpc_error.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_observer.d.ts - async_queue_impl.d.ts - async_queue_impl.d.ts - bundle_reader_d.ts - bundle_reader_d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - log.d.ts - log.d.ts - log.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	- remote
- connectivity_monitor.d.ts - connectivity_monitor_noop.d.ts - datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - online_state_tracker.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rep_error.d.ts - serializer.d.ts - stream_bridge.d.ts - wtch_change.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue.d.ts - bundle_reader_d.ts - bundle_reader_d.ts - byte_stream.d.ts - byte_string.d.ts - input_validation.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.ts - opi_map.d.ts - promise.d.ts	├─ backoff.d.ts
- connectivity_monitor_noop.d.ts - datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - number_serializer.d.ts - persistent_stream.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_store.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rpc_error.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue.d.ts - base6d_decode_error.d.ts - bundle_reader.impl.d.ts - bundle_reader.impl.d.ts - byte_stream.d.ts - byte_string.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts - promise.d.ts	— connection.d.ts
- connectivity_monitor_noop.d.ts - datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - number_serializer.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_store.d.ts - remote_store.d.ts - rest_connection.d.ts - rpc_error.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue.d.ts - base64_decode_error.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - input_validation.d.ts - logic_utils.d.ts - misc.d.ts - misc.d.ts - misc.d.ts - obj_map.d.ts - promise.d.ts	<pre>— connectivity monitor.d.ts</pre>
- datastore.d.ts - existence_filter.d.ts - number_serializer.d.ts - online_state_tracker.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rpc_error.d.ts - stream_bridge.d.ts - watch_change.d.ts - async_observer.d.ts - async_observer.d.ts - async_queue_d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_stream.d.ts - byte_stream.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	· · · ·
<pre>- existence_filter.d.ts - number_serializer.d.ts - online_state_tracker.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rpc_error.d.ts - stream_bridge.d.ts - stream_bridge.d.ts - watch_change.d.ts - async_observer.d.ts - async_queue_d.ts - async_queue_d.ts - bundle_reader.d.ts - bundle_reader.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.</pre>	
- number_serializer.d.ts - online_state_tracker.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rpc_error.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_observer.d.ts - async_queue_dimpl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader.impl.d.ts - byte_stream.d.ts - byte_stream.d.ts - input_validation.d.ts - logid.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	
- online_state_tracker.d.ts - persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rect_connection.d.ts - serializer.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue.d.ts - bundle_reader_impl.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	·
- persistent_stream.d.ts - remote_event.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rest_connection.d.ts - rect_error.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_observer.d.ts - async_queue_impl.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader.d.ts - byte_string.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - node_api.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	!!!
- remote_event.d.ts - remote_syncer.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rpc_error.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	! ! ! – –
- remote_store.d.ts - remote_syncer.d.ts - rest_connection.d.ts - rpc_error.d.ts - scrializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - watch_change.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue.d.ts - async_queue.impl.d.ts - bundle_reader.d.ts - bundle_reader.impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - misc.d.ts - mode_api.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	
remote_syncer.d.ts rest_connection.d.ts rpc_error.d.ts serializer.d.ts stream_bridge.d.ts watch_change.d.ts util array.d.ts assert.d.ts async_observer.d.ts async_queue.d.ts async_queue_impl.d.ts base64_decode_error.d.ts bundle_reader.d.ts bundle_reader_impl.d.ts byte_stream.d.ts byte_string.d.ts error.d.ts input_validation.d.ts log.d.ts log.d.ts logic_utils.d.ts indict indicts in	· · · · · ·
- rest_connection.d.ts - rpc_error.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader.impl.d.ts - byte_stream.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - log.d.ts - misc.d.ts - misc.d.ts - obj_map.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	_
- rpc_error.d.ts - serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue.impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - logi.d.ts - logi.c_utils.d.ts - misc.d.ts - node_api.d.ts - obj.d.ts - obj.d.ts - obj_map.d.ts - promise.d.ts	
- serializer.d.ts - stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - assert.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	!!!
- stream_bridge.d.ts - watch_change.d.ts - util - array.d.ts - assert.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_map.d.ts - obj_map.d.ts - promise.d.ts	!!! -
<pre>watch_change.d.ts util array.d.ts assert.d.ts async_observer.d.ts async_queue.d.ts async_queue_impl.d.ts base64_decode_error.d.ts bundle_reader_impl.d.ts bundle_reader_impl.d.ts byte_stream.d.ts byte_string.d.ts error.d.ts input_validation.d.ts log.d.ts logic_utils.d.ts misc.d.ts node_api.d.ts obj_map.d.ts promise.d.ts</pre>	
util array.d.ts assert.d.ts async_observer.d.ts async_queue.d.ts async_queue_impl.d.ts base64_decode_error.d.ts bundle_reader.d.ts bundle_reader_impl.d.ts byte_stream.d.ts byte_stream.d.ts error.d.ts input_validation.d.ts log.d.ts logic_utils.d.ts misc.d.ts node_api.d.ts obj_map.d.ts promise.d.ts	
- array.d.ts - assert.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_map.d.ts - promise.d.ts	
- assert.d.ts - async_observer.d.ts - async_queue.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader_impl.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj.d.ts - promise.d.ts	
- async_observer.d.ts - async_queue.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - obj.d.ts - obj_map.d.ts - promise.d.ts	! ! !
- async_queue.d.ts - async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj.d.ts - promise.d.ts	
- async_queue_impl.d.ts - base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_map.d.ts - promise.d.ts	
<pre>- base64_decode_error.d.ts - bundle_reader.d.ts - bundle_reader_impl.d.ts - byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj.d.ts - promise.d.ts</pre>	i i
<pre>bundle_reader.d.ts bundle_reader_impl.d.ts byte_stream.d.ts byte_string.d.ts byte_string.d.ts error.d.ts input_validation.d.ts log.d.ts logic_utils.d.ts misc.d.ts node_api.d.ts obj_d.ts promise.d.ts</pre>	
<pre>bundle_reader_impl.d.ts byte_stream.d.ts byte_string.d.ts byte_string.d.ts error.d.ts input_validation.d.ts log.d.ts logic_utils.d.ts misc.d.ts node_api.d.ts obj.d.ts promise.d.ts</pre>	
<pre>- byte_stream.d.ts - byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - misc.d.ts - node_api.d.ts - obj.d.ts - obj_map.d.ts - promise.d.ts</pre>	
<pre>- byte_string.d.ts - error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - node_api.d.ts - obj_d.ts - obj_map.d.ts - promise.d.ts</pre>	
- error.d.ts - input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - mode_api.d.ts - obj.d.ts - obj_map.d.ts - promise.d.ts	! ! -
<pre>- input_validation.d.ts - log.d.ts - logic_utils.d.ts - misc.d.ts - mode_api.d.ts - obj.d.ts - obj_map.d.ts - promise.d.ts</pre>	! !
- log.d.ts - logic_utils.d.ts - misc.d.ts - misc.d.ts - node_api.d.ts - obj.d.ts - obj_map.d.ts - promise.d.ts	!!!
- logic_utils.d.ts - misc.d.ts - mode_api.d.ts - obj.d.ts - obj_map.d.ts - promise.d.ts	
- misc.d.ts - node_api.d.ts - obj.d.ts - obj_map.d.ts - promise.d.ts	
— node_api.d.ts — obj.d.ts — obj_map.d.ts — promise.d.ts	· · · · · ·
— obj.d.ts — obj_map.d.ts — promise.d.ts	
<pre></pre>	
— promise.d.ts	! ! -
	! ! '
	— sorted_map.d.ts
	! ! -
integration	— integration
	├─ api
aggregation.test.d.ts	
array_transforms.test.d.ts	│

	batch_writes.test.d.ts bundle.test.d.ts cursor.test.d.ts database.test.d.ts get_options.test.d.ts index_configuration.test.d.ts numeric_transforms.test.d.ts query.test.d.ts server_timestamp.test.d.ts transactions.test.d.ts database.test.d.ts type.test.d.ts database.test.d.ts database.test.d.ts idle_timeout.test.d.ts bootstrap.d.ts browser indexeddb.test.d.ts prime_backend.test.d.ts prime_backend.test.d.ts stream.test.d.ts dile_test.d.ts idle_timeout.test.d.ts browser indexeddb.test.d.ts prime_backend.test.d.ts prime_backend.test.d.ts ifrebase_export.d.ts helpers.d.ts internal_helpers.d.ts internal_helpers.d.t
--	--

l guery test d ts
— query.test.d.ts
└─ view.test.d.ts
<pre>— generate_spec_json.d.ts</pre>
index index
└─ ordered_code_writer.test.d.ts
— local
<pre>bundle_cache.test.d.ts</pre>
├─ counting_query_engine.d.ts
<pre>— document_overlay_cache.test.d.ts</pre>
<pre>— encoded_resource_path.test.d.ts</pre>
<pre>index_backfiller.test.d.ts</pre>
<pre>index_manager.test.d.ts</pre>
<pre>indexeddb_persistence.test.d.ts</pre>
├ local_serializer.test.d.ts
<pre>— local_store.test.d.ts</pre>
<pre>— local_store_indexeddb.test.d.ts</pre>
<pre> lru_garbage_collector.test.d.ts</pre>
mutation_queue.test.d.ts
persistence_promise.test.d.ts
persistence_test_helpers.d.ts
persistence_transaction.test.d.ts
uery_engine.test.d.ts
reference_set.test.d.ts
remote_document_cache.test.d.ts
remote_document_change_buffer.test.d.ts
- simple_db.test.d.ts
target_cache.test.d.ts
— test_bundle_cache.d.ts
<pre>test_document_overlay_cache.d.ts</pre>
— test_index_manager.d.ts
— test_mutation_queue.d.ts
test_remote_document_cache.d.ts
test_remote_document_change_buffer.d.ts
test_target_cache.d.ts
web_storage_shared_client_state.test.d.ts
— model
— document.test.d.ts
document_set.test.d.ts
— field index.test.d.ts
mutation.test.d.ts
- object_value.test.d.ts
- object_value_builder.test.d.ts
path.test.d.ts
target.test.d.ts
target_index_matcher.test.d.ts
values.test.d.ts
- remote
datastore.test.d.ts
remote_event.test.d.ts
rest_connection.test.d.ts
- serializer.browser.test.d.ts
- serializer.helper.d.ts
serializer.node.test.d.ts
— specs
147 / 917

bundle_spec.test.d.ts
collection_spec.test.d.ts
describe_spec.d.ts
existence_filter_spec.test.d.ts
index_spec.test.d.ts
Limbo_spec.test.d.ts
Limit_spec.test.d.ts
l listen_spec.test.d.ts
│
orderby_spec.test.d.ts
perf_spec.test.d.ts
persistence_spec.test.d.ts
query_spec.test.d.ts
recovery_spec.test.d.ts
remote_store_spec.test.d.ts
resume_token_spec.test.d.ts
spec_rpc_error.d.ts
spec_test_components.d.ts
spec_test_runner.d.ts
│
L util
array.test.d.ts
async_queue.test.d.ts
base64.test.d.ts
bundle.test.d.ts
bundle_data.d.ts
│
│
│
— obj_map.test.d.ts
sorted_map.test.d.ts
sorted_set.test.d.ts
util
— api_helpers.d.ts
— equality_matcher.d.ts
— helpers.d.ts
<pre>mode_persistence.d.ts</pre>
— promise.d.ts
— spec_test_helpers.d.ts
test_platform.d.ts
│ └─ private.d.ts
— packages
— babel-register.d.ts
dist
index.esm2017.d.ts
— karma.conf.d.ts
lite
index.d.ts
│
— rollup.config.d.ts
— rollup.config.debug.d.ts
├─ rollup.config.lite.d.ts

— rollup.shared.d.ts
— src
— api
│
— bundle.d.ts
<pre>bytes.d.ts</pre>
- credentials.d.ts
database.d.ts
— field_path.d.ts
<u> </u>
— field_value.d.ts
— field_value_impl.d.ts
— filter.d.ts
├─ geo_point.d.ts
<pre>index_configuration.d.ts</pre>
<pre>— observer.d.ts</pre>
<pre>parse_context.d.ts</pre>
reference.d.ts
reference_impl.d.ts
settings.d.ts
sapshot.d.ts
timestamp.d.ts
— timestamp.d.ts
— transaction_options.d.ts
└─ write_batch.d.ts
— api.d.ts
⊢ auth
└─ user.d.ts
— core
— bundle.d.ts
— bundle_impl.d.ts
component_provider.d.ts
· · · · · · · · · · · · · · · · · · ·
— database_info.d.ts
- event_manager.d.ts
— filter.d.ts
<pre>firestore_client.d.ts</pre>
├─ listen_sequence.d.ts
│
— query.d.ts
— snapshot_version.d.ts
- sync_engine.d.ts
— sync_engine_impl.d.ts
target.d.ts
<pre></pre>
— transaction.d.ts
— transaction_options.d.ts
— transaction_runner.d.ts
— types.d.ts
├─ version.d.ts
— view.d.ts
└─ view_snapshot.d.ts
⊢ index
☐ directional_index_byte_encoder.d.ts
all cottons t_index_by to_checker rules

	<pre>- firestore_index_value_writer.d.ts - index_byte_encoder.d.ts - index_entry.d.ts - ordered_code_writer.d.ts ndex.d.ts ndex.node.d.ts ndex.rn.d.ts ite-api - aggregate.d.ts - aggregate_types.d.ts - bytes.d.ts - components.d.ts - database.d.ts</pre>
	<pre>- field_path.d.ts</pre>
	<pre>- field_value.d.ts</pre>
	<pre>- field_value_impl.d.ts</pre>
	<pre>- geo_point.d.ts</pre>
	<pre>- query.d.ts</pre>
	<pre>- reference.d.ts</pre>
	<pre>- reference_impl.d.ts</pre>
	<pre>- settings.d.ts</pre>
	<pre>- snapshot.d.ts</pre>
	<pre>- timestamp.d.ts</pre>
	<pre>- transaction.d.ts</pre>
	<pre>- transaction_options.d.ts</pre>
	- types.d.ts
	- user_data_reader.d.ts
	<pre>- user_data_writer.d.ts</pre>
	<pre>- write_batch.d.ts ocal</pre>
	- bundle_cache.d.ts
	<pre>- bundle_cache.d.ts - document_overlay_cache.d.ts</pre>
	- encoded_resource_path.d.ts
	<pre>- index_backfiller.d.ts</pre>
	<pre>- index_manager.d.ts</pre>
	<pre>- indexeddb_bundle_cache.d.ts</pre>
	<pre>- indexeddb_document_overlay_cache.d.ts</pre>
	<pre>- indexeddb_index_manager.d.ts</pre>
	<pre>- indexeddb_lru_delegate.d.ts</pre>
	<pre>- indexeddb_lru_delegate_impl.d.ts</pre>
	<pre>- indexeddb_mutation_batch_impl.d.ts</pre>
	<pre>- indexeddb_mutation_queue.d.ts</pre>
	<pre>- indexeddb_persistence.d.ts</pre>
	<pre>- indexeddb_remote_document_cache.d.ts</pre>
	<pre>- indexeddb_schema.d.ts</pre>
	<pre>- indexeddb_schema_converter.d.ts</pre>
	<pre>- indexeddb_schema_legacy.d.ts</pre>
	<pre>- indexeddb_sentinels.d.ts</pre>
	<pre>- indexeddb_target_cache.d.ts</pre>
	<pre>- indexeddb_transaction.d.ts</pre>
	- local_documents_view.d.ts
	- local_serializer.d.ts
	- local_store.d.ts
	<pre>- local_store_impl.d.ts</pre>

│
│
│
│
<pre> </pre>
│
│ │ ├─ memory_mutation_queue.d.ts
│
│ │ ├─ memory_remote_document_cache.d.ts
│
│
│
│
│
│ │ ├─ persistence_transaction.d.ts
query_engine.d.ts
reference_set.d.ts
remote_document_cache.d.ts
remote_document_change_buffer.d.ts
— shared_client_state.d.ts
— shared_client_state_schema.d.ts
<pre>- shared_client_state_syncer.d.ts</pre>
│
target_cache.d.ts
target_data.d.ts
— model
│
collections.d.ts
document.d.ts
document_comparator.d.ts
document_key.d.ts
document_set.d.ts
field_index.d.ts
field_mask.d.ts
mutation.d.ts
<pre>mutation_batch.d.ts</pre>
normalize.d.ts
— overlay.d.ts
path.d.ts
type_order.d.ts
values.d.ts
— platform
base64.d.ts
baseo4.u.ts
browser base64.d.ts
baseo4.u.ts byte_stream_reader.d.ts
— byte_stream_reader.d.ts
connection.d.ts
— connectivity_monitor.d.ts
151 / 017

— random_bytes.d.ts
— serializer.d.ts
— text_serializer.d.ts
└─ webchannel_connection.d.ts
— browser_lite
— base64.d.ts
<pre>byte_stream_reader.d.ts</pre>
— connection.d.ts
— dom.d.ts
<pre>— fetch_connection.d.ts</pre>
├ format_json.d.ts
<pre>- random_bytes.d.ts</pre>
— serializer.d.ts
└ text_serializer.d.ts
— byte_stream_reader.d.ts
— connection.d.ts
— dom.d.ts
— format_json.d.ts
— node
├─ base64.d.ts
— byte_stream_reader.d.ts
- connection.d.ts
— dom.d.ts
— format_json.d.ts
— grpc_connection.d.ts
— load_protos.d.ts
- random_bytes.d.ts
— serializer.d.ts
text_serializer.d.ts
— node_lite
├─ base64.d.ts
byte_stream_reader.d.ts
- connection.d.ts
— dom.d.ts
— format_json.d.ts
random_bytes.d.ts
— serializer.d.ts
text_serializer.d.ts
random_bytes.d.ts
— random_bytes.d.ts — rn
├─ '''
byte_stream_reader.d.ts
— byte_stream_reader.d.ts — connection.d.ts
— connection.d.ts — dom.d.ts
— format_json.d.ts
- random_bytes.d.ts
— serializer.d.ts
└─ text_serializer.d.ts
- rn_lite
— base64.d.ts
byte_stream_reader.d.ts
— connection.d.ts
— dom.d.ts
├─ format_json.d.ts

```
- random_bytes.d.ts
         serializer.d.ts

    text serializer.d.ts

      - serializer.d.ts

    text serializer.d.ts

  — protos
     — firestore_bundle_proto.d.ts
    └ firestore proto api.d.ts
  - register.d.ts
  remote
     backoff.d.ts
     connection.d.ts
     connectivity_monitor.d.ts
     connectivity_monitor_noop.d.ts
     — datastore.d.ts
     — existence_filter.d.ts
     humber_serializer.d.ts
     online state tracker.d.ts
     persistent stream.d.ts
     — remote_event.d.ts
     — remote_store.d.ts
     remote_syncer.d.ts
     — rest_connection.d.ts
     - rpc_error.d.ts
     - serializer.d.ts
      - stream_bridge.d.ts

    watch_change.d.ts

  - util

⊢ array.d.ts

     — assert.d.ts
     async observer.d.ts
     — async_queue.d.ts
     — async_queue_impl.d.ts
     — base64_decode_error.d.ts
     bundle_reader.d.ts
     bundle_reader_impl.d.ts
     — byte_stream.d.ts
     — byte_string.d.ts
     — error.d.ts
     — input_validation.d.ts
     — log.d.ts
     logic_utils.d.ts

    misc.d.ts

     — node_api.d.ts
     – obj.d.ts
     — obj_map.d.ts
     promise.d.ts
     - sorted_map.d.ts
      sorted_set.d.ts
    L types.d.ts
- test

    integration

      – api

─ aggregation.test.d.ts
```

- array_transforms.test.d.ts - batch_writes.test.d.ts - bundle.test.d.ts - cursor.test.d.ts - database.test.d.ts - fields.test.d.ts - index_configuration.test.d.ts - numeric_transforms.test.d.ts - provider.test.d.ts - provider.test.d.ts - server_timestamp.test.d.ts - transactions.test.d.ts - type.test.d.ts - walidation.test.d.ts - index_toft.d.ts - bootstrap.d.ts - remote - remote-test.d.ts - prime_backend.test.d.ts - prime_backend.test.d.ts - internal_helpers.d.ts - internal_helpers.d.ts - internal_helpers.d.ts - internal_helpers.d.ts - settings.d.ts - internal_helpers.d.ts - internal_helpers.d.ts - lite - bootstrap.d.ts - helpers.d.ts - internal_helpers.d.ts - internal_helpers.d.ts - internal_helpers.d.ts - internal_helpers.d.ts - internal_helpers.d.ts - helpers.d.ts - internal_helpers.d.ts - helpers.d.ts - internal_helpers.d.ts - internal_helpers.d.ts - helpers.d.ts - internal_helpers.d.ts - helpers.d.ts - internal_helpers.d.ts - helpers.d.ts - helpers.d.ts - internal_helpers.d.ts - helpers.d.ts - helpers.d.	
--	--

<pre> □ listen_sequence.test.d.ts □ query.test.d.ts □ yiew.test.d.ts □ generate_spec_json.d.ts □ index □ ordered_code_writer.test.d.ts □ local □ bundle_cache.test.d.ts □ counting_query_engine.d.ts □ document_overlay_cache.test.d.ts □ index_backfiller.test.d.ts □ index_backfiller.test.d.ts □ index_manager.test.d.ts □ local_serializer.test.d.ts □ local_store.test.d.ts □ local_store_indexeddb.test.d.ts □ loral_store_indexeddb.test.d.ts □ loral_store_indexeddb.test.d.ts □ persistence_promise.test.d.ts □ persistence_test_helpers.d.ts □ persistence_test_helpers.d.ts □ persistence_test.d.ts □ persistence_test.d.ts □ reference_set.test.d.ts □ remote_document_cache.test.d.ts □ remote_document_cache.test.d.ts □ remote_document_cache.test.d.ts □ remote_document_change_buffer.test.d.ts □ simple_db.test.d.ts □ target_cache.test.d.ts □ target_cache.d.ts □</pre>
!!
!! -
!!
<u>-</u> .
_
! ! ' '- '
!!!
!!
!! -
!!
!!
- test_mutation_queue.d.ts
<pre> — test_remote_document_cache.d.ts test_remote_document_change_buffer.d.ts</pre>
— test_remote_document_change_buffer.d.ts — test_target_cache.d.ts
web_storage_shared_client_state.test.d.ts
— model
— document.test.d.ts
<pre>— document_set.test.d.ts</pre>
— field_index.test.d.ts
— mutation.test.d.ts
— object_value.test.d.ts
- object_value_builder.test.d.ts
— path.test.d.ts
<pre>— target.test.d.ts — target_index_matcher.test.d.ts</pre>
remote
- datastore.test.d.ts
- remote_event.test.d.ts
rest_connection.test.d.ts
— serializer.browser.test.d.ts
— serializer.helper.d.ts
└─ serializer.node.test.d.ts
155 / 017

```
specs
                    - bundle spec.test.d.ts
                     collection_spec.test.d.ts
                    — describe_spec.d.ts
                    existence filter spec.test.d.ts
                    - index spec.test.d.ts
                     limbo spec.test.d.ts
                     - limit spec.test.d.ts
                     listen spec.test.d.ts
                    offline_spec.test.d.ts
                    orderby_spec.test.d.ts
                     - perf_spec.test.d.ts
                    persistence_spec.test.d.ts
                    — query_spec.test.d.ts
                     recovery_spec.test.d.ts
                    - remote_store_spec.test.d.ts
                    - resume_token_spec.test.d.ts
                    - spec builder.d.ts
                    - spec_rpc_error.d.ts
                    spec_test_components.d.ts
                     spec_test_runner.d.ts

    write spec.test.d.ts

                  – util
                    — array.test.d.ts
                     async_queue.test.d.ts
                     - base64.test.d.ts
                     - bundle.test.d.ts
                     bundle data.d.ts
                     logic utils.test.d.ts
                    - misc.test.d.ts
                    - node api.test.d.ts
                    - obj_map.test.d.ts
                     - sorted_map.test.d.ts
                   └ sorted_set.test.d.ts
              util
                 — api_helpers.d.ts
                 equality_matcher.d.ts
                 — helpers.d.ts
                 — node_persistence.d.ts
                 — promise.d.ts
                 - spec_test_helpers.d.ts
                 └ test_platform.d.ts
    └ private.d.ts
   - lite
    └ package.json
   - node modules
    └ .bin
        proto-loader-gen-types
  – package₌json
firestore-compat
  CHANGELOG.md
   README.md
   - dist

─ index.cjs.js
```

```
- index.cjs.js.map
- index.esm2017.js
- index.esm2017.js.map
— index.esm5.js
- index.esm5.js.map
index.node.cjs.js
- index.node.cjs.js.map
- index.rn.js
- index.rn.js.map
- node-esm
  index.node.esm.js
   - index.node.esm.js.map
   – package.json
   - src
      api
        ─ blob.d.ts
         — database.d.ts
         — field path.d.ts
         field value.d.ts
        — geo_point.d.ts
         — observer.d.ts
        └ timestamp.d.ts
      - config.d.ts
      index.console.d.ts
      - index.d.ts
      - index.node.d.ts
      - index.rn.d.ts
      register-module.d.ts
      - util

    input_validation.d.ts

  ∟ test
     — array_transforms.test.d.ts
      batch_writes.test.d.ts
      bootstrap.d.ts
      - bundle.test.d.ts
      - cursor.test.d.ts
      database.test.d.ts
      - fields.test.d.ts
      - get_options.test.d.ts
      - numeric_transforms.test.d.ts
      - query.test.d.ts
      - server_timestamp.test.d.ts
      - smoke.test.d.ts
      - transactions.test.d.ts
      - type.test.d.ts
      – util
        — equality_matcher.d.ts
         events_accumulator.d.ts
         firebase_export.d.ts
         - helpers.d.ts
         - promise.d.ts
        └ settings.d.ts
      validation.test.d.ts
- src
```

```
api

    blob.d.ts

            database.d.ts
            - field_path.d.ts
            - field value.d.ts
            - geo point.d.ts
            - observer.d.ts
           └ timestamp.d.ts
         config.d.ts
         index.console.d.ts
         - index.d.ts
         index.node.d.ts
         - index.rn.d.ts
         register-module.d.ts
         - util
           └ input_validation.d.ts
     ∟ test
        — array_transforms.test.d.ts
         - batch writes.test.d.ts
         bootstrap.d.ts
         - bundle.test.d.ts
         - cursor.test.d.ts
         database.test.d.ts
         - fields.test.d.ts
         - get_options.test.d.ts
         numeric_transforms.test.d.ts
        — query.test.d.ts
         server timestamp.test.d.ts
         - smoke.test.d.ts
         transactions.test.d.ts
        - type.test.d.ts
         - util
           — equality_matcher.d.ts
           — events_accumulator.d.ts
            – firebase_export.d.ts
           helpers.d.ts
            - promise.d.ts
           └ settings.d.ts
         validation.test.d.ts
   – package.json
firestore-types

    ─ CHANGELOG.md

  README.md
   - index.d.ts
  └ package.json
functions


    ⊢ CHANGELOG.md

   README.md
   - dist
     ⊢ esm-node
        — index.node.esm.js
         - index.node.esm.js.map
         – package⊾json
```

```
- api.d.ts
            callable.test.d.ts
            - config.d.ts
            constants.d.ts
            - context.d.ts
            - error.d.ts
            - index.d.ts
            - index.node.d.ts
            - public-types.d.ts
            serializer.d.ts
            - serializer.test.d.ts
            - service.d.ts
            - service.test.d.ts
         - test
          └ utils.d.ts
      functions-public.d.ts
     - functions.d.ts
      - index.cjs.js
      - index.cjs.js.map
      - index.esm.js
     - index.esm.js.map
      - index.esm2017.js
     index.esm2017.js.map
      index.node.cjs.js
      - index.node.cjs.js.map
      - src
        — api.d.ts
         callable.test.d.ts
         - config.d.ts
         constants.d.ts
         - context.d.ts
         - error.d.ts
         - index.d.ts
         - index.node.d.ts
         - public-types.d.ts
         serializer.d.ts
         serializer.test.d.ts
         - service.d.ts
         - service.test.d.ts
        └ tsdoc-metadata.json
      test
       └ utils.d.ts
 └ package json
functions—compat

    ─ CHANGELOG.md

  dist
     index.cjs.js
     – index.cjs.js.map
      - index.esm2017.js
     - index.esm2017.js.map
      - index.esm5.js
      - index.esm5.js.map
      index.node.cjs.js
      - index.node.cjs.js.map
```

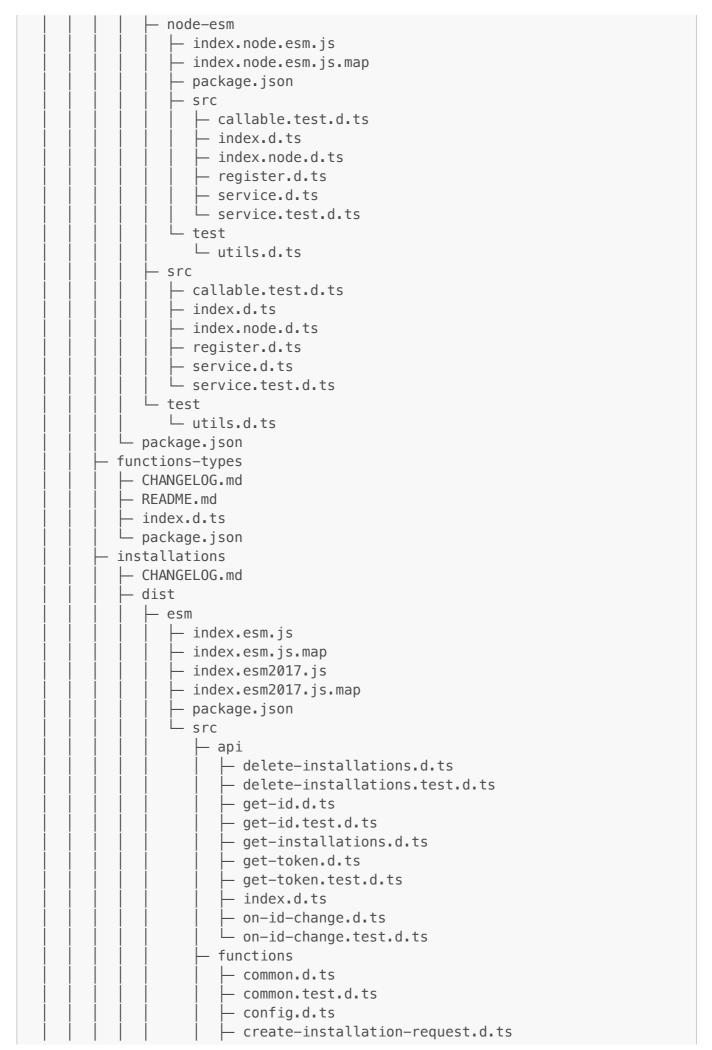

```
create-installation-request.test.d.ts

    delete-installation-request.d.ts

         delete-installation-request.test.d.ts
          generate-auth-token-request.d.ts
         └ generate-auth-token-request.test.d.ts
       helpers
         buffer-to-base64-url-safe.d.ts
         — buffer-to-base64-url-safe.test.d.ts
         — extract-app-config.d.ts
         — extract-app-config.test.d.ts
         fid-changed.d.ts
         fid-changed.test.d.ts
         — generate-fid.d.ts

─ generate-fid.test.d.ts

          get-installation-entry.d.ts
         — get-installation-entry.test.d.ts

    idb−manager.d.ts

         idb-manager.test.d.ts
          refresh-auth-token.d.ts
         └ refresh-auth-token.test.d.ts
       - index.d.ts

    interfaces

— api−response.d.ts

         installation-entry.d.ts
          installation-impl.d.ts

    □ public-types.d.ts

       testing
         compare-headers.d.ts
         compare-headers.test.d.ts
          fake-generators.d.ts
        L setup.d.ts
     └ util
         constants.d.ts
         — errors.d.ts
         - get-key.d.ts
          - sleep.d.ts
         └ sleep.test.d.ts
 - index.cjs.js
– index.cjs.js.map
 installations-public.d.ts
installations.d.ts
∟ src
      ─ delete-installations.d.ts
       delete-installations.test.d.ts
      – get-id.d.ts
       - get-id.test.d.ts
       get-installations.d.ts
       - get-token.d.ts
       get-token.test.d.ts
       - index.d.ts
       on-id-change.d.ts
     └─ on-id-change.test.d.ts
    functions
```

```
common.d.ts
           - common.test.d.ts
           - config.d.ts
           create-installation-request.d.ts
          — create-installation-request.test.d.ts
          — delete-installation-request.d.ts
           delete-installation-request.test.d.ts
           generate-auth-token-request.d.ts
          helpers
          ─ buffer-to-base64-url-safe.d.ts
           buffer-to-base64-url-safe.test.d.ts
           extract-app-config.d.ts
          — extract-app-config.test.d.ts
           - fid-changed.d.ts
           - fid-changed.test.d.ts
          — generate-fid.d.ts
           - generate-fid.test.d.ts
           get-installation-entry.d.ts
           get-installation-entry.test.d.ts
          — idb-manager.d.ts
           idb-manager.test.d.ts
           refresh-auth-token.d.ts
          └ refresh-auth-token.test.d.ts
        - index.d.ts

    interfaces

— api−response.d.ts

           installation-entry.d.ts
           installation-impl.d.ts
          └ public-types.d.ts
        testing
          — compare-headers.d.ts
          compare-headers.test.d.ts
           fake-generators.d.ts

    setup.d.ts

        - tsdoc−metadata.json
        - util

─ constants.d.ts

           - errors.d.ts
          — get-key.d.ts
           - sleep.d.ts
          └ package json

    installations-compat

 ─ CHANGELOG.md
  README.md
  dist
     - esm
       — index.esm.js
        index.esm.js.map
        - index.esm2017.js
        index.esm2017.js.map
        - package.json
```

```
- index.d.ts
             installationsCompat.d.ts
             installationsCompat.test.d.ts

    testing

               - setup.d.ts
               └ util.d.ts
       index.cjs.js
       - index.cjs.js.map
     ∟ src

─ index.d.ts

          installationsCompat.d.ts
          installationsCompat.test.d.ts

    testing

─ setup.d.ts

            └ util.d.ts
  └ package.json

─ installations-types

  ─ CHANGELOG.md
    - index.d.ts
  └ package.json
logger
  ─ CHANGELOG.md
   README.md
   – dist
     ⊢ esm
         — index.d.ts

─ index.esm2017.js

         - index.esm2017.js.map
          - index.esm5.js
         — index.esm5.js.map

    package.json


         - src
           └ logger.d.ts
        └ test
            custom-logger.test.d.ts
            └ logger.test.d.ts
       - index.cjs.js
       - index.cjs.js.map
       - index.d.ts
       - src
        └ logger.d.ts
     └ test
         custom-logger.test.d.ts
        └ logger.test.d.ts
  └ package.json
messaging

    ⊢ CHANGELOG.md

   README.md
   – dist
      ⊢ esm
         - index.esm.js
          index.esm.js.map
          - index.esm2017.js
          - index.esm2017.js.map
```

index.sw.esm2017.js
│
package.json
src
deleteToken.d.ts
isSupported.d.ts
onBackgroundMessage.d.ts
onMessage.d.ts
│
array-base64-translator.test.d.ts
— externalizePayload.d.ts
externalizePayload.test.d.ts
externatizer dy todditestiales - extract-app-config.d.ts
extract-app-config.test.d.ts
extract-app-config.test.d.ts
logToFirelog.d.ts
logToScion.d.ts
│
migrate-old-database.test.d.ts
register.d.ts
registerDefaultSw.d.ts
│
updateSwReg.d.ts
updateVapidKey.d.ts
index.d.ts
index.u.ts
interfaces
app-config.d.ts
internal-dependencies.d.ts
internal-message-payload.d.ts
logging-types.d.ts
public-types.d.ts
Loken-details.d.ts
internals — internals
idb-manager.test.d.ts
requests.d.ts
requests.test.d.ts
token-manager.d.ts
Loken-manager.test.d.ts
sw-listeners.d.ts
│
window-listener.d.ts
messaging-service.d.ts
testing
compare-headers.d.ts
164 / 017



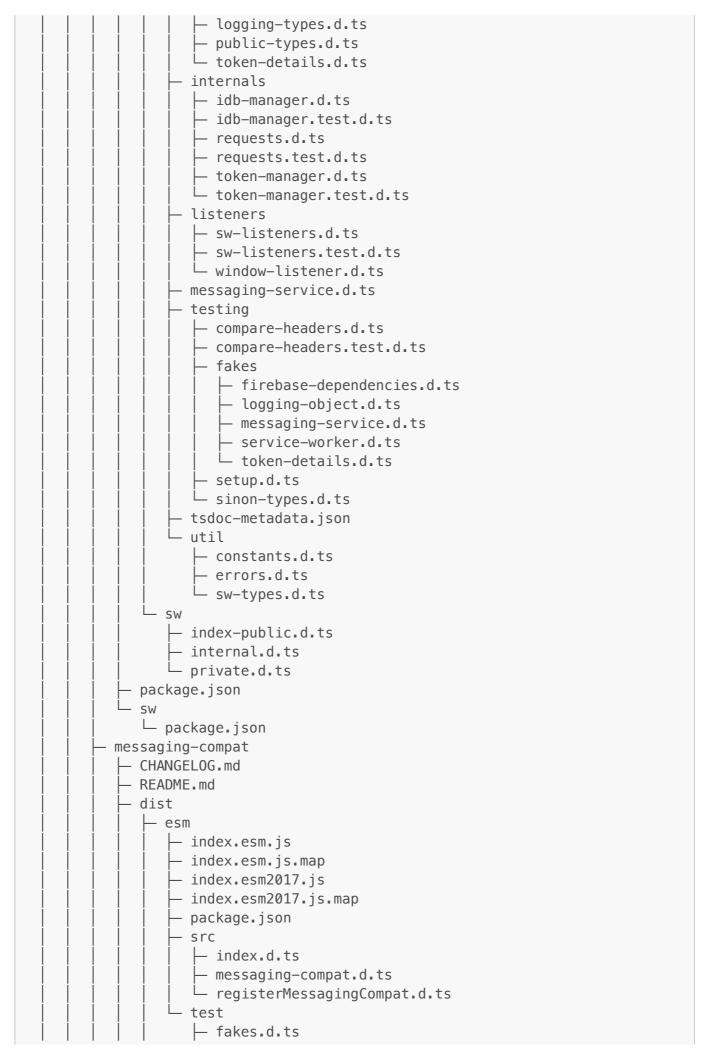

```
messaging-compat.test.d.ts
      - index.cjs.js
      index.cjs.js.map
      - src

─ index.d.ts

         messaging-compat.d.ts

    □ registerMessagingCompat.d.ts

     ∟ test
        — fakes.d.ts
        messaging-compat.test.d.ts
   – package.json
- messaging-interop-types

    ⊢ CHANGELOG.md

   README.md
   - index.d.ts
  └ package.json
– performance

⊢ CHANGELOG.md

   README.md
   – dist
     ⊢ esm
         index.esm.js
         index.esm.js.map
         — index.esm2017.js
         - index.esm2017.js.map
         – package.json
         - src

⊢ constants.d.ts

            - controllers
              perf.d.ts
              └ perf.test.d.ts
            - index.d.ts
            - index.test.d.ts
            public_types.d.ts
            resources
              metwork_request.d.ts
              hetwork_request.test.d.ts
                - trace.d.ts
              └ trace.test.d.ts
            - services
              ─ api_service.d.ts
               — api_service.test.d.ts
              — iid_service.d.ts
              — iid_service.test.d.ts
               initialization_service.d.ts
              initialization_service.test.d.ts
              — oob_resources_service.d.ts
               — oob_resources_service.test.d.ts
               — perf_logger.d.ts
               — perf_logger.test.d.ts
                remote_config_service.d.ts
               - remote_config_service.test.d.ts
               - settings_service.d.ts
               - transport_service.d.ts
```

```
- utils
       — app_utils.d.ts
        — attribute_utils.test.d.ts
        — attributes_utils.d.ts
        — console logger.d.ts
        — errors.d.ts
        metric utils.d.ts
        — metric_utils.test.d.ts
        — string_merger.d.ts
       └ string_merger.test.d.ts
   test
    └ setup.d.ts
- index.cjs.js
- index.cjs.js.map
- src
  — constants.d.ts
   controllers
     — perf.d.ts
    └ perf.test.d.ts
  — index.d.ts
   - index.test.d.ts
  public_types.d.ts
   resources

─ network_request.d.ts

    hetwork_request.test.d.ts
      - trace.d.ts
    └ trace.test.d.ts
   - services
    — api_service.d.ts
     — api service.test.d.ts
     - iid_service.d.ts
     iid_service.test.d.ts
     initialization_service.d.ts
     initialization_service.test.d.ts

─ oob_resources_service.d.ts

     - oob_resources_service.test.d.ts
     - perf_logger.d.ts
     — perf_logger.test.d.ts
     remote_config_service.d.ts
     remote_config_service.test.d.ts

─ settings_service.d.ts

     - transport_service.d.ts
    - tsdoc−metadata.json
  └ utils
    — app_utils.d.ts
    — attribute_utils.test.d.ts
     attributes_utils.d.ts
     console_logger.d.ts
      - errors.d.ts
     - metric_utils.d.ts
     — metric_utils.test.d.ts
     string_merger.d.ts
```

```
└ string_merger.test.d.ts
        test
         └ setup.d.ts
  └ package.json
performance-compat

— CHANGELOG.md

    README.md
   — dist
      ⊢ esm

    index.esm2017.js

          — index.esm2017.js.map
          - index.esm5.js
          - index.esm5.js.map
          — package.json
          - src

⊢ index.d.ts

             — performance.d.ts

    □ performance.test.d.ts

         └ test

─ setup.d.ts

            └ util.d.ts
       - index.cjs.js
      — index.cjs.js.map
       - src

─ index.d.ts

          - performance.d.ts

    □ performance.test.d.ts

      └ test

⊢ setup.d.ts

         └ util.d.ts
  └ package.ison
performance-types
   — CHANGELOG.md
    - index.d.ts
  └ package.json
 remote-config
   CHANGELOG.md
   README.md
    - dist
      — esm

─ index.esm.js

          — index.esm.js.map
         — index.esm2017.js
          - index.esm2017.js.map
          – package.json
          - src

— api.d.ts

             – api2.d.ts
             - client
               — caching_client.d.ts
               remote_config_fetch_client.d.ts
                 - rest_client.d.ts

    □ retrying_client.d.ts

             constants.d.ts
```

```
- errors.d.ts
      - index.d.ts
      language.d.ts
      - public_types.d.ts
      - register.d.ts
      remote_config.d.ts
      storage
        - storage.d.ts
        └ storage_cache.d.ts
     └ value.d.ts
   - test
      client
        — caching_client.test.d.ts
          - rest_client.test.d.ts
        └ retrying_client.test.d.ts
      - errors.test.d.ts
      language.test.d.ts
      remote config.test.d.ts
      - setup.d.ts
     — storage
         storage.test.d.ts
        └ storage cache.test.d.ts
     └ value.test.d.ts
— index.cjs.js
index.cjs.js.map
remote-config-public.d.ts
remote-config.d.ts
- src
   — api.d.ts
   api2.d.ts
  — client

    ─ caching_client.d.ts

     remote_config_fetch_client.d.ts
      rest_client.d.ts
     └ retrying_client.d.ts
   constants.d.ts
   - errors.d.ts
   - index.d.ts
   language.d.ts
   public_types.d.ts
   — register.d.ts
   — remote_config.d.ts
   storage
      storage.d.ts
     └ storage_cache.d.ts
   — tsdoc−metadata.json
  └ value.d.ts
test
  — client
     — caching_client.test.d.ts
      - rest_client.test.d.ts

    □ retrying_client.test.d.ts

   - errors.test.d.ts
    language.test.d.ts
```

```
- remote_config.test.d.ts
         - setup.d.ts
         storage
            - storage.test.d.ts
           └ storage cache.test.d.ts
        └ value.test.d.ts
   - package⊾json
remote-config-compat
  — CHANGELOG.md
  README.md
   - dist
     — esm
        index.esm2017.js
         index.esm2017.js.map
         - index.esm5.js
         - index.esm5.js.map
        — package.json
         - src

─ index.d.ts

            remoteConfig.d.ts
           └─ remoteConfig.test.d.ts
         test
           — setup.d.ts
           └ util.d.ts
      index.cjs.js
      index.cjs.js.map
      - src
        index.d.ts
         remoteConfig.d.ts

    □ remoteConfig.test.d.ts

     └ test

─ setup.d.ts

        └ util.d.ts
 └ package.json
remote-config-types
 ├ CHANGELOG.md
  README.md
   - index.d.ts
 └ package.json

    storage

  ─ CHANGELOG.md
  — README.md
  — dist
     index.browser.cjs.js
      index.browser.cjs.js.map
      index.cjs.js
     — index.cjs.js.map
     - index.esm2017.js
      index.esm2017.js.map
     – index.esm5.js


─ index.esm5.js.map

      index.node.cjs.js
      index.node.cjs.js.map
      - node-esm
```

- index.node.esm.js.map - package.json - src - api.browser.d.ts - api.node.d.ts - api.node.d.ts - api.node.d.ts - constants.d.ts - implementation - async.d.ts - backoff.d.ts - blob.d.ts - connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - path.d.ts - request.d.ts - request.d.ts - request.d.ts - request.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - url.d.ts - index.node.d.ts - index.node.d.ts - patform - base64.d.ts - browser - base64.d.ts - connection.d.ts - reference.d.ts - reference.d.ts - reference.d.ts - reference.d.ts - task.d.ts - task.d.ts - reference.d.ts - reference.d.ts - reference.d.ts - task.d.ts - towser - blob.test.d.ts - browser - blob.test.d.ts - browser - booker	index.node.esm.js.map	
	- package.json - src - api.drs - api.drs - api.node.d.ts - constants.d.ts - implementation - async.d.ts - blob.d.ts - connection.d.ts - connection.d.ts - failrequest.d.ts - fis.d.ts - list.d.ts - location.d.ts - observer.d.ts - path.d.ts - request.d.ts - request.d.ts - request.d.ts - string.d.ts - string.d.ts - url.d.ts - url.d.ts - index.node.d.ts - index.node.d.ts - path.d.ts - path.d.ts - connection.d.ts - connection.d.ts - requests.d.ts - string.d.ts - type.d.ts - url.d.ts - url.d.ts - url.d.ts - index.d.ts - index.node.d.ts - index.node.d.ts - index.node.d.ts - index.node.d.ts - bse64.d.ts - browser - base64.d.ts - connection.d.ts - reference.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - connection.test.d.ts - connection.test.d.ts - connection.test.d.ts - connection.test.d.ts - browser - blob.test.d.ts - connection.test.d.ts	index.node.esm.js
	- package.json - src - api.drs - api.drs - api.node.d.ts - api.mode.d.ts - constants.d.ts - implementation - async.d.ts - blob.d.ts - blob.d.ts - connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - location.d.ts - location.d.ts - observer.d.ts - path.d.ts - request.d.ts - request.d.ts - requests.d.ts - string.d.ts - string.d.ts - url.d.ts - url.d.ts - index.node.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - bese64.d.ts - connection.d.ts - path.d.ts - request.d.ts - index.node.d.ts - index.node.d.ts - index.node.d.ts - index.node.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - service.d.ts - test - browser - blob.test.d.ts - browser - blob.test.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - connection.test.d.ts - browser - blob.test.d.ts - connection.test.d.ts	<pre>index.node.esm.js.map</pre>
- src - api.browser.d.ts - api.d.ts - api.node.d.ts - constants.d.ts - implementation - async.d.ts - backoff.d.ts - blob.d.ts - connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - json.d.ts - location.d.ts - location.d.ts - netadata.d.ts - path.d.ts - requestinfo.d.ts - requestinfo.d.ts - requests.d.ts - taskenums.d.ts - type.d.ts - uils.d.ts - tils.d.ts - tils	- src	
api.browser.d.ts	api.browser.d.ts	
		! .
api.node.d.ts constants.d.ts implementation async.d.ts bblob.d.ts consection.d.ts constants.d.ts	- api.node.d.ts - constants.d.ts - implementation - async.d.ts - backoff.d.ts - blob.d.ts - connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - observer.d.ts - request.d.ts - request.d.ts - request.d.ts - request.d.ts - tskenums.d.ts - tskenums.d.ts - utils.d.ts - utils.d.ts - index.node.d.ts - list.d.ts - index.node.d.ts - list.d.ts - location.d.ts - type.d.ts - utils.d.ts - type.d.ts - utils.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - browser - base64.d.ts - bromeer - base64.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - reference.d.ts - service.d.ts - service.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	
constants.d.ts — implementation — async.d.ts — backoff.d.ts — blob.d.ts — connection.d.ts — constants.d.ts — error.d.ts — failrequest.d.ts — fs.d.ts — ison.d.ts — list.d.ts — location.d.ts — metadata.d.ts — observer.d.ts — path.d.ts — request.d.ts — request.d.ts — request.d.ts — taskenums.d.ts — tils.d.ts — url.d.ts — url.d.ts — url.d.ts — index.node.d.ts — index.d.ts — base64.d.ts — browser — base64.d.ts — connection.d.ts — connection.d.ts — public-types.d.ts — reference.d.ts — service.d.ts — test — task.d.ts — public-types.d.ts — reference.d.ts — service.d.ts — test — browser — blob.test.d.ts — test — browser — blob.test.d.ts — test — browser — blob.test.d.ts — connection.test.d.ts — test — browser — blob.test.d.ts — connection.test.d.ts — test — browser — blob.test.d.ts — connection.test.d.ts — connection.test.d.ts — connection.test.d.ts	constants.d.ts — implementation — async.d.ts — backoff.d.ts — blob.d.ts — connection.d.ts — constants.d.ts — error.d.ts — failrequest.d.ts — json.d.ts — location.d.ts — metadata.d.ts — observer.d.ts — path.d.ts — request.d.ts — request.d.ts — request.d.ts — taskenums.d.ts — utils.d.ts — utils.d.ts — index.d.ts — index.d.ts — browser — base64.d.ts — connection.d.ts — connection.d.ts — connection.d.ts — request.d.ts — tasked.d.ts — index.d.ts — index.node.d.ts — index.node.d.ts — list.d.ts — metadata.d.ts — browser — base64.d.ts — connection.d.ts — connection.d.ts — connection.d.ts — reference.d.ts — service.d.ts — reference.d.ts — service.d.ts — task.d.ts — browser — blob.test.d.ts — browser — blob.test.d.ts — connection.test.d.ts — connection.test.d.ts — task.d.ts — test — browser — blob.test.d.ts — connection.test.d.ts — service.d.ts — service.d.ts — connection.test.d.ts — test — browser — blob.test.d.ts — connection.test.d.ts — connection.test.d.ts	
implementation	- implementation - async.d.ts - backoff.d.ts - blob.d.ts - connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - path.d.ts - request.d.ts - request.d.ts - request.d.ts - string.d.ts - taskenums.d.ts - url.d.ts - url.d.ts - url.d.ts - index.d.ts - index.onde.d.ts - list.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - reference.d.ts - service.d.ts - treference.d.ts - service.d.ts - reference.d.ts - connection.test.d.ts - browser	!!!
- async.d.ts - backoff.d.ts - blob.d.ts - connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - path.d.ts - request.d.ts - request.d.ts - request.d.ts - taskenums.d.ts - type.d.ts - utils.d.ts - uils.d.ts - index.d.ts - index.d.ts - hase64.d.ts - platform - base64.d.ts - connection.d.ts - connection.d.ts - request.d.ts - requests.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - platform - base64.d.ts - powser - base64.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - reference.d.ts - service.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	- async.d.ts - backoff.d.ts - blob.d.ts - connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - requests.d.ts - requests.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - index.d.ts - index.d.ts - list.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - service.d.ts - task.d.ts - browser - base64.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - task.d.ts - task.d.ts - prowser - bowser - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - service.d.ts - task.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	! !
backoff.d.ts blob.d.ts connection.d.ts constants.d.ts error.d.ts failrequest.d.ts json.d.ts list.d.ts boserver.d.ts path.d.ts request.d.ts request.d.ts at skenums.d.ts taskenums.d.ts url.d.ts url.d.ts url.d.ts url.d.ts base64.d.ts base64.d.ts base64.d.ts connection.d.ts public-types.d.ts task.d.ts base64.d.ts connection.d.ts connection.d.ts public-types.d.ts task.d.ts base64.d.ts connection.d.ts c	backoff.d.ts	
blob.d.ts connection.d.ts constants.d.ts constants.d.ts failrequest.d.ts fs.d.ts json.d.ts json.d.ts list.d.ts location.d.ts metadata.d.ts observer.d.ts path.d.ts request.d.ts request.d.ts string.d.ts string.d.ts list.d.ts	blob.d.ts connection.d.ts constants.d.ts constants.d.ts error.d.ts fs.d.ts fs.d.ts json.d.ts list.d.ts location.d.ts ended to the standard to the standa	<pre></pre>
- connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - request.d.ts - requesti.d.ts - requesti.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - url.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - public-types.d.ts - public-types.d.ts - service.d.ts - service.d.ts - service.d.ts - service.d.ts - service.d.ts - task.d.ts - connection.test.d.ts - connection.tes - connection.d.ts	- connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - requesti.d.ts - requesti.d.ts - requesti.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - list.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - platform - base64.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.tes - service.d.ts - service.d.ts - test - connection.test.d.ts	<pre></pre>
- connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - request.d.ts - requesti.d.ts - requesti.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - url.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - public-types.d.ts - public-types.d.ts - service.d.ts - service.d.ts - service.d.ts - service.d.ts - service.d.ts - task.d.ts - connection.test.d.ts - connection.tes - connection.d.ts	- connection.d.ts - constants.d.ts - error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - requesti.d.ts - requesti.d.ts - requesti.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - list.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - platform - base64.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.tes - service.d.ts - service.d.ts - test - connection.test.d.ts	blob.d.ts
- constants.d.ts	constants.d.ts error.d.ts failrequest.d.ts fs.d.ts json.d.ts list.d.ts location.d.ts path.d.ts path.d.ts request.d.ts request.d.ts request.d.ts requestinfo.d.ts requestinfo.d.ts request.d.ts string.d.ts taskenums.d.ts url.d.ts url.d.ts lutils.d.ts index.d.ts metadata.d.ts platform base64.d.ts platform base64.d.ts connection.d.ts connection.d.ts connection.d.ts public-types.d.ts reference.d.ts service.d.ts service.d.ts browser blob.test.d.ts lest	!!!
- error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - requests.d.ts - requests.d.ts - taskenums.d.ts - url.d.ts - utils.d.ts - index.d.ts - index.d.ts - index.d.ts - platform - base64.d.ts - browser - connection.d.ts - public-types.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - service.d.ts - browser - blob.test.d.ts - test - browser - blob.test.d.ts - test - browser - blob.test.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	- error.d.ts - failrequest.d.ts - fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - request.d.ts - requests.d.ts - request.d.ts - taskenums.d.ts - taskenums.d.ts - utils.d.ts - index.d.ts - index.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - task.d.ts - task.d.ts - tomeser - blob.test.d.ts - connection.test.d.ts - connection.test.d.ts - connection.test.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	!!!
failrequest.d.ts	failrequest.d.ts	
- fs.d.ts - json.d.ts - list.d.ts - location.d.ts - metadata.d.ts - path.d.ts - request.d.ts - request.d.ts - request.d.ts - request.d.ts - request.d.ts - request.d.ts - tskenums.d.ts - url.d.ts - url.d.ts - index.d.ts - index.d.ts - index.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - task.d.ts - connection.test.d.ts - connection.test.d.ts - connection.test.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - connection.test.d.ts - connection.test.d.ts - connection.test.d.ts		!!!
		!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
List.d.ts Location.d.ts	list.d.ts location.d.ts	!!!
- location.d.ts - metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - requests.d.ts - requests.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - url.d.ts - index.node.d.ts - ist.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	location.d.ts	!!!"
- metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - requestinfo.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - reference.d.ts - service.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	- metadata.d.ts - observer.d.ts - path.d.ts - request.d.ts - requests.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - utils.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	!!!
- observer.d.ts - path.d.ts - request.d.ts - requests.d.ts - requests.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - node - base64.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	- observer.d.ts - path.d.ts - request.d.ts - requests.d.ts - requests.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - utils.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	│
path.d.ts request.d.ts requests.d.ts requests.d.ts requests.d.ts string.d.ts taskenums.d.ts type.d.ts url.d.ts utils.d.ts index.node.d.ts list.d.ts metadata.d.ts platform base64.d.ts connection.d.ts connection.d.ts connection.d.ts reference.d.ts service.d.ts metadata.d.ts connection.d.ts c	- path.d.ts - request.d.ts - requests.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - node - base64.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - test - connection.test.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - connection.test.d.ts	— metadata.d.ts
	- request.d.ts - requests.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - index.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - string.browser.test.d.ts	— observer.d.ts
- request.d.ts - requests.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - reference.d.ts - reference.d.ts - service.d.ts - task.d.ts - browser - blob.test.d.ts - connection.test.d.ts	- request.d.ts - requests.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - url.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - string.browser.test.d.ts	path.d.ts
requestinfo.d.ts - requests.d.ts - string.d.ts - type.d.ts - url.d.ts - url.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - browser - blob.test.d.ts - connection.test.d.ts - connection.test.d.ts - connection.d.ts	- requestinfo.d.ts - requests.d.ts - string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	!!!!
requests.d.ts		!!!!!
- string.d.ts - taskenums.d.ts - type.d.ts - url.d.ts - utils.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - node - base64.d.ts - node - base64.d.ts - reference.d.ts - service.d.ts - task.d.ts - browser - blob.test.d.ts - connection.test.d.ts	string.d.ts	!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
- taskenums.d.ts - type.d.ts - url.d.ts - utils.d.ts - index.note list.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - browser - blob.test.d.ts - connection.test.d.ts	taskenums.d.ts type.d.ts url.d.ts urlis.d.ts index.node.d.ts list.d.ts metadata.d.ts platform base64.d.ts browser base64.d.ts connection.d.ts connection.d.ts mode base64.d.ts connection.d.ts list.d.ts list.d.ts	!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
<pre>type.d.ts url.d.ts utils.d.ts index.node.d.ts list.d.ts lest platform lesse64.d.ts lest prowser lest base64.d.ts lest connection.d.ts lest lest lest lest lest lest lest lest</pre>	- type.d.ts - url.d.ts - utils.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - connection.d.ts - reference.d.ts - service.d.ts - task.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	! ! ! ·
	- url.d.ts - utils.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - browser - blob.test.d.ts - connection.test.d.ts - connection.test.d.ts - string.browser.test.d.ts	!!!
	utils.d.ts - index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - node - base64.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - connection.test.d.ts - string.browser.test.d.ts	
- index.d.ts - index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - browser - blob.test.d.ts - connection.test.d.ts	- index.d.ts - list.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - connection.d.ts - reference.d.ts - reference.d.ts - service.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - string.browser.test.d.ts	!!!
- index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - browser - blob.test.d.ts - connection.test.d.ts	- index.node.d.ts - list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - browser - blob.test.d.ts - connection.test.d.ts - string.browser.test.d.ts	!!
— list.d.ts	- list.d.ts - metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - browser - blob.test.d.ts - connection.test.d.ts - string.browser.test.d.ts	
- metadata.d.ts - platform - base64.d.ts - browser - base64.d.ts - connection.d.ts - connection.d.ts - node - base64.d.ts - connection.d.ts - public-types.d.ts - reference.d.ts - service.d.ts - task.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts	<pre></pre>	<pre>index.node.d.ts</pre>
<pre></pre>	<pre></pre>	├ list.d.ts
<pre></pre>	<pre></pre>	— metadata.d.ts
base64.d.ts base64.d.ts connection.d.ts connection.d.ts base64.d.ts connection.d.ts connection.d.ts connection.d.ts connection.d.ts connection.d.ts public-types.d.ts reference.d.ts service.d.ts task.d.ts test browser blob.test.d.ts connection.test.d.ts	base64.d.ts browser base64.d.ts connection.d.ts connection.d.ts base64.d.ts connection.d.ts public-types.d.ts reference.d.ts service.d.ts task.d.ts task.d.ts test blob.test.d.ts connection.test.d.ts connection.test.d.ts	!!
<pre></pre>	<pre></pre>	! ! .
	base64.d.ts connection.d.ts connection.d.ts node base64.d.ts connection.d.ts public-types.d.ts reference.d.ts service.d.ts task.d.ts blob.test.d.ts connection.test.d.ts string.browser.test.d.ts	
connection.d.ts connection.d.ts node base64.d.ts connection.d.ts public-types.d.ts reference.d.ts service.d.ts task.d.ts test browser blob.test.d.ts connection.test.d.ts	connection.d.ts connection.d.ts node base64.d.ts connection.d.ts public-types.d.ts reference.d.ts service.d.ts task.d.ts test browser blob.test.d.ts connection.test.d.ts string.browser.test.d.ts	!!!
	<pre></pre>	!!!!
<pre></pre>	<pre></pre>	!!!
base64.d.ts connection.d.ts public-types.d.ts reference.d.ts service.d.ts task.d.ts test browser blob.test.d.ts connection.test.d.ts	<pre></pre>	!!!
connection.d.ts public-types.d.ts reference.d.ts service.d.ts task.d.ts test browser blob.test.d.ts connection.test.d.ts	<pre>connection.d.ts public-types.d.ts preference.d.ts reference.d.ts service.d.ts task.d.ts test browser blob.test.d.ts connection.test.d.ts string.browser.test.d.ts</pre>	!!!
<pre></pre>	<pre></pre>	!!!!!!
<pre></pre>	<pre></pre>	│
<pre></pre>	<pre></pre>	— public-types.d.ts
<pre></pre>	- service.d.ts - task.d.ts - test - browser - blob.test.d.ts - connection.test.d.ts - string.browser.test.d.ts	
		!!
	test browser blob.test.d.ts connection.test.d.ts string.browser.test.d.ts	!!
<pre></pre>	<pre></pre>	
— connection.test.d.ts		
	string.browser.test.d.ts	!!
		⊢ integration

│ └ integration.test.d.ts
─ node
<pre>— connection.test.d.ts</pre>
└ stream.test.d.ts
└ unit
⊢ connection.d.ts
— index.test.d.ts
— location.test.d.ts
reference.test.d.ts
!
— request.test.d.ts
— requests.test.d.ts
<pre>— service.test.d.ts</pre>
<pre>— string.test.d.ts</pre>
<pre>— task.test.d.ts</pre>
<pre>— testshared.d.ts</pre>
└ utils.test.d.ts
— src
— api.browser.d.ts
— api.d.ts
— api.node.d.ts
— constants.d.ts
— implementation
async.d.ts
backoff.d.ts
— connection.d.ts
— constants.d.ts
error.d.ts
— failrequest.d.ts
├─ fs.d.ts
├ list.d.ts
├─ location.d.ts
— metadata.d.ts
— observer.d.ts
— path.d.ts
request.d.ts
requestinfo.d.ts
requests.d.ts
- string.d.ts
taskenums.d.ts
taskendins.d.ts type.d.ts
url.d.ts
utils.d.ts
— index.d.ts
— index.node.d.ts
— list.d.ts
— metadata.d.ts
— platform
├─ base64.d.ts
⊢ browser
├─ base64.d.ts
connection.d.ts
— connection.d.ts
1 1 22



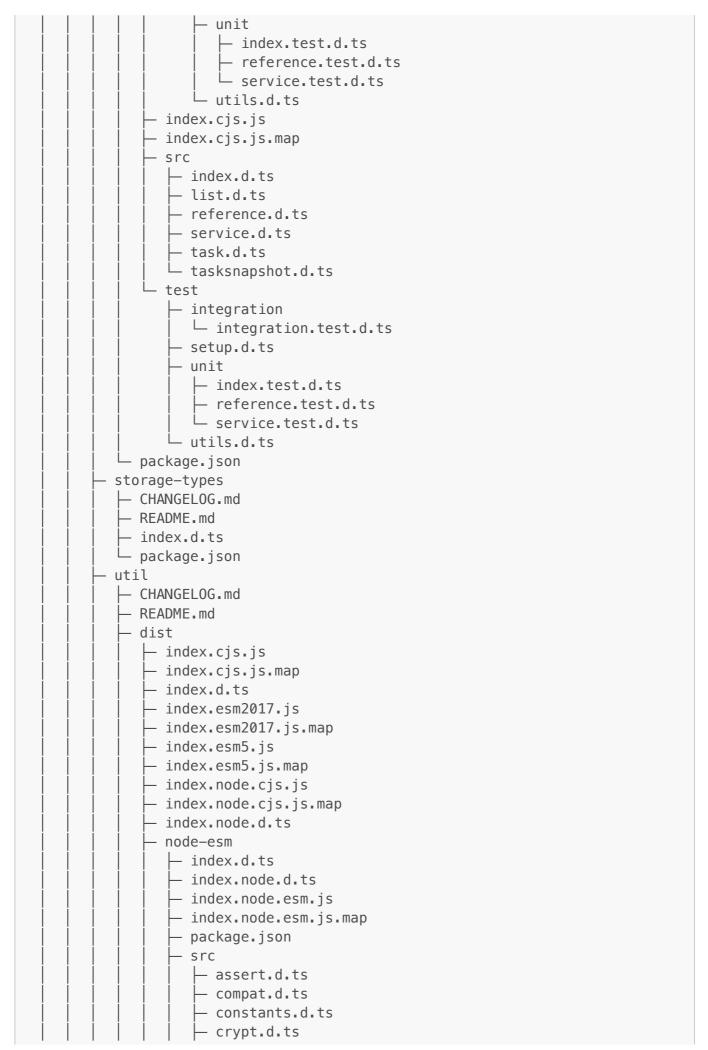

```
- deepCopy.d.ts
      - defaults.d.ts
      - deferred.d.ts
      - emulator.d.ts
      - environment.d.ts
      - errors.d.ts
      exponential_backoff.d.ts
      - formatters.d.ts
      - global.d.ts
      - json.d.ts
      - jwt.d.ts
      - obj.d.ts
      - promise.d.ts
      - query.d.ts
      - shal.d.ts
      - subscribe.d.ts
      – utf8.d.ts
      - uuid.d.ts
     └ validation.d.ts
   test
     ─ base64.test.d.ts
      - compat.test.d.ts
     — deepCopy.test.d.ts
      - defaults.test.d.ts
      - emulator.test.d.ts
      environments.test.d.ts
      - errors.test.d.ts
      exponential backoff.test.d.ts
      - object.test.d.ts
     └─ subscribe.test.d.ts
- src
  — assert.d.ts
   - compat.d.ts
   constants.d.ts
   - crypt.d.ts
   - deepCopy.d.ts
   – defaults.d.ts
   - deferred.d.ts
   - emulator.d.ts
   - environment.d.ts
  - errors.d.ts
   - exponential_backoff.d.ts
  — formatters.d.ts
   - global.d.ts
   - json.d.ts
   - jwt.d.ts
   - obj.d.ts
   - promise.d.ts
   - query.d.ts
   - sha1.d.ts
   - subscribe.d.ts
   - utf8.d.ts
   - uuid.d.ts
   validation.d.ts
```

```
test
          — base64.test.d.ts
          - compat.test.d.ts
          - deepCopy.test.d.ts
          - defaults.test.d.ts
          - emulator.test.d.ts
           - environments.test.d.ts
           - errors.test.d.ts
           exponential backoff.test.d.ts
          object.test.d.ts
         └ subscribe.test.d.ts
        - tsdoc-metadata.json
        - util-public.d.ts
        - util.d.ts
     - package.json
 webchannel-wrapper
   ─ CHANGELOG.md
    - README.md
    – dist

─ index.esm.js

       — index.esm.js.map
       - index.esm2017.js
       — index.esm2017.js.map
       – index.js
      └ index.js.map
    – package.json
@grpc
— grpc−js
    - LICENSE
     README.md
    - build
      ∟ src
          admin.d.ts
          admin.js
          - admin.js.map
          backoff-timeout.d.ts
          backoff-timeout.js
          backoff-timeout.js.map
          call-credentials-filter.d.ts
          call-credentials-filter.js
          - call-credentials-filter.js.map
          call-credentials.d.ts
          — call-credentials.js
          call-credentials.js.map
          call-interface.d.ts
          call-interface.js
          call-interface.js.map
          call-number.d.ts
          – call−number.js
          – call-number.js.map
           call-stream.d.ts
          - call-stream.js
          call-stream.js.map
          – call.d.ts
```

```
– call.js
- call.js.map
channel-credentials.d.ts
channel-credentials.js
channel-credentials.js.map
channel-options.d.ts
channel-options.js
channel-options.js.map
- channel.d.ts
- channel.js
channel.js.map
channelz.d.ts
– channelz.js
channelz.js.map
client-interceptors.d.ts
client-interceptors.js
client-interceptors.js.map
client.d.ts
– client.js
client.js.map
compression—algorithms.d.ts
compression—algorithms.js
compression-algorithms.js.map
compression-filter.d.ts
compression-filter.js
compression-filter.js.map
connectivity-state.d.ts
connectivity-state.js
connectivity-state.js.map
constants.d.ts
– constants.js
– constants.js.map
control-plane-status.d.ts
control-plane-status.js
control-plane-status.js.map
deadline-filter.d.ts
deadline-filter.js
deadline-filter.js.map
deadline.d.ts
deadline.js
deadline.is.map
– duration.d.ts
— duration.js
duration.js.map
- events.d.ts
– events.js
- events.js.map
experimental.d.ts
- experimental.js
experimental.js.map
 filter-stack.d.ts
- filter-stack.js
- filter-stack.js.map
- filter.d.ts
```

```
filter.js
- filter.js.map
generated
  channelz.d.ts
  - channelz.js
  - channelz.js.map
   - google
    └ protobuf
       Any.d.ts
        – Any.js
        - Any.js.map
        BoolValue.d.ts
        — BoolValue.js
        — BoolValue.js.map
        — BytesValue.d.ts
        — BytesValue₊js
        — BytesValue.js.map
        DoubleValue.d.ts
        — DoubleValue.js
        — DoubleValue.js.map
        — Duration.d.ts
        Duration.is
        Duration.js.map
        FloatValue.d.ts
        — FloatValue.js
        — FloatValue.js.map
        Int32Value.d.ts
        Int32Value.js
        - Int32Value.js.map
        — Int64Value.d.ts
        — Int64Value₊js
       — Int64Value.js.map
        StringValue.d.ts
        — StringValue₊js
        StringValue.js.map
        Timestamp.d.ts
        - Timestamp.js
        Timestamp.js.map
        UInt32Value.d.ts
        — UInt32Value.js
        — UInt32Value.js.map
       ─ UInt64Value.d.ts
       ─ UInt64Value.js
       └─ UInt64Value.js.map
  grpc
    ∟ channelz
       ∟ v1
           Address.d.ts
           Address.js
           Address.js.map
           Channel.d.ts
           Channel.js
           – Channel.js.map
           ChannelConnectivityState.d.ts
```

GetSubchannelResponse.js.map	- ChannelConnectivityState.js - ChannelData.d.ts - ChannelData.js - ChannelData.js.map - ChannelRef.d.ts - ChannelRef.js.map - ChannelRef.js.map - ChannelTrace.d.ts - ChannelTrace.d.ts - ChannelTrace.js.map - ChannelTrace.js.map - ChannelTrace.js.map - ChannelTraceEvent.d.ts - ChannelTraceEvent.js - ChannelTraceEvent.js.map - ChannelTraceEvent.js.map - ChannelTraceEvent.js.map - ChannelZ.js ChannelZ.js ChannelZ.js ChannelZ.js ChannelRequest.js.map - GetChannelRequest.js.map - GetChannelRequest.js.map - GetChannelResponse.js - GetChannelResponse.js - GetServerRequest.js - GetServerRequest.js - GetServerRequest.js - GetServerRequest.js - GetServerRequest.js - GetServerResponse.js - GetServerResponse.js - GetServerResponse.js - GetServerSocketsRequest.js - GetServerSocketsRequest.js - GetServerSocketsResponse.js - GetServerSocketsResponse.js - GetServerSocketsResponse.js - GetServerSocketsResponse.js - GetServerSocketsResponse.js - GetServerSequest.js - GetServerSequest.js.map - GetServerSeponse.js - GetSocketRequest.js - GetSocketRequest.js - GetSocketResponse.js - GetSubchannelRequest.js - GetSubchannelRequest.js - GetSubchannelResponse.d.ts - GetSubchannelResponse.d.ts - GetSubchannelResponse.js
│	

```
load-balancer-child-handler.js
load-balancer-child-handler.js.map

    load-balancer-outlier-detection.d.ts

load-balancer-outlier-detection.js
load-balancer-outlier-detection.js.map
load-balancer-pick-first.d.ts
- load-balancer-pick-first.js
load-balancer-pick-first.js.map
load-balancer-round-robin.d.ts
- load-balancer-round-robin₊js
load-balancer-round-robin.js.map
load-balancer.d.ts
- load-balancer.js
- load-balancer.js.map
load-balancing-call.d.ts
load-balancing-call.js
load-balancing-call.js.map
logging.d.ts
logging.js
logging.js.map
make-client.d.ts
- make-client.is
make-client.js.map
max-message-size-filter.d.ts
- max-message-size-filter.js
max-message-size-filter.js.map
- metadata.d.ts
metadata.is
– metadata.js.map
object-stream.d.ts
– object−stream.js
object-stream.js.map
picker.d.ts
– picker⊾js
– picker.js.map
- resolver-dns.d.ts
- resolver-dns.js
- resolver-dns.js.map
resolver-ip.d.ts
- resolver−ip.js
- resolver-ip.is.map
- resolver-uds.d.ts
– resolver-uds.js
- resolver-uds.js.map
- resolver.d.ts
– resolver⊾js
- resolver.js.map
resolving-call.d.ts
resolving-call.js
resolving-call.js.map
resolving-load-balancer.d.ts
resolving-load-balancer.js
resolving-load-balancer.js.map
retrying-call.d.ts
```

```
- retrying-call.js
      - retrying-call.js.map
      - server-call.d.ts
      – server–call.js
      - server-call.js.map
      server-credentials.d.ts
      server-credentials.js
      server-credentials.js.map
      - server.d.ts
      – server⊾js
      - server.js.map
      - service-config.d.ts
     service-config.js
      - service-config.js.map
      - status-builder.d.ts
      status-builder.js
     — status-builder.js.map
      - stream-decoder.d.ts
     - stream-decoder.js
     - stream-decoder.js.map
     subchannel-address.d.ts
      subchannel-addressis
     subchannel-address.js.map
     - subchannel-call.d.ts
      subchannel-call.js
     subchannel-call.js.map
      subchannel-interface.d.ts
      subchannel-interface.js
      subchannel-interface.js.map
     subchannel-pool.d.ts
     — subchannel-pool.js
      subchannel-pool.js.map
     subchannel.d.ts
     subchannel.js
     - subchannel.js.map
      - tls-helpers.d.ts
     – tls−helpers.js
      - tls-helpers.js.map
     – uri-parser.d.ts
      - uri-parser.js
    └ uri-parser.js.map
node_modules
  - .bin
    └ proto-loader-gen-types
    @grpc
     └ proto-loader

─ LICENSE

    README.md

         build
           — bin

    proto-loader-gen-types.js

              └ proto-loader-gen-types.js.map
            - src

─ index.d.ts
```

```
– index.js
          — index.js.map
          util.d.ts
          — util.js
          └ util.js.map
   └ package.json
@types
∟ node


    LICENSE


    README.md
     assert
      └ strict.d.ts
     - assert.d.ts
     - async_hooks.d.ts
     - buffer.d.ts
     child_process.d.ts
    - cluster.d.ts
     - console.d.ts
     - constants.d.ts
     - crypto.d.ts
     - dgram.d.ts
     diagnostics_channel.d.ts
      └ promises.d.ts
     - dns.d.ts
     - dom-events.d.ts
     - domain.d.ts
     - events.d.ts
     - fs
      └ promises.d.ts
    - fs.d.ts
     - globals.d.ts
     globals.global.d.ts
     - http.d.ts
    - http2.d.ts
     - https.d.ts
     - index.d.ts
     inspector.d.ts
     - module.d.ts
     - net.d.ts
    - os.d.ts
    – package.json
    - path.d.ts
     - perf_hooks.d.ts
     - process.d.ts
     - punycode.d.ts
     - querystring.d.ts
     - readline


    □ promises.d.ts

     - readline.d.ts
     repl.d.ts
     - stream
       consumers.d.ts
         promises.d.ts
```

└ web.d.ts
<pre>— stream.d.ts</pre>
<pre>— string_decoder.d.ts</pre>
<pre>- test.d.ts</pre>
— timers
└ promises.d.ts
— timers.d.ts
— tls.d.ts
<pre>— trace_events.d.ts</pre>
— ts4.8
— assert
└─ strict.d.ts
<pre>— assert.d.ts</pre>
<pre>— async_hooks.d.ts</pre>
<pre>buffer.d.ts</pre>
— child_process.d.ts
— cluster.d.ts
— console.d.ts
— constants.d.ts
- crypto.d.ts
— dgram.d.ts
— diagnostics_channel.d.ts
— dns
☐ promises.d.ts
— dns.d.ts
— dom-events.d.ts
— domain.d.ts
<pre>— events.d.ts</pre>
— fs
└ promises.d.ts
- fs.d.ts
— globals.d.ts
— globals.global.d.ts
http.d.ts
- http2.d.ts
— https:d.ts
— index.d.ts
— inspector.d.ts
— module.d.ts
— net.d.ts
— os.d.ts
— path.d.ts
<pre>perf_hooks.d.ts</pre>
— process.d.ts
— punycode.d.ts
— querystring.d.ts
— readline
☐ promises.d.ts
— readline.d.ts
- repl.d.ts
— stream
consumers.d.ts
□ promises.d.ts
└─ web.d.ts

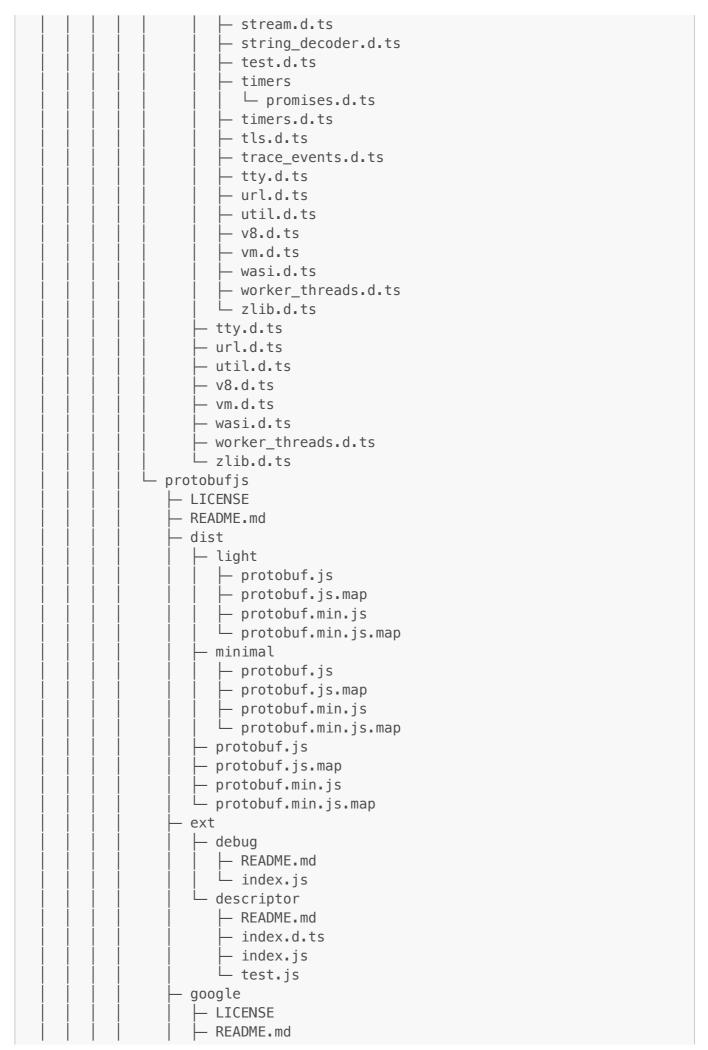

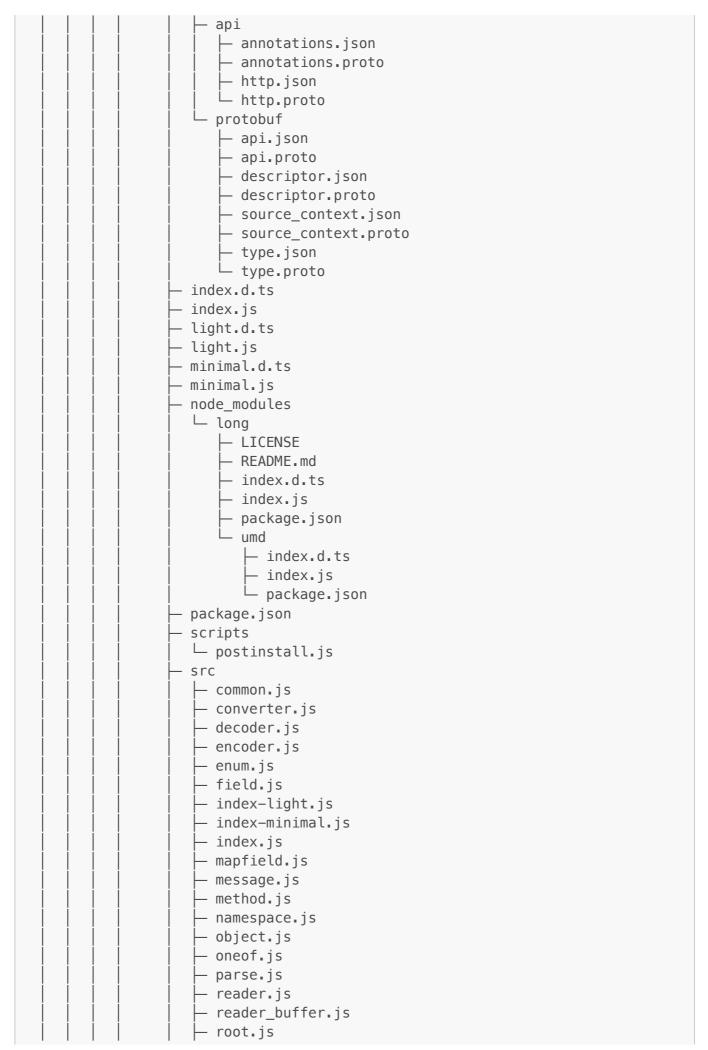

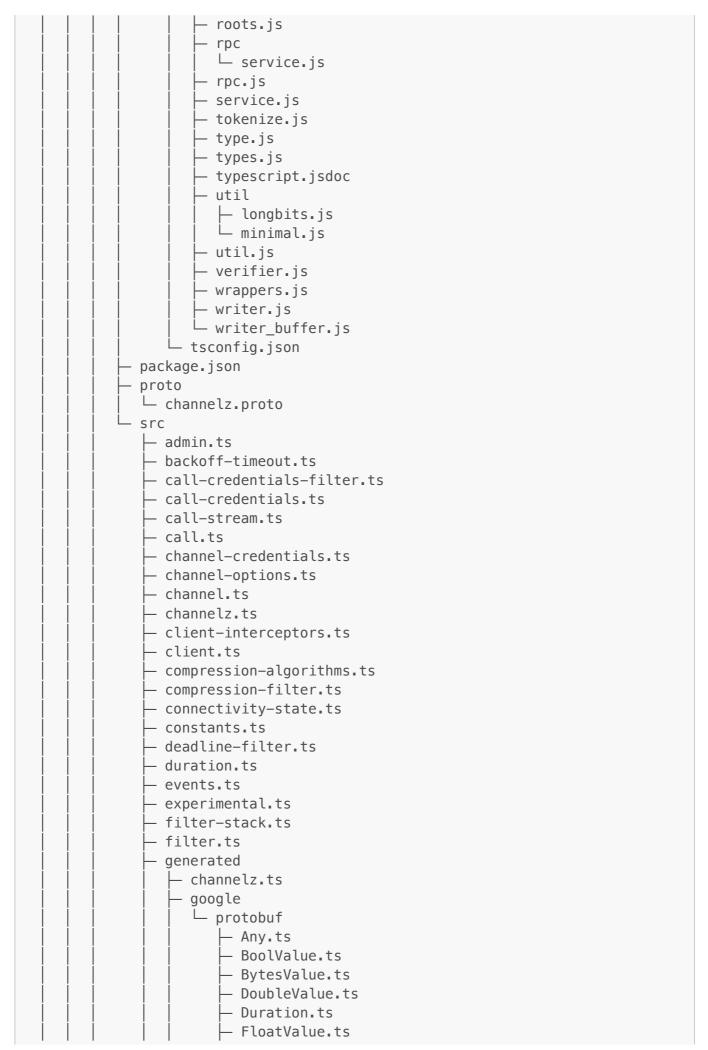

```
Int32Value.ts
         - Int64Value.ts
        StringValue.ts
        Timestamp.ts
        UInt32Value.ts
       └─ UInt64Value.ts
    grpc
    ∟ channelz
       L v1
          ⊢ Address.ts
           Channel.ts
           ChannelConnectivityState.ts
           ChannelData.ts
           ChannelRef.ts
           ChannelTrace.ts
           ChannelTraceEvent.ts
           — Channelz.ts
           — GetChannelRequest.ts
           GetChannelResponse.ts
           GetServerRequest.ts
           — GetServerResponse.ts
           GetServerSocketsRequest.ts
           GetServerSocketsResponse.ts
           GetServersRequest.ts
           GetServersResponse.ts
           GetSocketRequest.ts
           GetSocketResponse.ts
           GetSubchannelRequest.ts
           GetSubchannelResponse.ts
           GetTopChannelsRequest.ts

    □ GetTopChannelsResponse.ts

           — Security.ts
           Server.ts
           ServerData.ts
           ServerRef.ts
           Socket.ts
           SocketData.ts
           SocketOption.ts
           SocketOptionLinger.ts
           — SocketOptionTcpInfo.ts
           SocketOptionTimeout.ts
           SocketRef.ts
           Subchannel.ts
          └ SubchannelRef.ts
– http_proxy.ts
- index.ts
load-balancer-child-handler.ts

    load-balancer-outlier-detection.ts

load-balancer-pick-first.ts
load-balancer-round-robin.ts
load-balancer.ts
logging.ts
– make−client.ts
max-message-size-filter.ts
```

```
- metadata.ts
         object-stream.ts
         - picker.ts
        - resolver-dns.ts
        - resolver-ip.ts
        - resolver-uds.ts
         - resolver.ts
        resolving-load-balancer.ts
         - server-call.ts
        - server-credentials.ts
         - server.ts
        service-config.ts
        status-builder.ts
         - stream-decoder.ts
         subchannel-address.ts
        subchannel-interface.ts
        — subchannel-pool.ts
        subchannel.ts
        tls-helpers.ts
       └ uri-parser.ts
   proto-loader

    LICENSE

     README.md
     - build
       ⊢ bin
          └ proto-loader-gen-types.js
        - src
           index.d.ts
           – index.js
            - util.d.ts
          └ util.js
     node modules
       └ .bin
           — pbjs
          └ pbts
      - package.json
- @humanwhocodes
  config-array
    ─ CHANGELOG.md
     — LICENSE
     — README.md
     – api.js
    └ package.json
  module-importer
    ─ CHANGELOG.md
     LICENSE
     README.md
     - dist
       — module-importer.cjs
        — module-importer.d.cts
         - module-importer.d.ts
       └ module-importer.js
      - package.json
      - src
```

```
- module-importer.cjs
       └ module-importer.js
  object-schema
     .eslintrc.js
      - .github
       └ workflows

    — nodejs-test.yml

           └ release-please.yml

    CHANGELOG.md

     LICENSE
      - README.md
     — package.json
     - src
       index.js

    merge−strategy.js

         - object-schema.js
       └ validation—strategy.js
      - tests

    merge−strategy.js

         - object-schema.js
       └ validation-strategy.js
- @istanbuljs
  load-nyc-config

    ─ CHANGELOG.md

    LICENSE

      README.md
      - index.js
     — load−esm.js
      - node_modules
        _ .bin
           └ is-yaml
         - camelcase
           — index.d.ts
            – index.js
            license
            - package.json
           └ readme.md
         - find-up
           index.d.ts
           — index.js
           — license
            package.json

    readme.md

         - locate-path
           — index.d.ts
            — index.js
           — license
            - package.json
           └ readme.md
         - p-locate
           — index.d.ts
            - index.js
            - license
            package.json
```

```
└ readme.md
      - package.json
   - schema
     CHANGELOG.md
     — LICENSE
     — README.md
     — default-exclude.js
     — default-extension.js
      - index.js
     — package.json
- @jest
  ⊢ console
     LICENSE
      - build
        BufferedConsole.d.ts
         BufferedConsole.js
        CustomConsole.d.ts
         CustomConsole.js
        NullConsole.d.ts
        NullConsole.js
        — getConsoleOutput.d.ts
         getConsoleOutput.js
         - index.d.ts
         index.js
         - types.d.ts
       └ types.js
      – package.json
   - core
     LICENSE
      - README.md
     - build
        FailedTestsCache.d.ts
         FailedTestsCache.is

    FailedTestsInteractiveMode.d.ts

    FailedTestsInteractiveMode.is

         ReporterDispatcher.d.ts
         ReporterDispatcher js
        - SearchSource.d.ts
         - SearchSource.js
        SnapshotInteractiveMode.d.ts

    SnapshotInteractiveMode.is

        — TestNamePatternPrompt.d.ts
        TestNamePatternPrompt.js
         TestPathPatternPrompt.d.ts
         TestPathPatternPrompt.is
         TestScheduler.d.ts
         TestScheduler.is
         TestWatcher.d.ts
         – TestWatcher₊js
         assets
          └ jest_logo.png
         - cli
           – index.d.ts
           └ index.js
```

```
collectHandles.d.ts
collectHandles.is
getChangedFilesPromise.d.ts
getChangedFilesPromise.js
- getConfigsOfProjectsToRun.d.ts
getConfigsOfProjectsToRun.js
getNoTestFound.d.ts
getNoTestFound.js

    getNoTestFoundFailed.d.ts

- getNoTestFoundFailed.js

    getNoTestFoundPassWithNoTests.d.ts

    getNoTestFoundPassWithNoTests.js

    getNoTestFoundRelatedToChangedFiles.d.ts

getNoTestFoundRelatedToChangedFiles.js
getNoTestFoundVerbose.d.ts

    getNoTestFoundVerbose.js

getNoTestsFoundMessage.d.ts
getNoTestsFoundMessage.js
getProjectDisplayName.d.ts
– getProjectDisplayName₊js

    getProjectNamesMissingWarning.d.ts

    getProjectNamesMissingWarning.js

getSelectProjectsMessage.d.ts
getSelectProjectsMessage.js
- jest.d.ts
- jest.js
- lib
  activeFiltersMessage.d.ts
   activeFiltersMessage.js
   createContext.d.ts
   createContext.js
   handleDeprecationWarnings.d.ts
   handleDeprecationWarnings.js
  isValidPath.d.ts
   isValidPath.is
   logDebugMessages.d.ts
  — logDebugMessages₊js
   updateGlobalConfig.d.ts
   updateGlobalConfig.js
   watchPluginsHelpers.d.ts
  └ watchPluginsHelpers.js
– plugins
  FailedTestsInteractive.d.ts
   FailedTestsInteractive.js
   - Quit.d.ts
   - Quit.is
   TestNamePattern.d.ts
   TestNamePattern.is
   TestPathPattern.d.ts
   TestPathPattern.js
   UpdateSnapshots.d.ts
   UpdateSnapshots.js

    UpdateSnapshotsInteractive.d.ts

    UpdateSnapshotsInteractive.js
```



```
build
     — immutableUtils.js
      - index.d.ts
     – index.js
      jasmineUtils.js
      - types.js
    └ utils.js
   - node modules
    └ jest-get-type
        LICENSE
         build

─ index.d.ts

          └ index.js

    package.json

   – package.json
- fake-timers
  LICENSE
  build
     index.d.ts
      - index.js
     legacyFakeTimers.d.ts
      legacyFakeTimers.js
      - modernFakeTimers.d.ts
    └ modernFakeTimers.js
   – package.json
– globals
  — LICENSE
   build
     index.d.ts
    └ index.js
 └ package.json
reporters

─ LICENSE

  build
    ─ BaseReporter.d.ts
      – BaseReporter₌js
     - CoverageReporter.d.ts
     CoverageReporter.js
     CoverageWorker.d.ts
     CoverageWorker.js
     — DefaultReporter.d.ts
     ─ DefaultReporter.js
     ─ NotifyReporter.d.ts
     NotifyReporter.js
     Status.d.ts
      – Status.js
     SummaryReporter.d.ts
      SummaryReporter.js
      - VerboseReporter.d.ts
     VerboseReporter.js
      generateEmptyCoverage.d.ts
      generateEmptyCoverage.js
      getResultHeader.d.ts
      getResultHeader.js
```

```
- getSnapshotStatus.d.ts
       getSnapshotStatus.js
      getSnapshotSummary.d.ts
      getSnapshotSummary.js
      - getWatermarks.d.ts
      getWatermarks.js
       - index.d.ts
       - index.js
       - types.d.ts
      — types.js
       - utils.d.ts
     └ utils.js
    - package.json
 schemas
   — LICENSE
   README.md
   build
     ⊢ index.d.ts
     └ index.js

    package.json

- source-map
   LICENSE
   build

— getCallsite.d.ts

      – getCallsite.js
       - index.d.ts
       - index.js
       - types.d.ts
     └ types.js
  └ package.json

    test-result

  build
      formatTestResults.d.ts
      formatTestResults.js
      — helpers.d.ts
      – helpers.js
       - index.d.ts
       - index.js
       - types.d.ts

    types.js

  └ package.json
— test-sequencer
   LICENSE
   build

─ index.d.ts

     └ index.js
    - package.json
transform

─ LICENSE

   build
      ScriptTransformer.d.ts
      ScriptTransformer.js
       enhanceUnexpectedTokenMessage.d.ts
```

```
enhanceUnexpectedTokenMessage.js
                                 - index.d.ts
                               - index.js
                               runtimeErrorsAndWarnings.d.ts
                                runtimeErrorsAndWarnings.js
                               shouldInstrument.d.ts
                                shouldInstrument.js
                                 - types.d.ts
                            └ types.js
                      - package⊾json
           - types

─ LICENSE

                     build
                             ─ Circus.d.ts
                                - Circus.js
                               — Config.d.ts
                               Config.js
                               — Global.d.ts
                               — Global.js
                                TestResult.d.ts
                               — TestResult.js
                                 - Transform.d.ts
                               — Transform.js
                                 - index.d.ts
                            └ index.js
                       - node_modules
                            └ @types
                                       ∟ yarqs
                                                   ⊢ LICENSE
                                                      README.md
                                                   helpers.d.ts
                                                      - index.d.ts
                                                       - package.json

    yargs.d.ts
    yargs.d.ts

    output
        Learning
        Learning

                      – package⊾json
– @jridgewell
          gen-mapping

─ LICENSE

                      - README.md
                     – dist

— gen-mapping.mjs

                               — gen-mapping.mjs.map
                               — gen-mapping.umd.js
                                  - gen-mapping.umd.js.map
                            └ types

    — gen-mapping.d.ts

                                            sourcemap-segment.d.ts
                                       └ types.d.ts
                      – package.json
                      - src

— gen-mapping.ts

                                  sourcemap-segment.ts
                            └ types.ts
               resolve-uri
```

```
    LICENSE

                    - README.md
                 – dist

⊢ resolve-uri.mjs

                                 — resolve-uri.mjs.map

─ resolve-uri.umd.js

                                     resolve-uri.umd.js.map

    L types

                                               └ resolve-uri.d.ts
                  – package.json
- set-array
            LICENSE
                 — README.md
                 – dist
                                 — set–array.mjs

        ⊢ set-array.mjs.map

                              - set-array.umd.js.map

    types
    types

                                              └ set-array.d.ts
                    - package.json
                         src
                            ∟ set-array.ts
- source-map

─ LICENSE


                  - README.md
                  - dist
                              - source-map.mjs.map


─ source-map.umd.js

                              source-map.umd.js.map

    types
    types

                                              └ source-map.d.ts
           └ package.json
sourcemap-codec
           ─ LICENSE
                 README.md
                – dist
                              sourcemap-codec.mjs.map
                               sourcemap-codec.umd.js
                               sourcemap-codec.umd.js.map
                              └ types
                                              └ sourcemap-codec.d.ts
                  – package⊾json
                            └ sourcemap-codec.ts
 trace-mapping
            LICENSE
                 README.md
                 – dist
                                   trace-mapping.mjs
                                   trace-mapping.mjs.map
                                     trace-mapping.umd.js
```

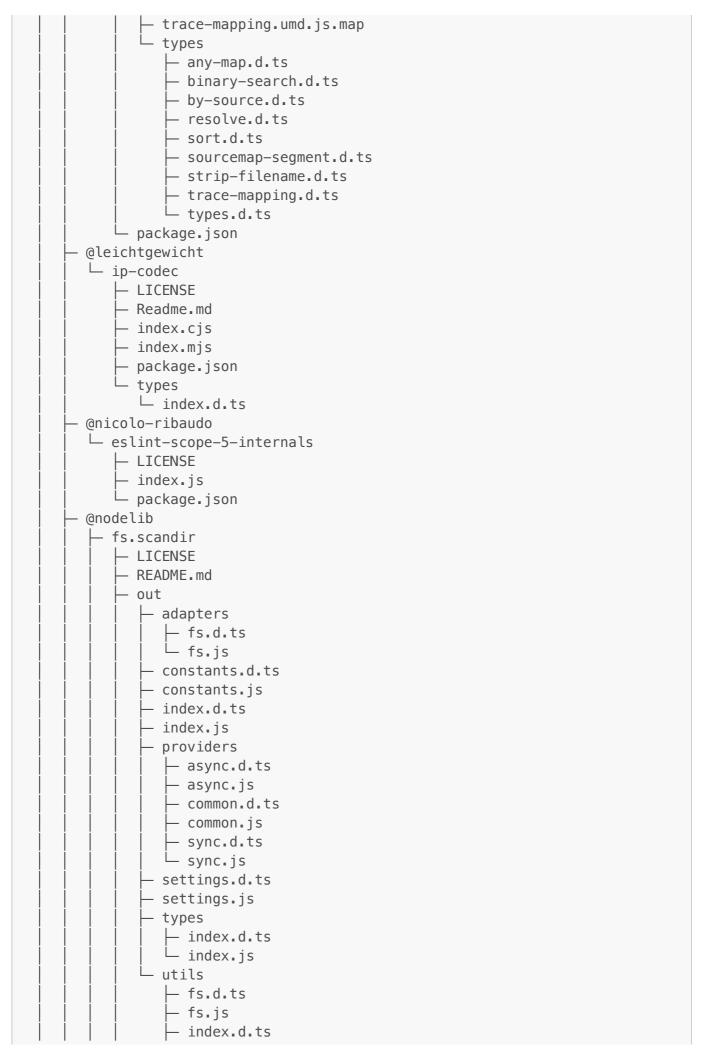

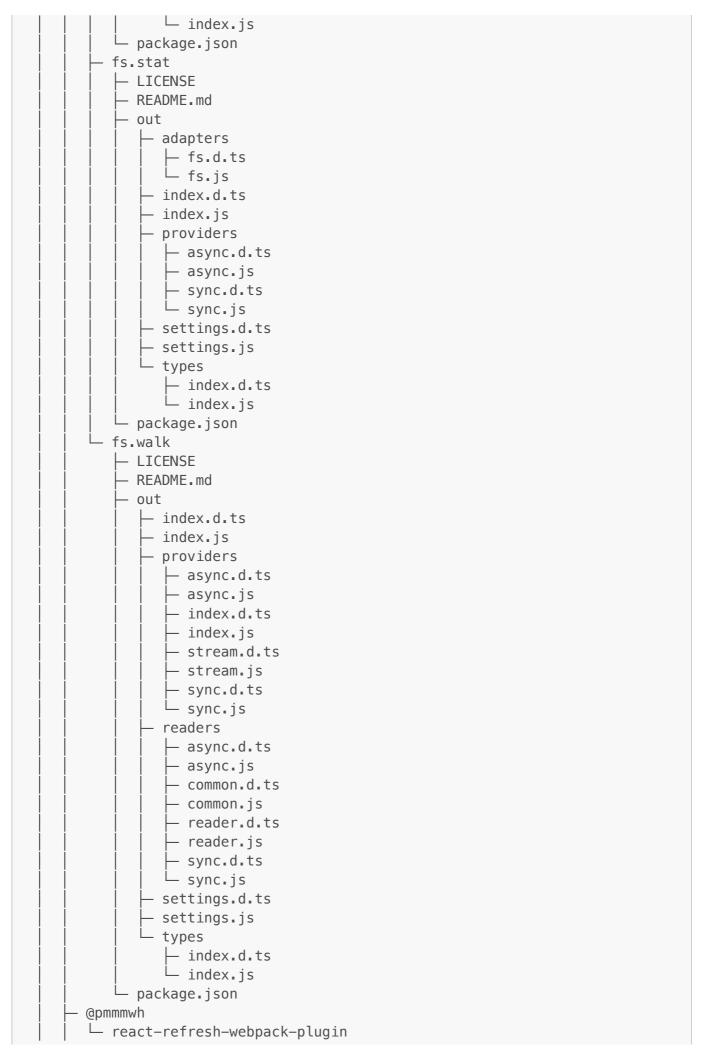

```
    LICENSE

- README.md
- client

⊢ ErrorOverlayEntry.js

  ReactRefreshEntry.js
  — package.json
 └ utils

⊢ errorEventHandlers.js

      – formatWebpackErrors₊js
      patchUrl.js
     └ retry.js
- lib

— globals.js

   - index.js
  – options.json
  - runtime
    └ RefreshUtils.js
   – types.js
 └ utils

— getAdditionalEntries.js

     getIntegrationEntry.js
      getRefreshGlobal.js
     getSocketIntegration.js
     — index.js
     injectRefreshEntry.js
     injectRefreshLoader.js
      makeRefreshRuntimeModule.js
    normalizeOptions.js
- loader

─ index.js

   – options.json
  – types.js
 └ utils

— getIdentitySourceMap.js

     — getModuleSystem.js
     — getRefreshModuleRuntime.js
      - index.js
     └ normalizeOptions.js
- node_modules
  - .bin
     — ansi-html
      webpack
     └ webpack-dev-server
   schema-utils
     — LICENSE
      README.md

    declarations

         ValidationError.d.ts
         - index.d.ts
         keywords
          └ absolutePath.d.ts
         - util
            Range.d.ts
           └ hints.d.ts
```


```
└ validate.d.ts
      dist
       ─ ValidationError.js
       — index.js
       — keywords
          └ absolutePath.js
        – util
          ⊢ Range.is
          └ hints.js
       └ validate.js
    └ package.json
  source-map
     LICENSE
     README.md
     - dist
       └ source-map.js
     — lib
       ⊢ array-set.is
       — base64-vlq.js
       — base64.js

    binary−search.js

       — mapping-list.js

    mappings.wasm

       — read-wasm₊js
       — source-node.js
        - util.js
       └ wasm.js
     — package.json
     - source-map.d.ts
    └ source-map.js
options
 └ index.js
overlay
 components
     CompileErrorTrace.js
    ─ PageHeader.js
     RuntimeErrorFooter.js
    — RuntimeErrorHeader₊js
     RuntimeErrorStack.js
    └ Spacer.js
  containers
    CompileErrorContainer.js
    └ RuntimeErrorContainer.js
  – index.js
  — package.json
   - theme.js
 └ utils.js
– package⊾json
sockets
  WDSSocket.js
  WHMEventSource.js
  WPSSocket.js
```

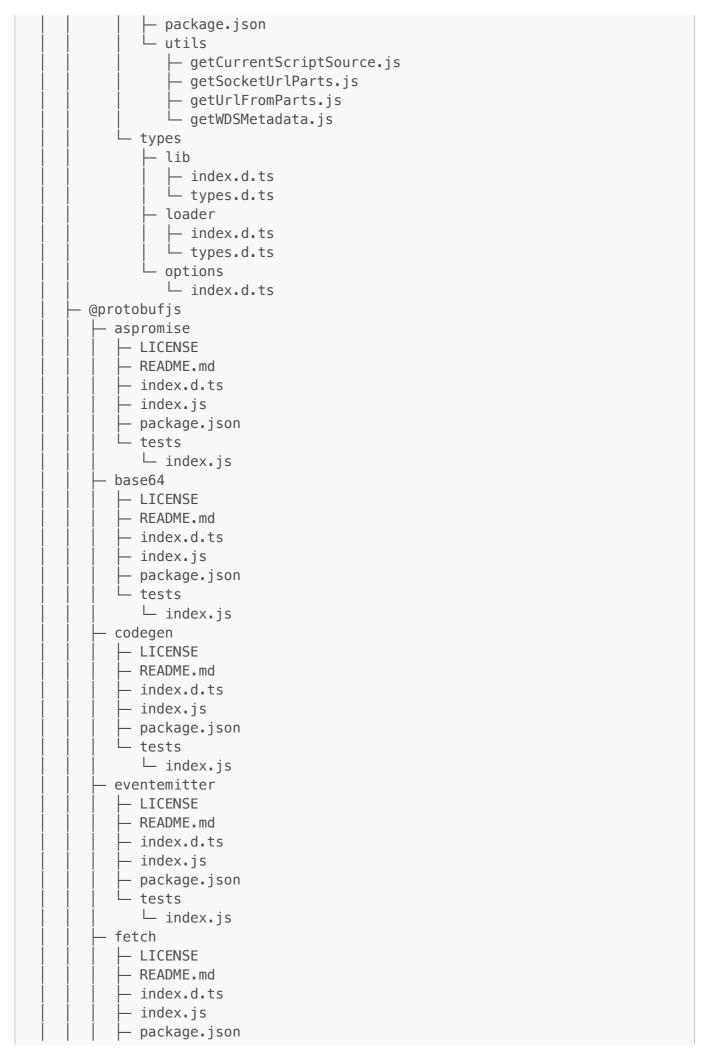

```
└ tests
     └ index.js
  float
   LICENSE
   README.md
   bench

─ index.js

     └ suite.js
   - index.d.ts
   — index.js
   – package.json
   tests
     └ index.js
 - inquire
   — LICENSE
   — README.md
   — index.d.ts
   - index.js
   — package.json
   tests
      └ data
        — array.js
        — emptyArray.js
         - emptyObject.js
        └ object.js
     └ index.js
 - path
  ⊢ LICENSE
   README.md
   — index.d.ts
   — index.js
   – package.json
   └ tests
     └ index.js
 - pool
   LICENSE
   README.md
   — index.d.ts
   — index.js
   — package₌json
  └ tests
     └ index.js
└ utf8
  LICENSE
   — README.md
    - index.d.ts
   - index.js
    - package.json
    - tests
     ─ data
        └ utf8.txt
```

```
└ index.js
 @remix-run
 ∟ router
     — CHANGELOG.md
     LICENSE.md
     README.md
     - dist

⊢ history.d.ts

        - index.d.ts
        - router.cjs.js
        - router.cjs.js.map
        - router.d.ts
        — router.js
        ⊢ router.js.map
        - router.umd.js

─ router.umd.js.map

─ router.umd.min.js
         - router.umd.min.js.map
       └ utils.d.ts
     - history.ts
      - index.ts
      - package.json
      - router.ts
     utils.ts
- @rollup
   plugin-babel
     — CHANGELOG.md
     - LICENSE
     README.md
     – dist

⊢ index.es.js

       └ index.js
      node_modules
       ∟ .bin
          └ rollup
      - package.json
      - types
       └ index.d.ts
    plugin-node-resolve
     ─ CHANGELOG.md
     LICENSE
     README.md
     – dist
        ⊢ cjs
          └ index.js
          ⊢ index.js
          └ package.json
      node_modules
       ∟ .bin
           resolve
            - rollup
       package.json
       types
```

```
└ index.d.ts
    plugin-replace
    ─ CHANGELOG.md
     LICENSE
     - README.md
     — dist

    ⊢ rollup-plugin-replace.cjs.js

       └ rollup-plugin-replace.es.js

    node modules

       └ .bin
          └ rollup
     – package.json
     - src
       └ index.js
      - types
       └ index.d.ts
  - pluginutils
    ├ CHANGELOG.md
     LICENSE
     README.md
     – dist
       ⊢ cjs
         └ index.js
       ∟ es
          ⊢ index.js
          └ package.json
      - node modules
       ⊢ .bin
          └ rollup
         - @types
          ∟ estree

─ LICENSE

              README.md
               - index.d.ts
             └ package.json
      - package.json
       types
       └ index.d.ts
 @rushstack
 └ eslint-patch
    LICENSE
     README.md
     — lib
       ─ modern-module-resolution.d.ts
        — modern-module-resolution.d.ts.map
        modern-module-resolution.js
        — modern-module-resolution.js.map
        – usage.d.ts
       ─ usage.d.ts.map
        — usage.js
       └ usage.js.map
      modern-module-resolution.js
    └ package.json
- @sinclair
```

```
└ typebox
   compiler
      compiler.d.ts
      — compiler.js
       - index.d.ts
      └ index.js

    conditional

    ─ conditional.d.ts

       conditional.js
      — index.d.ts
      — index.js
       - structural.d.ts
      L structural.js
    - errors
       — errors.d.ts
       — errors.js
       — index.d.ts
      └ index.js
    - format
      ├ format.d.ts
      — format.js
       - index.d.ts
      └ index.js
    guard
      — guard.d.ts
      — guard.js
        - index.d.ts
      └ index.js
    - license
    - package.json
    - readme.md
    - typebox.d.ts
    typebox.js
   ∟ value
      — cast.d.ts
       – cast.js
       - check.d.ts
       – check.js
       - clone.d.ts
       — clone.js
       - create.d.ts
       — create.js
      — delta.d.ts
       — delta.js
       - equal.d.ts
       – equal.js
       - index.d.ts
       – index.js
       - is.d.ts
       – is.js
       - pointer.d.ts
       - pointer.js
       - value.d.ts
      └ value.js
```

```
@sinonjs
 - commons
    — LICENSE
    README.md
    – lib

    ⊢ called-in-order.js

        called-in-order.test.js
       — class−name.js
        - class-name.test.js
       – deprecated.js
        - deprecated.test.js
        – every.js
       – every.test.js
        - function—name.js
        - function-name.test.js
        – global.js
       — global.test.js
        - index.js
       — index.test.js
       - order-by-first-call.js
       — order-by-first-call.test.js
        prototypes
          — README.md
          — array.js
          — copy-prototype-methods.js
           copy-prototype-methods.test.js
          – function.js
           – index.js
           - index.test.js
          — map₊js
          — object.js
          — set.js
           - string.js
         └ throws-on-proto.js
        - type-of.js
       type-of.test.js
        - value-to-string.js
      └ value-to-string.test.js
     - package.json
     - types

    ⊢ called−in−order.d.ts

       - class-name.d.ts
       deprecated.d.ts
        - every.d.ts
        - function-name.d.ts
        - global.d.ts
        - index.d.ts
        order-by-first-call.d.ts
        prototypes
          — array.d.ts
           copy-prototype-methods.d.ts
           - function.d.ts
           - index.d.ts
           - map.d.ts
```

```
- object.d.ts
           - set.d.ts
           - string.d.ts
         └ throws-on-proto.d.ts
       - type-of.d.ts
      └ value-to-string.d.ts
 - fake-timers
   ─ CHANGELOG.md
    LICENSE
    README.md
    – package.json
    - src
      └ fake-timers-src.js
@surma
└ rollup-plugin-off-main-thread

    ⊥travis.yml

    CODEOWNERS

    CONTRIBUTING

    CONTRIBUTORS
    Dockerfile
    — LICENSE
    — README.md
    — index.js
    — karma.conf.js
    — loader.ejs
    - node_modules
      ∟ .bin
          — ejs
         └ json5
    — package.json
    — renovate.json
    — run_tests.js
    tests
       amd-function-name.test.js
       asset-in-worker.test.js
       - dynamic-import.test.js
        - fixtures
          — amd-function-name
             ⊢ a.js
              - build
               └ runner.html
             — config.json
             └ entry.js
           - assets-in-worker
             - build

─ assets

    my−asset−620b911b.bin

               └ runner.html
              – entry.js
              rollup.config.js
             └ worker.js
            dynamic-import
             — a.js
              build
```

```
└ runner.html
  – entry.js
– empty⊾js
- import-meta
 ⊢ a.js
  — build
    └ runner.html
 └ entry.js
- import-meta-worker
 — a.js
 ─ build
    └ runner.html
 └ entry.js
- import-worker-url
 ⊢ a.js
 ⊢ b.js
 ─ build
   └ runner.html
  – entry.js
 └ worker.js

    import-worker-url-custom-scheme

 — a.js
 ⊢ b.js
 ─ build
   └ runner.html
 ├ config.json
   – entry.js
 └ worker.js
- module-worker
 — a.js
 ⊢ b.js
  ─ build
   ∟ runner.html
 ⊢ entry.js

─ rollup.config.js
 └ worker.js
- more-workers
 — a.js
 — b.js
  — build
   └ runner.html
 ⊢ entry.js
 — worker_a₊js
 └ worker_b.js
- public-path
 ⊢ a.js
  — build
   └ runner.html

    config.json

 └ entry.js
- simple-bundle
  – a₌js
   - build
    └ runner.html
```

```
└ entry.js
          - single-default
           — a.js
            - build
              └ runner.html
           ∟ entry.js
         - url-import-meta-worker
           — a₌js
           ⊢ b.js
           — build
             ∟ runner.html
            – entry.js
           └ worker.js
          - worker
           ⊢ a.js
            — b.js
            — build
             └ runner.html
            – entry.js
           └ worker.js
      — import-meta-worker.test.js
      - import-meta.test.js
      import-worker-url-custom-scheme.test.js
      - import-worker-url.test.js
      module-worker.test.js
      - more-workers.test.js
      public-path.test.js
      - simple-bundle.test.js
      - single-default.test.js
      url-import-meta-worker.test.js
     └ worker.test.js

    babel-plugin-add-jsx-attribute

    ─ CHANGELOG.md

    LICENSE

   README.md
   - lib
    └ index.js
   - package.json

    babel-plugin-remove-jsx-attribute

  ─ CHANGELOG.md
  LICENSE
  README.md
  — lib
    └ index.js

    package.json

    babel-plugin-remove-jsx-empty-expression

  — CHANGELOG.md

    LICENSE

   README.md
   - lib
    └ index.js
   – package.json
 babel-plugin-replace-jsx-attribute-value
```

```
- CHANGELOG.md
   - LICENSE
   README.md
   - lib
     └ index.js
   – package.json

    babel-plugin-svg-dynamic-title

  ─ CHANGELOG.md
   LICENSE
   README.md
   - lib
    └ index.js
   - package.json

    babel-plugin-svg-em-dimensions

⊢ CHANGELOG.md

  — LICENSE
  — README.md
  — lib
    └ index.js
  └ package.json
babel-plugin-transform-react-native-svg
  — CHANGELOG.md
  LICENSE
   — README.md
  – lib
    └ index.js
  └ package.json

    babel-plugin-transform-svg-component

    ─ CHANGELOG.md


  LICENSE
  — README.md
  — lib

⊢ index.js

    └ util.js
  └ package.json
babel-preset
  ─ CHANGELOG.md
  LICENSE
   README.md
   - lib
    └ index.js
  └ package.json
- core
  ─ CHANGELOG.md
   LICENSE
   README.md
   – lib

    config.js

     ─ convert.js
     — index.js
      - plugins.js
     └ state.js
   - package.json
 hast-util-to-babel-ast
```

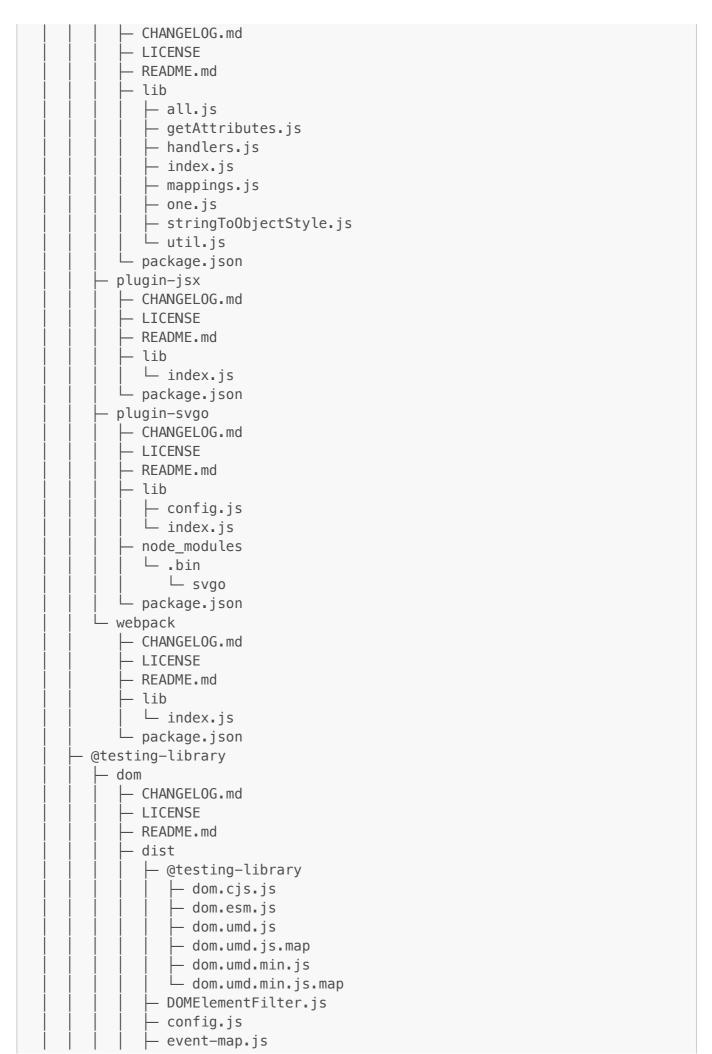

```
- events.js
      - get-node-text.js
      - get-queries-for-element.js
      - get-user-code-frame.js
      - helpers.js
      index.js
      - label—helpers.js
      matches.js
      – pretty–dom⊾js
      queries
        — all-utils.js
         – alt-text.js
        — display-value.js
        — index.js
         - label-text.js
        — placeholder-text.js
        — role.js
        — test-id.js
         - text.js
       └ title.js
      - query-helpers.js
      - role-helpers.js
      – screen.js
      suggestions.js
      wait-for-element-to-be-removed.js
    └ wait-for.js
   - node_modules
    └ .bin
       └ lz-string
   - package.json
   types
     — config.d.ts
      - events.d.ts
     - get-node-text.d.ts
      get-queries-for-element.d.ts
      - index.d.ts
      matches.d.ts
      - pretty-dom.d.ts
     - queries.d.ts
      - query-helpers.d.ts
     – role-helpers.d.ts
     - screen.d.ts
     suggestions.d.ts
      - wait-for-element-to-be-removed.d.ts
    └ wait-for.d.ts
iest-dom

    ─ CHANGELOG.md

   - LICENSE
  README.md
  – dist
     — extend-expect.js
      - index.js
      - matchers.js
      - to-be-checked.js
```

```
- to-be-disabled.js
      - to-be-empty-dom-element.js
      - to-be-empty.js
     - to-be-in-the-document.js
     – to-be-in-the-dom₁js
     — to−be−invalid.js
      to-be-partially-checked.js
     – to-be-required.js
      - to-be-visible.js
     – to-contain-element.js
      - to-contain-html.js
     to-have-accessible-description.js
     — to-have-accessible-name₁js
     – to–have–attribute.js
      - to-have-class.js
     — to-have-description.js
     — to-have-display-value.js
     to-have-errormessage.js
     — to-have-focus.js
     – to-have-form-values.js
     — to-have-style.js
      to-have-text-content.js
      - to−have−value.js
    └ utils.js
   - extend−expect.js
   – matchers.js
   node_modules
    └ chalk
        — index.d.ts
         license
         – package.json
         - readme.md
         - source
          ⊢ index.js
           templates.js
          └ util.js
 └ package.json
react
  CHANGELOG.md
  LICENSE
  README.md
  dist
     — @testing-library
        react.cjs.js
         - react.esm.js
        react.pure.cjs.js
         react.pure.esm.js
        react.pure.umd.js
        — react.pure.umd.js.map
        react.pure.umd.min.js
         react.pure.umd.min.js.map
         - react.umd.js
         react.umd.js.map
         react.umd.min.js
```

```
└ react.umd.min.js.map
    - act-compat.js
    — fire-event.js
    – index.js
   └ pure.js
 dont-cleanup-after-each.js
 - package.json
 - pure.d.ts
 - pure.js
 - types
    - index.d.ts
   └ pure.d.ts
user-event
─ CHANGELOG.md
 - LICENSE
 README.md
 — dist
   ⊢ blur.d.ts
    – blur.js
    – clear.d.ts
    — clear.js
    - click.d.ts
    – click.js
    - dom-helpers.d.ts
    - focus.d.ts
    - focus.js
    - hover.d.ts
    – hover.js
    - index.d.ts
    — index.js
    keyboard
      — getEventProps.d.ts
       getEventProps.js
       — getNextKeyDef.d.ts
       getNextKeyDef.js
       - index.d.ts
       – index.js
      keyMap.d.ts
       – keyMap₊js
       keyboardImplementation.d.ts
       keyboardImplementation.js
       plugins
         — arrow.d.ts
          – arrow₌js
          - character.d.ts
          character.js
          — control.d.ts
          - control.js
          - functional.d.ts
          functional.js
           - index.d.ts
         └ index.js
        shared
         carryValue.d.ts
```

```
- carryValue.js
       - fireChangeForInputTimeIfValid.d.ts
       fireChangeForInputTimeIfValid.js
       - fireInputEvent.d.ts

    ⊢ fireInputEvent.js

       - index.d.ts
     └ index.js
    specialCharMap.d.ts
    - specialCharMap.js
    - types.d.ts
   └ types.js
 paste.d.ts
 – paste⊾js
 select-options.d.ts
 select-options.js
 - tab.d.ts
— tab.js
 type
   — index.d.ts
    - index.js
    typeImplementation.d.ts

    □ typeImplementation.js

 upload.d.ts
 – upload.js
└ utils
    - click

    — getMouseEventOptions.d.ts

       getMouseEventOptions.js
       isClickableInput.d.ts

    isClickableInput.js

   edit
      ─ buildTimeValue.d.ts
       buildTimeValue.is
      calculateNewValue.d.ts
      calculateNewValue.is
       cursorPosition.d.ts
       cursorPosition.js
       - getValue.d.ts
      — getValue.js
      hasUnreliableEmptyValue.d.ts

⊢ hasUnreliableEmptyValue.js

      isContentEditable.d.ts
      isContentEditable.js
       isEditable.d.ts
       – isEditable.įs
      isValidDateValue.d.ts
      — isValidDateValue₊js
      - isValidInputTimeValue.d.ts
       isValidInputTimeValue.js
      maxLength.d.ts
      ─ maxLength.js
       selectionRange.d.ts
     focus
```



```
∟ parser
   – package.json
- babel__generator

─ LICENSE

  README.md
  - index.d.ts
  └ package.json
babel template

─ LICENSE

  README.md
   - index.d.ts
  - node_modules
     ∟ .bin
        ∟ parser
  └ package.json
– babel__traverse

─ LICENSE

  — README.md
   - index.d.ts
  └ package.json
body-parser
  ├ LICENSE
  — README.md
   - index.d.ts
  └ package.json
bonjour

─ LICENSE

  README.md
   - index.d.ts
  └ package.json
connect

    LICENSE

   README.md
   - index.d.ts

    package.json

    connect-history-api-fallback

  LICENSE
  — README.md
   - index.d.ts
  └ package.json
eslint

─ LICENSE

  — README.md
  helpers.d.ts
  - index.d.ts
  — package.json
   rules
     ─ best-practices.d.ts
     ─ deprecated.d.ts
     — ecmascript-6.d.ts
     index.d.ts
      - node-commonjs.d.ts
      - possible-errors.d.ts
      - strict-mode.d.ts
```

```
- stylistic-issues.d.ts
     └ variables.d.ts
  - use-at-your-own-risk.d.ts
– eslint-scope

─ LICENSE

  — README.md
   - index.d.ts
  └ package.json
estree
  ⊢ LICENSE
   - README.md
  — flow.d.ts
   - index.d.ts
  └ package.json
- express

─ LICENSE

  — README.md
   - index.d.ts
  └ package.json
express-serve-static-core

─ LICENSE

  — README.md
   - index.d.ts
  └ package.json
graceful-fs
  LICENSE
  — README.md
   - index.d.ts
  └ package.json
- html-minifier-terser

⊢ LICENSE

  — README.md
   - index.d.ts

    package.json

– http-proxy

─ LICENSE


  README.md
   - index.d.ts
  └ package.json


    istanbul-lib-coverage

  ─ LICENSE
  — README.md
  — index.d.ts
  └ package json
- istanbul-lib-report

⊢ LICENSE

  README.md
   index.d.ts
  └ package.json
- istanbul-reports
  ⊢ LICENSE
   - README.md
   index.d.ts
   – package.json
```

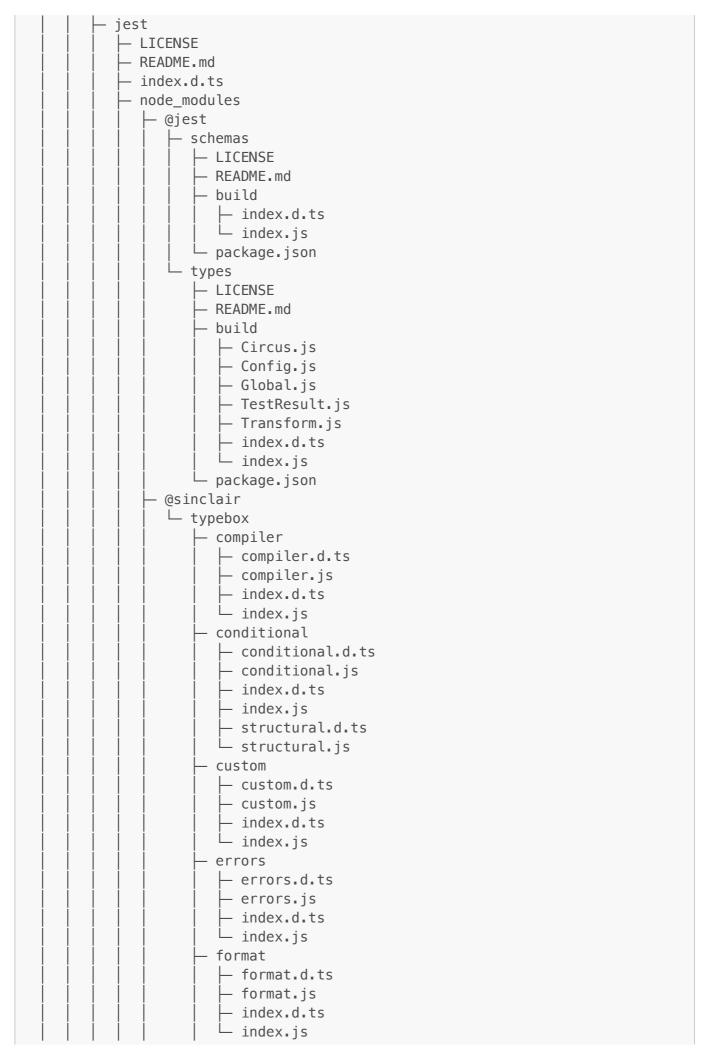

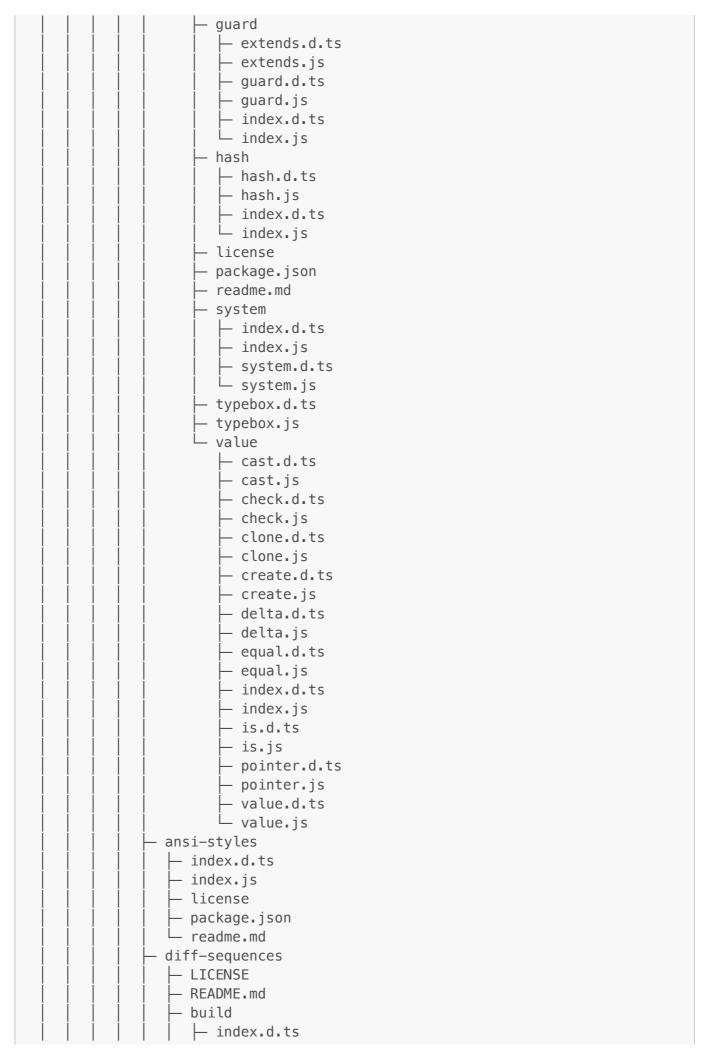

```
└ index.js
   - package.json
expect
  LICENSE
   - README.md
   build

— asymmetricMatchers.js

      extractExpectedAssertionsErrors.js
      - index.d.ts
     – index.js
      - jestMatchersObject.js
     - matchers.js
     — print.js

— spyMatchers.js

      toThrowMatchers.js
    └ types.js
 └ package.json
- jest-diff
  LICENSE
   README.md
   - build

    ─ cleanupSemantic.js

     — constants.js
     — diffLines.js
     — diffStrings.js
      - getAlignedDiffs.js
      - index.d.ts
      index.js

─ joinAlignedDiffs.js

     normalizeDiffOptions.js

→ printDiffs.js

    └ types.js
   – package⊾json
jest-get-type
  LICENSE
   build

─ index.d.ts

    └ index.js
 └ package.json
 jest-matcher-utils
  LICENSE
   README.md
   build
    ─ Replaceable.js
     deepCyclicCopyReplaceable.js
     - index.d.ts
    └ index.js
 └ package.json
jest-message-util
  LICENSE
   - build
     - index.d.ts
      - index.js
      – types.js
```



```
— index.d.ts
  — package.json
  └ types-metadata.json
long

⊢ LICENSE

  — README.md
   - index.d.ts
 └ package.json
- mime

─ LICENSE

   - Mime.d.ts
  README.md
  - index.d.ts
   - lite.d.ts
 └ package.json
node

─ LICENSE

  — README.md
  — assert
   └ strict.d.ts
  — assert.d.ts
  — async_hooks.d.ts
  - buffer.d.ts
  — child_process.d.ts
  └ cluster.d.ts
  - console.d.ts
  — constants.d.ts
  — crypto.d.ts
  — dgram.d.ts
  — diagnostics_channel.d.ts
  — dns
   └ promises.d.ts
   - dns.d.ts
  — dom-events.d.ts
  - domain.d.ts
  - events.d.ts
   - fs
   └ promises.d.ts
   - fs.d.ts
  — globals.d.ts
  — globals.global.d.ts
  — http.d.ts
  http2.d.ts
  https.d.ts
  - index.d.ts
  — inspector.d.ts
  - module.d.ts
   - net.d.ts
  - os.d.ts
  — package.json
   - path.d.ts
   - perf_hooks.d.ts
   - process.d.ts
   - punycode.d.ts
```

```
querystring.d.ts
- readline
  └ promises.d.ts
- readline.d.ts
- repl.d.ts
— stream
  — consumers.d.ts
   - promises.d.ts
  └ web.d.ts
- stream.d.ts
- string_decoder.d.ts
- test.d.ts
- timers
  └ promises.d.ts
- timers.d.ts
- tls.d.ts
- trace_events.d.ts
- ts4.8
  — assert
     └ strict.d.ts
   - assert.d.ts
   async hooks.d.ts
   - buffer.d.ts
   - child_process.d.ts
   – cluster.d.ts
   - console.d.ts
   - constants.d.ts
   – crypto.d.ts
   - dgram.d.ts
   diagnostics_channel.d.ts
   — dns

    □ promises.d.ts

   - dns.d.ts
   - dom-events.d.ts
   - domain.d.ts
   - events.d.ts
   - fs
    └ promises.d.ts
   - fs.d.ts
   - globals.d.ts
   globals.global.d.ts
   — http.d.ts
  http2.d.ts
   – https.d.ts
   - index.d.ts
   - inspector.d.ts
   module.d.ts
   - net.d.ts
   - os.d.ts
   - path.d.ts
   - perf_hooks.d.ts
   - process.d.ts
   - punycode.d.ts
   - querystring.d.ts
```

```
readline
        └ promises.d.ts
      - readline.d.ts
      - repl.d.ts
      – stream
        — consumers.d.ts
         - promises.d.ts
        └ web.d.ts
      - stream.d.ts
      - string_decoder.d.ts
      - test.d.ts
      - timers
       └ promises.d.ts
      - timers.d.ts
      - tls.d.ts
      - trace_events.d.ts
     — tty.d.ts
      - url.d.ts
      - util.d.ts
      - v8.d.ts
     - vm.d.ts
      - wasi.d.ts
      worker threads.d.ts
     └ zlib.d.ts
   - tty.d.ts
   - url.d.ts
   - util.d.ts
  – v8.d.ts
  - vm.d.ts
  — wasi.d.ts
  — worker threads.d.ts
 └ zlib.d.ts
– parse-json
  LICENSE
   README.md
   index.d.ts
 └ package.json
- prettier
  LICENSE
  README.md
  — doc.d.ts
  — index.d.ts
  — package.json
  — parser-angular.d.ts
  – parser-babel.d.ts
  — parser-espree.d.ts
  — parser-flow.d.ts
   - parser-glimmer.d.ts
   - parser-graphql.d.ts
  — parser-html.d.ts
   - parser-markdown.d.ts
   - parser-meriyah.d.ts
   - parser-postcss.d.ts
   - parser-typescript.d.ts
```

```
parser-yaml.d.ts
 └ standalone.d.ts
- prop-types

─ LICENSE

  — README.md
  — index.d.ts
 └ package.json

─ LICENSE

  README.md
   - index.d.ts
 └ package.json
- qs

─ LICENSE

  README.md
   - index.d.ts
 └ package.json
range-parser

─ LICENSE

  — README.md
  — index.d.ts
 └ package.json
react
  LICENSE
  — README.md
  — experimental.d.ts
  — global.d.ts
  — index.d.ts
  — jsx-dev-runtime.d.ts
  — jsx-runtime.d.ts
  - next.d.ts
 └ package.json
react-dom
  LICENSE
  — README.md
  — client.d.ts
  experimental.d.ts
  — index.d.ts
  - next.d.ts
  — package.json
   - server.d.ts
  └ test-utils
    └ index.d.ts
- resolve

─ LICENSE

  README.md
   - index.d.ts
 └ package.json
- retry

─ LICENSE

  — README.md
   - index.d.ts
  └ package.json
- scheduler
```

```
- LICENSE
   - README.md
   - index.d.ts
   – package.json
 └ tracing.d.ts
semver

─ LICENSE

   README.md
   classes
     — comparator.d.ts
      - range.d.ts
     └ semver.d.ts
   functions

─ clean.d.ts

      - cmp.d.ts
     - coerce.d.ts
     — compare-build.d.ts
     — compare-loose.d.ts
     — compare.d.ts
      - diff.d.ts
      - eq.d.ts
      - gt.d.ts
      - gte.d.ts
      - inc.d.ts
      - lt.d.ts
      - lte.d.ts
      - major.d.ts
      - minor.d.ts
      - neq.d.ts
      - parse.d.ts
      – patch.d.ts
      - prerelease.d.ts
      rcompare.d.ts
      - rsort.d.ts
      - satisfies.d.ts
      - sort.d.ts
     └ valid.d.ts
   - index.d.ts
   - internals
     └ identifiers.d.ts
   - package.json
   - preload.d.ts
  ranges
     — gtr.d.ts
      - intersects.d.ts
      - ltr.d.ts
      - max-satisfying.d.ts
      - min-satisfying.d.ts
      - min-version.d.ts
      - outside.d.ts
      simplify.d.ts
      - subset.d.ts
      to-comparators.d.ts
     └ valid.d.ts
```

```
serve-index
    - LICENSE
    — README.md
     - index.d.ts
   └ package.json
 - serve-static
   LICENSE
    — README.md
     - index.d.ts
   └ package.json
 – sockjs
   ─ LICENSE
    README.md
     - index.d.ts
   └ package.json
 - stack-utils

─ LICENSE

    — README.md
     - index.d.ts
   └ package.json
 - testing-library__jest-dom

⊢ LICENSE

    — README.md
    - index.d.ts
    - matchers.d.ts
   └ package.json
 - trusted-types

─ LICENSE

    — README.md
    — index.d.ts
    — lib
     └ index.d.ts
   └ package.json
 - WS
   ─ LICENSE
    README.md
    - index.d.mts
     - index.d.ts
   └ package.json
 - yargs
   ─ LICENSE
    — README.md
   helpers.d.mts
    helpers.d.ts
    — index.d.mts
    - index.d.ts
    – package.json
     - yargs.d.ts
 - yargs-parser
   LICENSE
    - README.md
     - index.d.ts
   └ package.json
@typescript-eslint
```

```
eslint-plugin

    LICENSE

 - README.md
 - dist

⊢ confias

→ all.js

       — all.js.map
       - base.js
       – base.js.map
       – eslint−recommended.js
       eslint-recommended.js.map

    recommended-requiring-type-checking.js

       recommended-requiring-type-checking.js.map

⊢ recommended.js

       recommended.js.map
        - strict.js
      └ strict.js.map
    - index.js
    - index.js.map
    - rules

— adjacent-overload-signatures.js

       adjacent-overload-signatures.js.map
       – array−type.js
       — array-type.js.map
       – await−thenable.js
       await-thenable.js.map
      ├ ban-ts-comment.js
       ban-ts-comment.js.map
       – ban—tslint–comment.js
       ban-tslint-comment.js.map
       — ban—types₌įs
       - ban-types.js.map
       block-spacing.js
       block-spacing.js.map
      brace-style.js
      ─ brace-style.js.map
       — class-literal-property-style.js
       class-literal-property-style.js.map
       – comma−dangle.js
       - comma-dangle.js.map
       — comma−spacing.js
       comma-spacing.js.map
       consistent-generic-constructors.js
       consistent-generic-constructors.js.map
       consistent-indexed-object-style.js
      — consistent-indexed-object-style.js.map
       consistent-type-assertions.js
       consistent-type-assertions.js.map

    consistent-type-definitions.js

      — consistent-type-definitions.js.map
       consistent-type-exports.js
       consistent-type-exports.js.map
       consistent-type-imports.js
       consistent-type-imports.js.map
```

```
- default-param-last.js
default-param-last.js.map
- dot−notation.js
- dot-notation.js.map
explicit-function-return-type.js
explicit-function-return-type.js.map
explicit-member-accessibility.js
explicit-member-accessibility.js.map
explicit-module-boundary-types.js
explicit-module-boundary-types.js.map
func-call-spacing.js
func-call-spacing.js.map
– indent.js
— indent.js.map
- index.js
- index.js.map
— init-declarations.js
init-declarations.js.map
– key−spacing.js
– key-spacing.js.map
keyword-spacing.js
keyword-spacing.js.map
lines-between-class-members.js
lines-between-class-members.js.map
member-delimiter-style.js
member-delimiter-style.js.map
member-ordering.js
- member-ordering.js.map
- method-signature-style.js
method-signature-style.js.map

    naming-convention-utils

  ⊢ enums.js
   – enums.js.map
   – format.js
   format.js.map
   – index.js
   - index.js.map
    - parse-options.js
   parse-options.js.map
   – schema⊾js
   schema.js.map
   – shared.js
   shared.js.map
   – types.js
   – types₌js₌map
   — validator.js
  └ validator.js.map
naming-convention.js
naming-convention.js.map
– no-array-constructor₁js
 no-array-constructor.js.map
- no−base−to−string.js
- no-base-to-string.js.map
no-confusing-non-null-assertion.js
```

```
no-confusing-non-null-assertion.js.map
no-confusing-void-expression.js
no-confusing-void-expression.js.map
– no-dupe-class-members.js
- no-dupe-class-members.js.map
no-duplicate-enum-values.js
no-duplicate-enum-values.js.map
no-duplicate-imports.js
no-duplicate-imports.js.map
– no−dynamic−delete.js
no-dynamic-delete.js.map
no−empty−function.js
- no-empty-function.js.map

    no−empty−interface.js

- no-empty-interface.js.map
no-explicit-any.js
— no-explicit-any.js.map
no-extra-non-null-assertion.js
no-extra-non-null-assertion.js.map
– no−extra−parens.js
no-extra-parens.js.map
 – no−extra−semi.js
– no–extra–semi.js.map
no-extraneous-class.js
– no-extraneous-class.js.map
no-floating-promises.js
h no-floating-promises.js.map
– no-for−in–array.js
– no−for−in−array.js.map
— no-implicit-any-catch.js
— no-implicit-any-catch.js.map
– no−implied−eval.js
- no-implied-eval.js.map
— no-import-type-side-effects.js
— no-import-type-side-effects.js.map
— no−inferrable−types.js
no-inferrable-types.js.map
 - no−invalid−this.js
 - no-invalid-this.js.map
– no−invalid-void-type.js
— no-invalid-void-type.js.map
— no-loop-func.js
— no-loop-func.js.map
no-loss-of-precision.js
- no-loss-of-precision.js.map
— no-magic-numbers.js
 - no-magic-numbers.js.map
– no-meaningless-void-operator.js
no-meaningless-void-operator.js.map
— no−misused−new.js
 - no-misused-new.js.map
 - no-misused-promises.js
 - no-misused-promises.js.map
 - no−mixed−enums.js
```

```
- no-mixed-enums.js.map
– no−namespace.js
 - no-namespace.js.map
no-non-null-asserted-nullish-coalescing.js
 no-non-null-asserted-nullish-coalescing.js.map
– no-non-null-asserted-optional-chain.js
– no-non-null-asserted-optional-chain.js.map
– no−non−null−assertion.js
no-non-null-assertion.js.map
no-parameter-properties.js
no-parameter-properties.js.map
– no−redeclare.js
- no-redeclare.js.map
no-redundant-type-constituents.js.map
– no−require−imports.js
— no−require−imports.js.map
no-restricted-imports.js
no-restricted-imports.js.map
– no−shadow.js
– no−shadow.js.map
– no—this—alias.js
– no-this-alias.js.map
— no-throw-literal.js
no-throw-literal.js.map
– no−type–alias.js

─ no-type-alias.js.map

no-unnecessary-boolean-literal-compare.js
 no-unnecessary-boolean-literal-compare.js.map
no-unnecessary-condition.js
no-unnecessary-condition.js.map
 - no-unnecessary-qualifier.js
— no−unnecessary−qualifier.js.map
no-unnecessary-type-arguments.js
no-unnecessary-type-arguments.js.map
 - no−unnecessary−type−assertion.js
no-unnecessary-type-assertion.js.map
 no-unnecessary-type-constraint.js
 - no-unnecessary-type-constraint.js.map
– no−unsafe−argument.js
— no-unsafe-argument.js.map
– no−unsafe−assignment.js
— no-unsafe-assignment.js.map
no-unsafe-call.js
– no-unsafe-call.js.map
no-unsafe-declaration-merging.js
no-unsafe-declaration-merging.js.map
no-unsafe-member-access.is
no-unsafe-member-access.js.map
– no−unsafe−return.js
 - no-unsafe-return.js.map
 no-unused-expressions.js
 - no-unused-expressions.js.map
 - no−unused−vars.js
```

```
- no-unused-vars.js.map
- no-use-before-define.js
no-use-before-define.js.map
no-useless-constructor.js
no-useless-constructor.js.map
– no-useless-empty-export.js
no-useless-empty-export.js.map
– no−var−requires.js
- no-var-requires.js.map
non-nullable-type-assertion-style.js
non-nullable-type-assertion-style.js.map
– object-curly-spacing.js
object-curly-spacing.js.map
padding-line-between-statements.js
- padding-line-between-statements.js.map
– parameter–properties.js
parameter-properties.js.map
- prefer—as—const.js
prefer-as-const.js.map
– prefer−enum−initializers.js
– prefer-enum-initializers.js.map
- prefer-for-of.js
- prefer-for-of.js.map
prefer-function-type.js
prefer-function-type.js.map
– prefer−includes.js
prefer-includes.js.map
- prefer-literal-enum-member.js
- prefer-literal-enum-member.js.map
– prefer–namespace–keyword⊾js
prefer-namespace-keyword.js.map
prefer-nullish-coalescing.js
prefer-nullish-coalescing.js.map
– prefer-optional-chain.js
- prefer-optional-chain.js.map
- prefer-readonly-parameter-types.js
prefer-readonly-parameter-types.js.map
prefer-readonly.js
- prefer-readonly.js.map
- prefer−reduce−type−parameter₌js
prefer-reduce-type-parameter.js.map
– prefer−regexp−exec.js
- prefer-regexp-exec.js.map
– prefer−return−this−type.js
- prefer-return-this-type.js.map
– prefer–string–starts–ends–with.js
prefer-string-starts-ends-with.js.map
prefer-ts-expect-error.js
prefer-ts-expect-error.js.map
promise-function-async₁js
 promise-function-async.js.map
- quotes.js
- quotes.js.map
- require-array-sort-compare.js
```

```
- require-array-sort-compare.js.map
  – require−await.js
   - require-await.js.map
  restrict-plus-operands.js
  restrict-plus-operands.js.map
  restrict-template-expressions.js
  restrict-template-expressions.js.map
   - return−await.js
  - return-await.js.map
  – semi⊾js
  — semi.js.map
  sort-type-constituents.js
  — sort-type-constituents.js.map

─ sort-type-union-intersection-members.js

   sort-type-union-intersection-members.js.map
   - space-before-blocks.js
  space-before-blocks.js.map
  space-before-function-paren.js
  space-before-function-paren.js.map
  – space−infix–ops.js
  — space-infix-ops.js.map
  strict-boolean-expressions.js
  strict-boolean-expressions.js.map
  — switch−exhaustiveness−check.js
  switch-exhaustiveness-check.js.map
  triple-slash-reference.js
   triple-slash-reference.js.map

    type-annotation-spacing.js

   type-annotation-spacing.js.map
  – typedef.js
  — typedef.js.map
  — unbound-method.js
  unbound-method.js.map
   - unified−signatures.js
 └ unified-signatures.js.map
- util
  – astUtils.js
   - astUtils.js.map
   collectUnusedVariables.js
   collectUnusedVariables.js.map
  createRule.is
  createRule.js.map
  — escapeRegExp.js
  escapeRegExp.js.map
   explicitReturnTypeUtils.js
  explicitReturnTypeUtils.js.map
  getESLintCoreRule.js
  getESLintCoreRule.js.map
   – getFunctionHeadLoc₊js
  getFunctionHeadLoc.js.map
   getOperatorPrecedence.js
   - getOperatorPrecedence.js.map
  getStringLength.js
  getStringLength.js.map
```

```
getThisExpression.js
     getThisExpression.js.map
      - getWrappingFixer.js
     getWrappingFixer.js.map
      - index.js
     index.js.map
     isNodeEqual.js
     isNodeEqual.js.map
      - isNullLiteral.js
     isNullLiteral.js.map
     isUndefinedIdentifier.js
     isUndefinedIdentifier.js.map
     — misc.js
     — misc.js.map
      objectIterators.js
    └ objectIterators.js.map
docs
 └ rules
     README.md
      - TEMPLATE.md
      - adjacent-overload-signatures.md
      - array-type.md
      - await−thenable.md
      - ban—ts—comment.md
      ban-tslint-comment.md
     – ban-types.md
      block—spacing.md
     brace-style.md
      - camelcase.md
     – class-literal-property-style.md
     — comma-dangle.md
     comma-spacing.md
     consistent-generic-constructors.md
     consistent-indexed-object-style.md
     consistent-type-assertions.md
      consistent-type-definitions.md
     consistent-type-exports.md
      consistent-type-imports.md
     – default-param-last.md
     – dot–notation.md
     explicit-function-return-type.md
     explicit-member-accessibility.md
     explicit-module-boundary-types.md
      func-call-spacing.md
     indent.md
      init-declarations.md
      key-spacing.md
     keyword-spacing.md
     lines-between-class-members.md
     member-delimiter-style.md
      member-ordering.md
      method-signature-style.md
     naming-convention.md
     no-array-constructor.md
```

├─ no-base-to-string.md
— no-confusing-non-null-assertion.md
— no-confusing-void-expression.md
— no-dupe-class-members.md
— no-duplicate-enum-values.md
— no-duplicate-imports.md
— no-dynamic-delete.md
— no-empty-function.md
— no-empty-interface.md
— no-explicit-any.md
— no-extra-non-null-assertion.md
— no-extra-parens.md
— no-extra-semi.md
— no-extraneous-class.md
— no-floating-promises.md
— no-for-in-array.md
— no-implicit-any-catch.md
— no-implied-eval.md
— no-imptied-evatimu — no-import-type-side-effects.md
— no-inferrable-types.md
— no-invalid-this.md
— no-invalid-void-type.md
— no-loop-func.md
— no-loss-of-precision.md
— no-magic-numbers.md
├ no-meaningless-void-operator.md
├─ no-misused-new.md
— no-misused-promises.md
├─ no-mixed-enums.md
⊢ no-namespace.md
— no-non-null-asserted-nullish-coalescing.md
─ no-non-null-asserted-optional-chain.md
— no-non-null-assertion.md
— no-parameter-properties.md
— no-redeclare.md
─ no-redundant-type-constituents.md
— no-require-imports.md
— no-restricted-imports.md
├─ no-shadow.md
— no-this-alias.md
— no-throw-literal.md
— no-type-alias.md
no-unnecessary-boolean-literal-compare.md
— no-unnecessary-condition.md
— no-unnecessary-qualifier.md
— no-unnecessary-type-arguments.md
— no-unnecessary-type-assertion.md
— no-unnecessary-type-constraint.md
— no-unsafe-argument.md
— no-unsafe-assignment.md
— no-unsafe-call.md
— no-unsafe-declaration-merging.md
— no-unsafe-member-access.md
— no-unsafe-return.md
no disare recurring



```
bin
  └ semver.js
  classes
   — comparator.js
   — index.js
    – range⊾js
   ∟ semver.js

    functions

⊢ clean.js

   — cmp.js
   — coerce.js

    compare-build.js

    compare-loose.js

    compare.js

    – diff.js
   — eq.js
   — gt.js
    – gte.js
    – inc.js
    – lt.js
    – lte.js
   — major.js
   — minor.js
   — neq.js
   — parse₊js
    — patch.js
   — prerelease.js

    ⊢ rcompare.js

   ⊢ rsort.js
   - satisfies.js
   — sort.js
  └ valid.js
 - index.js
 - internal

    ⊢ constants.js

   ─ debug.js
   — identifiers.js
    - parse-options.js
  ∟ re.js
 – package⊾json
 – preload.js
 – range⊾bnf
∟ ranges
   ⊢ gtr.js
    – intersects.js
   ⊢ ltr.js
   — max-satisfying.js
   — min-satisfying.js
   — min−version.js
    – outside.js
    - simplify.js
    - subset.js
    - to-comparators.js
   └ valid.js
```

```
└ package.json
 experimental-utils

─ LICENSE

   README.md
   - _ts3.4
     └ dist
       └ index.d.ts
   - dist
     ⊢ index.d.ts
     — index.d.ts.map
      - index.js
     └ index.js.map
   - node_modules
     └ .bin
        └ eslint
  └ package.json
parser
  LICENSE
   - README.md
   - _ts3.4
     └ dist
        ⊢ index.d.ts

    parser.d.ts

   – dist

    index.d.ts

      - index.d.ts.map
     — index.js
     — index.js.map
      - parser.d.ts
      - parser.d.ts.map
      – parser.js
     └ parser.js.map
   - node_modules
     └ .bin
        ∟ eslint
   - package.json
scope-manager
  - README.md
   – dist

─ ID.d.ts

     — ID.d.ts.map
     ⊢ ID.js
      - ID.js.map
     — ScopeManager.d.ts
      ScopeManager.d.ts.map
      — ScopeManager₁js
      ScopeManager.js.map
      — analyze.d.ts
      analyze.d.ts.map
      – analyze.js
      – analyze.js.map
      - assert.d.ts
      - assert.d.ts.map
```

— assert.js
— assert.js.map
— definition
— CatchClauseDefinition.d.ts
— CatchClauseDefinition.d.ts.map
— CatchClauseDefinition.js
— CatchClauseDefinition.js.map
— ClassNameDefinition.d.ts
— ClassNameDefinition.d.ts.map
— ClassNameDefinition.js
— ClassNameDefinition.js.map
— Definition.d.ts
<pre>├─ Definition.d.ts.map ├─ Definition.js</pre>
— Definition.js.map
— Definition.js.map — DefinitionBase.d.ts
— DefinitionBase.d.ts.map
— DefinitionBase.is
— DefinitionBase.js.map
— DefinitionType.d.ts
— DefinitionType.d.ts.map
— DefinitionType.is
— DefinitionType.js.map
- FunctionNameDefinition.d.ts
- FunctionNameDefinition.d.ts.map
— FunctionNameDefinition.js
- FunctionNameDefinition.js.map
- ImplicitGlobalVariableDefinition.d.ts
- ImplicitGlobalVariableDefinition.d.ts.map
- ImplicitGlobalVariableDefinition.js
- ImportBindingDefinition.d.ts
- ImportBindingDefinition.d.ts.map
- ImportBindingDefinition.js
- ImportBindingDefinition.js.map
— ParameterDefinition.d.ts
— ParameterDefinition.d.ts.map
— ParameterDefinition.js
— ParameterDefinition.js.map
☐ TSEnumMemberDefinition.d.ts
— TSEnumMemberDefinition.d.ts.map
☐ TSEnumMemberDefinition.js
TSEnumMemberDefinition.js.map
☐ TSEnumNameDefinition.d.ts
— TSEnumNameDefinition.d.ts.map
— TSEnumNameDefinition.js
— TSEnumNameDefinition.js.map
— TSModuleNameDefinition.d.ts
— TSModuleNameDefinition.d.ts.map
— TSModuleNameDefinition.js
— TSModuleNameDefinition.js.map
— TypeDefinition.d.ts
— TypeDefinition.d.ts.map
— TypeDefinition.js
 242 / 017

```
TypeDefinition.js.map
  VariableDefinition.d.ts
  VariableDefinition.d.ts.map
  VariableDefinition.js
  VariableDefinition.js.map
  - index.d.ts
  index.d.ts.map
   - index.js
 └ index.js.map
index.d.ts
index.d.ts.map
- index.js
- index.js.map
- lib
  — base-config.d.ts
  base-config.d.ts.map
  base-config₁js
  - base-config.js.map
  – dom.d.ts
  - dom.d.ts.map
  dom.iterable.d.ts
  dom.iterable.d.ts.map
  dom.iterable.js
  dom.iterable.js.map
  — dom.js
  — dom.js.map
  es2015.collection.d.ts
  es2015.collection.d.ts.map
  es2015.collection.js
  es2015.collection.js.map
  - es2015.core.d.ts
  es2015.core.d.ts.map
  - es2015.core.js
  es2015.core.js.map
  es2015.d.ts
  es2015.d.ts.map
  es2015.generator.d.ts
  es2015.generator.d.ts.map
  es2015.generator.js
  - es2015.generator.js.map
  es2015.iterable.d.ts
  es2015.iterable.d.ts.map
  – es2015.iterable.js
  es2015.iterable.js.map
  – es2015.js
  es2015.js.map
  - es2015.promise.d.ts
  es2015.promise.d.ts.map
  – es2015.promise.js
  es2015.promise.js.map
   es2015.proxy.d.ts
  es2015.proxy.d.ts.map
  - es2015.proxy.js
   - es2015.proxy.js.map
```

```
- es2015.reflect.d.ts
es2015.reflect.d.ts.map
- es2015.reflect.js
es2015.reflect.js.map
es2015.symbol.d.ts
es2015.symbol.d.ts.map
es2015.symbol.js
- es2015.symbol.js.map
es2015.symbol.wellknown.d.ts
es2015.symbol.wellknown.d.ts.map
es2015.symbol.wellknown.js
es2015.symbol.wellknown.js.map
es2016.array.include.d.ts
— es2016.array.include.d.ts.map
- es2016.array.include.js
- es2016.array.include.js.map
— es2016.d.ts
es2016.d.ts.map
– es2016.full.d.ts
es2016.full.d.ts.map
- es2016.full.js
– es2016.full.js.map
– es2016.js
— es2016.js.map
es2017.d.ts
- es2017.d.ts.map
– es2017.full.d.ts
es2017.full.d.ts.map
- es2017.full.js
es2017.full.js.map
es2017.intl.d.ts
es2017.intl.d.ts.map
– es2017.intl.js
es2017.intl.js.map
— es2017.js
— es2017.js.map
– es2017.object.d.ts
es2017.object.d.ts.map
- es2017.object.js
es2017.object.js.map
— es2017.sharedmemory.d.ts
es2017.sharedmemory.d.ts.map
— es2017.sharedmemory.js
es2017.sharedmemory.js.map
es2017.string.d.ts
es2017.string.d.ts.map
- es2017.string.js
es2017.string.js.map
es2017.typedarrays.d.ts
— es2017.typedarrays.d.ts.map
- es2017.typedarrays.js
es2017.typedarrays.js.map
es2018.asyncgenerator.d.ts
es2018.asyncgenerator.d.ts.map
```

```
es2018.asyncgenerator.js
es2018.asyncgenerator.js.map
 es2018.asynciterable.d.ts
es2018.asynciterable.d.ts.map
es2018.asynciterable.js
es2018.asynciterable.js.map
– es2018.d.ts
 es2018.d.ts.map
 - es2018.full.d.ts
 - es2018.full.d.ts.map
es2018.full.js
es2018.full.js.map
– es2018.intl.d.ts
 es2018.intl.d.ts.map
 - es2018.intl.js
es2018.intl.js.map
— es2018.js
es2018.js.map
– es2018.promise.d.ts
es2018.promise.d.ts.map
– es2018.promise.js
es2018.promise.js.map
es2018.regexp.d.ts
— es2018.regexp.d.ts.map
es2018.regexp.js
es2018.regexp.js.map
─ es2019.array.d.ts
es2019.array.d.ts.map
 - es2019.array.js
es2019.array.js.map
es2019.d.ts
es2019.d.ts.map
– es2019.full.d.ts
es2019.full.d.ts.map
— es2019.full.js
 - es2019.full.js.map
es2019.intl.d.ts
 es2019.intl.d.ts.map
 - es2019.intl.js
es2019.intl.js.map
— es2019.is
es2019.js.map
— es2019.object.d.ts
es2019.object.d.ts.map
- es2019.object.js
es2019.object.js.map
es2019.string.d.ts
es2019.string.d.ts.map
– es2019.string.js
es2019.string.js.map
 - es2019.symbol.d.ts
 es2019.symbol.d.ts.map
– es2019.symbol.js
es2019.symbol.js.map
```

```
es2020.bigint.d.ts
es2020.bigint.d.ts.map
- es2020.bigint.js
– es2020.bigint.js.map
es2020.d.ts
es2020.d.ts.map
es2020.date.d.ts
es2020.date.d.ts.map
es2020.date.js
es2020.date.js.map
- es2020.full.d.ts
es2020.full.d.ts.map
— es2020.full.js
es2020.full.js.map
es2020.intl.d.ts
es2020.intl.d.ts.map
— es2020.intl.js
es2020.intl.js.map
– es2020.js
es2020.js.map
- es2020.number.d.ts
es2020.number.d.ts.map
— es2020.number.js
— es2020.number.js.map
es2020.promise.d.ts
es2020.promise.d.ts.map
— es2020.promise.js
es2020.promise.js.map
es2020.sharedmemory.d.ts
es2020.sharedmemory.d.ts.map
— es2020.sharedmemory.js
es2020.sharedmemory.js.map
es2020.string.d.ts
— es2020.string.d.ts.map
— es2020.string.js
es2020.string.js.map
es2020.symbol.wellknown.d.ts
es2020.symbol.wellknown.d.ts.map
es2020.symbol.wellknown.js
– es2020.symbol.wellknown.js.map
— es2021.d.ts
es2021.d.ts.map
es2021.full.d.ts
es2021.full.d.ts.map
- es2021.full.js
es2021.full.js.map
- es2021.intl.d.ts
es2021.intl.d.ts.map
– es2021.intl.js
es2021.intl.js.map
 - es2021.js
- es2021.js.map
es2021.promise.d.ts
es2021.promise.d.ts.map
```

```
- es2021.promise.js
es2021.promise.js.map
es2021.string.d.ts
es2021.string.d.ts.map
es2021.string.js
es2021.string.js.map
es2021.weakref.d.ts
es2021.weakref.d.ts.map
es2021.weakref.js
es2021.weakref.js.map
es2022.array.d.ts
es2022.array.d.ts.map
es2022.array.js
– es2022.array.js.map
es2022.d.ts
es2022.d.ts.map
- es2022.error.d.ts
- es2022.error.d.ts.map
- es2022.error.js
- es2022.error.js.map
es2022.full.d.ts
es2022.full.d.ts.map
- es2022.full.js
es2022.full.js.map
- es2022.intl.d.ts
es2022.intl.d.ts.map
─ es2022.intl.js
es2022.intl.js.map
- es2022.js
– es2022.js.map
— es2022.object.d.ts
es2022.object.d.ts.map
es2022.object.js
— es2022.object.js.map
— es2022.sharedmemory.d.ts
es2022.sharedmemory.d.ts.map
es2022.sharedmemory.js
es2022.sharedmemory.js.map
es2022.string.d.ts
es2022.string.d.ts.map
es2022.string.js
es2022.string.js.map
— es5.d.ts
- es5.d.ts.map
– es5.js
— es5.js.map
- es6.d.ts
- es6.d.ts.map
– es6.js
— es6.js.map
 - es7.d.ts
- es7.d.ts.map
– es7.js
- es7.js.map
```

```
esnext.array.d.ts
esnext.array.d.ts.map
- esnext.array.js
- esnext.array.js.map
esnext.asynciterable.d.ts
esnext.asynciterable.d.ts.map
esnext.asynciterable.js
- esnext.asynciterable.js.map
esnext.bigint.d.ts
esnext.bigint.d.ts.map
esnext.bigint.js
– esnext.bigint.js.map
esnext.d.ts
esnext.d.ts.map
esnext.full.d.ts
esnext.full.d.ts.map
– esnext.full.js
esnext.full.js.map
esnext.intl.d.ts
esnext.intl.d.ts.map
- esnext.intl.js
- esnext.intl.js.map
– esnext.js
esnext.js.map
esnext.promise.d.ts
esnext.promise.d.ts.map
esnext.promise.js
esnext.promise.js.map
esnext.string.d.ts
esnext.string.d.ts.map
esnext.string.js
esnext.string.js.map
esnext.symbol.d.ts
esnext.symbol.d.ts.map
esnext.symbol.js
- esnext.symbol.js.map
esnext.weakref.d.ts
esnext.weakref.d.ts.map
esnext.weakref.js
esnext.weakref.js.map
- index.d.ts
– index.d.ts.map
– index.js
- index.js.map
- lib.d.ts
- lib.d.ts.map
- lib.js
– lib.js.map
- scripthost.d.ts
- scripthost.d.ts.map
scripthost.js
- scripthost.js.map
webworker.d.ts
webworker.d.ts.map
```

├─ webworker.importscripts.d.ts
<pre>webworker.importscripts.d.ts.map</pre>
<pre>webworker.importscripts.js</pre>
<pre>webworker.importscripts.js.map</pre>
— webworker.iterable.d.ts
— webworker.iterable.d.ts.map
— webworker.iterable.js
— webworker.iterable.js.map
— webworker.js
webworker.js.map
referencer
├─ ClassVisitor.d.ts
— ClassVisitor.d.ts.map
·
— ClassVisitor.js
— ClassVisitor.js.map
├─ ExportVisitor.d.ts
├─ ExportVisitor.d.ts.map
ExportVisitor.js
ExportVisitor.js.map
├─ ImportVisitor.d.ts
├─ ImportVisitor.d.ts.map
├─ ImportVisitor.js
├─ ImportVisitor.js.map
├─ PatternVisitor.d.ts
├─ PatternVisitor.d.ts.map
├ PatternVisitor.js
├─ PatternVisitor.js.map
├─ Reference.d.ts
— Reference.d.ts.map
— Reference.js
— Reference.js.map
— Referencer.d.ts
— Referencer.d.ts.map
⊢ Referencer.js
├─ Referencer.js.map
TypeVisitor.d.ts
TypeVisitor.d.ts TypeVisitor.d.ts.map
TypeVisitor.js
TypeVisitor.js TypeVisitor.js.map
Typevisitor.js.map Visitor.d.ts
├─ Visitor.d.ts.map
├─ Visitor.js
├ Visitor.js.map
├─ VisitorBase.d.ts
├─ VisitorBase.d.ts.map
├─ VisitorBase.js
├─ VisitorBase.js.map
— index.d.ts
— index.d.ts.map
index.js
└ index.js.map
— scope
├─ BlockScope.d.ts
— BlockScope.d.ts.map

— BlockScope.js
— BlockScope.js.map
— CatchScope.d.ts
— CatchScope.d.ts.map
— CatchScope.js
!
— CatchScope.js.map
— ClassFieldInitializerScope.d.ts
— ClassFieldInitializerScope.d.ts.map
─ ClassFieldInitializerScope.js
— ClassFieldInitializerScope.js.map
— ClassScope.d.ts
— ClassScope.d.ts.map
— ClassScope.js
— ClassScope.js.map
!
— ClassStaticBlockScope.d.ts
— ClassStaticBlockScope.d.ts.map
— ClassStaticBlockScope.js
— ClassStaticBlockScope.js.map
<pre>ConditionalTypeScope.d.ts</pre>
<pre>ConditionalTypeScope.d.ts.map</pre>
— ConditionalTypeScope.js
— ConditionalTypeScope.js.map
— ForScope.d.ts
— ForScope.d.ts.map
— ForScope.js
— ForScope.js.map
— FunctionExpressionNameScope.d.ts
·
— FunctionExpressionNameScope.d.ts.map
— FunctionExpressionNameScope.js
<pre>FunctionExpressionNameScope.js.map</pre>
— FunctionScope.d.ts
<pre>FunctionScope.d.ts.map</pre>
<pre>FunctionScope.js</pre>
— FunctionScope.js.map
— FunctionTypeScope.d.ts
<pre>FunctionTypeScope.d.ts.map</pre>
— FunctionTypeScope.js
— FunctionTypeScope.js.map
— GlobalScope.d.ts
· ·
— GlobalScope.d.ts.map
— GlobalScope.js
— GlobalScope.js.map
<pre>MappedTypeScope.d.ts</pre>
<pre>MappedTypeScope.d.ts.map</pre>
— MappedTypeScope.js
— MappedTypeScope.js.map
— ModuleScope.d.ts
— ModuleScope.d.ts.map
— ModuleScope.js
— ModuleScope.js.map
— Scope.d.ts
— Scope.d.ts.map
— Scope.js
— Scope.js.map

```
ScopeBase.d.ts
     ScopeBase.d.ts.map
    ScopeBase is
    ScopeBase.js.map
    ScopeType.d.ts
    ScopeType.d.ts.map
    ScopeType.js
    ScopeType.js.map
    SwitchScope.d.ts
    SwitchScope.d.ts.map
    SwitchScope.js
    SwitchScope.js.map
    TSEnumScope.d.ts
    TSEnumScope.d.ts.map
    - TSEnumScope.js
    TSEnumScope.js.map
    TSModuleScope.d.ts
    TSModuleScope.d.ts.map
    TSModuleScope.js
    TSModuleScope.js.map
    - TypeScope.d.ts
    TypeScope.d.ts.map
    TypeScope.js
    TypeScope.js.map
    WithScope.d.ts
    WithScope.d.ts.map
    WithScope.js
    WithScope.js.map
    index.d.ts
    index.d.ts.map
    - index.js
   └ index.js.map
  variable
   ESLintScopeVariable.d.ts
    ESLintScopeVariable.d.ts.map
    - ESLintScopeVariable.js
    ESLintScopeVariable.js.map
    ImplicitLibVariable.d.ts

    ImplicitLibVariable.d.ts.map

    - ImplicitLibVariable.js
    ImplicitLibVariable.js.map
    Variable.d.ts
    Variable.d.ts.map
    - Variable.js
    - Variable.js.map
    - VariableBase.d.ts
    VariableBase.d.ts.map
    - VariableBase₊js
    VariableBase.js.map
    - index.d.ts
    - index.d.ts.map
    - index.js
   └ index.js.map
package.json
```

```
type-utils

    LICENSE

  README.md
   ts3.4
   ∟ dist
      — containsAllTypesByName.d.ts

    getConstrainedTypeAtLocation.d.ts

       getContextualType.d.ts
       getDeclaration.d.ts
       getSourceFileOfNode.d.ts
       getTokenAtPosition.d.ts
       getTypeArguments.d.ts
       - getTypeName.d.ts
       - index.d.ts
       isTypeReadonly.d.ts
       isUnsafeAssignment.d.ts
      - predicates.d.ts
       propertyTypes.d.ts
       requiresQuoting.d.ts

    typeFlagUtils.d.ts

 – dist
    containsAllTypesByName.d.ts
    containsAllTypesByName.d.ts.map
    containsAllTypesByName.js
    containsAllTypesByName.js.map
    getConstrainedTypeAtLocation.d.ts
    getConstrainedTypeAtLocation.d.ts.map
    getConstrainedTypeAtLocation.js
    getConstrainedTypeAtLocation.js.map
    getContextualType.d.ts
    getContextualType.d.ts.map
    getContextualType.is
    getContextualType.js.map
    getDeclaration.d.ts
    getDeclaration.d.ts.map
    getDeclaration.js
    getDeclaration.js.map
    getSourceFileOfNode.d.ts
    getSourceFileOfNode.d.ts.map
    getSourceFileOfNode.js
    - getSourceFileOfNode.is.map
    getTokenAtPosition.d.ts
    getTokenAtPosition.d.ts.map
    getTokenAtPosition.js
    getTokenAtPosition.js.map
    getTypeArguments.d.ts
    getTypeArguments.d.ts.map
    getTypeArguments.js
    getTypeArguments.js.map
    getTypeName.d.ts
    getTypeName.d.ts.map
    getTypeName.js
    getTypeName.js.map
    - index.d.ts
```

```
index.d.ts.map
      - index.js
      - index.js.map
     isTypeReadonly.d.ts
     - isTypeReadonly.d.ts.map
     isTypeReadonly.js
     - isTypeReadonly.js.map
     isUnsafeAssignment.d.ts
      isUnsafeAssignment.d.ts.map
     isUnsafeAssignment.js
     isUnsafeAssignment.js.map
     - predicates.d.ts
     - predicates.d.ts.map
      - predicates.js
      - predicates.js.map
      - propertyTypes.d.ts
     - propertyTypes.d.ts.map
     - propertyTypes.is
     - propertyTypes.js.map
     requiresQuoting.d.ts
     - requiresQuoting.d.ts.map
      requiresQuoting.js
     requiresQuoting.js.map
     typeFlagUtils.d.ts
     typeFlagUtils.d.ts.map
      typeFlagUtils.js
    - node modules
    └ .bin
       ∟ eslint
 ∟ package.json
types
  LICENSE
  README.md
  - _ts3.4
    ∟ dist

    generated

          └ ast-spec.d.ts
        - index.d.ts
         - lib.d.ts
        - parser-options.d.ts
       └ ts-estree.d.ts
  – dist
     — generated
        — ast-spec.d.ts
        - ast-spec.d.ts.map
         - ast−spec.js
       └ ast-spec.js.map
      - index.d.ts
      index.d.ts.map
      - index.js
      - index.js.map
      - lib.d.ts
      - lib.d.ts.map
```

```
- lib.js
      - lib.js.map
     - parser-options.d.ts
     parser-options.d.ts.map
     - parser—options.js
     - parser-options.js.map
      - ts-estree.d.ts
     - ts-estree.d.ts.map
      - ts-estree.js
    └ ts-estree.js.map
   - package.json
- typescript-estree
  LICENSE

    README.md

    _ts3.4
    └ dist
       — ast-converter.d.ts
        clear-caches.d.ts
        convert-comments.d.ts
        - convert.d.ts
        create-program
          ─ WatchCompilerHostOfConfigFile.d.ts
          createDefaultProgram.d.ts
          createIsolatedProgram.d.ts
           createProjectProgram.d.ts
           createSourceFile.d.ts
           describeFilePath.d.ts
           getScriptKind.d.ts
          - shared.d.ts

    □ useProvidedPrograms.d.ts

        - getModifiers.d.ts
         - index.d.ts
         - isx
          └ xhtml-entities.d.ts
        - node-utils.d.ts
        parseSettings
          ExpiringCache.d.ts
           createParseSettings.d.ts

    getProjectConfigFiles.d.ts

          index.d.ts
          inferSingleRun.d.ts
           resolveProjectList.d.ts
          parser-options.d.ts
        parser.d.ts
         semantic-or-syntactic-errors.d.ts
        simple-traverse.d.ts
        - ts-estree
           - estree-to-ts-node-types.d.ts
           - index.d.ts
          └ ts-nodes.d.ts
        version-check.d.ts
   - dist
```

```
ast-converter.d.ts
ast-converter.d.ts.map
- ast−converter.js
ast-converter.js.map
clear-caches.d.ts
clear-caches.d.ts.map
– clear–caches₌js
- clear-caches.js.map
convert-comments.d.ts
convert-comments.d.ts.map
– convert–comments₌js
- convert-comments.js.map
- convert.d.ts
- convert.d.ts.map
- convert.js
– convert.js.map
create-program
  WatchCompilerHostOfConfigFile.d.ts
   WatchCompilerHostOfConfigFile.d.ts.map
  WatchCompilerHostOfConfigFile.js
   WatchCompilerHostOfConfigFile.js.map
   createDefaultProgram.d.ts
   createDefaultProgram.d.ts.map
  — createDefaultProgram₊js
   - createDefaultProgram.js.map
   createIsolatedProgram.d.ts
   createIsolatedProgram.d.ts.map
   createIsolatedProgram.js
   createIsolatedProgram.js.map
   createProjectProgram.d.ts
  — createProjectProgram.d.ts.map
   - createProjectProgram.js
   createProjectProgram.js.map
   createSourceFile.d.ts
   createSourceFile.d.ts.map
   - createSourceFile.js
   createSourceFile.js.map
   describeFilePath.d.ts
   describeFilePath.d.ts.map
   describeFilePath.js
   describeFilePath.js.map
   getScriptKind.d.ts
   getScriptKind.d.ts.map
   getScriptKind.js
   getScriptKind.js.map
   getWatchProgramsForProjects.d.ts
   getWatchProgramsForProjects.d.ts.map
   getWatchProgramsForProjects.js
   - getWatchProgramsForProjects.js.map
   shared.d.ts
   shared.d.ts.map
   shared.js
   shared.js.map
   useProvidedPrograms.d.ts
```

```
useProvidedPrograms.d.ts.map
   useProvidedPrograms.js
  └ useProvidedPrograms.js.map
- getModifiers.d.ts
- getModifiers.d.ts.map
- getModifiers.js
getModifiers.js.map
- index.d.ts
- index.d.ts.map
- index.js
- index.js.map
- jsx
  — xhtml-entities.d.ts
   xhtml-entities.d.ts.map
   - xhtml-entities.js
 └ xhtml-entities.js.map
- node-utils.d.ts
- node-utils.d.ts.map
node-utils.js
- node-utils.js.map
parseSettings
  - ExpiringCache.d.ts
   ExpiringCache.d.ts.map
  ExpiringCache.js
   ExpiringCache.js.map
   createParseSettings.d.ts
  — createParseSettings.d.ts.map
   createParseSettings.js
   createParseSettings.js.map
   getProjectConfigFiles.d.ts
  getProjectConfigFiles.d.ts.map
   getProjectConfigFiles.js
   getProjectConfigFiles.js.map
   - index.d.ts
  - index.d.ts.map
  — index.js
  - index.js.map
   inferSingleRun.d.ts
   inferSingleRun.d.ts.map
   inferSingleRun.js
  inferSingleRun.js.map
  — resolveProjectList.d.ts
  — resolveProjectList.d.ts.map
   resolveProjectList.js
   resolveProjectList.js.map
   warnAboutTSVersion.d.ts
   warnAboutTSVersion.d.ts.map
   warnAboutTSVersion.js


    warnAboutTSVersion.js.map

parser-options.d.ts
 parser-options.d.ts.map
parser-options.js
- parser—options.js.map
- parser.d.ts
```

```
parser.d.ts.map
  - parser.js
  - parser.js.map
  - semantic-or-syntactic-errors.d.ts
  - semantic-or-syntactic-errors.d.ts.map
 – semantic–or–syntactic–errors.js
  semantic-or-syntactic-errors.js.map
 – simple-traverse.d.ts
  simple-traverse.d.ts.map
 – simple-traverse.js
  - simple-traverse.js.map
  - ts-estree
    estree-to-ts-node-types.d.ts
     estree-to-ts-node-types.d.ts.map
     estree-to-ts-node-types.js
     - estree-to-ts-node-types.js.map
    — index.d.ts
     - index.d.ts.map
    - index.js
    - index.js.map
    — ts-nodes.d.ts
    — ts-nodes.d.ts.map
     - ts−nodes.js
    └ ts-nodes.js.map
  - version-check.d.ts
  - version-check.d.ts.map
  - version—check.js
└ version-check.js.map
node modules
 — .bin
   ∟ semver
  - semver
    LICENSE
     README.md
     - bin
      └ semver.js
     - classes
       — comparator.js
        index.js
        - range⊾js
       ∟ semver.js
     functions

⊢ clean.js

        – cmp.js
        – coerce.js
       ─ compare-build.js
       — compare-loose.js
        compare.js
        – diff.js
        – eq.js
        - gt.js
        - gte.js
        – inc.js
         lt.js
```

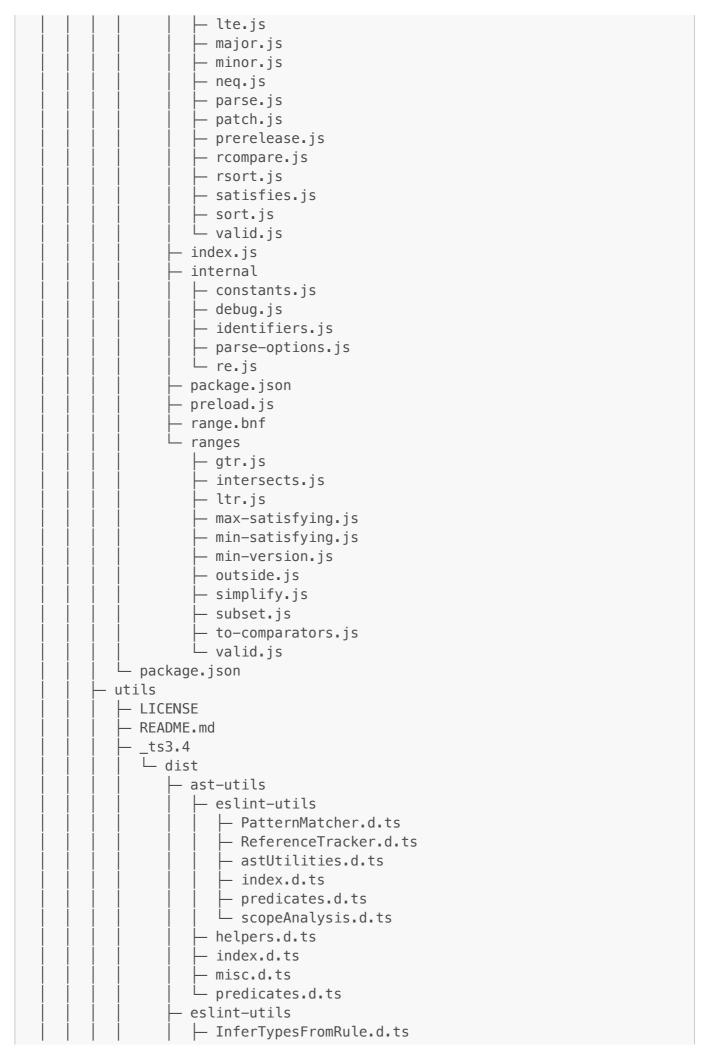

```
RuleCreator.d.ts
         applyDefault.d.ts
         batchedSingleLineTests.d.ts
        - deepMerge.d.ts
        - getParserServices.d.ts
         - index.d.ts
         - nullThrows.d.ts
        - rule-tester
           RuleTester.d.ts
           dependencyConstraints.d.ts
     - index.d.ts
      - ison-schema.d.ts
      - ts-eslint

— AST.d.ts

        CLIEngine.d.ts
        - ESLint.d.ts
        - Linter.d.ts
        ParserOptions.d.ts
        - Rule.d.ts
        RuleTester.d.ts
        Scope.d.ts
         SourceCode.d.ts
       └ index.d.ts
     - ts-eslint-scope
       ─ Definition.d.ts
        - Options.d.ts
         PatternVisitor.d.ts
        - Reference.d.ts
        - Referencer.d.ts
        - Scope.d.ts
        ScopeManager.d.ts
        Variable.d.ts
         analyze.d.ts
       └ index.d.ts
    └ ts-estree.d.ts
- dist
  ast-utils
     - eslint-utils
        PatternMatcher.d.ts
        PatternMatcher.d.ts.map
        — PatternMatcher.js
        PatternMatcher.js.map
        ReferenceTracker.d.ts
        ReferenceTracker.d.ts.map
        ReferenceTracker.js
        ReferenceTracker.js.map
        astUtilities.d.ts
        astUtilities.d.ts.map
        – astUtilities.js
        astUtilities.js.map
         - index.d.ts
         - index.d.ts.map
         index.js
         index.js.map
```

predicates.d.ts.map predicates.js predic	
- predicates.js - predicates.js.map - scopeAnalysis.d.ts.map - scopeAnalysis.js.map - scopeAnalysis.js.map - helpers.d.ts - helpers.d.ts.map - helpers.d.ts.map - helpers.js - helpers.js - helpers.js.map - index.d.ts - index.d.ts.map - index.js - index.js - index.js.map - misc.d.ts - misc.d.ts.map - predicates.d.ts - predicates.d.ts - predicates.js - predicates.js - predicates.js.map - predicates.js.map - predicates.js.map - selint-utils - InferTypesFromRule.d.ts - InferTypesFromRule.js.map - RuleCreator.d.ts - RuleCreator.d.ts - RuleCreator.d.ts - RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts - applyDefault.js.map - batchedSingleLineTests.d.ts.map - batchedSingleLineTests.d.ts.map - batchedSingleLineTests.js.map - deepMerge.d.ts.map - deepMerge.d.ts.map - deepMerge.d.ts.map - deepMerge.d.ts.map - deepMerge.d.ts.map - deepMerge.js.map - deepMerge.js.map - deepMerge.js.map - deepMerge.js.map - deepMerge.js.map - getParserServices.js.map - index.d.ts.map - index.d.ts.map - index.js.map	
predicates.js.map	
scopeAnalysis.d.ts.map	├─ predicates.js
scopeAnalysis.js scopeAnalysis.js scopeAnalysis.js scopeAnalysis.js scopeAnalysis.js helpers.d.ts helpers.d.ts helpers.js helpers.js helpers.js map index.d.ts index.d.ts index.d.ts index.js index.js misc.js misc.js.map misc.d.ts misc.js.map predicates.d.ts predicates.d.ts predicates.d.ts predicates.js.map predicates.js.map misc.js misc.js.map predicates.js misc.js.map predicates.js.map predicates.js map predicates.js map predicates.js map misc.js map mayore m	├─ predicates.js.map
scopeAnalysis.js helpers.d.ts helpers.d.ts.map helpers.js helpers.js.map index.d.ts index.d.ts.map index.js.map index.js.map misc.d.ts misc.d.ts misc.d.ts.map predicates.d.ts.map predicates.js.map predicates.js.map predicates.js predicates.js predicates.js inferTypesFromRule.d.ts InferTypesFromRule.js.map RuleCreator.d.ts.map RuleCreator.d.ts.map applyDefault.d.ts.map applyDefault.js.map batchedSingleLineTests.d.ts.map batchedSingleLineTests.js.map deepMerge.d.ts.map deepMerge.d.ts.map deepMerge.d.ts.map deepMerge.d.ts.map deepMerge.j.s.map deepMerge.j.s.map deepMerge.j.s.map applyDefault.s.map applyDefault.s.map applyDefault.s.map applyDefault.s.map applyDefault.js.map applyDefault.s.map applyDefault.js.map	— scopeAnalysis.d.ts
L scopeAnalysis.js.map helpers.d.ts helpers.js helpers.js.map helpers.js.map index.d.ts index.d.ts index.js index.js.map misc.d.ts misc.d.ts misc.js misc.js misc.js predicates.d.ts predicates.js publicates publicates publicates predicates.dis publicates publicates publicates publicates predicates.dis publicates publicates publicates predicates.dis publicates publicates publicates predicates predicates predicates.dis predicates predicates.dis predicates predicates.dis pre	├─ scopeAnalysis.d.ts.map
helpers.d.ts helpers.js helpers.js helpers.js.map index.d.ts index.d.ts index.d.ts index.js.map misc.d.ts misc.d.ts.map misc.js misc.js.map predicates.d.ts predicates.js predicates.js predicates.js inferTypesFromRule.d.ts InferTypesFromRule.js InferTypesFromRule.js RuleCreator.d.ts RuleCreator.js.map RuleCreator.js prulyDefault.d.ts applyDefault.d.ts applyDefault.d.ts applyDefault.js.map batchedSingleLineTests.d.ts batchedSingleLineTests.d.ts batchedSingleLineTests.js.map batchedSingleLineTests.js.map batchedSingleLineTests.js.map batchedSingleLineTests.js.map batchedSingleLineTests.js.map batchedSingleLineTests.js batchedSingleLineTe	├ scopeAnalysis.js
helpers.js helpers.js helpers.js.map index.d.ts index.d.ts index.js index.js index.js index.js index.js index.js misc.d.ts misc.d.ts predicates.d.ts predicates.d.ts.map predicates.js.map eslint-utils InferTypesFromRule.d.ts InferTypesFromRule.js.map RuleCreator.d.ts RuleCreator.d.ts.map RuleCreator.d.ts RuleCreator.js RuleCreator.js.map applyDefault.d.ts applyDefault.js applyDefault.js applyDefault.js batchedSingleLineTests.d.ts batchedSingleLineTests.js batchedSingleLineTests.js bedepMerge.d.ts deepMerge.d.ts deepMerge.d.ts deepMerge.d.ts getParserServices.d.ts getParserServices.js getParserServices.js getParserServices.js.map index.js midex.js.map nindex.d.ts midex.d.ts midex.js midex.js.map midex.js midex.js.map midex.js midex.js.map midex.js midex.js.map midex.js.map midex.js midex.js.map midex.js midex.js.map midex.js.map midex.js.map midex.js.map midex.js.map midex.js midex.js.map midex.js.map midex.js.map midex.js.map midex.js.map mullThrows.d.ts	└─ scopeAnalysis.js.map
helpers.js.map	— helpers.d.ts
helpers.js.map	— helpers.d.ts.map
Index.d.ts	— helpers.js
Index.d.ts	— helpers.js.map
- index.js - index.js.map - misc.d.ts - misc.d.ts - misc.js.map - predicates.d.ts - predicates.d.ts - predicates.js.map - predicates.js.map - predicates.js.map - eslint-utils - InferTypesFromRule.d.ts - InferTypesFromRule.js - InferTypesFromRule.js.map - Rulecreator.d.ts - RuleCreator.d.ts.map - RuleCreator.js - RuleCreator.js - RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.d.ts - batchedSingleLineTests.d.ts.map - batchedSingleLineTests.js - batchedSingleLineT	
- index.js.map - misc.d.ts - misc.d.ts - misc.js - misc.js - misc.js.map - predicates.d.ts - predicates.js - predicates.js - predicates.js.map - estint-utils - InferTypesFromRule.d.ts - InferTypesFromRule.js - InferTypesFromRule.js - InferTypesFromRule.js.map - RuleCreator.d.ts - RuleCreator.d.ts - RuleCreator.js.map - RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js - deepMerge.d.ts - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js - deepMerge.js - deepMerge.js - deepMerge.js - getParserServices.d.ts - getParserServices.d.ts - getParserServices.js - getParserServices.js - getParserServices.js - getParserServices.js - index.d.ts - index.js.map - index.js.map - nullThrows.d.ts	index.d.ts.map
misc.d.ts.map misc.js misc.js misc.js,map predicates.d.ts predicates.js predicates.js predicates.js.map eslint-utils InferTypesFromRule.d.ts InferTypesFromRule.js InferTypesFromRule.js InferTypesFromRule.js InferTypesFromRule.js RuleCreator.d.ts RuleCreator.d.ts RuleCreator.js.map RuleCreator.js.map applyDefault.d.ts applyDefault.js applyDefault.js batchedSingleLineTests.d.ts.map batchedSingleLineTests.d.ts.map batchedSingleLineTests.js batchedSingleLineTests.js.map deepMerge.d.ts deepMerge.d.ts deepMerge.d.ts deepMerge.js deepMerge.js deepMerge.js.map getParserServices.d.ts getParserServices.d.ts getParserServices.js getParserServices.js mgetParserServices.js mgetParserServices.js mgetParserServices.js.map index.d.ts index.js.map nullThrows.d.ts	— index.js
- misc.d.ts - misc.d.ts.map - misc.js - misc.js.map - predicates.d.ts - predicates.d.ts - predicates.js - predicates.js.map - predicates.js.map - eslint-utils - InferTypesFromRule.d.ts - InferTypesFromRule.js.map - InferTypesFromRule.js.map - RuleCreator.d.ts - RuleCreator.d.ts - RuleCreator.js.map - RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts - applyDefault.js - applyDefault.js - batchedSingleLineTests.d.ts - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTe	index.js.map
- misc.js - misc.js.map - predicates.d.ts - predicates.d.ts.map - predicates.js - predicates.js.map - eslint-utils - InferTypesFromRule.d.ts - InferTypesFromRule.d.ts.map - InferTypesFromRule.js.map - RuleCreator.d.ts - RuleCreator.d.ts - RuleCreator.js - RuleCreator.js - RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.d.ts.map - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js - deepMerge.js - deepMerge.js - deepMerge.js.map - getParserServices.d.ts.map - getParserServices.d.ts - getParserServices.js - getParserServices.js.map - index.d.ts - index.d.ts - index.js.map - index.js.map - nullThrows.d.ts	— misc.d.ts
<pre>misc.js.map predicates.d.ts predicates.js predicates.js predicates.js.map = slint-utils </pre>	— misc.d.ts.map
<pre>misc.js.map predicates.d.ts predicates.js predicates.js predicates.js.map = slint-utils </pre>	· ·
predicates.d.ts.map predicates.js predicates.js.map eslint-utils InferTypesFromRule.d.ts InferTypesFromRule.js InferTypesFromRule.js InferTypesFromRule.js.map RuleCreator.d.ts RuleCreator.d.ts RuleCreator.d.ts RuleCreator.js.map applyDefault.d.ts applyDefault.d.ts applyDefault.js applyDefault.js batchedSingleLineTests.d.ts batchedSingleLineTests.js.map deepMerge.d.ts deepMerge.d.ts deepMerge.d.ts deepMerge.js deepMerge.js deepMerge.js getParserServices.d.ts.map getParserServices.d.ts getParserServices.js.map metalore getParserServices.js.map metalore met	
- predicates.js - predicates.js.map - predicates.js.map - eslint-utils - InferTypesFromRule.d.ts - InferTypesFromRule.js - InferTypesFromRule.js - InferTypesFromRule.js.map - RuleCreator.d.ts - RuleCreator.d.ts.map - RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTests.js - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js.map - getParserServices.d.ts.map - getParserServices.d.ts - getParserServices.js.map - getParserServices.js.map - index.d.ts - index.d.ts - index.js.map - index.js.map - index.js.map - nullThrows.d.ts	
<pre>predicates.js predicates.js.map eslint-utils InferTypesFromRule.d.ts InferTypesFromRule.js InferTypesFromRule.js InferTypesFromRule.js.map RuleCreator.d.ts RuleCreator.d.ts.map RuleCreator.js RuleCreator.js.map applyDefault.d.ts applyDefault.d.ts applyDefault.js applyDefault.js applyDefault.js.map batchedSingleLineTests.d.ts batchedSingleLineTests.js batchedSingleLineTests</pre>	
— predicates.js.map — eslint-utils — InferTypesFromRule.d.ts — InferTypesFromRule.js — InferTypesFromRule.js — InferTypesFromRule.js.map — RuleCreator.d.ts — RuleCreator.d.ts — RuleCreator.js — RuleCreator.js.map — applyDefault.d.ts — applyDefault.js.map — batchedSingleLineTests.d.ts — batchedSingleLineTests.js — batchedSingleLineTests.js.map — deepMerge.d.ts — deepMerge.js.map — deepMerge.js.map — getParserServices.d.ts — getParserServices.d.ts — getParserServices.js — getParserServices.js — getParserServices.js.map — index.d.ts — index.d.ts — index.d.ts — index.js — index.js.map — index.js — index.js.map — nullThrows.d.ts	
- eslint-utils - InferTypesFromRule.d.ts - InferTypesFromRule.js - InferTypesFromRule.js - InferTypesFromRule.js.map - RuleCreator.d.ts - RuleCreator.d.ts.map - RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts - applyDefault.js.map - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js - betchedSingleLineTests.js - betchedSingleLineTests.js - betchedSingleLineTests.js - betchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js - deepMerge.js.map - getParserServices.d.ts - getParserServices.d.ts - getParserServices.js - getParserServices.js - getParserServices.js - getParserServices.js - getParserServices.js.map - index.d.ts - index.d.ts - index.js - index.js.map - nullThrows.d.ts	
InferTypesFromRule.d.ts.map	
InferTypesFromRule.js InferTypesFromRule.js InferTypesFromRule.js.map RuleCreator.d.ts RuleCreator.d.ts RuleCreator.js RuleCreator.js.map ApplyDefault.d.ts ApplyDefault.d.ts ApplyDefault.js ApplyDefault.js ApplyDefault.js ApplyDefault.js.map AbatchedSingleLineTests.d.ts AbatchedSingleLineTests.js AbatchedSingleLineTe	
InferTypesFromRule.js InferTypesFromRule.js.map RuleCreator.d.ts RuleCreator.js RuleCreator.js RuleCreator.js.map applyDefault.d.ts applyDefault.js.map batchedSingleLineTests.d.ts batchedSingleLineTests.js batchedSingleLineTests.js.map deepMerge.d.ts deepMerge.d.ts deepMerge.js deepMerge.js deepMerge.js.map getParserServices.d.ts getParserServices.d.ts getParserServices.js midex.d.ts index.d.ts index.js index.js index.js.map nullThrows.d.ts	
- InferTypesFromRule.js.map - RuleCreator.d.ts - RuleCreator.js - RuleCreator.js - RuleCreator.js.map - applyDefault.d.ts - applyDefault.js - applyDefault.js - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js.map - deepMerge.js.map - getParserServices.d.ts - getParserServices.js.map - index.d.ts - index.d.ts - index.d.ts - index.js.map - index.js.map - index.js.map - index.js.map - index.js.map - nullThrows.d.ts	
RuleCreator.d.ts RuleCreator.d.ts.map RuleCreator.js RuleCreator.js.map applyDefault.d.ts applyDefault.js applyDefault.js applyDefault.js.map batchedSingleLineTests.d.ts batchedSingleLineTests.d.ts.map batchedSingleLineTests.js batchedSingleLineTests.js batchedSingleLineTests.js batchedSingleLineTests.js batchedSingleLineTests.js batchedSingleLineTests.js.map deepMerge.d.ts deepMerge.d.ts deepMerge.d.ts deepMerge.js deepTerserServices.d.ts getParserServices.d.ts getParserServices.js getParserServices.js depMerge.js.map index.d.ts index.d.ts index.d.ts index.js.map index.js.map applications are services.js index.js.map andlithrows.d.ts	
- RuleCreator.d.ts.map - RuleCreator.js - RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts.map - applyDefault.js - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js - deepMerge.js - deepMerge.js.map - getParserServices.d.ts - getParserServices.d.ts - getParserServices.js - getParserServices.js - getParserServices.js - getParserServices.js - index.d.ts - index.d.ts - index.js - index.js.map - index.js - index.js.map - nullThrows.d.ts	
- RuleCreator.js - RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts.map - applyDefault.js - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js - deepMerge.js - deepMerge.js.map - getParserServices.d.ts - getParserServices.d.ts - getParserServices.js - getParserServices.js - getParserServices.js - getParserServices.js - getParserServices.js - map - index.d.ts - index.d.ts - index.d.ts - index.js.map - index.js.map - nullThrows.d.ts	!
- RuleCreator.js.map - applyDefault.d.ts - applyDefault.d.ts.map - applyDefault.js - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.d.ts.map - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js.map - deepMerge.js - deepMerge.js.map - getParserServices.d.ts - getParserServices.d.ts - getParserServices.js - getParserServices.js - index.d.ts - index.d.ts - index.js - index.js.map - nullThrows.d.ts	·
- applyDefault.d.ts - applyDefault.d.ts.map - applyDefault.js - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js - deepMerge.js.map - getParserServices.d.ts - getParserServices.d.ts - getParserServices.js - getParserServices.js - index.d.ts - index.d.ts - index.js - index.js.map - nullThrows.d.ts	
- applyDefault.js - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.d.ts.map - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js - deepMerge.js.map - getParserServices.d.ts - getParserServices.d.ts - getParserServices.js - getParserServices.js - getParserServices.js.map - index.d.ts - index.d.ts - index.js.map - index.js.map - nullThrows.d.ts	
- applyDefault.js - applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts - deepMerge.js - deepMerge.js - deepMerge.js.map - getParserServices.d.ts - getParserServices.d.ts.map - getParserServices.js - getParserServices.js - getParserServices.js.map - index.d.ts - index.d.ts - index.js - index.js.map - nullThrows.d.ts	
- applyDefault.js.map - batchedSingleLineTests.d.ts - batchedSingleLineTests.js - batchedSingleLineTests.js - batchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts.map - deepMerge.js - deepMerge.js.map - getParserServices.d.ts - getParserServices.d.ts.map - getParserServices.js - getParserServices.js - index.d.ts - index.d.ts.map - index.js.map - nullThrows.d.ts	
<pre>batchedSingleLineTests.d.ts batchedSingleLineTests.js batchedSingleLineTests.js.map batchedSingleLineTests.js.map deepMerge.d.ts deepMerge.d.ts deepMerge.js deepMerge.js deepMerge.js.map getParserServices.d.ts getParserServices.d.ts.map getParserServices.js getParserServices.js index.d.ts index.d.ts index.js index.js.map nullThrows.d.ts</pre>	
<pre>- batchedSingleLineTests.d.ts.map - batchedSingleLineTests.js - batchedSingleLineTests.js.map - deepMerge.d.ts - deepMerge.d.ts.map - deepMerge.js - deepMerge.js.map - getParserServices.d.ts - getParserServices.d.ts.map - getParserServices.js - getParserServices.js - index.d.ts - index.d.ts - index.js.map - index.js.map - nullThrows.d.ts</pre>	
<pre>batchedSingleLineTests.js batchedSingleLineTests.js.map deepMerge.d.ts deepMerge.d.ts.map deepMerge.js deepMerge.js.map getParserServices.d.ts getParserServices.js getParserServices.js getParserServices.js.map index.d.ts index.d.ts index.js nullThrows.d.ts</pre>	
<pre>batchedSingleLineTests.js.map deepMerge.d.ts deepMerge.d.ts.map deepMerge.js deepMerge.js.map getParserServices.d.ts getParserServices.d.ts.map getParserServices.js getParserServices.js.map index.d.ts index.d.ts index.js nullThrows.d.ts</pre>	
<pre>— deepMerge.d.ts — deepMerge.js — deepMerge.js.map — getParserServices.d.ts — getParserServices.js — getParserServices.js — getParserServices.js.map — index.d.ts — index.d.ts.map — index.js — index.js.map — nullThrows.d.ts</pre>	
<pre>— deepMerge.d.ts.map — deepMerge.js — deepMerge.js.map — getParserServices.d.ts — getParserServices.js — getParserServices.js — getParserServices.js.map — index.d.ts — index.d.ts — index.js — index.js — index.js — nullThrows.d.ts</pre>	
<pre>— deepMerge.js — deepMerge.js.map — getParserServices.d.ts — getParserServices.js — getParserServices.js — getParserServices.js.map — index.d.ts — index.d.ts — index.js — index.js — index.js.map — nullThrows.d.ts</pre>	
<pre>— deepMerge.js.map — getParserServices.d.ts — getParserServices.js — getParserServices.js.map — index.d.ts — index.d.ts.map — index.js — index.js — index.js.map — nullThrows.d.ts</pre>	
- getParserServices.d.ts - getParserServices.d.ts.map - getParserServices.js - getParserServices.js.map - index.d.ts - index.d.ts - index.js - index.js - index.js.map - nullThrows.d.ts	
- getParserServices.d.ts.map - getParserServices.js - getParserServices.js.map - index.d.ts - index.d.ts.map - index.js - index.js - index.js.map - nullThrows.d.ts	
<pre>- getParserServices.js - getParserServices.js.map - index.d.ts - index.d.ts.map - index.js - index.js - index.js.map - nullThrows.d.ts</pre>	
<pre>- getParserServices.js.map - index.d.ts - index.d.ts.map - index.js - index.js - index.js.map - nullThrows.d.ts</pre>	
<pre> </pre>	
- index.d.ts.map - index.js - index.js.map - index.js.map - nullThrows.d.ts	
	·

```
- nullThrows.d.ts.map
  nullThrows.js
   - nullThrows.js.map
  - rule-tester
    ─ RuleTester.d.ts
     RuleTester.d.ts.map
     - RuleTester.js
     RuleTester.js.map
     dependencyConstraints.d.ts
     dependencyConstraints.d.ts.map
      dependencyConstraints.js
    └ dependencyConstraints.js.map
index.d.ts
- index.d.ts.map
- index.js
- index.js.map
- json-schema.d.ts
- json-schema.d.ts.map
- json-schema.js
- json-schema.js.map
- ts-eslint
  AST.d.ts
  AST.d.ts.map
  AST.js
  — AST.js.map
  - CLIEngine.d.ts
  CLIEngine.d.ts.map
  - CLIEngine.js
  CLIEngine.js.map
  - ESLint.d.ts
  – ESLint.d.ts.map
  ESLint.js
  ESLint.js.map
  Linter.d.ts
  – Linter.d.ts.map
  — Linter.js
  – Linter.js.map
  ParserOptions.d.ts
  ParserOptions.d.ts.map
  ParserOptions.js
  ParserOptions.js.map
  Rule.d.ts
  Rule.d.ts.map
  - Rule.js
  Rule.js.map
  - RuleTester.d.ts
  RuleTester.d.ts.map
  RuleTester.js
  - RuleTester.js.map
  Scope.d.ts
   Scope.d.ts.map
   - Scope.js
   - Scope.js.map
   - SourceCode.d.ts
```

```
SourceCode.d.ts.map
     SourceCode.js
    SourceCode.js.map
    index.d.ts
    - index.d.ts.map
    - index.js
    – index.js.map
  ts-eslint-scope
   Definition.d.ts
    Definition.d.ts.map
    Definition.js
    Definition.js.map
    - Options.d.ts
    Options.d.ts.map
    - Options.js
    Options.js.map
    PatternVisitor.d.ts
    PatternVisitor.d.ts.map
    – PatternVisitor₊js
    PatternVisitor.js.map
    Reference.d.ts
    Reference.d.ts.map
    – Reference.js
    Reference.js.map
    - Referencer.d.ts
    Referencer.d.ts.map
    — Referencer₁js
    Referencer.js.map
    Scope.d.ts
    Scope.d.ts.map
    Scope.js
    - Scope.js.map
    ScopeManager.d.ts
    ScopeManager.d.ts.map
    ScopeManager₁js
    ScopeManager.js.map
    Variable.d.ts
    Variable.d.ts.map
    - Variable.js
    Variable.js.map
    – analyze.d.ts
    analyze.d.ts.map
    – analyze.js
    - analyze.js.map
    - index.d.ts
    index.d.ts.map
    - index.js
    - index.js.map
  ts-estree.d.ts
 - ts-estree.d.ts.map
  ts-estree.js
 - ts-estree.js.map
node_modules
 - ⊾bin
```

```
- eslint
 ∟ semver
- semver
  — LICENSE
   - README.md
   – bin
    └ semver.js
   - classes

    — comparator.js

— index.js

      – range⊾js
    ∟ semver.js
   functions
     ⊢ clean.js
      – cmp.js
     — coerce.js

    compare-build.js

    ─ compare-loose.js

     — compare.js
     — diff.js
     — eq.js
     — gt.js
     — gte.js
     — inc.js
      - lt.js
      – lte.js
     — major⊾js
     — minor.js
      – neq.js
     — parse.js
     — patch.js
     — prerelease.js
     ├ rcompare.js
     — rsort.js
     ─ satisfies.js
      – sort.js
     └ valid.js
   - index.js
   - internal

    ⊢ constants.js

    debug₁js

     ⊢ identifiers.js
     — parse-options.js
    └ re.js
  – package.json
   – preload.js
   range.bnf
   - ranges
     — gtr.js
      intersects.js
      - ltr.js
      max-satisfying.js
     — min−satisfying.js
      – min−version.js
```

```
– outside.js
               - simplify.js
              — subset.js
               – to−comparators.js
              └ valid.js
     – package.json
   visitor-keys
     LICENSE
      - README.md
       ts3.4
       ∟ dist
           — get-keys.d.ts
           - index.d.ts
          └ visitor-keys.d.ts
     - dist

— get−keys.d.ts

        — get-keys.d.ts.map
        – get-keys.js
        — get-keys.js.map
         - index.d.ts
        — index.d.ts.map
         - index.js

─ index.js.map

        — visitor-keys.d.ts
       visitor-keys.d.ts.map
         - visitor−keys.js
       └ visitor-keys.js.map
      - package.json
- @webassemblyjs
  – ast
    LICENSE
     README.md
     - esm

⊢ clone.js

        definitions.js
        — index.js
        - node-helpers.js
        – node-path.js
        — nodes.js
        – signatures.js
        transform

→ ast-module-to-module-context

             └ index.js
           – denormalize-type-references
             └ index.is
           - wast-identifier-to-index
             └ index.js
         - traverse.js
         types
          — basic.js
            - nodes.js
          └ traverse.js
         - utils.js
      - lib
```

```
clone.js
      - definitions.js
      - index.js
      - node-helpers.js
      - node-path.js
      – nodes.js
      - signatures.js
      - transform

    □ ast-module-to-module-context

          └ index.js

    denormalize-type-references

          └ index.js
         - wast-identifier-to-index
          └ index.js
      - traverse.js
      types
        ─ basic.js
         - nodes.js
        └ traverse.js
     └ utils.js
   - package.json
    scripts

— generateNodeUtils.js

      generateTypeDefinitions.js
     L util.js
 floating-point-hex-parser
  LICENSE
   README.md
   - esm
    └ index.js
   - lib
     └ index.js
   - package.json
- helper-api-error

─ LICENSE

   - esm
    └ index.js
   - lib
     └ index.js
   – package.json
helper-buffer

─ LICENSE

  - esm
     - compare.js
    └ index.js
   - lib

⊢ compare.js

     └ index.js
   – package.json
- helper-numbers
  ⊢ LICENSE
   - esm
    └ index.js
   - lib
```

```
└ index.js
   - package.json
  - src
    └ index.js
helper-wasm-bytecode

⊢ LICENSE

   - esm

⊢ index.js

    └ section.js
   - lib

⊢ index.js

    └ section.js
   – package.json
- helper-wasm-section
  LICENSE
  - esm
     — create.js
     ├ index.js
     – remove.js
    └ resize.js
   - lib
    ├ create.js
     — index.js
     — remove.js
    └ resize.js
   – package.json
- ieee754
  - esm
    └ index.js
   - lib
    └ index.js
   – package.json
  ∟ src
    └ index.js
 leb128

─ LICENSE.txt


  — esm
     ⊢ bits.js
     ├ bufs.js


─ index.js

    └ leb.js
  – lib
     ⊢ bits.js
     ├ bufs.js
     — index.js
    └ leb.js
   – package.json
– utf8

─ LICENSE

   - esm
     — decoder.js
      – encoder⊾js
     └ index.js
```

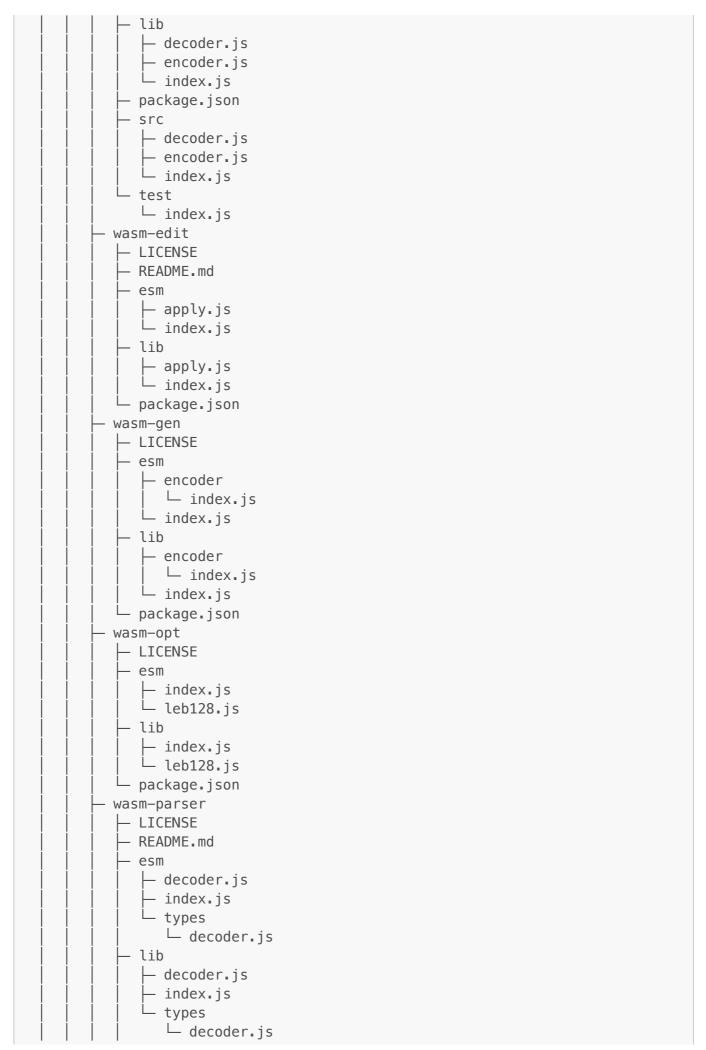

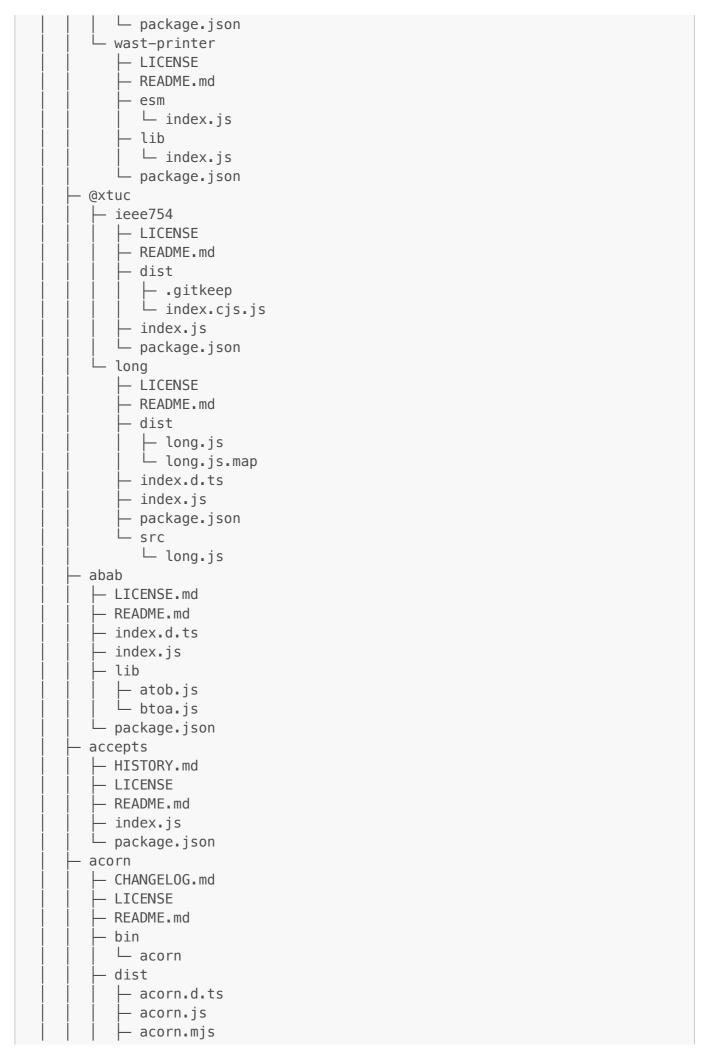

```
- acorn.mjs.d.ts
     – bin.js
   - package.json
acorn-globals
  — LICENSE
  — README.md
  – index.js

    ⊢ node modules

     ⊢ .bin
       ∟ acorn
       acorn
        — CHANGELOG.md
         - LICENSE
         - README.md
         - bin
          ∟ acorn
         – dist

⊢ acorn.d.ts

           — acorn.js
           — acorn.js.map
           — acorn.mjs
           — acorn.mjs.d.ts
            - acorn.mjs.map
           └ bin.js
         – package.json
 └ package.json
- acorn-import-assertions
  — README.md
   - lib
     index.js
    └ index.mjs
  - node_modules
    └ .bin
       ∟ acorn
  — package₊json
 ∟ src
    └ index.js
acorn-jsx
 LICENSE
  README.md
  - index.d.ts
  index.js
  — node_modules
    └ .bin
       ∟ acorn
  — package.json
 └ xhtml.js
acorn-node

    ⊥travis.yml

  CHANGELOG.md
  - LICENSE.md
   - README.md
  – build.js
   - index.js
```

```
lib

    bigint
    bi
                               └ index.js
                        class-fields
                              └ index.js
                        - dynamic-import
                             └ index.js
                        - export-ns-from
                             └ index.js
                         - import-meta
                              └ index.js
                         - numeric-separator
                              └ index.js
                          private-class-elements
                               └ index.js
                         - static-class-features
                               └ index.js
           - node modules
                    ⊢ .bin
                               ∟ acorn
                            acorn
                                   — CHANGELOG.md
                                     - LICENSE
                                     - README.md
                                     – bin
                                            ∟ acorn
                                      - dist

─ acorn.d.ts

                                                 – acorn.js
                                              — acorn.js.map
                                             — acorn.mjs

    acorn.mjs.d.ts

                                                  – acorn.mjs.map
                                            └ bin.js
                                     – package.json
          — package.json
            - test
              └ index.js
       └ walk.js
  acorn-walk
       — CHANGELOG.md
         — LICENSE
         — README.md
         – dist
                    ─ walk.d.ts
                    — walk.js
                    ─ walk.js.map
                        – walk.mjs
                   └ walk.mjs.map
       └ package.json
- address
           - LICENSE.txt
           README.md
            - lib
```

```
- address.d.ts
                    - address.js
         – package.json
- adjust-sourcemap-loader

    ishintre
    intre
    intr
         - nvmrc
          LICENSE
        codec

— absolute.js

                 — bower-component.js
                 — index.js
                 — npm-module.js
                 — output-relative.js
                 — output-root-relative.js
                 — project-relative.js
                 — project-root-relative.js
                 — source-relative.js
                  — source-root-relative.js
                 — utility
                          — enhanced-relative.js
                            — get-context-directory.js
                         └ get-output-directory.js
                    - webpack−bootstrap.js

    webpack-protocol.js

         index.js
          - lib

─ loader.js

                 module-filename-template.js
                ∟ process

    debug-message.js

                            — decode-sources-with.js
                             — encode-sources-with.js
                              – get−error.js
                             – get-field-as-fn.js
                              - index.js
                              - locate-root-with.js
                            — test-codec.js
                               - throw-errors.js
                          └ to-reg-exp.js
          – package⊾json
      └ readme.md
agent-base
      — README.md
         – dist
               ∟ src
                           — index.d.ts
                             — index.js
                              index.js.map
                              - promisify.d.ts
                              – promisify.js
                          └ promisify.js.map
          - package.json
      ∟ src
               — index.ts
```

```
└ promisify.ts
- ajv
 _ .tonic_example.js
  — LICENSE
  README.md
  — dist

— ajv.bundle.js

     – ajv.min.js
    └ ajv.min.js.map
  – lib

— ajv.d.ts

     ⊢ ajv⊾js
     — cache.js
     — compile
        — async.js
        ⊢ equal.js

⊢ error_classes.js

        — formats.js
        — index.js
        — resolve.js
        ⊢ rules.js
        — schema_obj₊js
         - ucs2length.js
       └ util.js
      - data.js
      definition_schema.js
     - dot
        — _limit.jst
         - _limitItems.jst
        — _limitLength.jst
        — _limitProperties.jst
        — allOf.jst
         – anyOf₊jst
        – coerce.def
        - comment.jst

    const.jst

        — contains.jst
        — custom.jst
        defaults.def
        — definitions.def
        — dependencies.jst
        ⊢ enum.jst
        — errors.def
        — format.jst
        – if.jst
        items.jst
        - missing.def
        - multipleOf.jst
        — not.jst
        — oneOf.jst
         – pattern.jst
         properties.jst
         propertyNames.jst
         - ref.jst
```

```
required.jst
         - uniqueItems.jst
        └ validate.jst
      – dotjs
        — README.md
         - limit.js
         - _limitItems.js
         - _limitLength.js
         _limitProperties.js
        – allOf.js
         – anyOf.js
         – comment.js
        — const.js
        — contains.js
         – custom.js
        – dependencies.js
        — enum.js
        – format.js
        – if.js
         - index.js
        items.js
         – multipleOf.js
        – not.js
        — oneOf.js
        – pattern.js
         – properties.js
         propertyNames.js
        - ref.is
        — required.js
         – uniqueItems.js
       └ validate.js
      keyword.js
      - refs
        — data.json
        — json-schema-draft-04.json

    json-schema-draft-06.json

         - json—schema—draft—07.json
        └ json-schema-secure.json
   – package.json
 └ scripts
     leslintrc.yml
     — bundle.js
     — compile-dots.js
     — info
     — prepare-tests
     publish-built-version
     └ travis-gh-pages
ajv-keywords
  LICENSE
  - README.md
  — ajv-keywords.d.ts
   - index.js
   keywords

─ _formatLimit.js
```

```
_util.js
      allRequired.js
     — anyRequired.js
     — deepProperties.js
     — deepRequired.js
     — dot

— _formatLimit.jst

         patternRequired.jst
        └ switch.jst
      dotjs
        — README.md
         — _formatLimit.js
         patternRequired.js
        └ switch.js
      dynamicDefaults.js
      – formatMaximum₊js
     — formatMinimum₊js
     — index.js
     — instanceof.js
     ─ oneRequired.js
     — patternRequired.js
      – prohibited.js
     – range₊js
     — regexp.js
     — select.js
     — switch.js
     — transform.js
      - typeof.js
     └ uniqueItemProperties.js
  └ package.json
ansi-escapes

─ index.d.ts

   - index.is
  license
   - node_modules
    └ type-fest
         base.d.ts
         - index.d.ts
         - license
         - package⊾json
         - readme.md
         source

— async-return-type.d.ts

            – asyncify.d.ts
            - basic.d.ts
            - conditional-except.d.ts
            conditional-keys.d.ts
           — conditional-pick.d.ts
            - entries.d.ts
           — entry.d.ts
            - except.d.ts
            - fixed-length-array.d.ts
            iterable-element.d.ts
            literal-union.d.ts
```

```
- merge-exclusive.d.ts
            - merge.d.ts
            - mutable.d.ts
           - opaque.d.ts
           — package-json.d.ts
           — partial-deep.d.ts
            - promisable.d.ts
           - promise-value.d.ts
           - readonly-deep.d.ts
           require-at-least-one.d.ts
           - require-exactly-one.d.ts
           — set-optional.d.ts
           — set-required.d.ts
            set-return-type.d.ts
           - simplify.d.ts
           — stringified.d.ts
           — tsconfig-json.d.ts
           — typed-array.d.ts
           — union-to-intersection.d.ts
            - utilities.d.ts
            - value-of.d.ts
         - ts41
           — camel-case.d.ts
           - delimiter-case.d.ts
           - aet.d.ts
            - index.d.ts
            - kebab-case.d.ts
            - pascal-case.d.ts
            - snake-case.d.ts
          └ utilities.d.ts
  — package.json
 └ readme.md
ansi-html-community
 README.md
  – bin
    └ ansi-html
   - index.js
 └ package.json
- ansi-regex

─ index.d.ts

  index.js
  — license
  – package.json
 └ readme.md
ansi-styles

─ index.d.ts

  — index.js
  license
  — package.json
 └ readme.md
- anymatch
  LICENSE
   - README.md
```

```
- index.d.ts
   - index.js
 └ package.json
- arg

— LICENSE.md

  README.md
  — index.d.ts
   - index.js
 └ package.json
- argparse
 — CHANGELOG.md
  LICENSE
  README.md
  — index.js
   - lib
    — action
        append
          └ constant.js
         – append.js
         – count.js
        — help.js
         - store

    ─ constant.js

          ├ false.js
└ true.js
        — store.js
         - subparsers.js
       └ version.js
      - action.js
     — action_container.js
     — argparse.js
     argument
       ⊢ error.js
         - exclusive.js
       └ group.js
     – argument_parser.js
     — const.js
     — help

— added_formatters.js

       └ formatter.js
      – namespace.js
    └ utils.js
 └ package.json
- aria-query
 README.md
  – lib
     — ariaPropsMap.js
     ─ domMap.js
     — elementRoleMap.js
     – etc
       └ roles
            – abstract
               - commandRole.js
```

— compositeRole.js
— inputRole.js
— landmarkRole.js
— rangeRole.js
— roletypeRole.js
- sectionRole.js
— sectionheadRole.js
- selectRole.js
— structureRole.js
— widgetRole.js
└─ windowRole.js
— ariaAbstractRoles.js
— ariaDpubRoles.js
— ariaGraphicsRoles.js
— ariaLiteralRoles.js
— dpub
— docAbstractRole.js
— docAcknowledgmentsRole.js
— docAfterwordRole.js
├─ docAppendixRole.js
├─ docBacklinkRole.js
<pre>— docBiblioentryRole.js</pre>
— docBibliographyRole.js
— docBibliorefRole.js
— docChapterRole.js
— docColophonRole.js
— docConclusionRole.js
— docCoverRole.js
— docCreditRole.js
— docCreditsRole.js
— docDedicationRole.js
— docEndnoteRole.js
— docEndnotesRole.js
— docEpigraphRole.js
— docEpilogueRole.js
— docErrataRole.js
— docExampleRole.js
— docFootnoteRole.js
— docforewordRole.js
— docflossaryRole.js
— docGlossrefRole.js
- documentation - documentatio
— docIntroductionRole.js
— docNoterefRole.js
— docNoticeRole.js
— docPagebreakRole.js
— docPagelistRole.js
— docPartRole.js
— docPrefaceRole.js
— docPrologueRole.js
— docPullquoteRole.js
— docQnaRole.js
— docSubtitleRole.js
├─ docTipRole.js

```
└ docTocRole.js
  graphics

— graphicsDocumentRole.js

    - graphicsObjectRole.js
   └ graphicsSymbolRole.js
└ literal

→ alertRole.js

    alertdialogRole.js
    — applicationRole.js
    – articleRole.js
    – bannerRole.js
    blockquoteRole.js
    – buttonRole.js
    – captionRole.js
    - cellRole.js
    - checkboxRole.js
   — codeRole.js
    columnheaderRole.js
    comboboxRole.js
   ⊢ complementaryRole.js
   — contentinfoRole.js
    definitionRole.js
    deletionRole.js
    — dialogRole.js
    – directoryRole.js
    – documentRole.js
    – emphasisRole.js
    feedRole.js
    - figureRole.js
    – formRole.js
   — genericRole.js
    graphicsDocumentRole.js
    – graphicsObjectRole⊾js
    graphicsSymbolRole.js
    — gridRole.js
    – gridcellRole.js
    – groupRole.js
    headingRole.js
    imgRole.js
    - insertionRole.js
    linkRole.js
    – listRole.js
    - listboxRole.js
    - listitemRole.js
    - logRole.js
    — mainRole.js
    – marqueeRole₊js
    — mathRole.js
    – menuRole.js
    — menubarRole₊js
    - menuitemRole.js
    menuitemcheckboxRole.js
   — menuitemradioRole.js
    - meterRole.js
```

```
navigationRole.js
               - noneRole.js
               - noteRole.js
               – optionRole.js
               - paragraphRole.js
               presentationRole.js
               - progressbarRole.js
               radioRole.js
               - radiogroupRole.js
               - regionRole.js
               – rowRole.js
               rowgroupRole.js
               rowheaderRole.js
               – scrollbarRole.js
               searchRole.js
               searchboxRole.js
              separatorRole.js
               sliderRole.js
               spinbuttonRole.js
               – statusRole.js
               – strongRole.js
               - subscriptRole.js
               superscriptRole.js
               – switchRole.js
               – tabRole.js
               – tableRole.js
               – tablistRole.js
               tabpanelRole.js
               - termRole.js
               – textboxRole.js
              – timeRole.js
               - timerRole.js
               – toolbarRole.js
              — tooltipRole.js
              – treeRole.js
               - treegridRole.js
              — treeitemRole.js
      - index.js
     roleElementMap.js
      - rolesMap₊js
    └ util
        iterationDecorator.js
       └ iteratorProxy.js
  — package₁json
- array-flatten
 README.md
   - array—flatten.js
 └ package.json
array-includes

    editorconfig

   - .eslintrc
    .github
    └ FUNDING.yml
```

```
nycrc
   - CHANGELOG.md
   - LICENSE
  README.md
  — auto.įs
  implementation.js
  – index.js
  — package.json
  – polyfill.js
   - shim.js
 └ test

    implementation.js

     — index.js
      - shimmed.js
    └ tests.js
array—union

─ index.d.ts

  – index.js
  — license
  — package.json
 └ readme.md
- array.prototype.flat

    ⊢ .editorconfig

  - .eslintrc
   - .github
    └ FUNDING.yml
  — .nycrc
  CHANGELOG.md
  LICENSE
  README.md
 — auto.js
  — implementation.js
  — index.js
  — package.json
  polyfill.js
   – shim.js
   test

    implementation.js

     — index.js
     — shimmed.js
    └ tests.js
array.prototype.flatmap
 ⊢ .editorconfig
   - .eslintrc
  - .github
   └ FUNDING.yml
   - nycrc
  CHANGELOG.md
  LICENSE
  README.md
  — auto.js
   implementation.js
   – index.js
   - package.json
```

```
– polyfill.js
  - shim.js
 └ test

    implementation.js

    index.js
     — shimmed.js
    └ tests.js
- array.prototype.reduce
 ⊢ .editorconfig
  — .eslintrc
  - nycrc
  CHANGELOG.md
  LICENSE
  README.md
  — auto.įs
 implementation.js
 index.js
 — package.json
  — polyfill.js
 — shim.js
 ∟ test

    implementation.js

    index.js
     — shimmed.js
    └ tests.js
array.prototype.tosorted
 ⊢ .eslintrc
  - .github
   └ FUNDING.yml
  — inycrc
  — CHANGELOG.md
  — LICENSE
  — README.md
 — auto.js

    implementation.js

 index.js
  — package.json

→ polyfill.js

  - shim.js
 └ test

    implementation.js

    index.js

— shimmed.js

    └ tests.js
- asap

— CHANGES.md

  LICENSE.md
  README.md
 — asap.js
 ─ browser-asap.js
 ─ browser-raw.js
   – package.json
 ∟ raw.js
ast-types-flow
```

```
- README.md
   - lib
     └ types.js
  └ package.json
async

    ⊢ CHANGELOG.md

   LICENSE
  README.md
  — all.js
  ⊢ allLimit.js

— allSeries.js

  ⊢ any.js
  — anyLimit.js
  — anySeries.js
  — apply.js

— applyEach.js

— applyEachSeries.js

— asyncify.js

  — auto.js

— autoInject.js

  — bower.json
  — cargo.js
  — cargoQueue₊js
  — compose.js
  — concat.js
   - concatLimit.js
  ─ concatSeries.js
  — constant.js
  — detect.js
  ─ detectLimit.js
  ─ detectSeries.js
  — dir.js
  — dist
     — async.js

    async.min.js
    async.mjs

  – doDuring.js
  ─ doUntil.js
  doWhilst.js
  ├ during.js
  — each.js

⊢ eachLimit.js

⊢ eachOf.js

  ─ eachOfLimit.js
  — eachOfSeries.js
  — eachSeries.js
  — ensureAsync₊js
  — every.js
  — everyLimit.js
  — everySeries.js
   - filter.js
   - filterLimit.js
   - filterSeries.js
   - find.js
```

```
findLimit.js
findSeries.js
- flatMap.js
– flatMapLimit₊js
– flatMapSeries.js
foldl.js
- foldr.js
forEach.js
forEachLimit.js
- forEachOf.js
- forEachOfLimit.js
- forEachOfSeries.js
- forEachSeries.js
– forever⊾js
– groupBy⊾js
– groupByLimit⊾js
groupBySeries.js
- index.js
inject.js
internal
  ─ DoublyLinkedList.js
   — Heap₊js
   applyEach.js
   — asyncEachOfLimit.js
   – awaitify.js
   — breakLoop.js
  — consoleFunc.js
   — createTester.js
   - eachOfLimit.js
   — filter.js
  — getIterator.js
   — initialParams.js
   – isArrayLike.js
   — iterator.js
   — map₊js
  — once.js
   — onlyOnce.js
   — parallel.js
   – promiseCallback.js
   – queue⊾js
   — range₊js
   — reject.js
  — setImmediate.js
   withoutIndex.js
  ∟ wrapAsync.js
- log.js
– map₌js
— mapLimit.js
— mapSeries.js
— mapValues.js
- mapValuesLimit.js
- mapValuesSeries.js
– memoize.js
- nextTick.js
```

```
– package.json
  - parallel.js
  – parallelLimit.js
  – priorityQueue.js
  – queue.js
  — race₊js
  – reduce.js
  — reduceRight.js
 reflect.js

⊢ reflectAll.js

 — reject.js
 ⊢ rejectLimit.js
 ─ rejectSeries.js
 — retry.js
  — retryable.js
 ⊢ select.js
 — selectLimit.js

— selectSeries.js

 — seq.js

— series.js

    setImmediate.js

  — some.js
 — someLimit.js
 — someSeries.js
 — sortBy₊js
  – timeout.js

─ times.js

 — timesLimit.js
 — timesSeries.js
 — transform.js

⊢ tryEach.js

 — unmemoize.js

─ until.js

 ─ waterfall.js
 — whilst.js
 └ wrapSync.js

    asynckit

 LICENSE
  README.md
 — bench.js
  index.js
 ⊢ lib
    — abort.js
     — async.js
     — defer₌js
    — iterate.js
     — readable_asynckit.js
     ⊢ readable_parallel.js
     readable_serial.js

    readable_serial_ordered.js

    — state.js
      - streamify.js
    └ terminator.js
    package.json
```

```
- parallel.js
   - serial.js
   - serialOrdered.js
 ∟ stream.js
- at-least-node

    LICENSE

  README.md
   index.js
 └ package.json
- autoprefixer

─ LICENSE

  README.md
   - bin

    □ autoprefixer

   - data
    └ prefixes.js
  – lib
     — at-rule.js
     — autoprefixer.d.ts
     — autoprefixer₊js
     — brackets.js
     — browsers.js
     — declaration.js
     hacks

— align-content.js

         — align−items.js
        — align−self.js
         animation.js
         – appearance.js
        — autofill.js
        — backdrop-filter.js
        - background-clip.js
         background-size.js
        — block-logical.js
         — border-image₁js
        ─ border-radius.js
         — break-props.js
         – cross-fade.js
        — display-flex.js
         — display-grid.js
        file-selector-button.js
        — filter-value.js
        – filter.js
         – flex−basis.js
         flex-direction.js
         - flex-flow.js
         – flex–grow.js
         - flex-shrink.js
         – flex−spec.js
         - flex-wrap.js
         - flex.js
         fullscreen.js
         - gradient.js
         - grid−area.js
```

```
grid-column-align.js
         - grid−end.js
         - grid−row−align.js
         – grid−row−column.js
         - grid-rows-columns.js
        – grid−start.js
         - grid-template-areas.js
         - grid-template.js
         - grid−utils.js
         image-rendering.js
         – image−set.js
         inline-logical.js
        – intrinsic.js
         justify-content.js
         – mask-border⊾js
        mask-composite.js
        – order.js
         overscroll-behavior.js
         pixelated.js
         – place−self.js
        placeholder-shown.js
         - placeholder⊾js
         - print-color-adjust.js
         text-decoration-skip-ink.js
        - text-decoration.js
         text-emphasis-position.js

─ transform-decl.js

        user-select.js
       └─ writing-mode.js
      - info.js
     — old-selector.js
     — old-value.js
     – prefixer.js
     – prefixes.js
     — processor.js
     resolution.js
     — selector.js
     — supports.js
     — transition.js
     — utils.js
     – value.js
    └ vendor.js
  node_modules
    └ .bin
       └ browserslist

    package.json

- available—typed—arrays
  - .eslintignore
  - .eslintrc
  github
    └ FUNDING.yml
   - nycrc
  CHANGELOG.md
  LICENSE
```

```
README.md
  - index.js
   - package.json
  test
    └ index.js
- axe-core
 LICENSE
  README.md
  axe d.ts
  — axe₊js
  axe.min.js
  locales
    — _template.json
     — da.json
     — de.json
     — es.json
     — eu.json
     — fr.json
     — he₊json
     — ja.json
     — ko.json
     — nl.json
     — no_NB.json
     – pl.json
     – pt_BR.json
  – package⊾json
 └ sri-history.json
axobject-query

─ LICENSE

  README.md
  — lib

→ AXObjectElementMap.js

     — AXObjectRoleMap.js
     — AXObjectsMap.js
     elementAXObjectMap.js
     – etc
       └ objects
          — AbbrRole.js
           AlertDialogRole.js
           AlertRole.js
           AnnotationRole.js
           ApplicationRole.js
           — ArticleRole.js
           AudioRole.js
           BannerRole.js
           BlockquoteRole₁js
           BusyIndicatorRole.js
           ButtonRole.js
           — CanvasRole.js
           CaptionRole.js
           - CellRole.js
           CheckBoxRole.js
           ColorWellRole.js
           ColumnHeaderRole.js
```

- ColumnRole.js - ComboBoxRole.js - ComplementaryRole.js - ContentInfoRole.js - DateRole.js - DateTimeRole.js - DefinitionRole.js - DescriptionListDetailRole.js - DescriptionListTermRole.js - DescriptionListTermRole.js - DetailsRole.js - DialogRole.js - DialogRole.js - DirectoryRole.js - DivRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FooterRole.js - FooterRole.js - FormRole.js - FormRole.js - GridRole.js - GridRole.js - IframePresentationalRole.js - IframePresentationalRole.js - IframeRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageMapRole.js - ImageRole.js - ImageRole.js - ImageRole.js - InjurtImeRole.js - InjurtImeRole.js - InjurtImeRole.js - LabelRole.js - LabelRole.js - LabelRole.js - LabelRole.js - LinkBole.js - LinkRole.js - LinkRole.js - LinkRole.js
- ComplementaryRole.js - ContentInfoRole.js - DateRole.js - DateTimeRole.js - DefinitionRole.js - DescriptionListDetailRole.js - DescriptionListTermRole.js - DescriptionListTermRole.js - DetailsRole.js - DialogRole.js - DirectoryRole.js - DirectoryRole.js - DivRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FigcaptionRole.js - FigrerRole.js - FigrerRole.js - ForterRole.js - Fordrole.js - GridRole.js - GroupRole.js - HeadingRole.js - HeadingRole.js - IframePresentationalRole.js - IframePresentationalRole.js - IframeRole.js - ImageMapLinkRole.js - ImageMaplinkRole.js - ImageMapRole.js - ImageRapRole.js - InputTimeRole.js - InputTimeRole.js - InputTimeRole.js - LabelRole.js - LabelRole.js - LabelRole.js - LinkBole.js - LinkRole.js - LinkRole.js - LinkRole.js - LinkRole.js
- ContentInfoRole.js - DateRole.js - DateTimeRole.js - DefinitionRole.js - DescriptionListDetailRole.js - DescriptionListRole.js - DescriptionListTermRole.js - DetailSRole.js - DialogRole.js - DialogRole.js - DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigreRole.js - FormRole.js - FormRole.js - GridRole.js - GroupRole.js - IframePresentationalRole.js - IframePresentationalRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - IntineTextBoxRole.js - InputTimeRole.js - InputTimeRole.js - LabelRole.js - LabelRole.js - LabelRole.js - LinkRole.js - LinkRole.js - LinkRole.js
- ContentInfoRole.js - DateRole.js - DateTimeRole.js - DefinitionRole.js - DescriptionListDetailRole.js - DescriptionListRole.js - DescriptionListTermRole.js - DetailSRole.js - DialogRole.js - DialogRole.js - DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigreRole.js - FormRole.js - FormRole.js - GridRole.js - GroupRole.js - IframePresentationalRole.js - IframePresentationalRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - IntineTextBoxRole.js - InputTimeRole.js - InputTimeRole.js - LabelRole.js - LabelRole.js - LabelRole.js - LinkRole.js - LinkRole.js - LinkRole.js
- DateRole.js - DateTimeRole.js - DefinitionRole.js - DescriptionListDetailRole.js - DescriptionListTermRole.js - DescriptionListTermRole.js - DetailsRole.js - DialogRole.js - DialogRole.js - DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigraptionRole.js - ForterRole.js - FormRole.js - FormRole.js - GridRole.js - GridRole.js - IframePresentationalRole.js - IframePresentationalRole.js - IframePresentationalRole.js - IfnangeMapLinkRole.js - ImageMapRole.js - ImageMapRole.js - ImageRole.js - ImageRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js
DateTimeRole.js DefinitionRole.js DescriptionListDetailRole.js DescriptionListTermRole.js DescriptionListTermRole.js DetailsRole.js DialogRole.js DialogRole.js DirectoryRole.js DirectoryRole.js DivRole.js DocumentRole.js EmbeddedObjectRole.js EmbeddedObjectRole.js FigcaptionRole.js FigureRole.js FormRole.js FormRole.js FormRole.js GridRole.js GridRole.js HeadingRole.js HadingRole.js IframePresentationalRole.js IframeRole.js IgnoredRole.js IngoredRole.js LinegRapRole.js LinegRapRole.js LinegRapRole.js LinegRapRole.js LabelRole.js LabelRole.js LabelRole.js LinedreakRole.js LinedPreakRole.js LinedPreakRole.js LinedPreakRole.js
- DefinitionRole.js - DescriptionListDetailRole.js - DescriptionListTermRole.js - DescriptionListTermRole.js - DetailsRole.js - DialogRole.js - DialogRole.js - DirectoryRole.js - DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigureRole.js - FigureRole.js - FormRole.js - FormRole.js - GridRole.js - GridRole.js - GridRole.js - IframePresentationalRole.js - IframeRole.js - IframeRole.js - ImageMapLinkRole.js - ImageMapLinkRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LabelRole.js - LineBreakRole.js
DescriptionListDetailRole.js DescriptionListRole.js DescriptionListTermRole.js DetailsRole.js DialogRole.js DialogRole.js DirectoryRole.js DirectoryRole.js DivRole.js DocumentRole.js EmbeddedObjectRole.js EmbeddedObjectRole.js FeedRole.js FigcaptionRole.js FigraptionRole.js FigraptionRole.js ForterRole.js GridRole.js GroupRole.js GroupRole.js HeadingRole.js HeadingRole.js IframePresentationalRole.js IframeRole.js IgnoredRole.js ImageMapLinkRole.js ImageMapRole.js ImageMapRole.js ImageRole.js InlineTextBoxRole.js InputTimeRole.js LabelRole.js LegendRole.js LegendRole.js LineBreakRole.js LineBreakRole.js LineBreakRole.js LineBreakRole.js
- DescriptionListRole.js - DescriptionListTermRole.js - DetailsRole.js - DialogRole.js - DirectoryRole.js - DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FooterRole.js - FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - ImageMapLinkRole.js - ImageMapLinkRole.js - ImageRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LegendRole.js - LineBreakRole.js
- DescriptionListTermRole.js - DetailsRole.js - DialogRole.js - DirectoryRole.js - DirectoryRole.js - DivRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FigcaptionRole.js - FigureRole.js - FigureRole.js - FormRole.js - FormRole.js - GridRole.js - GridRole.js - HeadingRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LegendRole.js - LineBreakRole.js - LineRole.js - LineRole.js
- DetailsRole.js - DialogRole.js - DirectoryRole.js - DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FormRole.js - FormRole.js - GridRole.js - GridRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IfnameRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageMapRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js
- DialogRole.js - DirectoryRole.js - DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FooterRole.js - FormRole.js - GridRole.js - GridRole.js - HeadingRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageMapRole.js - InlineTextBoxRole.js - InlineTextBoxRole.js - LabelRole.js - LegendRole.js - LegendRole.js - LegendRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js
- DirectoryRole.js - DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FigureRole.js - FormRole.js - FormRole.js - GroupRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LegendRole.js - LegendRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js
- DirectoryRole.js - DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FigureRole.js - FormRole.js - FormRole.js - GroupRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LegendRole.js - LegendRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js
- DisclosureTriangleRole.js - DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FooterRole.js - FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LegendRole.js - LinkRole.js - LinkRole.js
- DivRole.js - DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FooterRole.js - FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LegendRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LinkRole.js
- DocumentRole.js - EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FooterRole.js - FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LabelRole.js - LineBreakRole.js
- EmbeddedObjectRole.js - FeedRole.js - FigcaptionRole.js - FigureRole.js - FooterRole.js - FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IfmageMapLinkRole.js - ImageMapRole.js - ImageRole.js - ImageRole.js - IntineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LabelRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js
- FeedRole.js - FigcaptionRole.js - FigureRole.js - FooterRole.js - FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js
- FigcaptionRole.js - FigureRole.js - FooterRole.js - FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LabelRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js
- FigureRole.js - FooterRole.js - FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapLinkRole.js - ImageRole.js - InlineTextBoxRole.js - InlineTextBoxRole.js - LabelRole.js - LabelRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js
- FooterRole.js - FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LineBreakRole.js - LineBreakRole.js
- FormRole.js - GridRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LinkRole.js - LinkRole.js
- GridRole.js - GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LineBreakRole.js - LinkRole.js
- GroupRole.js - HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LineBreakRole.js
- HeadingRole.js - IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LinkRole.js
<pre>- IframePresentationalRole.js - IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LinkRole.js</pre>
- IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LinkRole.js
- IframeRole.js - IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LinkRole.js
- IgnoredRole.js - ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LinkRole.js
<pre>- ImageMapLinkRole.js - ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LinkRole.js</pre>
<pre>- ImageMapRole.js - ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LinkRole.js</pre>
<pre>- ImageRole.js - InlineTextBoxRole.js - InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LinkRole.js</pre>
 InlineTextBoxRole.js InputTimeRole.js LabelRole.js LegendRole.js LineBreakRole.js LinkRole.js
<pre>- InputTimeRole.js - LabelRole.js - LegendRole.js - LineBreakRole.js - LinkRole.js</pre>
<pre>LabelRole.js LegendRole.js LineBreakRole.js LinkRole.js</pre>
<pre>LegendRole.js LineBreakRole.js LinkRole.js</pre>
<pre>LineBreakRole.js LinkRole.js</pre>
LinkRole.js
ListBoxOptionRole.js
ListBoxRole.js
ListItemRole.js
ListMarkerRole.js
ListRole.js
LogRole.js
MenuButtonRole.js
— MenuItemCheckBoxRole.js
│
│
MenuListOptionRole.js
MenuListPopupRole.js

```
- MenuRole.js
     - MeterRole.js
     NavigationRole.js
     – NoneRole.js
     – NoteRole₊js
     OutlineRole.js
     - ParagraphRole.js
     PopUpButtonRole.js
     - PreRole.js
     PresentationalRole.js
     ProgressIndicatorRole.js
     – RadioButtonRole₊js
     RadioGroupRole.js
     - RegionRole.js
     - RootWebAreaRole.js
     - RowHeaderRole.js
    – RowRole.js
     – RubyRole₁js
     – RulerRole.js
     SVGRootRole.js
     - ScrollAreaRole.js
     - ScrollBarRole.js
     - SeamlessWebAreaRole.js
    SearchBoxRole.js
     SearchRole.js
     – SliderRole.js
     - SliderThumbRole.js
     SpinButtonPartRole.js
     SpinButtonRole.js
     – SplitterRole.js
     StaticTextRole.js
     - StatusRole.js
     – SwitchRole⊾js
    TabGroupRole.js
    – TabListRole.js
     - TabPanelRole.js
    – TabRole₊js

    TableHeaderContainerRole.js

     - TableRole.js
     - TermRole.js
    TextFieldRole.js
    – TimeRole.js
    TimerRole.js
     ToggleButtonRole.js
     – ToolbarRole.js
     TreeGridRole.js
     - TreeItemRole.js
     TreeRole.js
     UserInterfaceTooltipRole.js
    – VideoRole.js
     - WebAreaRole.js
   └─ WindowRole.js
index.js
util
```

```
iterationDecorator.js
       └ iteratorProxy.js
 └ package.json
- babel-jest

    LICENSE

  README.md
   - build

─ index.d.ts

      - index.js
      loadBabelConfig.d.ts
    └ loadBabelConfig.js
 └ package.json
- babel-loader

    ⊢ CHANGELOG.md

   - LICENSE
  README.md
  — lib
    ⊢ Error.js
     — cache.js
     — index.js

— injectCaller.js

      - schema.json
    └ transform.js
  - node_modules
     ⊢ .bin
       schema-utils
        — CHANGELOG.md
         - LICENSE
         README.md
        - declarations
           ValidationError.d.ts
            - index.d.ts
           – keywords
             └ absolutePath.d.ts
            - util
              - Range.d.ts
              └ hints.d.ts
          └ validate.d.ts
         - dist
           ─ ValidationError.js
           — index.js
            keywords
             └ absolutePath.js
           util
              ⊢ Range.js
              └ hints.js
           └ validate.js
       └ package.json
 └ package.json
- babel-plugin-istanbul
   CHANGELOG.md
   LICENSE
   - README.md
```

```
lib

⊢ index.js

     └ load-nyc-config-sync.js
  └ package.json
- babel-plugin-jest-hoist

─ LICENSE

   README.md
  - build

⊢ index.d.ts

    └ index.js
  └ package.json
babel-plugin-macros
  ─ CHANGELOG.md
   - LICENSE
   - README.md
  — dist
    └ index.js
  node modules
    └ .bin
       ∟ resolve
  └ package.json

    babel-plugin-named-asset-import

⊢ LICENSE

  — index.js
  └ package.json
babel-plugin-polyfill-corejs2
  LICENSE
   README.md
   - esm
     — index.mjs
    └ index.mjs.map
  — lib

— add-platform-specific-polyfills.js

     built-in-definitions.js
     helpers.js
    └ index.js
   - node_modules
    └ .bin
       ∟ semver
  └ package.json
babel-plugin-polyfill-corejs3
  LICENSE
  README.md
   - core-js-compat
     — README.md
     — data.js
     — entries.js
    — index.mjs
    └ index.mjs.map
    lib
     ├ built-in-definitions.js
      - index.js
```

```
— shipped-proposals.js
      usage-filters.js
     └ utils.js

    package.json

    babel-plugin-polyfill-regenerator

─ LICENSE

   README.md
  - esm
     — index.mjs
     └ index.mjs.map
   - lib
     └ index.js

    package.json

    babel-plugin-transform-react-remove-prop-types

— CHANGELOG.md

  — LICENSE
  README.md
  — lib
     ⊢ index.js

─ isAnnotatedForRemoval.js

      isStatelessComponent.js
     └ remove.js
   – package⊾json
  ∟ src
     index.js
     isAnnotatedForRemoval.js
      isStatelessComponent.js
     └ remove.js
- babel-preset-current-node-syntax

    LICENSE

  README.md
  — package.json
   – scripts
   └ check-yarn-bug.sh
   - src
    └ index.js
babel-preset-jest
  README.md
   - index.js

    package.json

babel-preset-react-app
  README.md
  — create.js

— dependencies.js

  — dev.js
  — index.js
  — package.json
  — prod.js
   - test.js

    webpack-overrides.js

 balanced-match
   github
```

```
└ FUNDING.yml
   LICENSE.md
  README.md
   - index.js
 └ package.json
batch
 — History.md
  LICENSE
  — Makefile
  — Readme.md
 ─ component.json
 index.js
 └ package.json
- bfj
 ⊢ .eslintrc
  — .gitlab-ci.yml
  ─ AUTHORS
  CONTRIBUTING.md
  — COPYING
  — HISTORY.md
  README.md
  — package.json
  - src
    ─ datastream.js
     — error₊js
     ─ eventify.js
     — events.js
     — index.js
     — jsonstream.js
     — match.js
     — memory.js
     — parse.js
     — promise.js
     — read.js
     — stream.js
     — streamify.js

    stringify.js

     — unpipe.js
      – walk.js
    └ write.js
 ∟ test

    integration.js

     - performance.js
    ∟ unit

    datastream.js

        – error⊾js
         – eventify.js
         – jsonstream.js
         - match.js
         – parse.js
         – read.js
        — streamify.js
        — stringify.js
```

```
– unpipe.js
         — walk.js
        └ write.js
– big.js
  ─ CHANGELOG.md
  LICENCE
  README.md
  — big.js
  — big.min.js
  — big.mjs
 └ package.json
binary-extensions

    binary-extensions.json

  binary-extensions.json.d.ts
   - index.d.ts
  — index.js
  — license
   - package.json
 └ readme.md
- bluebird

─ LICENSE

   - README.md

    ⊢ changelog.md

  ⊢ js
     ⊢ browser
        — bluebird.core.js

→ bluebird.core.min.js

         - bluebird.js
        └ bluebird.min.js
      - release
        ⊢ any.js
         – assert.js
         – async⊾js
         — bind.js
         - bluebird.js
         – call_get.js
         cancel.js
         - catch_filter.js
         – context.js
         debuggability.js
         – direct_resolve.js
        — each.js
        — errors.js
         – es5.js
         – filter.js
         – finally.js
         – generators.js
         - join.js
         – map₊js
         - method.js
         nodeback.js
         - nodeify.js
         – promise.js
         – promise_array.js
```

```
- promisify.js
         – props.js
         - queue⊾js
        – race.js
        - reduce.is
        – schedule.js
         – settle.js
        – some.js
         synchronous_inspection.js
        – thenables.js
        — timers.js
         - using.js
       └ util.js
 └ package.json
- body-parser

⊢ HISTORY.md

  LICENSE
  README.md
  SECURITY.md
 — index.js
  — lib
    ⊢ read.js
    ∟ types
        — json.js
        – raw₌js
         - text.js
       └ urlencoded.js
  node modules
    debug
        L .coveralls.yml
        eslintrc
        npmignore
         – .travis.yml
        CHANGELOG.md

    LICENSE

        Makefile
        README.md
        - component.json
        – karma.conf.js
        – node.js
        – package.json
       ∟ src

    browser.js

           — debug₁js
           — index.js

─ inspector-log.js

          └ node.js
      - ms
        — index.js
        license.md
         - package.json
       └ readme.md
 └ package.json
bonjour-service
```

```
- LICENSE
   - README.md
  – dist
     index.d.ts
     — index.js
     — index.js.map
     └ lib
        KeyValue.d.ts
         – KeyValue₊js
        – KeyValue.js.map
         - browser.d.ts
         - browser.js
         - browser.js.map
        - dns-txt.d.ts
         - dns-txt.js
        — dns-txt.js.map
        — mdns-server.d.ts
        — mdns-server.js
        - mdns-server.js.map
        registry.d.ts
        — registry.js
         registry.js.map
        - service-types.d.ts
        – service-types.js
         - service-types.js.map
         - service.d.ts
         – service.js
         – service.js.map
         - utils
           filter-service.d.ts
           filter-service.js
            – filter-service.js.map
           filter-txt.d.ts
            - filter-txt.js
          └ filter-txt.js.map
  node_modules
     - .bin
       └ multicast-dns
      - array-flatten

─ LICENSE

        README.md
        — array-flatten.d.ts
        — array−flatten.js
       └ package.json
   - package.json
  types

─ dns-equal.d.ts

    └ multicast-dns.d.ts

    boolbase

 ─ README.md
   - index.js

    package.json

brace-expansion
  LICENSE
```

```
README.md
   - index.js
  └ package.json
- braces
  ├ CHANGELOG.md
  LICENSE
  README.md
  — index.js
  – lib

    ⊢ compile.js

     — constants.js
     — expand.js
     — parse.js
      - stringify.js
    └ utils.js
 └ package.json
- browser-process-hrtime
  README.md
  index.d.ts
  index.js
 └ package.json
- browserslist
  ─ LICENSE
  README.md
  — browser.js
  — cli.js
  — error.d.ts
  — error.js
  — index.d.ts

⊢ index.js

  — node.js
  — node_modules
    ∟ .bin

    browserslist-lint

  – package.json
 └ parse.js
- bser
  - README.md
   - index.js

    package.json

buffer-from

─ index.js

  — package.json
 └ readme.md
builtin-modules
  ─ builtin-modules.json

─ index.d.ts

  index.js

─ license

   – package.json
   – readme.md
   - static.d.ts
```

```
└ static.js
 bytes

    History.md

  — LICENSE
  — Readme.md
  — index.js
 └ package.json
- call-bind
 .eslintignore
  - .eslintrc
  - .github
   └ FUNDING.yml
  _ nycrc
  — CHANGELOG.md
   - LICENSE
  — README.md

— callBound.js

 — index.js
  — package.json
 ∟ test

    ⊢ callBound.js

    └ index.js

    callsites

─ index.d.ts

   - index.js
  license
   – package⊾json
 └ readme.md
- camel-case
  ─ LICENSE
  — README.md
  — dist

─ index.d.ts

     index.js

─ index.js.map

     index.spec.d.ts
      - index.spec.js
    └ index.spec.js.map
   - dist.es2015

─ index.d.ts

     — index.js

─ index.js.map

     index.spec.d.ts
      - index.spec.js
    └ index.spec.js.map
 └ package.json

    camelcase

 index.d.ts
  — index.js
  license
   - package.json
 └ readme.md
camelcase-css
  — README.md
```

```
- index-es5.js
   index.js
   - license
 └ package.json
– caniuse–api

    ⊢ CHANGELOG.md

   LICENSE
  README.md
   – dist

─ index.js
    └ utils.js
  mode_modules
    ∟ .bin
       └ browserslist
 └ package.json
– caniuse—lite
  LICENSE
  README.md
  — data
     — agents.js
     ─ browserVersions.js
      - browsers.js
      features
        — aac.js
         abortcontroller.js
        — ac3−ec3.js

— accelerometer.js

        addeventlistener.js
         alternate-stylesheet.js
        — ambient−light.js
        — apng.js
        — array−find−index.js
        — array−find.js
        — array-flat.js
        — array-includes.js
        — arrow−functions.js
         – asmjs.js
         async-clipboard.js
        async-functions.js
         – atob−btoa.js
        — audio−api.js
        — audio.js
        — audiotracks.js
         autofocus.js
        — auxclick.js
        – av1.js
        — avif.js
         background-attachment.js
         background-clip-text.js
        — background-img-opts.js
         background-position-x-y.js
         background-repeat-round-space.js
         background-sync.js
         - battery-status.js
```

```
beacon.js
 beforeafterprint.js
- bigint.js
– blobbuilder⊾js
- bloburls.js
– border-image₁js
– border–radius.js
broadcastchannel.js
– brotli.js
— calc.js
- canvas-blending.js
– canvas−text.js
— canvas.js
— ch−unit.js
chacha20-poly1305.js
— channel-messaging.js
— childnode-remove.js
– classlist.js
— client-hints-dpr-width-viewport.js
— clipboard.js
— colr-v1.js
– colr.js
comparedocumentposition.js
— console−basic.js
— console−time.js
– const.js
constraint-validation.js
contenteditable.js
contentsecuritypolicy.js
— contentsecuritypolicy2.js
— cookie−store−api.js
– cors.js
– createimagebitmap₊js
— credential-management.js
— cryptography⊾js
— css−all.js
– css−animation.js
– css—any—link.js
— css−appearance.js
– css–at–counter–style⊾js
— css-autofill.js
— css-backdrop-filter.js
— css-background-offsets.js
css-backgroundblendmode.js
css-boxdecorationbreak.js
– css-boxshadow⊾js
– css−canvas.js
- css-caret-color.js
– css−cascade−layers.js
– css-case-insensitive.js
- css-clip-path.js
- css-color-adjust.js
css-color-function.js
- css-conic-gradients.js
```

```
- css-container-queries-style.js
 - css-container-queries.js
 - css-container-query-units.js
- css-containment.js
 css-content-visibility.js
– css–counters.js
– css−crisp−edges.js
— css-cross-fade.js
 css-default-pseudo.js
— css-descendant-gtgt₁js
css-deviceadaptation.js
– css−dir−pseudo.js
— css-display-contents.js
css-env-function₁js
— css-exclusions.js
— css-featurequeries₌js
css-file-selector-button.js
— css-filter-function.js
– css-filters.js
— css-first-letter.js
 - css-first-line.js
— css−fixed.js
css-focus-visible.js
⊢ css-focus-within.js
– css-font-palette.js
— css-font-rendering-controls.js
— css-font-stretch.js
 - css−gencontent.js
— css−gradients.js
— css-grid-animation.js
– css–grid⊾js
css-hanging-punctuation.js
— css−has.js
— css−hyphens.js
— css−image−set.js
 – css−in−out−of−range.js
— css-indeterminate-pseudo.js
– css−initial−letter.js
— css-initial-value₊js
— css−lch−lab.js
— css-letter-spacing.js
– css−line−clamp.js
– css-logical-props.js
– css–marker–pseudo⊾js
 – css−masks.js
– css–matches–pseudo⊾js
 – css–math–functions.js
css-media-interaction.js
 - css−media−range−syntax.js
 css-media-resolution.js
 css-media-scripting.js
 css-mediaqueries.js
```

```
- css-mixblendmode.js
- css-motion-paths.js
- css-namespaces.js
– css−nesting.js
- css-not-sel-list.js
- css-nth-child-of.js
– css−opacity.js
– css−optional−pseudo.js
css-overflow-anchor.js
– css−overflow−overlay.js
– css-overflow.js
– css–overscroll–behavior.js
— css-page-break.js
— css−paged−media.js
– css-paint-api⊾įs
css-placeholder-shown.js
— css-placeholder₊js
css-print-color-adjust.js
- css-read-only-write.js
– css-rebeccapurple₊js
− css-reflections.js
– css−regions.js
css-repeating-gradients.js
– css−resize.js
- css-revert-value.js
– css−rrggbbaa.js
– css–scroll–behavior₊js
css-scroll-timeline.js
- css−scrollbar.js
– css–sel2.js
– css-sel3.js
– css-selection.js
– css−shapes.js
– css−snappoints.js
– css−sticky.js
– css–subgrid⊾js
– css–supports–api⊾js
– css−table.js
— css-text-align-last.js
- css-text-indent.js
css-text-justify₁js
css-text-orientation.js
— css−text−spacing.js
– css−textshadow.js
– css—touch—action.js
css-transitions.js
– css−unicode−bidi.js
- css-unset-value.js
– css−variables.js
– css-when-else.js
- css—widows—orphans.js
- css-width-stretch.js
- css-writing-mode.js
- css-zoom.js
```

```
css3-attr.js
- css3-boxsizing.js
- css3-colors.js
- css3-cursors-grab.js
- css3-cursors-newer⊾js
– css3–cursors₊js
– css3−tabsize.js
- currentcolor.js
- custom-elements.js
custom-elementsv1.js
– customevent.js
– datalist.js
– dataset.js
— datauri.js
date-tolocaledatestring.js
— declarative-shadow-dom₊js
— decorators.js
details.js
deviceorientation.js
devicepixelratio.js
— dialog.js
dispatchevent.js
– dnssec.js
– do-not-track.js
document-currentscript.js
document-evaluate-xpath.js
document-execcommand.js
document-policy.js
document-scrollingelement.js
documenthead.js
dom-manip-convenience.js
— dom−range.js
domcontentloaded.js
— dommatrix.js
– download.js
— dragndrop.js
— element-closest.js
element-from-point.js
element-scroll-methods.js
– eme.js
– eot.js
– es5.js
— es6−class.js
– es6-generators.js
es6-module-dynamic-import.js
– es6-module.js
– es6−number⊾js
es6-string-includes.js
– es6.js
– eventsource.js
extended-system-fonts.js
 feature-policy.js
- fetch.js
 fieldset-disabled.js
```

```
fileapi.js
filereader.js
- filereadersync.js
– filesystem.js
– flac.js
– flexbox–gap₊js
- flexbox.js
- flow-root.js
- focusin-focusout-events.js
– font-family-system-ui₊js
– font−feature.js
font-kerning.js
– font−loading.js
- font−size−adjust.js
font-smooth.js
– font-unicode-range.js
font-variant-alternates.js
– font-variant-numeric₊js
fontface.js
- form-attribute.js
form-submit-attributes.js
- form-validation.js
– forms.js
- fullscreen.js
– gamepad⊾js
– geolocation.js

    getboundingclientrect.js

getcomputedstyle.js
- getelementsbyclassname.js
getrandomvalues.js
- gyroscope.js
hardwareconcurrency.js
– hashchange⊾js
– heif.js
– hevc.js
– hidden.js
high-resolution-time.js
– history.js
- html-media-capture.js
html5semantic.js
– http-live-streaming.js
http2.js
– http3.js
– iframe−sandbox.js
- iframe-seamless.js
- iframe−srcdoc.js
– imagecapture.js
– ime.js
img-naturalwidth-naturalheight.js
– import–maps.js
- imports.js
indeterminate-checkbox.js
indexeddb.js
indexeddb2.js
```

```
inline-block.js
innertext.js
input-autocomplete-onoff.js
- input-color.js
input-datetime.js
- input-email-tel-url.js
- input-event.js
input-file-accept.js
input-file-directory.js
input-file-multiple.js
- input−inputmode.js
- input-minlength.js
- input−number.js
- input−pattern.js
input-placeholder.js
- input−range.js
– input−search.js
input-selection.js
insert-adjacent.js
insertadjacenthtml.js
internationalization.js
intersectionobserver-v2.js
- intersectionobserver.js
- intl-pluralrules.js
intrinsic-width.js
- jpeg2000⊾js
-jpegxl.js
- jpegxr⊾js
- js-regexp-lookbehind.js
- json.js
justify-content-space-evenly.js
kerning-pairs-ligatures.js
keyboardevent-charcode.js
keyboardevent-code.js

    keyboardevent-getmodifierstate.js

– keyboardevent−key.js
keyboardevent-location.js
keyboardevent-which.js
lazyload.js
- let.js
- link-icon-png.js
— link-icon-svg.js
link-rel-dns-prefetch.js
link-rel-modulepreload.js
- link-rel-preconnect.js
- link-rel-prefetch.js
- link−rel−preload.js
- link-rel-prerender.js
- loading−lazy–attr.js
localecompare.js
- magnetometer.js
matchesselector.js
- matchmedia.js
- mathml.js
```

```
- maxlength.js
 mdn-css-unicode-bidi-isolate-override.js
mdn-css-unicode-bidi-isolate.js
mdn-css-unicode-bidi-plaintext.js
— mdn-text-decoration-color.js
mdn-text-decoration-line.js
mdn-text-decoration-shorthand.js
mdn-text-decoration-style.js
— media−fragments.js
mediacapture-fromelement.js
— mediarecorder.js
– mediasource.js
— menu.js
- meta-theme-color.js
– meter.js
– midi.įs
— minmaxwh.js
– mp3.js
– mpeg−dash.js
— mpeg4.js
— multibackgrounds.js
– multicolumn.js
– mutation−events.js
— mutationobserver.js
— namevalue-storage.js
— native-filesystem-api₊js
— nav−timing.js
– netinfo.js
notifications.js
— object−entries.js
— object-fit.js
– object–observe.js
– object–values.js
objectrtc.js
— offline−apps.js
offscreencanvas.js
– ogg−vorbis.js
- ogv.js
— ol−reversed.js
– once-event-listener.js
— online−status.js
– opus.js
— orientation—sensor₊js
- outline.js
– pad−start−end.js
– page−transition−events.js
 pagevisibility.js
 - passive−event−listener.js
 - passwordrules⊾js
– path2d.js
 - payment−request.js
 - pdf−viewer⊾js
 - permissions−api⊾js
 - permissions—policy.js
```

```
picture-in-picture.js
  picture.js
  ping.js
 - png—alpha.js
 pointer-events.js
 - pointer⊾js
 - pointerlock.js
 - portals.js
 - prefers-color-scheme.js
 prefers-reduced-motion.js
 - progress.js
 - promise-finally.js
 – promises.js
 - proximity.js
 - proxy.js
 publickeypinning.js
— push−api.js
– queryselector.js
— readonly–attr.js
- referrer-policy.js
— registerprotocolhandler.js
– rel-noopener₌js
– rel-noreferrer.js
– rellist.js
— rem₊js
requestanimationframe.js
— requestidlecallback.js
— resizeobserver.js
 - resource-timing.js
— rest−parameters.js
rtcpeerconnection.js
– ruby.js
– run−in.js
– same−site−cookie−attribute.js
screen-orientation.js

    script-async.js

– script–defer⊾js
scrollintoview.js
scrollintoviewifneeded.js
– sdch.js
— selection-api.js
— server-timing.js
serviceworkers.js
– setimmediate.js
— shadowdom.js
– shadowdomv1.js
sharedarraybuffer.js
 sharedworkers.js
 – sni⊾js
– spdy⊾js
 speech-recognition.js
 - speech-synthesis.js
 - spellcheck—attribute.js
 - sql—storage.js
```

```
- srcset.js
- stream.js
- streams.js
stricttransportsecurity.js
– style-scoped₁js
subresource-bundling.js
– subresource−integrity.js
– svg−css.js
– svg–filters.js
– svg−fonts.js
– svg−fragment.js
– svg-html.js
— svg−html5.js
- svg-img.js
- svg-smil.js
– svg.js
— sxg.js
– tabindex–attr.js
— template−literals.js
– template.js
temporal.js
- testfeat.js
– text-decoration.js
- text-emphasis.js
text-overflow.js
– text–size–adjust.js
– text–stroke.js
textcontent.js
– textencoder⊾js
— tls1-1.js
— tls1-2.js
– tls1–3.js
- touch.js
— transforms2d.js
— transforms3d.js
— trusted−types.js
– ttf.js
– typedarrays.js
— u2f.js
unhandledrejection.js
upgradeinsecurerequests.js
— url-scroll-to-text-fragment.js
— url.js
– urlsearchparams.js
– use−strict.js
— user-select-none.js
– user−timing.js
– variable–fonts.js
- vector-effect.js
— vibration.js
– video.js
- videotracks.js
- viewport−unit−variants.js
viewport-units.js
```

```
wai-aria.js
   - wake-lock.js
   – wasm.js
   – wav.js
  – wbr–element.js
  web-animation.js
   - web-app-manifest.js
  web-bluetooth.js
   - web-serial.js
  – web−share.js
   – webauthn.js
   webcodecs.js
  – webgl.js
   – webgl2.js
   – webgpu₌js
  – webhid.js
  — webkit-user-drag.js
  – webm.js
  - webnfc.js
  – webp.js
  – websockets.js
   - webtransport.js
  – webusb.js
  – webvr⊾js
  – webvtt.js
   - webworkers.js
   – webxr⊾js
  – will−change.js
  – woff.js
  – woff2.js
  — word-break₊js
  — wordwrap.js
  - x-doc-messaging.js
  x-frame-options.js
  – xhr2.js
 - xhtmlsmil.js
 └ xml-serializer.js
features.js
- regions
  — AD.js
  – AE.js
  – AF.js
  – AG.js
  – AI.js
   - AL.js
  – AM.js
   - AO.js
   - AR.js
   - AS.js
   - AT.js
   - AU.js
  – AW.js
   - AX.js
```

	— AZ₊js
	— BA.js
	— BB.js
	— BD.js
	— BE.js
	⊢ BF.js
	— BG.js
	— BH.js
	— BI.js
	— BJ.js
	— BM.js
	— BN.js
	— B0.js
	— BR.js
	— BS.js
	— BT.js
	⊢ BW.js
	— BY.js
	— BZ.js
	— CA.js
	— CD.js
	— CF.js
	├─ CG.js
	— CH.js
i i i	— CI.js
	— CK.js
	— CL.js
	— CM.js
	⊢ CN.js
	— CO.js
	— CR.js
	— CU.js
	- CV.js
	— CX.js
	— CY.js
	— CZ.js
	— DE.js
	— DJ.js
	— DK.js
	— DM.js
	— DO.js
	⊢ DZ.js
	— EC.js
	— EE.js
	EG.js
	ER.js
	ES.js
	— ET.js
	— FI.js
	— FJ.js
	FK.js
	— FM.js
	F0.js
	— FR.js
	210 / 017

	— GA.js
	— GB.js
	— GD.js
	— GE.js
	— GF.js
	— GG.js
	— GH.js
	— GI.js
	— GL.js
	⊢ GM.js
	— GN.js
	— GP.js
	— GQ.js
	— GR.js
	⊢ GT.js
	— GU.js
	— GW.js
	— GY.js
	— HK.js
	⊢ HN.js
	⊢ HR.js
	— HT.js
	HU.js
	— ID.js
	— IE.js
	— IL.js
	— IM.js
	— IN.js
	— IQ.js
	⊢ IR.js
	⊢ IS.js
i i i	— IT.js
	— JE.js
	— JM.js
	⊢ J0.js
	⊢ JP.js
	— KE.js
	⊢ KG.js
	— KH.js
	⊢ KI.js
	— KM.js
	— KN.js
	— KP.js
	— KR.js
	⊢ KW.js
	⊢ KY.js
	— KZ.js
	LA.js
	⊢ LB.js
	— LC.js
	⊢ LI.js
	⊢ LK.js
	LR.js
	⊢ LS.js
	211 / 017

	⊢ LT.js
	⊢ LU.js
	⊢ LV.js
	⊢ LY.js
	⊢ MA.js
	⊢ MC.js
	├─ MD.js
	⊢ ME.js
i i i	⊢ MG.js
	⊢ MH.js
	⊢ MK.js
	⊢ ML.js
	⊢ MM.js
	⊢ MN.js
	⊢ MO.js
	⊢ MP.js
	⊢ MQ.js
	⊢ MR.js
	⊢ MS.js
	⊢ MT.js
	⊢ MU.js
	⊢ MV.js
	⊢ MW.js
	⊢ MX.js
	⊢ MY.js
	⊢ MZ.js
	⊢ NA.js
	⊢ NC.js
	⊢ NE.js
	⊢ NF.js
	⊢ NG.js
	⊢ NI.js
	⊢ NL.js
	⊢ NO.js
	⊢ NP.js
	⊢ NR.js
	├ NU.js
	⊢ NZ.js
	⊢ OM.js
	⊢ PA.js
	⊢ PE.js
	⊢ PF.js
	⊢ PG.js
	⊢ PH.js
	⊢ PK.js
	⊢ PL.js
	⊢ PM.js
	⊢ PN.js
	⊢ PR.js
	⊢ PS.js
	⊢ PT.js
	├─ PW.js
	⊢ PY.js
	⊢ QA.js
	212 / 017

	⊢ RE.js
i i i	⊢ RO.js
	⊢ RS.js
	⊢ RU.js
	⊢ RW.js
	⊢ SA.js
	⊢ SB.js
	⊢ SC.js
i i i	⊢ SD.js
	⊢ SE.js
	⊢ SG.js
	⊢ SH.js
	⊢ SI.js
	⊢ SK.js
	⊢ SL.js
	⊢ SM.js
	⊢ SN.js
	⊢ S0.js
	⊢ SR.js
	⊢ ST.js
	⊢ SV.js
	⊢ SY.js
	⊢ SZ.js
	⊢ TC.js
	⊢ TD.js
	⊢ TG.js
	⊢ TH.js
	⊢ TJ.js
	⊢ TK.js
	⊢ TL.js
	⊢ TM.js
	⊢ TN.js
	├ T0.js
	⊢ TR.js
	⊢ TT.js
	⊢ TV.js
	⊢ TW.js
	⊢ TZ.js
	├─ UA.js
	├─ UG.js
	⊢ US.js
	⊢ UY.js
	├─ UZ.js
	⊢ VA.js
	⊢ VC.js
	├─ VE.js
	├─ VG.js
	⊢ VI.js
	⊢ VN.js
	⊢ VU.js
	⊢ WF.js
	⊢ WS.js
	⊢ YE.js
	⊢ YT.js
	212 / 017

```
- ZA.js
         - ZM.js
         - ZW.js
         – alt–af.js
         – alt−an.js
         – alt–as₊įs
         – alt–eu.js
         – alt-na.js
         – alt–oc.js
         — alt−sa.js
        └ alt-ww.js
   – dist
     ⊢ lib
        — statuses.js
        └ supported.js
      unpacker
        — agents.js
         - browserVersions.js
         − browsers.js
         – feature.js
         — features.js
         - index.js
        └ region.js
 └ package.json

    case-sensitive-paths-webpack-plugin

  ─ CHANGELOG.md
  — LICENSE
  README.md
   - index.js
 └ package.json
- chalk

─ index.d.ts

   license

    package.json

  — readme.md
 ∟ source
     index.js
      – templates.js
     └ util.js
- char-regex

─ LICENSE

  README.md
  index.d.ts
   - index.js
 └ package.json
check-types

─ COPYING

  README.md
  package.json
 ∟ src
     — check-types.js
     └ check-types.min.js
 chokidar

─ LICENSE
```

```
README.md
   - index.js
  – lib

    ─ constants.js

     — fsevents-handler.js
     └ nodefs-handler.js
   – package.json
  └ types
    └ index.d.ts

    chrome-trace-event

— CHANGES.md

  – LICENSE.txt
  — README.md
  – dist
     trace-event.d.ts
      – trace–event.js
     └ trace-event.js.map

    package.json

- ci-info
  ─ CHANGELOG.md
  — LICENSE
  README.md
  — index.d.ts
  index.js
   – package.json
 └ vendors.json
- cjs-module-lexer
  — CHANGELOG.md
  — LICENSE
  README.md
  ⊢ dist
     ⊢ lexer.js
     └ lexer.mjs
  ─ lexer.d.ts
  – lexer.js
  └ package.json
- clean-css

    History ■ md

   LICENSE
  ─ README.md
  — index.js
  ⊢ lib
     ⊢ clean.js
     — optimizer

⊢ clone.js

         configuration

    break-up.js

           ─ can-override.js
            - properties
              └ understandable.js
           └ restore.js
         configuration.js
         - hack.js
         invalid-property-error.js
```

```
level-0
 └ optimize.js
level-1
  — optimize.js
  - property-optimizers
    ─ background.js
     — border-radius.js
     – box−shadow.js
     - filter.js
     – font–weight⊾js
    — margin.js
     - outline.js
    └ padding.js
  property-optimizers.js
   - sort-selectors.js
  - tidy—at—rule.js
  — tidy-block.js
  – tidy-rules.js
  value-optimizers
    ⊢ color
       - shorten-hsl.js
       └ shorten-rgb.js
     – color.js
     – degrees.js
     – fraction.js
    — precision.js
     - starts-as-url.js
     – text–quotes.js
     – time.js
     — unit.js
     — url-prefix.js
    — url-quotes.js
    — url-whitespace.js
     whitespace.js
    ∟ zero.js
 └ value-optimizers.js
- level-2
  extract-properties.js
  – is−mergeable.js
  — merge-adjacent.js
  — merge-media-queries.js
  — merge-non-adjacent-by-body.js
  merge-non-adjacent-by-selector.js
  optimize.js
  properties
    — every-values-pair.js
     — find-component-in.js
     – has−inherit.js
     – has−same−values.js
     - has-unset.js
     - is-component-of.js
     is-mergeable-shorthand.js
     merge-into-shorthands.js
```

```
- optimize.js
         override-properties.js
         overrides-non-component-shorthand.js

    □ populate-components.js

     — reduce-non-adjacent.js
     — remove-duplicate-font-at-rules.js
     remove-duplicate-media-queries.js
      remove-duplicates.js
      remove-unused-at-rules.js
      – reorderable.js
     restore-with-components.js
     – restructure.js
     — rules-overlap.js
      specificities-overlap.js
      specificity.js
    └ tidy-rule-duplicates.js
  — remove-unused.js
  restore-from-optimizing.js
  — validator.js
   vendor-prefixes.js
 └ wrap-for-optimizing.js
options
  compatibility.js
  fetch.js
  – format.js
  – inline−request.js
   - inline−timeout.js
  - inline.js
   optimization-level.js
  – plugins.js
  — rebase-to₊įs
  – rebase.js

    □ rounding-precision.js

- reader

— apply-source-maps₁js

  extract-import-url-and-media.js
  – input–source–map–tracker₌js
   - is—allowed—resource.js

    load-original-sources.js

  - load-remote-resource.js
  — match-data-uri.js
  — normalize-path.js
  — read-sources.js
  rebase-local-map.js
  – rebase−remote–map.js
  – rebase.js
   - restore−import.js
 └ rewrite-url.js
- tokenizer
  — marker.js
   - token.js
 └ tokenize.js
- utils
  – clone—array⊾js
```

```
- format-position.js
         - has-protocol.js
         - is-data-uri-resource.js
         — is-http-resource.js
        — is-https-resource.js
         — is−import.js
         - is-remote-resource.js

— natural-compare.js

         – override⊾js
        └ split.js
      - writer

— helpers.js

         — one-time.js
         - simple.js
        └ source-maps.js

    package.json

– cliui

— CHANGELOG.md

   – LICENSE.txt
  README.md
  — build

⊢ index.cjs

     └ lib
        — index.js
        └ string-utils.js
   – index.mjs
  └ package.json
- co

⊢ History.md

  — LICENSE

— Readme.md


  index.js
  └ package.json
- coa
  ─ LICENSE
   README.md
   — README.ru.md
  — coa.d.ts
   – index.js
   - lib
     ⊢ arg.js

⊢ cmd.js

     coaobject.js
     — coaparam.js
     — completion.js
     ─ completion.sh
     index.js
      – opt.js
     └ shell.js
   - node_modules

— ansi−styles

         - index.js
         license
         – package.json
```

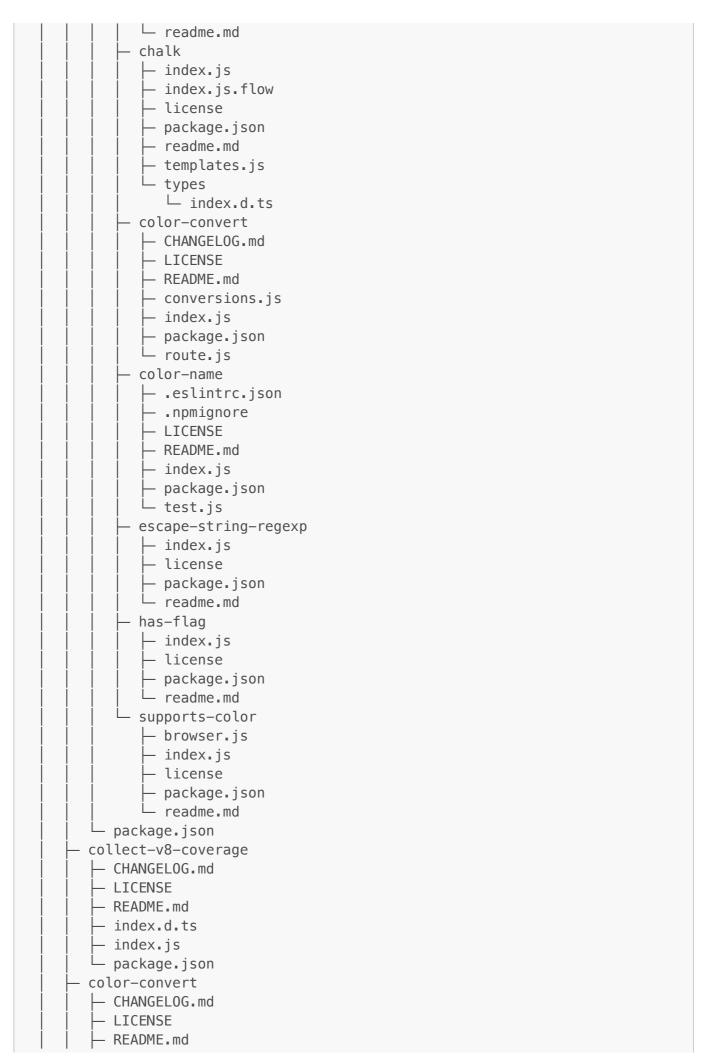

```
- conversions.js
   – index.js
   - package.json
 └ route.js
- color-name
  LICENSE
   README.md
   - index.js
 └ package.json
- colord
  ├ CHANGELOG.md
   LICENSE.md
  README.md
   - colord.d.ts
   - constants.d.ts
  - extend.d.ts
  helpers.d.ts
  — index.d.ts
  – index.js
  — index.mjs
  — package.json
   - parse.d.ts
  plugins
     — a11y.d.ts
     — a11y.js
     — a11y.mjs
     - cmyk.d.ts
     — cmyk.js
     — cmyk₁mjs
     — harmonies.d.ts
     — harmonies.js
     — harmonies.mjs
      - hwb.d.ts
     — hwb.js
     — hwb.mjs
      - lab.d.ts
      – lab.js
     — lab.mjs
      - lch.d.ts
      – lch.js
     — lch.mjs
     — minify.d.ts
     ─ minify.js
     — minify.mjs
     - mix.d.ts
     — mix.js
     — mix.mjs
      - names.d.ts
      – names.js
     — names.mjs
      - xyz.d.ts
      - xyz.js
     ∟ xyz.mjs
    random.d.ts
```

```
└ types.d.ts
 colorette

    LICENSE.md

  — README.md
  — index.cjs
  index.d.ts
   - index.js
 └ package.json
combined-stream

    License

  – Readme.md
  — lib
    └ combined_stream.js
   - package.json
 └ yarn.lock
commander
 ─ CHANGELOG.md
  — LICENSE
  — Readme.md
  index.js
  — package.json
 └ typings
    └ index.d.ts
- common-path-prefix

─ LICENSE

  README.md
   - index.d.ts
   - index.js
 └ package.json
- common-tags

⊢ dist

    └ common-tags.min.js
     — TemplateTag
        — TemplateTag.js
        └ index.js
      codeBlock
       └ index.js
      commaLists

    commaLists.js

        └ index.js
      commaListsAnd

    ─ commaListsAnd.js

        └ index.js
      - commaListsOr
        — commaListsOr.js
        └ index.js
      html

⊢ html.js

        └ index.js
      - index.js
      inlineArrayTransformer
         - index.js

    inlineArrayTransformer.js
```

```
inlineLists
   — index.js
  └ inlineLists.js
- oneLine
  index.js
  └ oneLine.js

    oneLineCommaLists

   — index.js
  └ oneLineCommaLists.js

    oneLineCommaListsAnd

   – index.js
  └ oneLineCommaListsAnd.js
- oneLineCommaListsOr
   — index.js
  └ oneLineCommaListsOr.js
oneLineInlineLists

⊢ index.js

  └ oneLineInlineLists.js
- oneLineTrim

─ index.js

  └ oneLineTrim.js

    removeNonPrintingValuesTransformer

    - index.js

    □ removeNonPrintingValuesTransformer.js

replaceResultTransformer
    - index.js

    □ replaceResultTransformer.js

replaceStringTransformer
   — index.js

    □ replaceStringTransformer.js

    replaceSubstitutionTransformer

  index.js

    □ replaceSubstitutionTransformer.js

safeHtml
  index.js
  └ safeHtml.js
- source
  └ index.js
splitStringTransformer
   — index.js

    □ splitStringTransformer.js

stripIndent
  ⊢ index.js
  └ stripIndent.js
stripIndentTransformer

─ index.js

    □ stripIndentTransformer.js

- stripIndents
   - index.js
  └ stripIndents.js
- trimResultTransformer
    - index.js

    trimResultTransformer.js

- utils
```

```
– index.js
       readFromFixture
         — index.js
        └ readFromFixture.js
— lib
  TemplateTag
      — TemplateTag.js
     └ index.js

    codeBlock

    └ index.js
   commaLists
      – commaLists.js
     └ index.js

    commaListsAnd

      commaListsAnd.js
     └ index.js
  commaListsOr
      — commaListsOr.js
     └ index.js
   – html

⊢ html.js

     └ index.js
  — index.js
   inlineArrayTransformer
     ⊢ index.js

    inlineArrayTransformer.js

   inlineLists
     — index.js
     └ inlineLists.js
   - oneLine

⊢ index.js

     └ oneLine.js
   oneLineCommaLists
      - index.js
     └ oneLineCommaLists.js
   oneLineCommaListsAnd
      - index.js
     └ oneLineCommaListsAnd.js
   oneLineCommaListsOr
      - index.js
     └ oneLineCommaListsOr.js
   oneLineInlineLists
     ⊢ index.js
     └ oneLineInlineLists.js
   oneLineTrim
     — index.js
     └ oneLineTrim.js

    removeNonPrintingValuesTransformer

      - index.js
     └ removeNonPrintingValuesTransformer.js

    replaceResultTransformer

      - index.js

    □ replaceResultTransformer.js

     replaceStringTransformer
```

```
- index.js

    □ replaceStringTransformer.js

    replaceSubstitutionTransformer

        — index.js

    □ replaceSubstitutionTransformer.js

     safeHtml
        — index.js
       └ safeHtml.js
      source
       └ index.js
      splitStringTransformer
        — index.js
       └ splitStringTransformer.js
      - stripIndent
         - index.js
       └ stripIndent.js
     — stripIndentTransformer
        - index.js

    stripIndentTransformer.js

     – stripIndents
        index.js
        └ stripIndents.js

    trimResultTransformer

        index.js
        └ trimResultTransformer.js
      - utils

⊢ index.js

        └ readFromFixture
           index.js
           └ readFromFixture.js

— license.md


  — package.json
 └ readme.md
- commondir
 LICENSE
  example
    └ dir.js
  – index.js
  – package.json
   - readme.markdown
 └ test
    └ dirs.js

    compressible

 ─ HISTORY.md
  LICENSE
  README.md
  index.js
 └ package.json

    compression

  — HISTORY.md
  LICENSE
   - README.md
  – index.js
   - node_modules
```

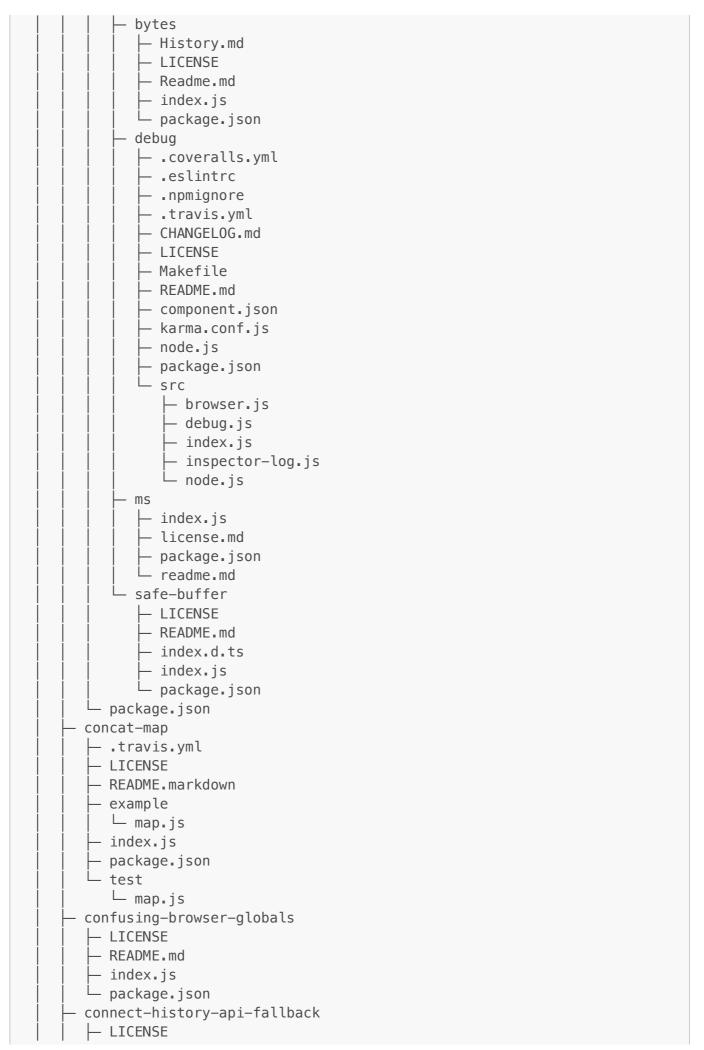

```
- README.md
   - lib
    └ index.js
 └ package.json
- content-disposition

⊢ HISTORY.md

   LICENSE
  README.md
   - index.js
 └ package.json
- content-type

⊢ HISTORY.md

  LICENSE
  - README.md
   - index.js
 └ package.json
- convert-source-map
  README.md
  index.js
 └ package.json
- cookie

⊢ HISTORY.md

  LICENSE
  — README.md
   SECURITY md
   - index.js
 └ package.json
- cookie-signature
  _ .npmignore

⊢ History.md

  — Readme.md
   - index.js

    package.json

- core-js
  README.md
  actual

— README.md

     — aggregate−error.js
     — array
        ⊢ at.js
        — concat.js
        — copy-within₁js
        – entries.js
        – every.js
        — fill.js
         – filter.js
         – find−index.js
        — find-last-index.js
         - find-last.js
         - find.js
         - flat-map.js
         - flat.js
```

```
for-each.js
 from-async.js
- from.js
- group-by-to-map.js
- group-by⊾js
– group-to-map.js
- group⊾js
includes.js
– index–of⊾js
– index.js
– is−array.js
- iterator.js
– join.js
- keys.js
- last-index-of.js
– map₊js
— of.js
– push.js
- reduce-right.js
– reduce.js
– reverse⊾js
- slice.js
– some.js
– sort.js
– splice.js
– to−reversed.js
– to−sorted.js
– to-spliced.js
- unshift.js
– values.js
virtual
   — at.js
   — concat.js
  — copy-within.js
  — entries.js
  — every.js
   — fill.js
  filter.js
   — find—index.js
   — find-last-index.js
   — find-last.js
   — find.js
   — flat-map.js
   – flat.js
   – for-each₁js
   — group-by-to-map₊js
   – group−by⊾js
   — group-to-map₊js
   — group.js
   — includes.js
   - index-of.js
   - index.js
   - iterator.js
   - join.js
```

```
keys.js
       - last-index-of.js
       - map.js
      – push.js
      - reduce-right.js
      — reduce.js
      – reverse⊾js
      - slice.js
      – some.js
      – sort.js
      – splice.js
      - to-reversed.js
      — to-sorted.js
      — to-spliced.js
      unshift.js
       – values.js
     └ with.js
   − with.js
array-buffer
  ⊢ constructor.js
   detached.js
   - index.js
   – is−view.js
   - slice.js
   transfer-to-fixed-length.js
  └ transfer.js
- async-iterator
  — drop.js
   - every.js
   – filter.js
   — find.js
   — flat-map.js
   - for-each.js
   – from.js
   – index.js
   – map₊js
   – reduce.js
   – some.js
   - take.js
  └ to-array.js
– atob.js
– btoa.js
— clear-immediate.js
data-view
  └ index.js
date
  — get-year.js
   index.js
   – now₌js
   – set–year₊js
   - to-gmt-string.js
   - to-iso-string.js
   - to-json.js
   - to-primitive.js
```

```
└ to-string.js
  disposable-stack
  ─ constructor.js
  └ index.js
dom-collections

─ for-each.js

    - index.js
  └ iterator.js
- dom-exception

    ─ constructor.js

    - index.js
  └ to-string-tag.js
- error

    ─ constructor.js

    - index.js
  └ to-string.js
— escape.js
- function
  ─ bind.js
   – has−instance.js
   — index.js
    - name.js
  ∟ virtual
     ─ bind.js
     └ index.js
get-iterator-method.js
– get−iterator.js
— global−this.js
 - index.js
instance
  ⊢ at.is
   – bind.js
   – code-point-at.js
   — concat.js
   — copy-within₁js
   — ends−with.js
   – entries.js
   – every.js
   — fill.js
   — filter.js
   — find-index.js
   — find-last-index.js
   — find−last.js
   — find.js
   flags.js
   - flat-map.js
   – flat.js
   - for-each.js
   – group-by-to-map₊js
   – group−by⊾js
    - group-to-map₌js
    - group.js
    includes.js
    - index-of.js
```

```
is-well-formed.js
   - keys.js
   - last-index-of.js
   – map₊js
   - match-all.js
  — pad−end.js
   – pad−start.js
   - push.js
   reduce-right.js
   – reduce.js
  – repeat.js
  — replace-all.js
  — reverse.js
  — slice.js
   – some.js
  — sort.js
  — splice.js
   – starts-with.js
  — to-reversed.js
  – to-sorted.js
  — to-spliced.js
   - to-well-formed.js
  – trim−end.js
   – trim−left.js
   – trim−right.js
   – trim−start.js
  — trim.js
  – unshift.js
   - values.js
  └ with.js
- is-iterable.js
- iterator
  — dispose.js

⊢ drop.js

  – every.js
   – filter.js
   – find.js
   – flat-map₊js
   - for-each.js
  – from.js
  — index.js
  — map.js
  — reduce.js
   – some.js
  – take.js
   – to–array.js
  └ to-async.js
- json

─ index.js

   – is−raw−json.js
   - parse.js
   - raw−json.js
   - stringify.js
   - to-string-tag.js
```

```
map
  └ index.js
- math
  — acosh.js
   – asinh.js
   — atanh.js
   – cbrt.js
   - clz32.js
   - cosh.js
   – expm1.js
   - fround.js
   – hypot.js
   - imul.js
   - index.js
   - log10.js
   – log1p.js
   – log2.js
   – sign.įs
   – sinh.js
   – tanh.js
   – to–string–tag₊js
  └ trunc.js
number

— constructor.js

   – epsilon.js
   – index.js
  — is−finite.js
   – is−integer.js
   - is−nan.js
  — is−safe−integer.js
  — max-safe-integer₁js
   — min-safe-integer.js
   – parse–float.js
   – parse−int.js
   to-exponential.js

─ to-fixed.js

   - to−precision.js
  ∟ virtual
     — index.js
     — to-exponential.js
      – to-fixed.js
     └ to-precision.js
object
  — assign.js
   – create.js
   – define–getter.js
   define-properties.js
   define-property.js
   – define−setter.js
   – entries.js
   - freeze.js
   - from−entries.js
   – get–own–property–descriptor₌js
   get-own-property-descriptors.js
```

```
- get-own-property-names.js
   get-own-property-symbols.js
   - get-prototype-of.js
  – has−own.js
  - index.js
  — is-extensible.js
   – is−frozen.js
   - is-sealed.js
   - is₊js
  – keys.js
   - lookup-getter.js
   - lookup-setter.js
  prevent-extensions.js
   - proto.js
   – seal.js
  – set-prototype-of.js
  — to-string.js
 └ values.js
- parse-float.js
- parse−int.js
promise
   – all−settled.js
   – any.js
   finally.js
 └ index.js
- queue−microtask.js
- reflect
  — apply.js
   – construct.js
  — define−property.js

    delete-property.js

  get-own-property-descriptor₁js
   – get–prototype–of.js
   – get.js
   – has.js

─ index.js

  — is-extensible.js
  – own-keys₁js
  – prevent-extensions.js
  – set-prototype-of₁js
   – set.js
 └ to-string-tag.js
- regexp
  — constructor.js
   – dot-all.js
   – flags.js
  – index.js
   match.js
   – replace.js
  – search.js
   - split.js
   - sticky.js
   - test.js
   - to-string.js
```

```
– self.js
- set

— difference.js

  — index.js
  intersection.js
  — is-disjoint-from.js
   – is−subset–of.js
  — is-superset-of₊js
   symmetric-difference.js
  └ union.js
set-immediate.js
- set-interval.js
– set−timeout.js
- string
   – anchor⊾js
   – at.js
  — big.js
   - blink.js
  – bold.js
  - code-point-at.js
  — ends-with.js
   - fixed.js
  – fontcolor.js
   - fontsize.js
  — from-code-point.js
  – includes.js
  — index.js
   - is-well-formed.js
   - italics.js
  – iterator.js
  — link.js
  match-all.js
   match.js
   – pad−end.js
   – pad−start.js
   – raw₌js
   – repeat.js
   replace-all.js
  – replace.js
   – search.js
  small.js
  split.js
  — starts–with.js
   – strike.js
   – sub.js
   – substr.js
   – sup.js
   - to-well-formed.js
   – trim−end.js
   – trim−left.js
   - trim−right.js
   - trim−start.js
   - trim.js
   – virtual
```

```
anchor.js
      - at.js
      - big.js
      – blink.js
      bold.js
      — code-point-at.js
      - ends-with.js
      fixed.js
      - fontcolor.js
      – fontsize.js
      includes.js
      - index.js
      – is-well-formed.js
      – italics.js
      - iterator.js
      – link.js
     — match−all.js
      - pad-end.js
      – pad-start.js
      – repeat.js
     — replace−all.js
      – small.js
      – starts–with.js
      – strike.js
      – sub.js
      – substr.js
      - sup.js
      to-well-formed.js
      - trim−end.js
      – trim−left.js
      – trim−right.js
      - trim−start.js
     └ trim.js
structured-clone.js
– suppressed-error₌js
- symbol
  — async−iterator.js
   description.js
  – dispose.js
   - for⊾js
  — has−instance.js
  — index.js
  — is-concat-spreadable.js
   - iterator.js
   – key–for⊾js
   – match–all.js
   – match.js
   – replace.js
   – search.js
   – species.js
   - split.js
   - to−primitive.js
   - to−string−tag.js
   - unscopables.js
```

```
typed-array
  – at.js
   - copy-within₌js
   – entries.js
   – every.js
   – fill.js
   - filter.js
   - find-index.js
   - find—last—index.js
   – find−last.js
   – find.js
   – float32–array₊js
  — float64-array.js
   – for–each.js
   - from.js
   - includes.js
  — index−of.js
   – index.js
  – int16-array.js
   – int32-array⊾js
  — int8-array.js
   - iterator.js
   - join⊾js
   - keys.js
   - last-index-of.js
   – map₊js
  – methods.js
  — of.js
   - reduce−right.js
  – reduce.js
  – reverse.js
   – set.js
   – slice.js
  – some.js
  – sort.js
  — subarray.js
   – to−locale−string.js
   – to−reversed.js
   – to-sorted.js
   – to−spliced.js
  — to-string.js
  — uint16-array.js
  — uint32–array.js
   – uint8–array.js
  — uint8-clamped-array.js
   – values.js
  └ with.js
– unescape⊾js
- url
  — index.js
  └ to-json.js
url-search-params
 └ index.js
 weak-map
```

```
└ index.js
    weak-set
     └ index.js
– configurator.js

— README.md

   — aggregate−error.js
  — array
     — at.js
      — concat.js
      copy-within.js
      – entries.js
      – every.js
      - fill.js
      - filter.js
      — find-index.js
      — find-last-index.js
      – find-last.js
      – find.js
      – flat-map₊js
      – flat.js
      - for-each.js
      – from₊js
      - includes.js
      – index-of₁js
      – index.js
      – is−array.js
      – iterator.js
      - join.js
      – keys⊾js
      – last-index-of.js
      – map₊js
      – of.js
      – push.js
      — reduce-right.js
      — reduce.js
      – reverse₌js
      – slice.js
      – some.js
      – sort.js
      - splice.js
      — to-reversed.js
      — to-sorted.js
      - to-spliced.js
      unshift.js
      – values.js
      – virtual
        — at.js
        — concat.js
         — copy-within.js
          – entries.js
          – every.js
          - fill.js
          - filter.js
```

```
- find-index.js
      - find-last-index.js
      - find-last.js
      – find.js
      – flat-map.js
      – flat.js
      – for–each.js
      includes.js
      – index−of.js
      - index.js
      – iterator.js
      – join.js
      – keys⊾js
      — last-index-of.js
      – map.js
      — push.js
     — reduce−right.js
      - reduce.js
      – reverse₌js
      – slice.js
      — some₊js
      – sort.js
      – splice.js
     — to-reversed.js
     — to-sorted.js
      to-spliced.js
     — unshift.js
      - values.js
     └ with.js
  └ with.js
– array-buffer

    constructor.js

  — index.js
   - is−view.js
  └ slice.js
 data-view
  └ index.js
- date
  — get–year₊js
   – index.js
  — now₌js
  — set–year₊js
  — to-gmt-string.js
   – to−iso−string.js
   – to-json.js
   – to−primitive.js
  └ to-string.js
- error

    constructor.js

   index.js
  └ to-string.js
- escape.js
 function
   − bind.js
```

```
has-instance.js
   - index.js
   – name.js
 └ virtual
     bind.js
     └ index.js
- get-iterator-method.js
- get−iterator.js
- global-this.js
- index.js
instance
  — at.js
  — bind.js
  – code-point-at.js
   - concat.js
  – copy-within₁js
  — ends-with.js
   - entries.js
  – every.js
  – fill.js
  – filter.js
   - find−index.js
  — find-last-index.js
   – find−last.js
   – find.js
   – flags.js
   - flat-map.js
   – flat.js
   – for-each₁js
  – includes.js
  - index-of.js
   - keys.js
   - last-index-of.js
   – map₊js
   – match−all.js
   – pad−end.js
   – pad−start.js
   - push.js
   - reduce−right.js
   – reduce.js
  – repeat.js
  - replace-all.js
  – reverse⊾js
   – slice.js
   – some.js
   – sort.js
   – splice.js
   – starts–with.js
   – to−reversed.js
   – to−sorted.js
   - to-spliced.js
   - trim−end.js
   – trim−left.js
   - trim−right.js
```

```
- trim−start.js
   - trim.js
   – unshift.js
   – values.js
  └ with.js
- is-iterable.js
- json
  — index.js
   - stringify.js
  └ to-string-tag.js
- map
 └ index.js
- math

— acosh.js

   asinh.js
   — atanh.js
  — cbrt.js
  clz32.js
  — cosh.js
   – expm1.js
   – fround.js
   – hypot.js
   — imul.js
   index.js
   - log10.js
   - log1p.js
   - log2.js
  — sign.js
   – sinh.js
  — tanh.js
   – to–string–tag₊js
  └ trunc.js
- number

    constructor.js

  — epsilon.js

⊢ index.js

   – is-finite.js
   – is−integer.js
   – is−nan.js
   – is−safe−integer.js
  — max-safe-integer₊js
  — min-safe-integer.js
  — parse−float.js
   - parse−int.js
   – to−exponential.js
   – to−fixed.js
   – to-precision.js
  ∟ virtual

    index.js

     ─ to-exponential.js
      - to-fixed.js
     └ to-precision.js
 object
   – assign.js
```

```
- create.js
   - define-getter.js
   - define−properties.js
  – define-property.js
  — define-setter.js
  – entries.js
  - freeze.js
  - from-entries.js
  – get–own–property–descriptor₌js
  get-own-property-descriptors.js
  get-own-property-names.js
   - get-own-property-symbols.js
  — get-prototype-of⊾js
   - has−own.js
   - index.js
   - is-extensible.js
  — is−frozen.js
  – is−sealed.įs
  – is.įs
  – keys.js
  – lookup-getter.js
   - lookup-setter.js
   - prevent−extensions.js
  – proto.js
  – seal.js
  – set-prototype-of.js
   - to−string.js
 └ values.js
- parse-float.js
- parse−int.js
promise
  — all−settled.js
  — any.js
   - finally.js
 └ index.js
- reflect
 — apply.js
  construct.js
  — define-property.js
  delete-property.js
  get-own-property-descriptor₁js
  — get−prototype−of.js
  — get.js
  – has.js
  – index.js
  - is-extensible.js
  – own−keys.js
  - prevent-extensions.js
  – set–prototype–of⊾js
  – set.js
 └ to-string-tag.js
 regexp
  – constructor.js
  – dot-all.js
```

```
flags.js
   - index.js
   – match.js
  – replace.js
  search.js
  – split.js
  – sticky.js
   - test.js
 └ to-string.js
set
 └ index.js
- string
  — anchor.js
   - at.js
   - big.js
  – blink.js
  — bold.js
  - code-point-at.js
  — ends-with.js
  fixed.js
  — fontcolor.js
   - fontsize.js
  — from-code-point.js
  – includes.js
  — index.js
  – italics.js
  — iterator.js
  — link.js
  - match-all.js
  – match.js
  – pad-end.js
  – pad−start.js
  – raw₌js
  – repeat.js
  - replace-all.js
  — replace.js
  – search.js
  small.js
  – split.js
   – starts–with.js
  – strike.js
  — sub.js
  — substr.js
   - sup.js
  – trim−end.js
  – trim−left.js
  – trim−right.js
  – trim−start.js
   - trim.js
 ∟ virtual
     — anchor⊾js
      – at.js
      – big.js
      - blink.js
```

```
- bold.js
      - code-point-at.js
      - ends-with.js
      – fixed.js
      - fontcolor.js
      – fontsize.js
      – includes.js
      - index.js
      - italics.js
      – iterator.js
      - link.js
      - match-all.js
      — pad—end.js
      - pad-start.js
      – repeat.js
      - replace-all.js
     — small.js
      – starts-with.js
      – strike.js
      – sub.js
      – substr.js
      – sup.js
      – trim−end.js
     — trim−left.js
     ─ trim-right.js
      - trim−start.js
     └ trim.js
- symbol
  — async−iterator.js
  description.js
  – for₊is
   - has-instance.js
   - index.js
  — is-concat-spreadable.js
   – iterator.js
   – key−for⊾js
   – match−all.js
   match.js
  – replace.js
   – search.js
  species.js
  – split.js
  — to-primitive.js
   - to−string−tag.js
  └ unscopables.js
- typed-array
  — at.js
   copy-within.js
   – entries.js
   – every.js
   - fill.js
   - filter.js
   - find−index.js
   - find-last-index.js
```

```
- find-last.js
      - find.js
      - float32-array.js
      – float64–array.js
      - for-each.js
      – from.js
      includes.js
      – index–of₊js
      index.js
      — int16-array.js
      — int32−array.js
      – int8−array.js
      — iterator.js
      - join⊾js
      - keys.js
      – last-index-of.js
      — map₊js
      - methods.js
      — of.js
      — reduce-right.js
      — reduce.js
      – reverse₌js
      – set.js
      – slice.js
      — some.js
      – sort.js
     — subarray.js
     — to-locale-string.js
      — to-reversed.js
      — to-sorted.js
      — to-string.js
      — uint16-array.js
      — uint32-array.js
      — uint8–array₊js
      — uint8-clamped-array.js
      – values.js
     └ with.js
   - unescape.js
   - weak-map
     └ index.js
   - weak-set
     └ index.js
features
  — aggregate-error.js
   array
      — at.js
      — concat.js
      copy-within.js
      – entries.js
      – every.js
      - fill.js
      - filter-out.js
      - filter-reject.js
      - filter.js
```

```
find-index.js
- find-last-index.js
- find-last.js
– find.js
- flat-map.js
– flat.js
- for−each.js
- from−async.js
- from.js
- group-by-to-map.js
- group-by.js
- group-to-map₊js
– group.js
- includes.js
- index-of.js
– index.js
— is−array.js
- is-template-object.js
– iterator.js
- join.js
– keys.js
- last-index-of.js
- last−index.js
– last−item.js
– map.js
– of⊾js
– push.js
— reduce-right.js
– reduce.js
– reverse⊾js
– slice.js
– some.js
– sort.js
– splice.js
- to−reversed.js
– to−sorted.js
- to-spliced.js
– unique−by.js
unshift.js
– values.js
– virtual
  — at.js
  — concat.js
   — copy-within₁js
   – entries.js
  — every.js
   — fill.js
   — filter-out.js

⊢ filter-reject.js

   — filter.js
   - find-index.js
   - find−last−index.js
   - find-last.js
   - find.js
```

```
- flat-map.js
      - flat.js
      - for—each.js
      – group-by-to-map₊js
      – group−by⊾js
      – group-to-map₊js
      – group₌js
      - includes.js
      – index−of.js
      - index.js
      – iterator.js
      – join.js
      – keys.js
     — last-index-of.js
      – map.js
     — push.js
     — reduce−right.js
      — reduce.js
     — reverse.js
      slice.js
     — some₌js
      – sort.js
      – splice.js

─ to-reversed.js

     — to-sorted.js
     to-spliced.js
     — unique−by.js
     unshift.js
      - values.js
     └ with.js
 └ with.js
- array-buffer

    ─ constructor.js

  ─ detached.js
  — index.js
   – is−view.js
  — slice.js
   - transfer-to-fixed-length.js
  ∟ transfer.js
- async-disposable-stack
  — constructor₁js
 └ index.js
- async-iterator
   – as−indexed−pairs.js
   – async−dispose.js
   – drop.js
   – every.js
   filter.js
   – find.js
   – flat−map.js
   - for−each.js
   - from.js
   - index.js
   - indexed.js
```

```
- map₊js
   - reduce.js
   – some₌js
   - take.js
  └ to-array.js
– atob.js
bigint
  — index.js
  └ range.js
– btoa.js
- clear-immediate.js
composite-key.js
composite-symbol.js
– data-view
 └ index.js
date
  — get–year.js
   - index.js
  — now.js
   – set–year₊js
  — to-gmt-string.js
   - to−iso−string.js
   – to−json.js
   - to-primitive.js
  └ to-string.js

    disposable-stack

    constructor.js
    index.js

dom-collections

─ for—each.js

   - index.js
  └ iterator.js
- dom-exception

    constructor.js

   — index.js
  └ to-string-tag.js
- error

    constructor.js

   - index.js
  └ to-string.js
– escape.js
- function

→ bind.js

   - demethodize.js
   — has−instance.js
   index.js
   — is-callable.js
   - is-constructor.js
  — name.js
   – un−this.js
  └ virtual
      — bind.js
      – demethodize.js
      — index.js
```

```
└ un-this.js
 get-iterator-method.js
- get−iterator.js
– global−this.js
- index.js
instance
  — at.js
   bind.js
   – code−point–at.js
  — code−points.js
   – concat.js
   copy-within.js
  — demethodize.js
  — ends-with.js
   - entries.js
  – every.js
  — fill.js
  – filter–out.js
  – filter-reject.js
   – filter.js
  — find-index.js
   - find-last-index.js
  – find−last.js
   – find.js
   – flags.js
   – flat-map.js
   - flat.js
  – for-each.js
   – group-by-to-map₊js
   – group−by⊾js
   – group-to-map₊js
   – group.js
   includes.js
   - index-of.js
   - is-well-formed.js
   – keys.js
   - last-index-of.js
   – map₌js
   – match−all.js
   – pad−end.js
   – pad−start.js
   – push.js
  - reduce-right.js
   - reduce.js
   – repeat.js
   - replace-all.js
   – reverse.js
   - slice.js
   – some₌js
   – sort.js
   - splice.js
   - starts—with.js
   - to−reversed.js
   - to-sorted.js
```

```
- to-spliced.js
   to-well-formed.js
   – trim−end.js
  – trim−left.js
  – trim−right.js
  – trim−start.js
   – trim.js
  – un-this.js
   – unique−by⊾js
  — unshift.js
   - values.js
 └ with.js
- is-iterable.js
iterator
  – as−indexed−pairs.js
  – dispose.js
  — drop.js
  – every.js
  – filter.js
  — find.js
  — flat-map.js
   - for-each.js
  – from.js
  index.js
  - indexed.js
  – map₊js
  — range.js
  — reduce.js
  – some.js
  — take.js
   – to–array₌js
 └ to-async.js
json
  — index.js
  – is-raw-json.js
  — parse.js
  — raw−json.js
   - stringify.js
 └ to-string-tag.js
- map

— delete-all.js

 — emplace.js
  — every.js
  – filter.js
  — find-key₁js
   – find.js
  – from.js
  – group−by⊾js
   includes.js
   – index.js
   - key−by.js
   - key−of.js
  – map−keys.js
   - map-values.js
```

```
- merge⊾js
   - of.js
   - reduce.js
   – some.js
   – update–or–insert.js
   – update.js
 └ upsert.js
- math

— acosh.js

  — asinh.js
   – atanh.js
   – cbrt.js
  — clamp.js
   – clz32.js
   - cosh.js
   – deg-per-rad.js
  — degrees.js
   - expm1.js
   fround.js
   - fscale.js
   – hypot₁js
   - iaddh.js
   – imul.js
   - imulh.js
   – index.js
   - isubh.js
   - log10.js
  — log1p.js
   - log2.js
  — rad-per-deg₁js
  — radians.js
  – scale.js
   – seeded−prng.js
  — sign.js
  – signbit.js
  — sinh.js
   – tanh.js
   - to-string-tag.js
   - trunc.js
  └ umulh.js
- number

    constructor.js

  — epsilon.js
  – from-string.js
  — index.js
   - is−finite.js
   – is−integer.js
   – is−nan.js
   – is−safe−integer.js
  — max−safe−integer.js
   – min−safe−integer.js
   - parse-float.js
   - parse−int.js
   - range.js
```

```
to-exponential.js
   - to-fixed.js
   - to-precision.js
 ∟ virtual
     index.js
     — to-exponential.js
      - to-fixed.js
     └ to-precision.js
object

— assign.js

  — create.js
  – define-getter.js
  — define-properties.js
  — define-property.js
   - define-setter.js
  — entries.js
  — freeze.js
  – from-entries.js
  get-own-property-descriptor.js
  get-own-property-descriptors.js
  — get-own-property-names.js
   - get-own-property-symbols.js
   - get-prototype-of.js
   – has−own.js
  index.js
  - is-extensible.js
  — is−frozen.js
  — is-sealed.js
  – is.js
  — iterate-entries.js
  — iterate-keys.js
  iterate-values.js
   – keys.js
  lookup-getter.js
   lookup-setter.js
  — prevent-extensions.js
   – proto.js
   – seal.js
  — set-prototype-of₁js
   - to−string.js
 └ values.js

    observable

 └ index.js
- parse-float.js
- parse−int.js
– promise
  — all−settled.js
   – any.js
   – finally.js
   – index.js
  – try.js
queue-microtask.js
 reflect
   - apply.js
```

```
- construct.js
   - define-metadata.js
   define-property.js
  — delete−metadata.js
  — delete-property.js
  — get-metadata-keys₊js
   – get–metadata.js
   get-own-metadata-keys.js
   - get−own−metadata.js
   - get−own−property−descriptor.js
   – get−prototype−of.js
   - get.js
  — has−metadata.js
   - has-own-metadata.js
   – has.įs
   – index.js
  — is-extensible.js
  – metadata.js
  — own-keys.js
   – prevent-extensions.js
  — set-prototype-of₊js
   - set.js
  └ to-string-tag.js
regexp

    constructor₁js

   – dot–all.js
   – flags.js
  index.js
  match.js
  — replace.js
  — search.js
  – split.js
   – sticky.js
   - test.js
 └ to-string.js
- self.js
- set
  — add−all.js
   – delete–all.js
  – difference.js
  – every.js
  – filter.js
  — find.js
   – from.js
  — index.js
   intersection.js
   – is−disjoint−from.js
   – is−subset–of.js
   - is−superset−of.js
   – join.js
   - map₊js
   - of.js
   - reduce.js
   - some.js
```

```
symmetric-difference.js
    union.js
- set-immediate.js
- set-interval.js
– set−timeout.js
string
   — anchor⊾js
   - at.js
   - big.js
   – blink.js
   – bold.js
  — code-point-at.js
  — code−points.js
  — cooked.js
   dedent.js
   — ends-with.js
  — fixed.js
   fontcolor.js
   – fontsize.js
   – from-code-point.js
  includes.js
   index.js
   – is-well-formed.js
   – italics.js
   - iterator.js
   - link.js
   – match−all.js
  match.js
   – pad−end.js
   – pad−start.js
   – raw₌js
   – repeat.js
   - replace-all.js
   – replace.js
   – search.js
  — small.js
   - split.js
   – starts–with.js
   – strike.js
   - sub.js
   – substr.js
   – sup.js
  — to-well-formed.js
   – trim−end.js
   – trim−left.js
   – trim−right.js
   – trim−start.js
   – trim.js
  ∟ virtual
     — anchor₊js
      - at.js
      - big.js
      - blink.js
      - bold.js
```

```
- code-point-at.js
      - code-points.js
      - ends-with.js
      – fixed.js
      - fontcolor.js
      – fontsize.js
      includes.js
      index.js
      - is-well-formed.js
      italics.js
      – iterator.js
      - link.js
      – match–all.js
      – pad−end.js
      - pad−start.js
      – repeat.js
     — replace−all.js
      - small.js
      – starts-with.js
      – strike.js
      – sub.js
      - substr.js
      – sup.js
      – to-well-formed.js
      - trim−end.js
      – trim−left.js
      – trim−right.js
      – trim−start.js
     └ trim.js
structured-clone.js
suppressed-error.js
- symbol
  – async-dispose.js
  — async−iterator.js
   description.js
   – dispose.js
   - for⊾js
   – has−instance.js
   – index.js
   is-concat-spreadable.js
  — is-registered.js
  — is-well-known.js
  — iterator.js
   – key-for.js
   – match−all.js
   – match.js
   – matcher₊js
   – metadata–key⊾js
   – metadata.js
   – observable.js
   pattern-match.js
   - replace—all.js
   replace.js
   - search.js
```

```
- species.js
   - split.js
   – to–primitive.js
   - to−string−tag.js
 └ unscopables.js
typed—array
  – at.js
  – copy-within⊾js
   – entries.js
  – every.js
   - fill.js
   - filter-out.js
  – filter-reject.js
   – filter.js
   - find-index.js
  – find-last-index.js
  — find-last.js
  – find.js
  float32-array.js
  – float64–array.js
  – for–each.js
   - from−async.js
  – from.js
  – group−by.js
   includes.js
  – index–of₊js
  — index.js
  — int16−array.js
  – int32-array₊js
  — int8−array.js
  – iterator.js
   - join⊾js
   - keys.js
  – last-index-of.js
  – map₊js
  – methods.js
  – of.js
  reduce-right.js
  – reduce.js
   – reverse₌js
  – set.js
  – slice.js
  — some.js
  – sort.js
  – subarray⊾js
   – to−locale−string.js
  – to-reversed.js
   - to-sorted.js
   - to-spliced.js
  – to–string.js
   - uint16−array.js
   - uint32—array.js
   - uint8−array.js
   uint8-clamped-array.js
```

```
- unique-by.js
      - values.js
     └ with.js
   – unescape⊾js
  — url

─ index.js

    └ to-json.js
   url-search-params
    └ index.js
   - weak-map
     ─ delete-all.js
     — emplace.js
     — from.js
     index.js
      - of.js
     └ upsert.js
   - weak-set
     — add−all.js
     — delete-all.js
     – from.js
     — index.js
     └ of.js
– full
  README.md
   - aggregate-error.js
   array
     — at.js
     — concat.js
     — copy-within₁js
     — entries.js
     – every.js
     – fill.js
     – filter–out.js

⊢ filter-reject.js

     — filter.js
     — find-last-index.js
      - find-last.js
      find.js
     — flat-map.js
     – flat.js
     — for-each.js
     — from−async.js
      – from.js
      – group-by-to-map₊js
      – group−by⊾js
      – group-to-map₌js
      – group.js
      - includes.js
     — index-of.js
      - index.js
      - is−array.js
      is-template-object.js
      - iterator.js
```

```
join.js
 keys.js
- last-index-of.js
- last−index.js
last-item.js
– map₌js
- of.js
– push.js
- reduce−right.js
- reduce.js
– reverse₌js
– slice.js
– some.js
- sort.js
- splice.js
– to−reversed.js
– to-sorted.js
– to-spliced.js
— unique-by.js
– unshift.js
– values.js
- virtual
  — at.js
  — concat.js
  — copy-within.js
   – entries.js
  — every.js
  — fill.js
   – filter–out.js
   – filter-reject.js
   filter.js
   - find-index.js
   — find−last−index.js
   — find−last.js
   – find.js
   — flat-map.js
   – flat.js
   - for-each.js
   – group-by-to-map₌js
   – group−by⊾js
   — group-to-map.js
   — group.js
  — includes.js
   – index-of.js
   – index.js
   – iterator.js
   - join.js
   - keys.js
   – last−index–of.js
   — map₊js
   - push.js
   reduce-right.js
   – reduce.js
   - reverse.js
```

```
- slice.js
       - some.js
       - sort.js
      – splice.js
      – to-reversed.js
      − to-sorted.js
      to-spliced.js
      — unique-by₁js
      unshift.js
      – values.js
     └ with.js
  └ with.js
- array-buffer

    constructor.js

   - detached.js
   — index.js
   — is−view.js
   slice.js
   transfer-to-fixed-length.js

    transfer.js

    async-disposable-stack

   – constructor₌js
  └ index.js
- async-iterator

— as−indexed-pairs.js

   – async-dispose.js
   – drop.js
   — every.js
   – filter.js
   — find.js
   — flat-map.js
   – for-each.js
   – from.js
   — index.js
   – indexed.js
   — map₊js
   – reduce.js
   – some.js
   – take.js
  └ to-array.js
– atob.js
bigint

    index.js

  └ range.js
– btoa.js
— clear-immediate.js
– composite-key.js
composite-symbol.js
– data-view
  └ index.js
- date
   – get–year⊾js
    - index.js
   - now₌js
```

```
- set-year.js
   - to-gmt-string.js
   - to−iso−string.js
   – to-json.js
   – to-primitive.js
  └ to-string.js

    disposable-stack

   — constructor.js
  └ index.js
dom-collections
  ─ for-each.js
    - index.js
  └ iterator.js
- dom-exception
  — constructor.js
    - index.js
  └ to-string-tag.js
- error

    ─ constructor.js

   - index.js
  └ to-string.js
– escape⊾js
function
  ─ bind.js
   - demethodize.js
   — has−instance.js
  — index.js
   — is−callable.js
   - is-constructor.js
   — name.js
   — un−this.js
  ∟ virtual
     ─ bind.js
     ─ demethodize.js
      — index.js
     └ un-this.js
— get-iterator-method.js
— get−iterator.js
— global—this.js
- index.js
instance
  ⊢ at.js
   — bind.js
   - code-point-at.js
   — code-points.js
   – concat.js
   copy-within.js
   – demethodize.js
   — ends-with.js
   — entries.js
   — every.js
   - fill.js
   - filter-out.js
   - filter-reject.js
```

```
- filter.js
   - find-index.js
   - find-last-index.js
  – find−last.js
  find.js
  – flags.js
   - flat-map.js
   - flat.js
   - for−each.js
   - group-by-to-map.js
  – group−by.js
   - group-to-map₌js
  – group₊js
   includes.js
   - index-of.js
   - is-well-formed.js
  – keys⊾js
  - last-index-of.js
  – map₊js
  – match−all.js
  – pad−end.js
   - pad−start.js
   - push.js
  - reduce-right.js
  – reduce.js
  – repeat.js
  — replace-all.js
  — reverse₌js
  – slice.js
  — some.js
  – sort.js
  – splice.js
  – starts–with.js
  — to−reversed.js
  - to-sorted.js
  — to-spliced.js
  - to-well-formed.js
  – trim−end.js
  – trim-left.js
  – trim−right.js
  — trim−start.js
  — trim.js
  — un−this.js
  – unique-by₁js
  – unshift.js
  – values.js
 └ with.js
- is-iterable.js
- iterator
  – as−indexed−pairs.js
  – dispose.js
   - drop.js
  – every.js
   - filter.js
```

```
- find.js
   - flat-map.js
   - for-each.js
   – from.js
   - index.js
  – indexed.js
   – map₊js
  — range.js
   – reduce.js
  — some.js
  — take.js
   - to−array.js
  └ to-async.js
 json
  — index.js
   – is−raw−json.js
  — parse.js
  — raw−json.js
   – stringify.js
 └ to-string-tag.js
- map

— delete-all.js

  — emplace.js
  – every.js
  – filter.js
   – find-key₊js
   – find.js
  — from.js
  — group−by.js
  — includes.js
  — index.js
   – key−by⊾js
   – key−of.js
  — map−keys.js
  — map−values.js
  — merge.js
  – of.js
  - reduce.js
  – some.js
  — update−or−insert.js
   – update.js
 └ upsert.js
- math

— acosh.js

  — asinh.js
   – atanh.js
  — cbrt.js
   – clamp.js
   – clz32.js
  – cosh.js
   – deg−per−rad.js
   - degrees.js
   – expm1.js
   - fround.js
```

```
fscale.js
   - hypot.js
   - iaddh.js
   - imul.js
   - imulh.js
   index.js
   - isubh.js
   - log10.js
   - log1p.js
   - log2.js
   - rad-per-deg.js
   – radians.js
  — scale.js
   – seeded−prng.js
   – sign.js
   – signbit.js
  — sinh.js
   – tanh.js
  — to-string-tag.js
   - trunc.js
  └ umulh.js
- number

    ─ constructor.js

  epsilon.js
  — from−string.js
  – index.js
  — is-finite.js
  — is−integer.js
  – is−nan.js
  — is-safe-integer.js
  — max-safe-integer₊js
  — min−safe−integer.js
   – parse–float.js
   – parse−int.js
  – range.js
   – to−exponential.js
  — to-fixed.js
   - to-precision.js
  ∟ virtual
     — index.js

─ to-exponential.js

      to-fixed.js
     └ to-precision.js
object

— assign.js

   – create.js
  – define-getter.js
   – define-properties.js
   define-property.js
  — define-setter.js
   – entries.js
   - freeze.js
   – from−entries.js

    get-own-property-descriptor.js
```

```
get-own-property-descriptors.js
   - get-own-property-names.js
   get-own-property-symbols.js
   – get−prototype−of.js
   – has−own.js
   – index.js
   - is-extensible.js
   - is−frozen.js
   - is-sealed.js
   – is.js
   - iterate-entries.js
   – iterate−keys.js
   – iterate-values.js
   – keys.js
   lookup-getter.js
   – lookup-setter.js
  — prevent-extensions.js
   – proto.js
  – seal.js
   – set–prototype–of.js
  – to-string.js
 └ values.js
- observable
 └ index.js
- parse−float.js
- parse-int.js
promise
  — all−settled.js
   – any.js
  — finally.js
   – index.js
 ∟ try.js
– queue−microtask.js
- reflect
  — apply.js

    ─ construct.js

  — define−metadata.js
   define-property₁js
  — delete-metadata.js
   delete-property.js
  — get-metadata-keys₊js
  — get−metadata.js
  — get-own-metadata-keys₊js
   – get−own−metadata.js
   – get–own–property–descriptor.js
   – get–prototype–of.js
   – get.js
   - has-metadata.js
   – has−own−metadata.js
   – has₊js
   - index.js
   - is-extensible.js
   – metadata.js
   - own-keys.js
```

```
prevent-extensions.js
   - set-prototype-of.js
   - set.js
  └ to-string-tag.js
regexp

    — constructor.js

   – dot−all.js
   - flags.js
   index.js
   – match.js
   - replace.js
   – search.js
   — split.js
  — sticky.js
   - test.js
  └ to-string.js
– self.js
- set

— add−all.js

   — delete−all.js
  — difference.js
   – every⊾js
   – filter.js
   – find.js
   — from₊js
   — index.js
  — intersection.js
  — is-disjoint-from.js
   — is-subset-of.js
   — is-superset-of.js
   – join.js
   – map₊js
   – of.js
   – reduce.js
   – some.js
   symmetric-difference.js
  └ union.js
- set-immediate.js
- set-interval.js
- set-timeout.js
string
  — anchor.js
  — at.js
   – big.js
   blink₁js
   – bold.js
   - code-point-at.js
   - code-points.js
   – cooked.js
   — dedent.js
   - ends-with.js
   - fixed.js
   - fontcolor.js
   - fontsize.js
```

```
from-code-point.js
 - includes.js
 index.js
 - is-well-formed.js
 - italics.js
 – iterator.js
 - link.js
 - match-all.js
 - match.js
 – pad−end.js
 – pad−start.js
 - raw₌js
 – repeat.js
 replace-all.js
 - replace.js
 – search.js
— small.js
 - split.js
 – starts–with.js
 – strike.js
 – sub.js
 - substr⊾js
 – sup.js
 to-well-formed.js
 – trim−end.js
 - trim−left.js
 – trim−right.js
— trim−start.js
 – trim.js
∟ virtual
   — anchor⊾js
    – at.js
    – big.js
    – blink.js
    bold.js
   — code−point−at.js
    - code-points.js
    ends-with.js
    - fixed.js
    – fontcolor.js
    – fontsize.js
   — includes.js
   — index.js
    is-well-formed.js
    italics.js
    – iterator.js
    - link.js
    – match-all.js
    – pad−end.js
    – pad−start.js
    - repeat.js
    - replace-all.js
    small.js
    - starts-with.js
```

```
- strike.js
      - sub.js
      - substr⊾js
      - sup.js
      - to-well-formed.js
      - trim−end.js
      – trim−left.js
      - trim-right.js
      - trim−start.js
     └ trim.js
structured-clone.js
- suppressed−error.js
- symbol
  — async−dispose.js
   - async-iterator.js
   - description.js
  – dispose.js
   - for.js
   - has-instance.js
   – index.js
  — is-concat-spreadable.js
   - is-registered.js
   – is-well-known.js
   - iterator.js
   – key-for⊾js
   – match−all.js
  — match.js
  — matcher.js
   – metadata-key₊js
  — metadata.js
  — observable₌js
   pattern-match.js
   - replace-all.js
  – replace.js
   – search.js
   – species.js
   - split.js
   - to−primitive.js
   – to−string−tag.js
  └ unscopables.js
 typed-array
  — at.js
  — copy−within.js
   – entries.js
   – every.js
   - fill.js
   – filter–out.js
   - filter-reject.js
   - filter.js
   – find−index.js
   - find-last-index.js
   - find-last.js
   - find.js
    float32-array.js
```

```
float64-array.js
   - for-each.js
   - from−async.js
   – from.js
   – group-by₁js
   – includes.js
   – index–of.js
   index.js
   - int16−array.js
   – int32–array.js
   – int8–array.js
   - iterator.js
   – join.js
   - keys.js
   - last-index-of.js
  – map₊js
  — methods.js
   – of.js
  — reduce-right.js
   – reduce.js
  – reverse.js
   – set.js
  – slice.js
   – some₌js
  — sort.js
   – subarray⊾js

    to-locale-string.js

  — to-reversed.js
  – to-sorted.js
  — to-spliced.js
  — to-string.js
  — uint16-array.js
  — uint32-array.js

— uint8-array.js

  — uint8-clamped-array.js
  — unique-by.js
   - values.js
 └ with.js
– unescape⊾js
- url
  — index.js
 └ to-json.js
url-search-params
 └ index.js
weak-map

— delete-all.js

  – emplace.js
   – from₌js
   – index.js
   - of.js
  – upsert.js
 weak-set

— add−all.js

  – delete-all.js
```

```
– from₊js
      - index.js
     └ of.js
— index.js
internals

— README.md

  — a−callable.js
  — a-constructor₊js
   — a-map₊js
   — a-possible-prototype₊js
  — a−set.js
  — a−weak−map₊js
  — a–weak–set₊js

— add-disposable-resource.js

   — add-to-unscopables.js
  — advance−string−index.js
  — an−instance.js
  ─ an-object.js
  — array-buffer-basic-detection.js
  — array-buffer-byte-length.js
  ├ array−buffer−is−detached.js
  — array-buffer-non-extensible.js
   — array−buffer−transfer.js
  — array-buffer-view-core.js
  — array−buffer.js
  — array-copy-within₌js
  — array−fill.js
  — array−for–each.js
  ├ array-from-async.js
  — array-from-constructor-and-list.js
  — array−from.js
   – array-group-to-map₊js
  — array-group.js
   — array−includes.js

— array-iteration-from-last.js

— array−iteration.js

  — array−last−index−of.js
  — array-method-has-species-support.js
   — array-method-is-strict.js
  — array−reduce.js
  — array-set-length.js
  — array-slice-simple.js
  — array−slice.js
  — array-sort.js
   — array-species-constructor.js
  ⊢ array−species−create.js
  — array-to-reversed.js
  — array−unique−by⊾js
  ⊢ array–with.js
  — async−from−sync−iterator.js
   async-iterator-close.js
   – async−iterator−create−proxy.js
   – async−iterator−indexed.js
   - async−iterator−iteration.js
```

```
async-iterator-map.js
async-iterator-prototype.js
— async−iterator–wrap.js
— base64-map₊js
— call-with-safe-iteration-closing.js
— caller.js
— check-correctness-of-iteration.js
— classof−raw.js
— classof.js
⊢ collection-from₊js
— collection-of.js
— collection-strong.js
— collection–weak.js
— collection.js
— composite-key.js
copy-constructor-properties.js
— correct-is-regexp-logic.js
— correct-prototype-getter.js
— create-html.js
├ create-iter-result-object.js
— create-non-enumerable-property.js
create-property-descriptor.js
— create-property.js

— date-to-iso-string.js

— date−to−primitive.js
— define-built-in-accessor.js
— define-built-in.js
— define-built-ins.js
├ define-global-property.js
— delete-property-or-throw.js
— descriptors.js
— document-all.js
— document-create-element.js
— does-not-exceed-safe-integer₁js
dom-exception-constants.js

    dom−iterables.js

— dom-token-list-prototype.js
⊢ engine-ff-version.js
— engine−is−browser.js
— engine−is−bun.js
— engine−is−deno.js
— engine-is-ie-or-edge.js
— engine-is-ios-pebble.js
— engine−is−ios.js
— engine−is−node.js

— engine-is-webos-webkit.js

— engine−user−agent.js
engine-v8-version.js
– engine-webkit-version.js
— entry−unbind.js
entry-virtual.js
– enum-bug-keys⊾js
– error–stack–clear.js
 error-stack-install.js
```

```
- error—stack—installable.js
– error–to–string.js
– export.js
fails.js
fix-regexp-well-known-symbol-logic.js
— flatten−into−array.js
– freezing.js
 function—apply.js
function-bind-context.js
function-bind-native.js
function-bind.js
function-call.js
function-demethodize.js
 - function—name₊js

    function-uncurry-this-accessor.js

function-uncurry-this-clause.js
— function-uncurry-this₊js
get-async-iterator-flattenable.js
— get-async-iterator.js
— get-built-in.js
— get-iterator-direct.js
– get−iterator−flattenable.js
– get−iterator–method.js
— get−iterator.js
get-json-replacer-function.js
– get−method.js
– get–set–record.js
— get-substitution.js
– global.js
— has-own-property.js
— hidden-keys.js
– host-report-errors.js
— html.js
— ie8-dom-define.js
⊢ ieee754.js
— indexed–object.js
— inherit-if-required.js
 - inspect-source.js
— install-error-cause.js
– internal−metadata.js
— internal-state.js
— is-array-iterator-method.js
— is−array.js
— is-big-int-array₁js
 - is—callable.js
— is-constructor.js
 - is−data−descriptor.js
is-forced.js
– is−integral−number.js
— is-iterable.js
 is-null-or-undefined.js
 - is-object.js
 - is−pure.js
 - is-raw-json.js
```

```
– is−regexp.js
 - is-symbol.js
 - iterate-simple.js
— iterate.js
— iterator-close.js
— iterator-create-constructor.js
— iterator-create-proxy.js
— iterator-define.js
— iterator-indexed.js
— iterator-map.js
— iterators-core₊js
— iterators.js
— length-of-array-like.js
— make−built−in.js
— map−helpers.js
— map−iterate.js
— map−upsert.js
— math−expm1.js
— math−fround.js
— math−log10.js
— math-log1p.js
— math-scale.js
— math−sign.js
— math−trunc.js
— microtask.js
— native−raw−json.js
├ new-promise-capability.js
— normalize-string-argument.js
– not−a−nan.js
— not-a-regexp.js
— number−is−finite.js
— number−parse−float.js
├ number-parse-int.js
├ numeric-range-iterator.js
— object–assign.js

— object-create.js

— object-define-properties.js
bject-define-property.js
— object-get-own-property-descriptor.js
— object-get-own-property-names-external.js
— object-get-own-property-names.js

→ object-get-own-property-symbols.js.

├ object-get-prototype-of.js
— object-is-extensible.js
— object−is-prototype-of.js
— object-iterator.js
├ object-keys-internal.js
— object-keys.js
├ object-property-is-enumerable.js
├ object-prototype-accessors-forced.js
object-set-prototype-of.js
– object−to−array.js
— object−to−string.js
observable-forced.js
```

```
ordinary-to-primitive.js
– own-keys₁js
— parse−json−string.js
— path.js
— perform.js
— promise-constructor-detection.js
— promise-native-constructor.js
— promise-resolve.js
promise-statics-incorrect-iteration.js
— proxy−accessor.js
— queue.js
— reflect-metadata.js
— regexp-exec-abstract.js
— regexp−exec.js
— regexp-flags.js
— regexp-get-flags.js
├ regexp-sticky-helpers.js
regexp-unsupported-dot-all.js
regexp-unsupported-ncg.js

    require-object-coercible.js

— same-value-zero.js
— same-value.js
— schedulers-fix.js
— set-clone.js
— set-difference.js
— set-helpers.js

    set−intersection.js

— set−is−disjoint−from.js
– set−is-subset-of.js
— set−is−superset−of.js
— set−iterate.js
set-method-accept-set-like.js
— set-size.js
— set-species.js

    set-symmetric-difference.js

— set-union.js
— shared-key₊js
— shared−store.js
— shared.js
— species-constructor.js
— string−cooked.js

    string-html-forced.js

— string-multibyte.js
— string-pad-webkit-bug₊js
— string−pad.js
— string−parse.js

— string-punycode-to-ascii.js

— string−repeat.js
⊢ string−trim−end.js
– string−trim−forced.js
– string−trim−start.js
— string−trim.js
structured-clone-proper-transfer.js
```

```
symbol-constructor-detection.js
  symbol-define-to-primitive.js
  symbol-registry-detection.js
  — task.js
  — this-number-value.js
  — to-absolute-index.js
  – to−big−int.js
  — to−index.js
  — to-indexed-object.js
  – to-integer-or-infinity.js
  - to-length.js
  — to-object.js
  — to-offset.js
  – to-positive-integer.js
   - to-primitive.js
  — to-property-key.js
  — to-set-like.js
  – to-string-tag-support.js
  — to−string.js
  — try-node-require.js
  — try-to-string.js
  typed-array-constructor.js
  typed-array-constructors-require-wrappers.js
  — typed-array-from-species-and-list.js
  typed-array-from.js
  typed-array-species-constructor.js
  — uid.js
  — url-constructor-detection.js
  — use—symbol—as—uid₊js
  — v8-prototype-define-bug.js
  — validate-arguments-length.js
  weak-map-basic-detection.js
  — weak-map-helpers.js
  — weak-set-helpers.js
  well-known-symbol-define.js
  — well-known-symbol-wrapped.js
  — well-known-symbol.js
   – whitespaces.js
 └ wrap-error-constructor-with-cause.js
- modules
 ─ README.md
  ├ es.aggregate-error.cause.js
  ├ es.aggregate-error.constructor.js
  — es.aggregate-error.js
  es.array-buffer.constructor.js
  ├ es.array−buffer.is−view.js
  — es.array-buffer.slice.js
  — es.array.at.js
  ├ es.array.concat.js
  — es.array.copy-within.js
   - es.array.every.js
  – es.array.fill.js
  — es.array.filter.js
  - es.array.find-index.js
```

```
es.array.find-last-index.js
- es.array.find-last.js
— es.array.find.js
— es.array.flat-map.js
— es.array.flat.js
— es.array.for-each.js
— es.array.from.js
es.array.includes.js
— es.array.index-of.js
— es.array.is–array.js
— es.array.iterator.js
— es.array.join.js
— es.array.last-index-of.js
— es.array.map.js
— es.array.of.js
— es.array.push.js
— es.array.reduce-right.js
— es.array.reduce.js
— es.array.reverse.js
— es.array.slice.js
— es.array.some.js
— es.array.sort.js
— es.array.species.js
├ es.array.splice.js
├ es.array.to-reversed.js
— es.array.to-sorted.js
— es.array.to-spliced.js
es.array.unscopables.flat-map.js
├ es.array.unscopables.flat.js
— es.array.unshift.js
— es.array.with.js
es.data-view.constructor.js
— es.data-view.js
— es.date.get-year.js
— es.date.now.js
─ es.date.set-year.js
— es.date.to-gmt-string.js
— es.date.to-iso-string.js
— es.date.to-json.js
— es.date.to-primitive.js
— es.date.to-string.js
— es.error.cause.js
— es.error.to-string.js
es.escape.js
— es.function.bind.js
— es.function.has-instance.js
— es.function.name.js
— es.global-this.js
— es.json.stringify.js
— es.json.to-string-tag.js
 - es.map.constructor.js
– es.map.js
es.math.acosh.js
 – es.math.asinh.js
```

```
– es.math.atanh.js
- es.math.cbrt.js
– es.math.clz32.js
es.math.cosh.js
— es.math.expm1.js
— es.math.fround.js
— es.math.hypot.js
— es.math.imul.js
— es.math.log10.js
— es.math.log1p.js
— es.math.log2.js
— es.math.sign.js
— es.math.sinh.js
— es.math.tanh.js
— es.math.to-string-tag.js
— es.math.trunc.js
— es.number.constructor.js
es.number.epsilon.js
— es.number.is-finite.js
— es.number.is-integer.js
─ es.number.is-nan.js
— es.number.is-safe-integer.js
— es.number.max-safe-integer.js
├ es.number.min-safe-integer.js
├ es.number.parse-float.js
— es.number.parse-int.js
— es.number.to-exponential.js
— es.number.to-fixed.js

→ es.number.to-precision.js

es.object.assign.js
— es.object.create.js
— es.object.define-getter.js
├ es.object.define-properties.js
— es.object.define-property.js
es.object.define-setter.js
─ es.object.entries.js
— es.object.freeze.js
es.object.from-entries.js
— es.object.get-own-property-descriptor.js
— es.object.get-own-property-descriptors.js
— es.object.get-own-property-names.js
├ es.object.get-own-property-symbols.js
├ es.object.get-prototype-of.js
— es.object.has-own.js
— es.object.is-extensible.js
— es.object.is-frozen.js
— es.object.is-sealed.js
— es.object.is.js
├ es.object.keys.js
├ es.object.lookup-getter.js
es.object.lookup-setter.js
es.object.prevent-extensions.js
— es.object.proto.js
 es.object.seal.js
```

```
es.object.set-prototype-of.js
es.object.to-string.js
— es.object.values.js
— es.parse-float.js
— es.parse-int.js
— es.promise.all-settled.js
— es.promise.all.js
— es.promise.any.js
— es.promise.catch.js
— es.promise.constructor.js
— es.promise.finally.js
— es.promise.js
— es.promise.race.js
├ es.promise.reject.js
es.promise.resolve.js
— es.reflect.apply.js
— es.reflect.construct.js
— es.reflect.define-property.js
— es.reflect.delete-property.js
— es.reflect.get-own-property-descriptor.js
— es.reflect.get-prototype-of.js
— es.reflect.get.js
— es.reflect.has.js
es.reflect.is-extensible.js
├ es.reflect.own-keys.js
es.reflect.prevent-extensions.js
— es.reflect.set-prototype-of.js
— es.reflect.set.js
├ es.reflect.to-string-tag.js
— es.regexp.constructor.js
— es.regexp.dot-all.js
es.regexp.exec.js
— es.regexp.flags.js
— es.regexp.sticky.js
⊢ es.regexp.test.js

─ es.regexp.to-string.js

— es.set.constructor.js
⊢ es.set.js
— es.string.anchor.js
— es.string.at-alternative.js
— es.string.big.js
— es.string.blink.js
— es.string.bold.js
— es.string.code-point-at.js
— es.string.ends-with.js
— es.string.fixed.js
— es.string.fontcolor.js
— es.string.fontsize.js
├─ es.string.from-code-point.js
— es.string.includes.js
es.string.italics.js
es.string.iterator.js
— es.string.link.js
es.string.match-all.js
```

```
es.string.match.js
- es.string.pad-end.js
— es.string.pad-start.js
— es.string.raw.js
— es.string.repeat.js
— es.string.replace-all.js
— es.string.replace.js
— es.string.search.js
— es.string.small.js
— es.string.split.js
— es.string.starts-with.js
— es.string.strike.js
— es.string.sub.js
— es.string.substr.js
es.string.sup.js
— es.string.trim-end.js
— es.string.trim-left.js
— es.string.trim-right.js
— es.string.trim-start.js
— es.string.trim.js
├ es.symbol.async-iterator.js
— es.symbol.constructor.js
— es.symbol.description.js
es.symbol.for.js
├ es.symbol.has-instance.js
— es.symbol.is-concat-spreadable.js
— es.symbol.iterator.js
— es.symbol.js
├ es.symbol.key-for.js
— es.symbol.match-all.js
— es.symbol.match.js
— es.symbol.replace.js
— es.symbol.search.js
— es.symbol.species.js
─ es.symbol.split.js
─ es.symbol.to-primitive.js
— es.symbol.to-string-tag.js
— es.symbol.unscopables.js
— es.typed-array.at.js
— es.typed-array.copy-within.js
— es.typed-array.every.js
├ es.typed-array.fill.js
├ es.typed-array.filter.js
— es.typed-array.find-index.js
— es.typed-array.find-last-index.js
─ es.typed-array.find-last.js
— es.typed-array.find.js
— es.typed-array.float32-array.js
├ es.typed-array.float64-array.js
├ es.typed-array.for-each.js
es.typed-array.from.js
es.typed-array.includes.js
— es.typed-array.index-of.js
es.typed-array.int16-array.js
```

```
├ es.typed-array.int32-array.js
— es.typed-array.int8-array.js
— es.typed-array.iterator.js
— es.typed-array.join.js
— es.typed-array.last-index-of.js
— es.typed-array.map.js
— es.typed-array.of.js
— es.typed-array.reduce-right.js
— es.typed-array.reduce.js
⊢ es.typed-array.reverse.js
— es.typed-array.set.js
— es.typed-array.slice.js
— es.typed-array.some.js
─ es.typed-array.sort.js
— es.typed-array.subarray.js
es.typed-array.to-locale-string.js
├ es.typed-array.to-reversed.js
— es.typed-array.to-sorted.js
— es.typed-array.to-string.js
├ es.typed-array.uint16-array.js
├ es.typed-array.uint32-array.js
— es.typed-array.uint8-array.js
— es.typed-array.uint8-clamped-array.js
├ es.typed-array.with.js
— es.unescape.js
— es.weak-map.constructor.js
— es.weak-map.js
— es.weak-set.constructor.js
- es.weak-set.js
— esnext.aggregate-error.js
— esnext.array-buffer.detached.js
— esnext.array-buffer.transfer-to-fixed-length.js
— esnext.array-buffer.transfer.js
— esnext.array.at.js
— esnext.array.filter-out.js

─ esnext.array.filter-reject.js

— esnext.array.find-last-index.js

─ esnext.array.find-last.js

— esnext.array.from-async.js
— esnext.array.group-by-to-map.js
— esnext.array.group-by.js
— esnext.array.group-to-map.js
— esnext.array.group.js
— esnext.array.is-template-object.js
esnext.array.last-index.js
─ esnext.array.last-item.js
esnext.array.to-reversed.js
— esnext.array.to-sorted.js
├ esnext.array.to-spliced.js
— esnext.array.unique-by.js
esnext.array.with.js
esnext.async-disposable-stack.constructor.js
esnext.async-iterator.as-indexed-pairs.js
esnext.async-iterator.async-dispose.js
```

```
esnext.async-iterator.constructor.js
esnext.async-iterator.drop.js
esnext.async-iterator.every.js
esnext.async-iterator.filter.js
— esnext.async-iterator.find.js
— esnext.async-iterator.flat-map.js
— esnext.async-iterator.for-each.js
esnext.async-iterator.from.js
esnext.async-iterator.indexed.js
esnext.async-iterator.map.js
esnext.async-iterator.reduce.js
— esnext.async-iterator.some.js
— esnext.async-iterator.take.js
├ esnext.async-iterator.to-array.js
esnext.bigint.range.js
— esnext.composite-key.js
├ esnext.composite-symbol.js
esnext.disposable-stack.constructor.js
— esnext.function.demethodize.js
esnext.function.is-callable.js
esnext.function.is-constructor.js
esnext.function.un-this.js
— esnext.global-this.js
esnext.iterator.as-indexed-pairs.js
— esnext.iterator.constructor.js
esnext.iterator.dispose.js
esnext.iterator.drop.js
— esnext.iterator.every.js

⊢ esnext.iterator.filter.js

esnext.iterator.find.js
esnext.iterator.flat-map.js
esnext.iterator.for-each.js
esnext.iterator.from.js
esnext.iterator.indexed.js
esnext.iterator.map.js
├ esnext.iterator.range.js
— esnext.iterator.reduce.js
— esnext.iterator.some.js
esnext.iterator.take.js
esnext.iterator.to-array.js
esnext.iterator.to-async.js
— esnext.json.is-raw-json.js
— esnext.json.parse.js
— esnext.json.raw-json.js
esnext.map.delete-all.js
— esnext.map.emplace.js
esnext.map.every.js
esnext.map.filter.js
esnext.map.find-key.js
— esnext.map.find.js
esnext.map.from.js
esnext.map.group-by.js
esnext.map.includes.js
esnext.map.key-by.js
```

```
esnext.map.key-of.js
esnext.map.map-keys.js
— esnext.map.map-values.js
esnext.map.merge.js
— esnext.map.of.js
— esnext.map.reduce.js
— esnext.map.some.js
— esnext.map.update-or-insert.js
esnext.map.update.js
— esnext.map.upsert.js
esnext.math.clamp.js
— esnext.math.deg-per-rad.js
esnext.math.degrees.js
esnext.math.fscale.js
esnext.math.iaddh.js
— esnext.math.imulh.js
— esnext.math.isubh.js
— esnext.math.rad-per-deg.js
— esnext.math.radians.js
— esnext.math.scale.js
— esnext.math.seeded-prng.js
— esnext.math.signbit.js
— esnext.math.umulh.js
— esnext.number.from-string.js
├ esnext.number.range.js
— esnext.object.has-own.js
— esnext.object.iterate-entries.js
esnext.object.iterate-keys.js
— esnext.object.iterate-values.js
esnext.observable.constructor.js
esnext.observable.from.js
— esnext.observable.js
— esnext.observable.of.js
esnext.promise.all-settled.js
— esnext.promise.any.js

─ esnext.promise.try.js

esnext.reflect.define-metadata.js
— esnext.reflect.delete-metadata.js
— esnext.reflect.get-metadata-keys.js
— esnext.reflect.get-metadata.js
esnext.reflect.get-own-metadata-keys.js
├ esnext.reflect.get-own-metadata.js
├ esnext.reflect.has-metadata.js
— esnext.reflect.has-own-metadata.js
esnext.reflect.metadata.is
— esnext.set.add-all.js
esnext.set.delete-all.js
esnext.set.difference.js
esnext.set.difference.v2.js
— esnext.set.every.js
 - esnext.set.filter.js
esnext.set.find.js
esnext.set.from.js
 esnext.set.intersection.js
```

```
esnext.set.intersection.v2.js
esnext.set.is-disjoint-from.js
— esnext.set.is-disjoint-from.v2.js
— esnext.set.is-subset-of.js
— esnext.set.is-subset-of.v2.js
— esnext.set.is-superset-of.js
— esnext.set.is-superset-of.v2.js
— esnext.set.join.js
— esnext.set.map.js
— esnext.set.of.js
— esnext.set.reduce.js
— esnext.set.some.js
esnext.set.symmetric-difference.js
esnext.set.symmetric-difference.v2.js
— esnext.set.union.js
— esnext.set.union.v2.js
— esnext.string.at-alternative.js
— esnext.string.at.js
— esnext.string.code-points.js
esnext.string.cooked.js
├ esnext.string.dedent.js
— esnext.string.is-well-formed.js
esnext.string.match-all.js
— esnext.string.replace-all.js
— esnext.string.to-well-formed.js
esnext.suppressed-error.constructor.js
esnext.symbol.async-dispose.js
esnext.symbol.dispose.js

─ esnext.symbol.is-registered.js

— esnext.symbol.is-well-known.js
├ esnext.symbol.matcher.js
esnext.symbol.metadata-key.js
— esnext.symbol.metadata.js
esnext.symbol.observable.js
— esnext.symbol.pattern-match.js
— esnext.symbol.replace-all.js
├ esnext.typed-array.at.js
├ esnext.typed-array.filter-out.js
esnext.typed-array.filter-reject.js
|- esnext.typed-array.find-last-index.js
esnext.typed-array.find-last.js
esnext.typed-array.from-async.js

─ esnext.typed-array.group-by.js

|- esnext.typed-array.to-reversed.js
esnext.typed-array.to-sorted.js
├ esnext.typed-array.to-spliced.js
├ esnext.typed-array.unique-by.js
├ esnext.typed-array.with.js
├ esnext.weak-map.delete-all.js
├ esnext.weak-map.emplace.js
esnext.weak-map.from.js
esnext.weak-map.of.js
— esnext.weak-map.upsert.js
esnext.weak-set.add-all.js
```

```
esnext.weak-set.delete-all.js
   esnext.weak-set.from.js
  esnext.weak-set.of.js
  — web.atob.js
  — web.btoa.js
  — web.clear-immediate.js
  web.dom-collections.for-each.js
  — web.dom-collections.iterator.js
  web.dom-exception.constructor.js
  web.dom-exception.stack.js
  web.dom-exception.to-string-tag.js
  — web.immediate.js
  — web.queue-microtask.js
  — web.self.js
  — web.set-immediate.js
  — web.set-interval.js
  — web.set-timeout.js
  web.structured-clone.js
  — web.timers.js
  — web.url-search-params.constructor.js
  ─ web.url-search-params.js
  — web.url-search-params.size.js
  — web.url.constructor.js
  – web.url.js
  └ web.url.to-json.js
– package⊾json
- postinstall.js
proposals
  — accessible-object-hasownproperty.js
  — array-buffer-transfer₊js
  — array-filtering-stage-1.js
  — array−filtering.js
  — array-find-from-last.js
  — array-flat-map₊js

— array-from-async-stage-2.js

— array-from—async₁js

  — array-grouping-stage-3-2.js
  — array-grouping-stage-3.js
  — array-grouping.js
  — array−includes.js
  — array-is-template-object.js
  — array−last.js
  — array−unique.js
  — async-explicit-resource-management.js
  — async−iteration.js

— async-iterator-helpers.js

  — change-array-by-copy-stage-4₌js
  — change−array−by−copy.js
  ├ collection-methods.js
  ⊢ collection-of-from.js
   decorator-metadata.js
   – decorators.js
  — efficient−64−bit−arithmetic.js
   – error−cause.js
```

```
explicit-resource-management.js
  function-demethodize.js
 function-is-callable-is-constructor.js
 — function-un-this.js
 — global−this.js
 — index.js
 — iterator-helpers-stage-3-2.js
 iterator-helpers-stage-3.js
 — iterator-helpers.js
 – iterator–range.js
 - json-parse-with-source.js
 keys-composition.js
 — map−update−or−insert.js
 — map-upsert-stage-2₊js
 — map-upsert.js
 — math-extensions.js
 — math−signbit.js

─ number-from-string.js

 — number−range.js
 — object-from-entries.js
 ─ object-getownpropertydescriptors.js
 — object-iteration.js
 object-values-entries.js
 — observable.js
 — pattern-matching.js
 — promise-all-settled.js
 — promise–any₊js
 — promise-finally.js
 — promise−try.js
 — reflect-metadata.js
 — regexp-dotall-flag.js
 — regexp-named-groups₌js
 — relative-indexing-method.js
 — seeded−random.js

— set-methods-v2.js

— string−at.js

    string-code-points.js

 — string-cooked.js
 — string−dedent.js
 — string-left-right-trim.js
 ├ string-match-all.js
 — string−padding.js
 — string-replace-all-stage-4.js
 — string-replace-all.js

— symbol-description.js

 — symbol-predicates.js
 — url.js
 — using−statement.js
 well-formed-stringify.js

    well-formed-unicode-strings.js

stable
 — README.md
  - aggregate−error.js
```

```
array
 – at.js
 – concat.js
 copy-within₁js
 – entries.js
 – every⊾js
 - fill.js
 - filter.js
 - find−index.js
 - find-last-index.js
 - find-last.js
 – find.js
 – flat-map.js
 - flat.js
 - for-each.js
 – from₌js
 – includes.js
 - index-of.js
 – index.js
 – is−array.js
 – iterator.js
  - join.js
 - keys.js
 - last-index-of.js
 – map.js
 – of⊾js
 – push.js
 — reduce-right.js
 – reduce.js
 – reverse⊾js
 – slice.js
 – some₌js
 – sort.js
 – splice.js
 - to−reversed.js
 – to−sorted.js
 - to-spliced.js
 unshift.js
 – values.js
 - virtual
   — at.js
    — concat.js
    — copy-within.js
    – entries.js
    – every.js
    – fill.js
    – filter.js
    — find—index.js
    — find−last−index.js
    – find-last.js
     - find.js
     - flat-map.js
     - flat.js
     - for-each.js
```

```
includes.js
       - index-of.js
       - index.js
       – iterator.js
       – join.js
       – keys.js
       – last-index-of₁js
      — map₊js
      — push.js
      — reduce-right.js
      — reduce.js
      — reverse₌js
      — slice.js
      — some₌js
      – sort.js
      — splice.js

─ to-reversed.js

      - to-sorted.js
      — to-spliced.js
      unshift.js
       – values.js
     └ with.js
  └ with.js
– array-buffer

    — constructor.js

   — index.js
    - is−view.js
  └ slice.js
– atob⊾js
— btoa.js
— clear-immediate.js
data-view
  └ index.js
date
  — get-year.js
   — index.js
   – now₌js
   – set–year₊js
   — to-gmt-string.js
   — to−iso−string.js
   — to-json.js
   – to-primitive.js
  └ to-string.js
dom-collections
  ─ for-each.js
   – index.js
  └ iterator.js
- dom-exception

    constructor.js

    index.js
  └ to-string-tag.js
 error
   – constructor⊾js
    - index.js
```

```
└ to-string.js
 escape.js
function
  — bind.js
   – has−instance.js
   — index.js
   – name.js
  ∟ virtual
     — bind.js
     └ index.js
get-iterator-method.js
- get−iterator.js
– global–this₊js
- index.js
- instance
  ⊢ at.js
  — bind.js
  - code-point-at.js
  — concat.js
   – copy-within.js
  — ends-with.js
   – entries.js
   – every.js
   - fill.js
   – filter.js
   — find-index.js
   - find-last-index.js
  — find-last.js
   — find.js
  — flags.js
  — flat-map.js
   – flat.js
   – for–each.js
   includes.js
   - index-of.js
   – keys.js
   - last-index-of.js
   – map₌js
   – match−all.js
   - pad-end.js
   – pad−start.js
   – push.js
  — reduce-right.js
   – reduce.js
   – repeat.js
   - replace-all.js
   – reverse.js
   - slice.js
   – some₌js
   – sort.js
   - splice.js
   - starts-with.js
   - to−reversed.js
   - to-sorted.js
```

```
- to-spliced.js
   - trim−end.js
   - trim−left.js
   – trim−right.js
   – trim-start.js
   – trim.js
   – unshift.js
   - values.js
  └ with.js
- is−iterable.js
- json

— index.js

  — stringify.js
  └ to-string-tag.js
- map
 └ index.js
math
  — acosh.js
  — asinh.js
   — atanh.js
  — cbrt.js
   – clz32.js
  – cosh.js
   – expm1.js
   – fround.js
   – hypot.js
   – imul.js
  — index.js
   – log10.js
   – log1p.js
   log2.js
   – sign.js
   – sinh.js
   — tanh.js
   – to–string–tag₊js
  └ trunc.js
- number
  ─ constructor.js
   – epsilon.js
   - index.js
  — is-finite.js
  — is−integer.js
  — is−nan.js
   – is−safe−integer.js
   — max−safe−integer.js
   – min−safe−integer.js
   – parse–float.js
   - parse−int.js
   - to-exponential.js
   - to-fixed.js
   - to-precision.js
   – virtual
     — index.js
      to-exponential.js
```

```
– to-fixed.js
     └ to-precision.js
- object
  — assign.js
   – create.js
  — define-getter.js
   define-properties.js
   define-property.js
   – define−setter.js
  — entries.js
   – freeze.js
   – from−entries.js
  get-own-property-descriptor.js
  — get-own-property-descriptors.js
   – get–own–property–names.js
   - get-own-property-symbols.js
  — get-prototype-of.js
   – has−own.js
  — index.js
   is-extensible.js
  — is−frozen.js
   - is-sealed.js
   - is₊js
   – keys.js
   - lookup-getter.js
   - lookup-setter.js
  prevent-extensions.js
  — proto.js
   – seal.js
  — set-prototype-of.js
   – to−string.js
 └ values.js
– parse–float.js
- parse−int.js
– promise
  — all−settled.js
  — any₊js
   - finally.js
 └ index.js
- queue−microtask.js
reflect

— apply.js

  — construct.js
  — define-property.js
  delete-property.js
   – get–own–property–descriptor.js
   get-prototype-of.js
   - get.js
   - has⊾js
  – index.js
   - is-extensible.js
   - own-keys.js
   prevent-extensions.js
   set-prototype-of.js
```

```
- set.js
   - to−string−tag.js
 regexp
   – constructor.js
   – dot−all.js
   — flags.js
   – index.js
   – match.js
   - replace.js
   – search.js
   – split.js
   – sticky.js
   – test.js
  └ to-string.js
- self.js
- set
 └ index.js
set-immediate.js
– set−interval.js
– set−timeout.js
string
   — anchor.js
   – at.js
   - big.js
   – blink.js
   — bold.js
  — code-point-at.js
  — ends-with.js
   fixed.js
  — fontcolor.js
  — fontsize.js
   — from-code-point.js
   includes.js
  — index.js
   italics.js
   - iterator.js
   - link.js
   – match−all.js
   - match.js
   – pad−end.js
   – pad−start.js
   – raw.js
  — repeat.js
   - replace-all.js
   – replace.js
   – search.js
   – small.js
   - split.js
   – starts–with.js
   – strike.js
   - sub.js
   - substr.js
   - sup.js
   - trim−end.js
```

```
trim-left.js
   - trim-right.js
   - trim−start.js
   – trim.js
  ∟ virtual
     — anchor⊾js
      – at.js
      - big.js
      - blink.js
      – bold.js
      - code-point-at.js
      – ends−with.js
      – fixed.js
      - fontcolor.js
      - fontsize.js
      – includes.js
     — index.js
      italics.js
      – iterator.js
      – link.js
      - match-all.js
      – pad−end.js
      – pad−start.js
      — repeat.js
      - replace-all.js
      - small.js
     — starts–with.js
      – strike.js
      – sub.js
      – substr.js
      – sup.js
      - trim−end.js
      – trim−left.js
     ├ trim-right.js
      – trim−start.js
     └ trim.js
structured-clone.js
- symbol
  — async−iterator.js
   – description.js
  — for₌js
  – has-instance.js
  — index.js
   is-concat-spreadable.js
   – iterator.js
   – key−for.js
   – match−all.js
   match.js
   – replace.js
   – search.js
   - species.js
   - split.js
   - to-primitive.js
   - to−string−tag.js
```

```
└ unscopables.js
 typed-array
  ⊢ at.js
   – copy-within₁js
   – entries.js
   – every.js
   - fill.js
   - filter.js
   - find-index.js
   – find-last-index.js
   - find-last.js
   – find.js
  — float32-array.js
   – float64–array.js
   – for–each.js
  – from.js
  — includes.js
   - index-of.js
  — index.js
   – int16-array.js
  — int32–array.js
   - int8−array.js
   – iterator.js
   - join.js
   - keys.js
   last-index-of.js
  — map₊js
  — methods.js
  – of.js
  — reduce-right.js
  - reduce.js
   – reverse.js
   – set.js
  — slice.js
  – some.js
  — sort.js
   – subarray⊾js
   - to-locale-string.js
   – to-reversed.js
   – to–sorted.js
  — to-string.js

— uint16-array.js

  — uint32–array.js
   – uint8-array.js
  — uint8-clamped-array.js
   – values.js
  └ with.js
– unescape⊾js
- url
  — index.js
  └ to-json.js
url-search-params
 └ index.js
 weak-map
```

```
└ index.js
       weak-set
        └ index.js
   - stage
     ⊢ 0.js
      - 1.js
      - 2.js
      - 3.js
      - 4.js
     README.md
      - index.js
     └ pre.js
   - web
     ├ README.md
     — dom-collections.js
     — dom-exception.js
     — immediate.js
     — index.js
     — queue−microtask.js
     structured-clone.js
     ⊢ timers.js
      url-search-params.js
     └ url.js
- core-js-compat

─ LICENSE

   README.md
  — compat.js
  — data.json
  ─ entries.json
  — external.json

    get-modules-list-for-target-version.js

  — helpers.js
  — index.js
  ─ modules-by-versions.json
  — modules.json
  — node_modules
    ∟ .bin

    browserslist

   – package.json
  └ targets-parser.js
- core-js-pure

─ LICENSE

  README.md
  actual
     ─ README.md
     — aggregate−error.js
      - array
        — at.js

    concat.js

         — copy-within.js
         – entries.js
         - every.js
         – fill.js
         - filter.js
```

```
find-index.js
 - find-last-index.js
- find-last.js
– find.js
– flat-map.js
– flat.js
- for−each.js
- from−async.js
- from.js
- group-by-to-map.js
- group-by.js
- group-to-map.js
– group.js
- includes.js
- index-of.js
– index.js
– is−array.js
– iterator.js
- join.js
- keys.js
- last-index-of.js
– map.js
– of.js
– push.js
reduce-right.js
– reduce.js
– reverse⊾js
– slice.js
– some.js
– sort.js
– splice.js
– to−reversed.js
– to−sorted.js
– to-spliced.js
unshift.js
– values.js
- virtual
  — at.js
   – concat.js
   — copy-within.js
   — entries.js
   – every.js
   — fill.js
   – filter.js
   - find-index.js
   — find−last−index.js
   - find-last.js
   – find.js
   – flat−map.js
   – flat.js
    - for—each.js
    - group-by-to-map₊js
    - group−by⊾js
    group-to-map.js
```

```
- group.js
      includes.js
      – index–of⊾js
      – index.js
      – iterator.js
      – join.js
      – keys.js
      - last-index-of.js
      — map₊js
     — push.js
      - reduce-right.js
     — reduce.js
     — reverse.js
     - slice.js
      – some.js
     — sort.js
     — splice.js
      — to-reversed.js
      — to-sorted.js
      to-spliced.js
     — unshift.js
      – values.js
     └ with.js
  └ with.js
- array-buffer

    constructor₁js

  ─ detached.js
  — index.js
   — is-view.js
  — slice.js
   transfer-to-fixed-length.js
  ∟ transfer.js
- async-iterator

⊢ drop.js

   – every.js
  — filter.js
   – find.js
   - flat-map.js
   - for-each.js
   – from.js
  — index.js
  — map.js
  — reduce.js
  — some₌js
   - take.js
  └ to-array.js
– atob.js
- btoa.js
– clear−immediate.js
data-view
 └ index.js
- date
   – get–year⊾js
   - index.js
```

```
- now₌js
   - set-year⊾js
   – to-gmt-string.js
   – to−iso−string.js
   – to-įson.įs
   – to–primitive.js
  └ to-string.js

    disposable-stack

  — constructor.js
  └ index.js
dom-collections
  ─ for-each.js
   – index.js
  └ iterator.js
dom-exception

    constructor₁js

   – index.js
  └ to-string-tag.js
- error
  ─ constructor.js
   — index.js
  └ to-string.js
– escape⊾js
- function

→ bind.js

   — has−instance.js
  index.js
  — name₊įs
  ∟ virtual
     — bind.js
     └ index.js
get-iterator-method.js
– get−iterator.js
- global-this.js
index.js

    instance

   – at.js

→ bind.js

   — code-point-at.js
   – concat.js
  — copy-within₁js
  — ends-with.js
  — entries.js
   – every.js
   fill.js
   – filter.js
   — find-index.js
   - find-last-index.js
   – find−last.js
   – find.js
   - flags.js
   - flat-map.js
   - flat.js
   - for-each.js
```

```
group-by-to-map.js
   - group-by⊾js
   - group-to-map₊js
  – group⊾js
   - includes.js
  – index−of.js
   - is-well-formed.js
   - keys.js
   - last-index-of.js
  – map.js
  - match-all.js
  – pad−end.js
  – pad−start.js
  - push.js
   - reduce-right.js
  – reduce.js
  — repeat.js
  - replace-all.js
  – reverse.js
  – slice.js
  — some.js
  – sort.js
  – splice.js
  – starts–with.js
  — to-reversed.js
  - to-sorted.js

─ to-spliced.js

  — to-well-formed.js
  — trim−end.js
  — trim−left.js
  — trim−right.js
  – trim−start.js
  – trim.js
  — unshift.js
  – values.js
 └ with.js
- is-iterable.js
- iterator
  — dispose.js
  – drop.js
  — every.js
  – filter.js
  — find.js
  – flat-map₊js
  - for-each.js
  – from.js
  – index.js
  – map₊js
  – reduce.js
  – some₌js
   - take.js
   - to−array.js
 └ to-async.js
 json
```

```
· index.js
   - is-raw-json.js
   – parse.js
  – raw-json₌js
   – stringify.js
  └ to-string-tag.js
 map
 └ index.js
– math

— acosh.js

   – asinh.js
   – atanh.js
  — cbrt.js
  – clz32.js
   - cosh.js
   – expm1.js
  – fround.js
   hypot.js
  — imul.js
   - index.js
   – log10.js
   - log1p.js
   – log2.js
   – sign.js
   – sinh.js
  – tanh.js
   - to-string-tag.js
  └ trunc.js
- number

    constructor.js

  epsilon.js
  — index.js
   – is−finite.js
  — is−integer.js
  — is−nan.js
   – is−safe−integer.js
  — max−safe−integer.js
   – min−safe−integer.js
   – parse–float.js
   - parse−int.js
   to-exponential.js
   to-fixed.js
  — to-precision.js
  └ virtual
     — index.js
     — to-exponential.js
      - to-fixed.js
     └ to-precision.js
object
  — assign.js
   – create.js
   - define-getter.js
   – define−properties.js
   define-property.js
```

```
- define-setter.js
   - entries.js
   – freeze.js
  — from—entries.js
  get-own-property-descriptor₁js
  get-own-property-descriptors.js
  get-own-property-names.js
   – get-own-property-symbols.js
   - get-prototype-of.js
  – has−own.js
   – index.js
   - is-extensible.js
  – is−frozen.js
   – is−sealed.js
   - is.įs
  – keys⊾js
  — lookup-getter.js
  – lookup-setter.js
  prevent-extensions.js
  – proto.js
  — seal.js
  — set-prototype-of.js
   - to−string.js
 └ values.js
parse-float.js
 parse-int.js
promise

— all−settled.js

  — any₊js
   – finally.js
 └ index.js
- queue-microtask.js
- reflect
 — apply.js
  construct.js

    define-property₁js

  — delete-property.js
  – get–own–property–descriptor.js
  — get-prototype-of.js
   – get.js
  — has.js
  — index.js
  — is-extensible.js
  – own-keys₁js
  - prevent-extensions.js
  – set-prototype-of.js
   – set.js
 └ to-string-tag.js
regexp
  — constructor₌js
   - dot-all.js
   - flags.js
   - index.js
   - match.js
```

```
replace.js
   - search.js
   – split.js
   – sticky.js
   - test.js
  └ to-string.js
- self.js
- set
   — difference.js
   — index.js
   - intersection.js
   — is-disjoint-from.js
   — is-subset-of₁js

    is−superset−of.js

    symmetric-difference.js
  └ union.js
set-immediate.js
set-interval.js
– set−timeout.js
– string

— anchor.js

   - at.js
   – big.js
   – blink.js
   — bold.js
   – code-point-at.js
   — ends-with.js
   – fixed.js
   fontcolor.js
   – fontsize.js
   — from-code-point.js
   — includes.js
   - index.js
   — is-well-formed.js
   – italics.js
   - iterator.js
   - link.js
   match-all.js
   - match.js
   – pad−end.js
   – pad−start.js
   – raw.js
   — repeat.js
   - replace-all.js
   replace.js
   – search.js
   – small.js
   - split.js
   – starts–with.js
   – strike.js
   - sub.js
   - substr.js
   - sup.js
   - to-well-formed.js
```

```
trim-end.js
    trim-left.js
   - trim−right.js
   - trim−start.js
   - trim.js
  └ virtual
     — anchor₊js
      – at.js
      - big.js
      – blink.js
      − bold.js
      - code-point-at.js
      — ends-with.js
      – fixed.js
      - fontcolor.js
      fontsize.js
     — includes.js
      - index.js
      is-well-formed.js
      – italics.js
      – iterator.js
      - link.js
      – match−all.js
      — pad−end.js
      – pad−start.js
      – repeat.js
     — replace-all.js
     - small.js
      - starts-with.js
      – strike.js
      – sub.js
      – substr⊾js
      – sup.js
      to-well-formed₁js
     — trim−end.js
     — trim−left.js
      – trim−right.js
      - trim-start.js
     └ trim.js
- structured-clone.js
suppressed-error.js
– symbol

— async-iterator.js

   - description.js
   – dispose.js
   - for₌js
   - has-instance.js
   - index.js
   is-concat-spreadable.js
   - iterator.js
   - key-for.js
   - match-all.js
   – match.js
   replace.js
```

```
- search.js
  - species.js
  - split.js
 — to-primitive.js
  – to–string–tag₊js
 └ unscopables.js
typed-array
 — at.js
  – copy−within.js
  – entries.js
  – every.js
  - fill.js
 – filter.js
  – find−index.js
  - find-last-index.js
 — find−last.js
 — find.js
 – float32-array.js
 — float64-array.js
  – for–each₊js
 – from.js
  includes.js
 – index–of.js
  – index.js
  – int16−array.js
 — int32-array.js
 — int8–array.js
 — iterator.js
  – join.js
  – keys⊾js
 – last-index-of.js
  – map₊js
  – methods.js
 — of.js
 — reduce-right.js
 – reduce.js
  – reverse₌js
  – set.js
 – slice.js
  – some₌js
 — sort.js
 — subarray.js
 — to-locale-string.js
  - to-reversed.js
  – to–sorted.js
  – to-spliced.js
  – to-string.js
  – uint16–array.js
  – uint32–array.js
 — uint8-array.js
  uint8-clamped-array.js
  - values.js
 └ with.js
unescape.js
```

```
url
      index.js
      └ to-json.js
    - url-search-params
     └ index.js
    weak-map
      └ index.js
    - weak-set
      └ index.js
— configurator.js
– es
   ─ README.md
   — aggregate-error.js
    - array
       – at.js
      — concat.js
      — copy-within.js
       – entries.js
       – every.js
       – fill.js
      – filter.js
       - find−index.js
      — find−last−index.js
       – find−last.js
       – find.js
       – flat-map.js
       – flat.js
      – for-each.js
       – from.js
      — includes.js
      - index-of.js
       — index.js
       – is−array.js
       – iterator.js
       - join.js
       – keys.js
       - last-index-of.js
       – map₊js
      — of.js
       – push.js
       — reduce-right.js
      — reduce.js
      — reverse₌js
       – slice.js
       – some.js
       – sort.js
       - splice.js
       – to−reversed.js
       – to-sorted.js
       – to-spliced.js
       unshift.js
       - values.js
       - virtual
         — at.js
```

```
- concat.js
      copy-within.js
      - entries.js
      – every.js
      - fill.js
      – filter.js
      – find-index.js
      - find-last-index.js
      - find-last.js
      – find.js
      – flat-map₊js
      – flat.js
     — for-each.js
     — includes.js
      - index-of.js
      – index.js
     — iterator.js
      – join.js
      – keys.js
     – last-index-of.js
     — map₊js
     — push.js
     - reduce-right.js
     — reduce.js
     — reverse₌js
      – slice.js
     — some₌js
     — sort.js
      - splice.js
      – to-reversed.js
     — to-sorted.js
     — to-spliced.js
     — unshift.js
      - values.js
    └ with.js
  – with.js
array-buffer
   – constructor⊾js
   index.js
   - is−view.js
 └ slice.js
- data-view
 └ index.js
– date
  — get–year⊾js
   – index.js
  – now₌js
   – set–year⊾js
   – to-gmt-string.js
   – to−iso−string.js
   - to-json.js
   - to-primitive.js
 └ to-string.js
 error
```

```
- constructor.js
   - index.js
  └ to-string.js
– escape⊾js
– function

    bind.is

   – has−instance.js
  — index.js
   – name⊾js
  ∟ virtual
      — bind.js
     └ index.js
get-iterator-method.js
- get−iterator.js
- global-this.js
- index.js
instance
  ⊢ at.is
   — bind.js
   - code-point-at.js
   — concat.js
   - copy-within.js
   — ends−with.js
   – entries.js
   — every.js
   - fill.js
   – filter.js
  — find-index.js
   – find-last-index.js
   — find-last.js
   — find.js
   – flags.js
   - flat-map.js
   – flat.js
   – for-each₁js
   includes.js
   - index-of.js
   – keys.js
   - last-index-of.js
   – map₊js
   – match-all.js
   – pad-end.js
   — pad−start.js
   – push.js
   – reduce-right.js
   – reduce.js
   – repeat.js
   - replace-all.js
   – reverse⊾js
   – slice.js
   – some₌js
   - sort.js
   – splice.js
   - starts—with.js
```

```
- to-reversed.js
   - to-sorted.js
   - to-spliced.js
   – trim−end.js
   – trim-left.js
   — trim−right.js
   – trim−start.js
   – trim.js
   – unshift.js
   – values.js
  └ with.js
- is−iterable.js
- json

─ index.js

   stringify.js
  └ to-string-tag.js
- map
 └ index.js
– math

⊢ acosh.js

   — asinh.js
   – atanh.js
   – cbrt.js
   – clz32.js
   – cosh.js
   – expm1.js
   – fround.js
  — hypot.js
   – imul.js
   — index.js
   – log10.js
   - log1p.js
   - log2.js
   — sign.js
   – sinh.js

⊢ tanh.js

   - to-string-tag.js
  └ trunc.js
- number
  ─ constructor.js
  — epsilon.js
  index.js
  — is-finite.js
   – is−integer.js
   — is−nan.js
   – is−safe−integer.js
   — max−safe−integer.js
   – min−safe−integer.js
   – parse−float.js
   — parse−int.js
   to-exponential.js
   - to-fixed.js
   - to-precision.js
   – virtual
```

```
- index.js
      to-exponential.js
      - to-fixed.js
     └ to-precision.js
object

— assign.js

   – create.js
   - define-getter.js
   – define−properties.js
  — define-property.js
   – define−setter.js
   – entries.js
  – freeze.js
  — from−entries.js
   get-own-property-descriptor₁js
   – get–own–property–descriptors.js
  — get–own–property–names.js
   get-own-property-symbols.js
   – get–prototype–of.js
   – has−own.js
  — index.js
   - is-extensible.js
   – is−frozen.js
   – is−sealed.js
   - is.js
   – keys.js
   - lookup-getter.js
  — lookup-setter.js
   prevent-extensions.js
   – proto.js
  – seal.js

    set-prototype-of₁js

   - to−string.js
  ∟ values.js
– parse−float.js
- parse−int.js
- promise

→ all-settled.js

   – any₌js
   - finally.js
  └ index.js
reflect
  — apply.js
   construct.js
  — define−property.js
  — delete-property.js
   – get–own–property–descriptor⊾js
   - get-prototype-of.js
   - get.js
   – has₊js
   - index.js
   - is-extensible.js
   - own−keys.js
   prevent-extensions.js
```

```
- set-prototype-of.js
   - set.js
 └ to-string-tag.js
 regexp
  – constructor.js
  — dot−all.js
  – flags.js
  – index.js
   – match.js
  — replace.js
  – search.js
  – split.js
  — sticky.js
   - test.js
 └ to-string.js
- set
 └ index.js
- string

— anchor.js

  – at.js
  – big.js
   - blink.js
  — bold.js
  — code-point-at.js
  — ends-with.js
  – fixed.js
  – fontcolor.js
  — fontsize.js

─ from-code-point.js

  — includes.js
  — index.js
  — italics.js
   iterator.js
  — link.js
  — match−all.js
  - match.js
  – pad−end.js
   - pad−start.js
  – raw₊js
  – repeat.js
  - replace-all.js
  — replace.js
  — search.js
  - small.js
  – split.js
  – starts–with.js
  – strike.js
   - sub.js
  – substr.js
  – sup.js
   - trim-end.js
   - trim-left.js
   - trim−right.js
   - trim−start.js
```

```
- trim.js
    virtual
     — anchor⊾js
      — at.js
      - big.js
      – blink.js
      – bold.js
      - code-point-at.js
      – ends−with.js
      – fixed.js
      – fontcolor.js
      fontsize.js
      includes.js
     — index.js
      - italics.js
      – iterator.js
     — link.js
      - match-all.js
      – pad−end.js
      – pad-start.js
      – repeat.js
      – replace—all.js
      – small.js
      — starts-with.js
      – strike.js
      – sub.js
     — substr.js
      – sup.js
      – trim−end.js
      – trim−left.js
     — trim−right.js
      - trim−start.js
     └ trim.js
– symbol
  — async−iterator.js
   description.js
   - for⊾js
   – has−instance.js
   - index.js
   is-concat-spreadable.js
  — iterator.js
  – key-for.js
  — match-all.js
   - match.js
  – replace.js
   – search.js
   – species.js
   - split.js
   – to−primitive.js
   – to–string–tag.js
  └ unscopables.js
 typed-array
  – at.js
   - copy—within.js
```

```
-entries.js
      - every.js
      - fill.js
      – filter.js
      – find-index.js
      – find-last-index.js
      – find−last.js
      find.js
      - float32-array.js
      – float64–array.js
      – for–each.js
      – from₌js
     – includes.js
      - index-of.js
      - index.js
      – int16–array.js
     — int32-array.js
      – int8−array.js
      – iterator.js
      - join.js
      – keys.js
      - last-index-of.js
      – map₊js
     - methods.js
     — of.js
      – reduce-right.js
     — reduce.js
     — reverse₌js
      – set.js
     — slice.js
     — some.js
     – sort.js
      – subarray⊾js
     — to-locale-string.js
      – to−reversed.js
      – to-sorted.js
      – to-string.js
      – uint16–array₊js
     — uint32−array.js
     — uint8-array.js
     — uint8-clamped-array₁js
      – values.js
     └ with.js
   - unescape.js
    weak-map
    └ index.js
    weak-set
    └ index.js

    features

  — aggregate-error.js
   - array
      – at.js
      – concat.js
      copy-within.js
```

```
entries.js
- every.js
- fill.js
- filter-out.js
- filter-reject.js
– filter.js
- find-index.js
- find-last-index.js
- find-last.js
– find.js
– flat-map.js
– flat.js
– for–each.js
- from−async.js
- from.js
– group-by-to-map₊js
— group−by.js
- group-to-map₌js
– group.js
includes.js
— index-of.js
- index.js
– is−array.js
- is-template-object.js
- iterator.js
- join.js
- keys.js
— last-index-of.js
– last−index.js
– last−item.js
— map₊js
– of.js
– push.js
— reduce-right.js
– reduce.js
– reverse⊾js
– slice.js
– some₌js
– sort.js
– splice.js
– to−reversed.js
— to-sorted.js
— to-spliced.js
– unique-by₁js
– unshift.js
– values.js
– virtual
   — at.js
  — concat.js
   – copy-within.js
   - entries.js
   – every.js
   - fill.js
    - filter-out.js
```

```
- filter-reject.js
      - filter.js
      - find-index.js
      – find−last−index.js
      - find-last.js
      find.js
      – flat–map₊js
      - flat.js
      – for−each.js
      – group-by-to-map.js
      – group−by⊾js
      - group-to-map₌js
     — group.js
     includes.js
      - index-of.js
      – index.js
     — iterator.js
      – join.js
      – keys⊾js
     – last-index-of.js
     — map₊js
     — push.js
     — reduce-right.js
     — reduce.js
     — reverse₌js
      – slice.js
     — some₌js
     — sort.js
     splice.js
     — to-reversed.js
     — to-sorted.js
     — to-spliced.js
     — unique-by.js
     — unshift.js
     — values.js
     └ with.js
  └ with.js
- array-buffer
  — constructor.js
   detached.js
  — index.js
  — is-view.js
  — slice.js
   transfer-to-fixed-length.js

    transfer.js

    async-disposable-stack

    constructor.js

 └ index.js
- async-iterator
  — as−indexed−pairs.js
   - async-dispose.js
   - drop.js
   – every.js
   - filter.js
```

```
- find.js
    - flat-map.js
    - for-each.js
   – from.js
   – index.js
   – indexed.js
   – map₊js
   - reduce.js
    – some⊾js
   – take.js
  └ to-array.js
– atob.js
- bigint
   — index.js
  └ range.js
– btoa.js
— clear−immediate.js
— composite-key.js
composite-symbol.js
– data–view
  └ index.js
date
  — get–year.js
   index.js
   — now.js
   – set-year.js

    to-gmt-string.js
    is

   — to−iso−string.js
   — to-json.js
   – to-primitive.js
  └ to-string.js

    disposable-stack

   – constructor.js
  └ index.js
dom-collections
  ─ for-each.js
    - index.js
  └ iterator.js
- dom-exception

    ─ constructor.js

    - index.js
  └ to-string-tag.js
- error

    constructor.js

    · index.js
  └ to-string.js
– escape.js
 function
  ─ bind.js
   – demethodize.js
    – has−instance.js
    - index.js
    - is-callable.js
    - is-constructor.js
```

```
- name.js
   - un-this.js
  ∟ virtual
     — bind.js
      - demethodize.js
      – index.js
     └ un-this.js
get-iterator-method.js
- get−iterator.js
– global−this.js
- index.js

    instance

  — at.js
   – bind.js
   - code-point-at.js
  — code−points.js
  — concat.js
   copy-within.js
  — demethodize.js
  — ends-with.js
  — entries.js
   – every⊾js
  – fill.js
   – filter–out.js
   - filter-reject.js
   – filter.js
   – find−index.js
  – find-last-index.js
  — find-last.js
  find.js
  flags.js
   – flat-map.js
   – flat.js
   – for-each.js
   – group-by-to-map₊js
   – group−by⊾js
   – group—to—map.js
   - group⊾js
   includes.js
   – index–of.js
   - is-well-formed.js
   – keys.js
  – last-index-of.js
   – map.js
   match-all.js
   – pad−end.js
   - pad−start.js
   - push.js
   - reduce-right.js
   – reduce.js
   - repeat.js
   - replace-all.js
   - reverse⊾js
   - slice.js
```

```
- some.js
   - sort.js
   - splice.js
   – starts–with.js
   – to−reversed.js
  – to-sorted.js
   - to-spliced.js
  — to-well-formed.js
   - trim−end.js
  – trim−left.js
   – trim−right.js
   – trim−start.js
  — trim.js
   – un−this.js
   – unique−by.js
  – unshift.js
  — values.js
 └ with.js
- is-iterable.js
- iterator

— as−indexed-pairs.js

   - dispose.js
  – drop.js
   – every.js
   – filter.js
   - find.js
   – flat–map.js
  – for-each.js
  – from.js
  — index.js
  — indexed.js
  – map₊js
   – range₊js
  – reduce.js
  — some.js
  — take.js
   - to−array.js
 └ to-async.js
- json
  — index.js
  — is-raw-json₌js
  — parse.js
  — raw-json.js
   - stringify.js
 └ to-string-tag.js
- map
  ─ delete-all.js
  – emplace.js
   – every.js
   - filter.js
   - find-key.js
   - find.js
   - from.js
   - group-by.js
```

```
- includes.js
   - index.js
   - key-by.js
  – key-of₁js
  — map-keys₁js
  — map−values.js
  – merge₊js
  – of.js
  – reduce.js
  — some.js
  — update-or-insert.js
   - update.js
 └ upsert.js
- math
  acosh.js
  — asinh.js
  — atanh.js
  − cbrt.js
  — clamp₁js
  – clz32.js
  — cosh.js
   - deg-per-rad.js
  – degrees₌js
  – expm1.js
  – fround.js
   - fscale.js
   – hypot.js
  — iaddh.js
  - imul.js
  imulh.js
  – index.is
  – isubh.js
   - log10.js

─ log1p.js

  — log2.js

    rad-per-deg.js

  — radians.js
 ⊢ scale.js
  — seeded-prng.js
  – sign.js
  — signbit.js

⊢ sinh.js

  — tanh.js
  – to-string-tag.js
   - trunc.js
 └ umulh.js
- number
  – constructor₌js
  – epsilon.js
  – from−string.js
   - index.js
   - is-finite.js
   – is−integer.js
   - is−nan.js
```

```
- is-safe-integer.js
   - max−safe−integer.js
   - min−safe−integer.js
   – parse–float.js
   - parse−int.js
   – range₊js
   - to-exponential.js
   - to-fixed.js
   - to-precision.js
 ∟ virtual

─ index.js

─ to-exponential.js

      – to-fixed.js
     └ to-precision.js
object

⊢ assign.js

  — create.js
  — define-getter.js
  — define-properties.js
  — define−property.js
  — define-setter.js
   – entries.js
  – freeze.js
   – from−entries.js
  — get-own-property-descriptor₁js
   – get–own–property–descriptors.js
  — get-own-property-names.js
  get-own-property-symbols.js
   get-prototype-of.js
  — has−own.js
  – index.is
   is-extensible.js
   – is−frozen.js
  — is-sealed.js
  – is.js
  — iterate−entries.js
  — iterate−keys.js
   - iterate-values.js
   – keys₌js
   - lookup-getter.js
  lookup-setter.js
  — prevent-extensions.js
  — proto.js
   – seal.js
  – set-prototype-of₁js
   – to−string.js
 └ values.js

    observable

 └ index.js
– parse–float.js
- parse-int.js
promise
   – all−settled.js
   - any.js
```

```
- finally.js
    · index.js
  ∟ try.js
- queue-microtask.js
reflect
  — apply.js
   – construct.js
   define-metadata.js
   define-property.js
   — delete−metadata.js
   – delete-property.js
   – get–metadata–keys₊js
   — get-metadata.js
   – get-own-metadata-keys.js
    - get−own−metadata.js
    - get−own−property−descriptor.js
   — get-prototype-of.js
    - get.js
   – has−metadata.įs
   – has−own−metadata.js
   – has.js
    - index.js
   — is-extensible.js
   — metadata.js
   – own-keys₌js
   prevent-extensions.js
   — set-prototype-of.js
   – set.js
  └ to-string-tag.js
  regexp
   — constructor₌js
   – dot-all.js
   – flags.js
   – index.js
   – match.js
   – replace.js
   – search.js
   - split.js
   – sticky.js
    - test.js
  └ to-string.js
– self.js
set

— add−all.js

   delete-all.js
   – difference.js
   – every.js
    - filter.js
   – find.js
   – from.js
    - index.js
    - intersection.js
    - is−disjoint−from.js
    - is-subset-of.js
```

```
- is−superset−of.js
   - join.js
   - map.js
   – of⊾js
   – reduce.js
   – some₌js
   symmetric-difference.js
 └ union.js
– set−immediate.js
– set−interval.js
– set−timeout.js
string
  — anchor.js
   - at.js
   – big.js
   – blink.js
  — bold.js
  - code-point-at.js
  — code-points.js
  – cooked.js
  — dedent.js
   – ends−with.js
  — fixed.js
   – fontcolor.js
   – fontsize.js
  — from-code-point.js
  — includes.js
  — index.js
  - is-well-formed.js
  — italics.js
  — iterator.js
   – link.js
   – match–all.js
  — match.js
  — pad−end.js
   – pad−start.js
   – raw₊js
   – repeat.js
  - replace-all.js
   – replace.js
  — search.js
  small.js
  — split.js
   - starts-with.js
   – strike.js
   – sub.js
   – substr.js
   - sup.js
   – to-well-formed.js
   – trim−end.js
   - trim-left.js
   - trim−right.js
   - trim−start.js
   - trim.js
```

```
└ virtual
     — anchor₁js
      - at.js
      – big.js
      - blink.js
     bold.js
     - code-point-at.js
     - code-points.js
      ends-with.js
      – fixed.js
      – fontcolor.js
      fontsize.js
      includes.js
     — index.js
      is-well-formed.js
      italics.js
     — iterator.js
      - link.js
      - match-all.js
      – pad−end.js
      – pad−start.js
      – repeat.js
      – replace−all.js
     — small.js
      – starts–with.js
      – strike.js
     – sub.js
      – substr.js
      – sup.js
      to-well-formed.js
     — trim−end.js
      - trim-left.js
     ├─ trim−right.js
      - trim−start.js
     └ trim.js
structured-clone.js
– suppressed-error₌js
- symbol
  — async−dispose.js
   – async−iterator.js
  — description.js
  — dispose.js
  — for₌js
  – has-instance.js
  — index.js
   is-concat-spreadable.js
  – is−registered.js
   - is-well-known.js
   - iterator.js
   – key−for⊾js
   match-all.js
   - match.js
   – matcher₊js
   - metadata-key₊js
```

```
- metadata.js
   - observable.js
   pattern-match.js
   - replace-all.js
  replace.js
  – search.js
   - species.js
   – split.js
   - to-primitive⊾js
   – to−string−tag.js
 └ unscopables.js
typed—array
  — at.js
   - copy—within.js
   – entries.js
  – every.js
  — fill.js
  – filter–out.js
  – filter-reject.js
  – filter.js
  — find-index.js
   - find-last-index.js
  – find−last.js
  – find.js
  – float32–array₊js
   - float64-array.js
   - for−each.js
  – from−async.js
  – from.js
  — group−by⊾js
  includes.js
  - index-of.js
  - index.js
  — int16−array.js
  — int32−array.js
  — int8−array.js
   – iterator.js
   - join⊾js
   - keys.js
   - last-index-of.js
  — map₊js
  — methods.js
  — of.js
   - reduce-right.js
  – reduce.js
   – reverse₌js
  – set.js
   - slice.js
   – some₌js
  – sort.js
   - subarray.js
   - to-locale-string.js
   - to−reversed.js
   - to-sorted.js
```

```
- to-spliced.js
      - to-string.js
      – uint16-array⊾js
      — uint32-array.js
      — uint8−array.js
      — uint8-clamped-array.js
     — unique-by.js
      - values.js
     └ with.js
   – unescape⊾js
   - url
      – index.js
     └ to-json.js
   url-search-params
     └ index.js
   weak-map

— delete−all.js

      – emplace.js
     — from.js
      — index.js
      – of.js
     └ upsert.js
   - weak-set
     — add−all.js
      – delete–all.js
      — from.js
      - index.js
     └ of.js
- full
  — README.md
  — aggregate−error.js
   - array
     — at.js
     ─ concat.js
      — copy-within₁js
     — entries.js
      – every.js
      - fill.js
      – filter–out.js
      – filter-reject.js
     — filter.js
     — find−index.js
     — find−last−index.js
      – find-last.js
      find.js
      - flat-map.js
      – flat.js
      - for−each.js
      – from−async.js
      – from.js
      - group-by-to-map₊js
      - group−by.js
      - group-to-map₊js
      - group.js
```

```
includes.js
- index-of.js
- index.js
– is−array.js
is-template-object.js
– iterator.js
- join.js
- keys.js
- last-index-of.js
- last−index.js
- last-item.js
– map.js
– of.js
– push.js
- reduce-right.js
– reduce.js
– reverse⊾js
- slice.js
– some.js
– sort.js
– splice.js
- to−reversed.js
– to−sorted.js
to-spliced.js
– unique−by.js
– unshift.js
- values.js
virtual
  — at.js
   — concat.js
   — copy-within⊾js
   – entries.js
   — every.js
  — fill.js
  ├ filter-out.js

⊢ filter-reject.js

   — filter.js
   - find-index.js
   – find-last-index.js
   – find−last.js
  — find.js
  — flat-map.js
   — flat.js
   – for-each.js
   - group-by-to-map₊js
   – group−by₌js
   - group-to-map₊js
   – group.js
   includes.js
   – index–of.js
   - index.js
   - iterator.js
   - join.js
   - keys.js
```

```
- last-index-of.js
      – map₊js
      - push.js
      - reduce-right.js
      - reduce.js
      – reverse₌js
      – slice.js
      – some.js
      – sort.js
      – splice.js
      – to-reversed.js
      – to-sorted.js
     - to-spliced.js
     — unique-by₊js
      unshift.js
      – values.js
     └ with.js
   – with.js
array-buffer

    constructor₁js

  detached.js
   - index.js
  – is−view.js
   - slice.js
   transfer-to-fixed-length.js
  └ transfer.js
- async-disposable-stack

    constructor.js

 └ index.js
- async-iterator

— as-indexed-pairs.js

   – async−dispose.js
   – drop.js
  – every.js
   - filter.js
  — find.js
   – flat−map.js
   – for−each.js
   – from⊾js
   – index.js
  – indexed.js
  — map.js
  — reduce.js
   – some₌js
   - take.js
 └ to-array.js
– atob.js
- bigint
  – index.js
 └ range.js
- btoa.js
- clear-immediate.js
– composite−key.js
 composite-symbol.js
```

```
data-view
  └ index.js
 - date
   — get−year.js
   – index.js
   — now.js
   – set–year⊾js
   – to-gmt-string.js
   - to−iso−string.js
   – to–json.js
    - to-primitive.js
  └ to-string.js
– disposable-stack
   — constructor.js
  └ index.js
dom-collections

─ for-each.js

    - index.js
  └ iterator.js
- dom-exception

    ─ constructor.js

    · index.js
  └ to-string-tag.js
- error

    ⊢ constructor.js

    - index.js
  └ to-string.js
— escape.js
- function

→ bind.js

   – demethodize.js
   - has-instance.js
   - index.js
   — is-callable.js
   - is-constructor.js
  — name.js
   – un−this.js
  ∟ virtual
     ─ bind.js
      ─ demethodize.js
       index.js
     └ un-this.js
get-iterator-method.js
- get−iterator.js
- global-this.js
index.js

    instance

   – at.js
  ─ bind.js
   — code-point-at.js
   - code-points.js
    - concat.js
   copy-within.js
   demethodize.js
```

```
ends-with.js
  - entries.js
  - every.js
 - fill.js
 - filter-out.js
 – filter-reject.js
  - filter.js
  - find-index.js
  - find-last-index.js
 – find−last.js
 - find.js
 – flags.js
 – flat-map.js
 – flat.js
  - for-each.js
 – group-by-to-map₊js
 – group−by⊾js
  - group-to-map₊js
 – group.js
  includes.js
  - index-of.js
  - is-well-formed.js
  - keys.js
  - last-index-of.js
 – map.js
 – match−all.js
 – pad−end.js
 – pad−start.js
  - push.js
 - reduce-right.js
 – reduce.js
 – repeat.js
 - replace-all.js
 – reverse₌js
 – slice.js
 – some₌js
 – sort.js
 – splice.js
 – starts–with.js
 – to−reversed.js
 — to-sorted.js
 - to-spliced.js
 — to-well-formed.js
 – trim−end.js
 - trim-left.js
 – trim−right.js
 – trim−start.js
 – trim.js
 – un−this.js
 – unique−by.js
  - unshift.js
  - values.js
└ with.js
is-iterable.js
```

```
iterator
  — as−indexed−pairs.js
   - dispose.js
  – drop.js
  – every.js
  – filter.js
  – find.js
  – flat-map.js
   – for–each.js
  — from.js
  – index.js
  - indexed.js
  — map₊js
  — range.js
  - reduce.js
  — some.js
  — take.js
   - to-array.js
 └ to-async.js
- json
 — index.js
   - is−raw−json.js
  — parse.js
  — raw−json.js
   stringify.js
 └ to-string-tag.js
- map
 ─ delete-all.js
 — emplace.js
  — every.js
  – filter.js
  — find-key.js
  – find.js
  — from.js
  — group−by.js
  — includes.js
  – index.js
  – key-by₌js
  – key−of.js
  — map−keys.js
  — map−values.js
  — merge.js
  — of.js
  – reduce.js
  – some.js
  – update–or–insert.js
  – update.js
 └ upsert.js
- math

— acosh.js

   – asinh.js
   - atanh.js
  – cbrt.js
   - clamp₁js
```

```
- clz32.js
   - cosh.js
   - deg−per−rad.js
   – degrees.js
   – expm1.js
   – fround.js
   - fscale.js
   - hypot.js
   - iaddh.js
   - imul.js
   - imulh.js
   index.js
   – isubh.js
   - log10.js
   - log1p.js
  — log2.js
  — rad−per−deg.js
   - radians.js
  — scale.js
   - seeded-prng.js
  — sign.js
   – signbit.js
  — sinh.js
   – tanh.js
   – to-string-tag.js
   - trunc.js
  └ umulh.js
number

    — constructor.js

  — epsilon.js
  — from−string.js
  — index.js
   – is−finite.js
  — is−integer.js
  — is−nan.js
   – is−safe−integer.js
  — max−safe−integer.js
   – min−safe−integer.js
   – parse–float.js
   – parse−int.js
   – range.js
  to-exponential.js
  — to−fixed.js
   to-precision₁js
  ∟ virtual

    index.js

─ to-exponential.js

      - to-fixed.js
     └ to-precision.js
object
  — assign.js
   - create.js
   define-getter.js
   define-properties.js
```

```
define-property.js
   - define-setter.js
   – entries.js
  – freeze.js
  – from−entries.js
  - get-own-property-descriptor.js
   – get–own–property–descriptors.js
   - get-own-property-names.js
   get-own-property-symbols.js
   - get-prototype-of.js
   – has−own.js
   - index.js
  – is-extensible.js
   - is−frozen.js
   - is-sealed.js
   - is.js
  — iterate−entries.js
  – iterate-keys.js
  — iterate-values.js
   – keys.js
   - lookup-getter.js
   - lookup-setter.js
   - prevent−extensions.js
  – proto.js
  – seal.js
  – set-prototype-of.js
   - to−string.js
 └ values.js
 observable
 └ index.js
- parse-float.js
- parse−int.js
- promise

→ all-settled.js

  – any₌js

─ finally.js

   - index.js
 ∟ try.js
- queue-microtask.js
- reflect

— apply.js

─ construct.js

  — define−metadata.js
  – define-property.js
  — delete−metadata.js
  delete-property.js
   - get-metadata-keys.js
   – get−metadata.js
   – get−own−metadata−keys.js
  – get–own–metadata.js
   - get-own-property-descriptor.js
   - get-prototype-of.js
   - get.js
   - has-metadata.js
```

```
- has-own-metadata.js
   - has.js
   - index.js
   — is-extensible.js
  — metadata.js
  — own−keys.js
   - prevent-extensions.js
   – set-prototype-of₁js
   - set.js
  └ to-string-tag.js
- regexp
  — constructor.js
  — dot-all.js
  — flags.js
   - index.js
  match.js
  — replace.js
   search.js
   – split.js
   – sticky.js
   – test.js
  └ to-string.js
– self.js
– set

— add−all.js

  — delete–all.js
  ├ difference.js
  — every.js
  – filter.js
  — find.js
  — from.js
  — index.js
  — intersection.js

    is-disjoint-from.js

   — is−subset−of.js
   – is-superset-of⊾js
   – join.js
   – map₌js
  — of.js
   – reduce.js
  — some.js
   symmetric-difference.js
  └ union.js
- set-immediate.js
- set-interval.js
– set−timeout.js
string
   — anchor.js
   – at.js
   – big.js
   - blink.js
   - bold.js
   – code−point–at.js
   – code−points.js
```

```
- cooked.js
 - dedent.js
 - ends-with.js
 – fixed.js
 - fontcolor.js
 – fontsize.js
 - from-code-point.js
 includes.js
 - index.js
 - is-well-formed.js
 - italics.js
 - iterator.js
 - link.js
 – match-all.js
 - match.js
 – pad−end.js
 – pad−start.js
 - raw.js
 – repeat.js
 replace-all.js
– replace.js
 – search.js
— small.js
 – split.js
 – starts–with.js
 – strike.js
 - sub.js
— substr.js
 - sup.js
— to-well-formed.js
— trim−end.js
 – trim−left.js
 – trim−right.js
 – trim−start.js
 – trim.js
∟ virtual
   — anchor⊾js
    – at.js
    – big.js
    - blink.js
   - bold.js
   — code-point-at.js
   — code-points.js
    – ends-with.js
    fixed.js
    - fontcolor.js
    – fontsize.js
    includes.js
    – index.js
    — is-well-formed.js
    - italics.js
    - iterator.js
    – link.js
    - match-all.js
```

```
pad-end.js
       – pad−start.js
       - repeat.js
       – replace—all.js
       - small.js
      – starts–with.js
       – strike.js
       – sub.js
       - substr.js
       – sup.js
      to-well-formed.js
       – trim−end.js
      – trim-left.js
      — trim−right.js
       - trim-start.js
     └ trim.js
— structured-clone.js
suppressed-error.js
symbol
   — async-dispose.js
   — async−iterator.js
   description.js
   – dispose.js
   – for.js
   - has-instance.js
   – index.js
   — is-concat-spreadable.js
   — is-registered.js
   — is-well-known₁js
   — iterator.js
   – key-for.js
   — match-all.js
   – match.js
   — matcher₊js
   — metadata-key₁js
  — metadata.js
   — observable.js
   pattern-match.js
   replace-all.js
   – replace.js
   — search.js
   — species.js
   — split.js
   – to-primitive.js
    - to−string−tag.js
  └ unscopables.js
 typed-array
   – at.js
   copy-within.js
   – entries.js
   – every.js
    - fill.js
    - filter-out.js
    - filter-reject.js
```

```
- filter.js
   - find-index.js
   - find-last-index.js
   – find−last.js
   find.js
   - float32-array.js
   - float64—array.js
   - for-each.js
   - from−async.js
   – from.js
   – group−by⊾js
   includes.js
  — index-of.js
  — index.js
   - int16−array.js
  — int32-array.js
  — int8-array₊js
   – iterator.js
   – join.js
   - keys⊾js
   – last-index-of.js
   – map.js
  — methods.js
  – of.js
  - reduce-right.js
  – reduce.js
  — reverse.js
  — set.js
  – slice.js
  — some.js
  — sort.js
  – subarray₊js
   – to−locale–string.js
  — to−reversed.js
   – to−sorted.js
   – to-spliced.js
  — to-string.js
   – uint16–array.js
  — uint32-array.js
   – uint8–array.js
  — uint8-clamped-array₁js

— unique-by₁js

⊢ values.js

  └ with.js
- unescape⊾js
– url

⊢ index.js

 └ to-json.js
url-search-params
 └ index.js
- weak-map
   – delete–all.js
   – emplace.js
   - from.js
```

```
– index.js
      - of.is
     └ upsert.js
    weak-set
     — add-all.js
      — delete−all.js
      – from.js
      - index.js
     └ of.js
— index.js
internals

— README.md

  — a−callable.js
  — a–constructor.js
  — a-map₊js
  — a-possible-prototype.js
  — a−set.js
  — a-weak-map₊js
  — a−weak−set.js
  — add-disposable-resource.js
  — add-to-unscopables.js
  — advance−string−index.js
  — an−instance.js
  — an-object.js

— array-buffer-basic-detection.js

  — array-buffer-byte-length.js
  — array−buffer−is−detached.js
  — array-buffer-non-extensible.js
  ├ array-buffer-transfer.js
  — array-buffer-view-core.js
  — array−buffer.js
  — array-copy-within.js
  — array-fill.js
  — array−for–each.js
  ⊢ array-from-async₊js

— array-from-constructor-and-list.js

  — array−from.js
  — array-group-to-map₊js
  — array-group₊js
  — array−includes.js
  — array-iteration-from-last.js
  — array−iteration.js
  — array-last-index-of.js
  array-method-has-species-support.js
  — array-method-is-strict.js
  — array−reduce.js
  — array-set-length.js
  array-slice-simple.js
  — array−slice.js
  — array-sort.js
   array-species-constructor.js
   array-species-create.js
  — array−to−reversed.js
   - array—unique—by₊js
```

```
– array–with.js
async-from-sync-iterator.js
– async−iterator–close.js
— async-iterator-create-proxy.js
— async-iterator-indexed.js
async-iterator-iteration.js
— async−iterator–map.js
async-iterator-prototype.js
— async−iterator–wrap.js
— base64-map₊js
call-with-safe-iteration-closing.js
— caller.js
— check-correctness-of-iteration.js
— classof-raw₊js
classof.js
— collection-from.js

─ collection—of.js

─ collection-strong.js

— collection-weak.js
— collection.js
— composite-key.js
copy-constructor-properties.js
— correct-is-regexp-logic.js
— correct-prototype-getter.js
— create−html.js
— create-iter-result-object.js
├ create-non-enumerable-property.js
— create-property-descriptor.js
— create-property₌js
— date-to-iso-string.js
— date−to−primitive.js
— define-built-in-accessor.js
— define-built-in.js
— define-built-ins.js

— define-global-property.js

    delete-property-or-throw₁js

— descriptors.js
─ document-all.js
— document-create-element.js
— does−not−exceed−safe−integer.js
— dom-exception-constants.js
— dom-iterables.js
├ dom-token-list-prototype.js
— engine-ff-version.js
— engine-is-browser₊js
— engine−is−bun.js
— engine−is−deno.js
— engine-is-ie-or-edge.js
— engine-is-ios-pebble.js
— engine−is−ios.js
– engine−is−node.js
engine-is-webos-webkit₁js
– engine−user–agent.js
 - engine-v8-version.js
```

```
engine-webkit-version.js
entry-unbind.js
— entry-virtual.js
— enum-bug-keys₊js
— error-stack-clear.js
error-stack-install.js
error-stack-installable.js
— error–to–string.js
— export.js
– fails.js
fix-regexp-well-known-symbol-logic.js
— flatten−into−array.js
— freezing.js
function—apply.js
function-bind-context.js
function-bind-native.js
— function-bind.js
function-call.js
function-demethodize.js
— function-name.js
— function-uncurry-this-accessor.js
 - function-uncurry-this-clause.js
— function-uncurry-this₊js
— get-async-iterator-flattenable.js
— get-async-iterator.js
— get-built-in.js
— get-iterator-direct.js
— get-iterator-flattenable.js
get-iterator-method.js
— get−iterator.js
get-json-replacer-function.js
get-method.js
– get-set-record.js
— get−substitution.js
— global.js
⊢ has-own-property.js
— hidden−keys.js
— host-report-errors.js
— html.js
– ie8-dom-define₌js
— ieee754.js
— indexed-object.js
— inherit−if−required.js
— inspect-source.js
 - install-error-cause.js
— internal-metadata.js
 - internal—state.js
is-array-iterator-method.js
– is−array.js
— is−big−int−array.js
 - is−callable.js
 - is−constructor.js
 - is−data−descriptor⊾js
- is-forced.js
```

```
– is−integral−number.js
– is−iterable.įs
 - is-null-or-undefined.js
— is-object.js
— is−pure.js
— is−raw−json.js
— is−regexp.js
— is-symbol.js
— iterate−simple.js
— iterate.js
— iterator-close.js
— iterator-create-constructor.js
— iterator-create-proxy.js
— iterator–define₊js
 iterator—indexed.js
— iterator-map₊js
— iterators–core.js
— iterators.js
— length-of-array-like.js
— make−built−in.js
— map-helpers.js
— map−iterate.js
— map−upsert.js
— math-expm1.js
— math−fround.js
— math−log10.js
— math−log1p.js
— math-scale.js
— math−sign.js
— math−trunc.js
— microtask.js
— native−raw−json.js
⊢ new-promise-capability.js
— normalize-string-argument.js
— not-a-nan.js

    not-a-regexp.js

— number−is−finite.js

⊢ number-parse-float.js

— number–parse−int.js
├ numeric-range-iterator.js
— object−assign.js
— object-create.js
— object-define-properties.js

— object-define-property.js

— object-get-own-property-descriptor.js
b object-get-own-property-names-external.js
— object-get-own-property-names.js
— object-get-own-property-symbols.js
├ object-get-prototype-of.js
├ object-is-extensible.js

→ object-is-prototype-of.js

object-iterator.js
— object-keys-internal.js
- object-keys.js
```

```
object-property-is-enumerable.js
object-prototype-accessors-forced.js
— object-set-prototype-of.js
— object-to-array.js
├ object-to-string.js
— observable-forced.js
— ordinary-to-primitive.js
— own−keys.js
— parse−json−string.js
— path.js
— perform₊js
promise-constructor-detection.js
— promise-native-constructor.js
— promise-resolve.js
promise-statics-incorrect-iteration.js
— proxy−accessor.js
— queue.js
— reflect-metadata.js
— regexp-exec-abstract.js
⊢ regexp−exec.js

⊢ regexp-flags.js

— regexp-get-flags.js
regexp-sticky-helpers.js
regexp-unsupported-dot-all.js

⊢ regexp-unsupported-ncg.js

require-object-coercible.js
⊢ same-value-zero.js
— same-value₊js
— schedulers-fix.js
— set-clone.js
— set-difference.js

— set-helpers.js

    set−intersection.js

— set−is−disjoint−from.js

    set−is−subset−of.js

    set−is−superset−of.js

— set−iterate.js
 set-method-accept-set-like.js
— set-size.js
— set−species.js
— set-symmetric-difference.js
— set−to−string−tag.js
— set-union.js
— shared-key₊js
— shared−store.js
— shared.js
— species-constructor.js
— string−cooked.js
├ string-html-forced.js
├ string-multibyte.js
string-pad-webkit-bug.js
– string−pad.js
— string−parse.js
 – string−punycode−to−ascii.js
```

```
string-repeat.js
  — string-trim-end.js
  — string-trim-forced.js
  — string−trim−start.js
  — string−trim.js

— structured-clone-proper-transfer.js

  — symbol-constructor-detection.js
  — symbol-define-to-primitive.js
  symbol-registry-detection.js
  — task.js
   this-number-value.js
  — to-absolute-index.js
  — to-big-int.js
  — to−index.js
  — to-indexed-object.js
  — to-integer-or-infinity.js
  — to-length.js
  — to-object.js
  — to-offset.js
  — to-positive-integer.js
  — to-primitive.js
   - to-property-key.js
  — to-set-like.js
  — to-string-tag-support.js
  — to-string.js
  — try-node-require.js
  — try−to−string.js
  — typed-array-constructor.js
   typed-array-constructors-require-wrappers.js
  — typed-array-from-species-and-list.js
  — typed-array-from.js
   – typed-array-species-constructor.js
  — uid.js
  url-constructor-detection.js
  ─ use-symbol-as-uid.js

    v8-prototype-define-bug₁js

  — validate-arguments-length.js
  — weak-map-basic-detection.js
  weak-map-helpers.js
  — weak-set-helpers.js
  — well-known-symbol-define.js
  — well-known-symbol-wrapped.js
  — well-known-symbol.js
   whitespaces.js

    wrap-error-constructor-with-cause.js

modules

— README.md

  ├ es.aggregate-error.cause.js
   es.aggregate-error.constructor.js
  — es.aggregate-error.js
   es.array-buffer.constructor.js
   es.array-buffer.is-view.js
  — es.array-buffer.slice.js
   es.array.at.js
```

```
– es.array.concat.js
es.array.copy-within.js
– es.array.every.js
— es.array.fill.js
— es.array.filter.js
— es.array.find-index.js
— es.array.find-last-index.js
— es.array.find-last.js
— es.array.find.js
— es.array.flat-map.js
es.array.flat.js
— es.array.for-each.js
— es.array.from.js
— es.array.includes.js
— es.array.index-of.js
— es.array.is–array.js
— es.array.iterator.js
— es.array.join.js
— es.array.last-index-of.js
— es.array.map.js
— es.array.of.js
— es.array.push.js
— es.array.reduce-right.js
├ es.array.reduce.js
⊢ es.array.reverse.js
— es.array.slice.js
— es.array.some.js
— es.array.sort.js
— es.array.species.js
— es.array.splice.js
— es.array.to-reversed.js
├ es.array.to-sorted.js
— es.array.to-spliced.js
— es.array.unscopables.flat-map.js
├ es.array.unscopables.flat.js
─ es.array.unshift.js
— es.array.with.js
─ es.data-view.constructor.js
— es.data-view.js
— es.date.get-year.js
— es.date.now.js
├ es.date.set-year.js
├ es.date.to-gmt-string.js
— es.date.to-iso-string.js
— es.date.to-json.js
├ es.date.to-primitive.js
- es.date.to-string.js
— es.error.cause.js
— es.error.to-string.js
— es.escape.js
es.function.bind.js
es.function.has-instance.js
es.function.name.js
 - es.global—this.js
```

```
es.json.stringify.js
es.json.to-string-tag.js
es.map.constructor.js
— es.map.js
es.math.acosh.js
— es.math.asinh.js
es.math.atanh.js
— es.math.cbrt.js
es.math.clz32.js
— es.math.cosh.js
— es.math.expm1.js
— es.math.fround.js
— es.math.hypot.js
— es.math.imul.js
es.math.log10.js
— es.math.log1p.js
— es.math.log2.js
— es.math.sign.js
— es.math.sinh.js
— es.math.tanh.js
— es.math.to-string-tag.js
es.math.trunc.js
— es.number.constructor.js
─ es.number.epsilon.js
├ es.number.is-finite.js
— es.number.is-integer.js
— es.number.is–nan.js
— es.number.is-safe-integer.js
├ es.number.max-safe-integer.js
— es.number.min-safe-integer.js
— es.number.parse-float.js
─ es.number.parse-int.js
— es.number.to-exponential.js
— es.number.to-fixed.js
es.number.to-precision.js

─ es.object.assign.js

— es.object.create.js

⊢ es.object.define-getter.js

— es.object.define-properties.js
— es.object.define-property.js
— es.object.define-setter.js
— es.object.entries.js
├ es.object.freeze.js
— es.object.from-entries.js
— es.object.get-own-property-descriptor.js
— es.object.get-own-property-descriptors.js
├ es.object.get-own-property-names.js
├ es.object.get-own-property-symbols.js
├ es.object.get-prototype-of.js
├ es.object.has-own.js
├ es.object.is-extensible.js
es.object.is-frozen.js
— es.object.is-sealed.js
– es.object.is.js
```

```
├ es.object.keys.js
— es.object.lookup-getter.js
— es.object.lookup-setter.js
— es.object.prevent-extensions.js
─ es.object.proto.js
─ es.object.seal.js
— es.object.set-prototype-of.js
— es.object.to-string.js
es.object.values.js
— es.parse-float.js
— es.parse-int.js
— es.promise.all-settled.js
— es.promise.all.js
├ es.promise.any.js
— es.promise.catch.js
— es.promise.constructor.js
— es.promise.finally.js
— es.promise.js
— es.promise.race.js
— es.promise.reject.js
├ es.promise.resolve.js
— es.reflect.apply.js
— es.reflect.construct.js
— es.reflect.define-property.js
├ es.reflect.delete-property.js
— es.reflect.get-own-property-descriptor.js
├ es.reflect.get-prototype-of.js
— es.reflect.get.js
⊢ es.reflect.has.js
— es.reflect.is-extensible.js
— es.reflect.own-keys.js
─ es.reflect.prevent-extensions.js
├ es.reflect.set-prototype-of.js
es.reflect.set.js
├ es.reflect.to-string-tag.js

─ es.regexp.constructor.js

— es.regexp.dot-all.js
─ es.regexp.exec.js
— es.regexp.flags.js
— es.regexp.sticky.js
— es.regexp.test.js
— es.regexp.to-string.js
— es.set.constructor.js
— es.set.js
es.string.anchor.js
─ es.string.at-alternative.js
es.string.big.js
— es.string.blink.js
├ es.string.bold.js
├ es.string.code-point-at.js
es.string.ends-with.js
es.string.fixed.js
es.string.fontcolor.js
es.string.fontsize.js
```

```
es.string.from-code-point.js
es.string.includes.js
— es.string.italics.js
— es.string.iterator.js
— es.string.link.js
— es.string.match-all.js
— es.string.match.js
— es.string.pad-end.js
— es.string.pad-start.js
— es.string.raw.js
— es.string.repeat.js
— es.string.replace-all.js
— es.string.replace.js
— es.string.search.js
— es.string.small.js
— es.string.split.js
— es.string.starts-with.js
— es.string.strike.js
— es.string.sub.js
— es.string.substr.js
— es.string.sup.js
— es.string.trim-end.js
— es.string.trim-left.js
├ es.string.trim-right.js
├ es.string.trim-start.js
— es.string.trim.js
— es.symbol.async-iterator.js
— es.symbol.constructor.js
─ es.symbol.description.js
— es.symbol.for.js
─ es.symbol.has-instance.js
— es.symbol.is-concat-spreadable.js
— es.symbol.iterator.js
— es.symbol.js
─ es.symbol.key-for.js
─ es.symbol.match—all.js
— es.symbol.match.js
— es.symbol.replace.js
— es.symbol.search.js
— es.symbol.species.js
— es.symbol.split.js
— es.symbol.to-primitive.js
├ es.symbol.to-string-tag.js
— es.symbol.unscopables.js
— es.typed-array.at.js
─ es.typed-array.copy-within.js
— es.typed-array.every.js
— es.typed-array.fill.js
├ es.typed-array.filter.js
├ es.typed-array.find-index.js
— es.typed-array.find-last-index.js
es.typed-array.find-last.js
— es.typed-array.find.js
es.typed-array.float32-array.js
```

```
es.typed-array.float64-array.js
— es.typed-array.for-each.js
— es.typed-array.from.js
— es.typed-array.includes.js
— es.typed-array.index-of.js
— es.typed-array.int16-array.js
— es.typed-array.int32-array.js
— es.typed-array.int8-array.js
— es.typed-array.iterator.js
├ es.typed-array.join.js
— es.typed-array.last-index-of.js
— es.typed-array.map.js
— es.typed-array.of.js
— es.typed-array.reduce-right.js
— es.typed-array.reduce.js
— es.typed-array.reverse.js
├ es.typed-array.set.js

⊢ es.typed-array.slice.js

— es.typed-array.some.js
├ es.typed-array.sort.js
├ es.typed-array.subarray.js
— es.typed-array.to-locale-string.js
— es.typed-array.to-reversed.js
├ es.typed-array.to-sorted.js

─ es.typed-array.to-string.js

— es.typed-array.uint16-array.js
├ es.typed-array.uint32-array.js
— es.typed-array.uint8-array.js
— es.typed-array.uint8-clamped-array.js
— es.typed–array.with.js
— es.unescape.js
es.weak-map.constructor.js
— es.weak-map.js
es.weak-set.constructor.js
─ es.weak-set.js

    ← esnext.aggregate-error.js

esnext.array-buffer.detached.js
esnext.array-buffer.transfer-to-fixed-length.js
esnext.array-buffer.transfer.js
— esnext.array.at.js
— esnext.array.filter-out.js
├ esnext.array.filter-reject.js
— esnext.array.find-last-index.js
— esnext.array.find-last.js
esnext.array.from-async.js
├ esnext.array.group-by-to-map.js
esnext.array.group-by.js
— esnext.array.group-to-map.js
├ esnext.array.group.js
— esnext.array.is-template-object.js
esnext.array.last-index.js
– esnext.array.last-item.js
esnext.array.to-reversed.js
esnext.array.to-sorted.js
```

```
esnext.array.to-spliced.js
esnext.array.unique-by.js
esnext.array.with.js
esnext.async-disposable-stack.constructor.js
— esnext.async-iterator.as-indexed-pairs.js
— esnext.async-iterator.async-dispose.js
esnext.async-iterator.constructor.js
esnext.async-iterator.drop.js
— esnext.async-iterator.every.js
esnext.async-iterator.filter.js
— esnext.async-iterator.find.js
— esnext.async-iterator.flat-map.js
— esnext.async-iterator.for-each.js
├ esnext.async-iterator.from.js
esnext.async-iterator.indexed.js
— esnext.async-iterator.map.js
— esnext.async-iterator.reduce.js
— esnext.async-iterator.some.js
— esnext.async-iterator.take.js
— esnext.async-iterator.to-array.js
─ esnext.bigint.range.js
esnext.composite-key.js
esnext.composite-symbol.js
esnext.disposable-stack.constructor.js
esnext.function.demethodize.js
esnext.function.is-callable.js
esnext.function.is-constructor.js
— esnext.function.un-this.js

⊢ esnext.global-this.js

— esnext.iterator.as-indexed-pairs.js
esnext.iterator.constructor.js
esnext.iterator.dispose.js
esnext.iterator.drop.js
esnext.iterator.every.js
esnext.iterator.filter.js
├ esnext.iterator.find.js
esnext.iterator.flat-map.js
— esnext.iterator.for-each.js
esnext.iterator.from.js
esnext.iterator.indexed.js
esnext.iterator.map.js
— esnext.iterator.range.js
— esnext.iterator.reduce.js
esnext.iterator.some.js
esnext.iterator.take.is
— esnext.iterator.to-array.js
esnext.iterator.to-async.js
— esnext.json.is-raw-json.js
— esnext.json.parse.js
— esnext.json.raw-json.js
esnext.map.delete-all.js
esnext.map.emplace.js
— esnext.map.every.js
esnext.map.filter.js
```

```
esnext.map.find-key.js
esnext.map.find.js
esnext.map.from.js
esnext.map.group-by.js
esnext.map.includes.js
— esnext.map.key-by.js
— esnext.map.key-of.js
— esnext.map.map-keys.js
— esnext.map.map-values.js
— esnext.map.merge.js
— esnext.map.of.js
— esnext.map.reduce.js
— esnext.map.some.js
— esnext.map.update-or-insert.js
esnext.map.update.js
esnext.map.upsert.js
— esnext.math.clamp.js
— esnext.math.deg-per-rad.js
— esnext.math.degrees.js
— esnext.math.fscale.js
— esnext.math.iaddh.js
esnext.math.imulh.js
esnext.math.isubh.js

— esnext.math.rad-per-deg.js

├ esnext.math.radians.js
esnext.math.scale.js
— esnext.math.seeded-prng.js
esnext.math.signbit.js
├ esnext.math.umulh.js
— esnext.number.from-string.js
— esnext.number.range.js
— esnext.object.has-own.js
— esnext.object.iterate-entries.js
esnext.object.iterate-keys.js
— esnext.object.iterate-values.js
— esnext.observable.constructor.js
esnext.observable.from.js
esnext.observable.js
— esnext.observable.of.js
esnext.promise.all-settled.js
esnext.promise.any.js
─ esnext.promise.try.js
esnext.reflect.define-metadata.js
— esnext.reflect.delete-metadata.js
esnext.reflect.get-metadata-keys.js
|- esnext.reflect.get-metadata.js
esnext.reflect.get-own-metadata-keys.js
— esnext.reflect.get-own-metadata.js
— esnext.reflect.has-metadata.js
— esnext.reflect.has-own-metadata.js
esnext.reflect.metadata.js
– esnext.set.add–all.js
esnext.set.delete-all.js
 esnext.set.difference.js
```

```
— esnext.set.difference.v2.js
— esnext.set.every.js
esnext.set.filter.js
esnext.set.find.js
— esnext.set.from.js
esnext.set.intersection.js
esnext.set.intersection.v2.js
— esnext.set.is-disjoint-from.js
— esnext.set.is-disjoint-from.v2.js
─ esnext.set.is-subset-of.js
— esnext.set.is-subset-of.v2.js
├ esnext.set.is-superset-of.js
— esnext.set.is-superset-of.v2.js
— esnext.set.join.js
esnext.set.map.js
— esnext.set.of.js
— esnext.set.reduce.js
— esnext.set.some.js
— esnext.set.symmetric-difference.js
— esnext.set.symmetric-difference.v2.js
─ esnext.set.union.js
— esnext.set.union.v2.js
esnext.string.at-alternative.js
— esnext.string.at.js
─ esnext.string.code-points.js
esnext.string.cooked.js
— esnext.string.dedent.js
— esnext.string.is-well-formed.js

⊢ esnext.string.match-all.js

— esnext.string.replace-all.js
esnext.string.to-well-formed.js
esnext.suppressed-error.constructor.js
— esnext.symbol.async-dispose.js
esnext.symbol.dispose.js
esnext.symbol.is-registered.js
— esnext.symbol.is-well-known.js
— esnext.symbol.matcher.js
├ esnext.symbol.metadata-key.js
esnext.symbol.metadata.js
├ esnext.symbol.observable.js
esnext.symbol.pattern-match.js
├ esnext.symbol.replace-all.js
├ esnext.typed-array.at.js
— esnext.typed-array.filter-out.js
esnext.typed-array.filter-reject.js
─ esnext.typed-array.find-last-index.js
─ esnext.typed-array.find-last.js
esnext.typed-array.from-async.js
├ esnext.typed-array.group-by.js
├ esnext.typed-array.to-reversed.js
esnext.typed-array.to-sorted.js
esnext.typed-array.to-spliced.js
esnext.typed-array.unique-by.js
esnext.typed-array.with.js
```

```
esnext.weak-map.delete-all.js
  esnext.weak-map.emplace.js
  esnext.weak-map.from.js
  — esnext.weak-map.of.js
  — esnext.weak-map.upsert.js
  — esnext.weak-set.add-all.js
  — esnext.weak-set.delete-all.js
  — esnext.weak-set.from.js
  esnext.weak-set.of.js
  — web.atob.js
  — web⊾btoa.js
  — web.clear-immediate.js
  — web.dom-collections.for-each.js
  — web.dom-collections.iterator.js
  web.dom-exception.constructor.js
  web.dom-exception.stack.js
  — web.dom-exception.to-string-tag.js
  web.immediate.js
  — web.queue-microtask.js
  — web.self.js
  — web.set-immediate.js
  — web.set-interval.js
  — web.set-timeout.js
  — web.structured-clone.js
  — web.timers.js
  — web.url-search-params.constructor.js
  ├ web.url-search-params.js
  — web.url-search-params.size.js
  ─ web.url.constructor.js
   – web.url.js
 └ web.url.to-json.js
– package.json
postinstall.js
– proposals

→ accessible-object-hasownproperty.js

— array-buffer-transfer.js

  — array-filtering-stage-1.js
  — array-filtering.js
  — array-find-from-last.js
  — array-flat-map.js
  — array-from-async-stage-2.js
  ├ array-from-async.js
  ├ array-grouping-stage-3-2.js
  — array-grouping-stage-3.js
  — array-grouping.js
  ⊢ array−includes.js
  — array−is-template-object.js
  — array−last.js
  — array−unique.js
  — async-explicit-resource-management.js
   – async−iteration.js
   async-iterator-helpers.js
  — change-array-by-copy-stage-4.js
   – change−array−by−copy⊾js
```

```
collection-methods.js
collection-of-from.js
— decorator-metadata.js
— decorators.js
— efficient-64-bit-arithmetic.js
— error−cause.js
explicit-resource-management.js
 function-demethodize.js
 - function-is-callable-is-constructor.js
— function-un-this.js
— global-this.js
— index.js
— iterator-helpers-stage-3-2.js
├ iterator-helpers-stage-3.js
iterator-helpers.js
 - iterator−range.js
— json-parse-with-source.js
— keys-composition.js
— map-update-or-insert.js
— map-upsert-stage-2.js
— map-upsert.js
— math-extensions.js
— math−signbit.js
— number−from−string.js
— number−range.js
— object-from-entries.js
object-getownpropertydescriptors.js
— object−iteration.js
├ object-values-entries.js
— observable.js
— pattern-matching.js
– promise–all–settled.js
– promise–any⊾js
— promise−finally.js
— promise−try.js
⊢ reflect-metadata.js
— regexp-dotall-flag.js
— regexp-named-groups.js
— relative-indexing-method.js
— seeded−random.js
— set-methods-v2.js
— set-methods.js
⊢ string–at.js
— string-code-points.js
— string−cooked.js
- string-dedent.js
— string-left-right-trim.js
— string-match-all.js
— string−padding.js
├ string-replace-all-stage-4.js
string-replace-all.js
symbol-description.js
– symbol−predicates.js
- url.js
```

```
— using−statement.js
  — well-formed-stringify.js
  └ well-formed-unicode-strings.js
- stable
  — README.md
  — aggregate-error⊾js
   array
     — at.js
      – concat.js
      – copy-within.js
      – entries.js
      – every⊾js
     – fill.js
      – filter.js
      - find-index.js
     – find-last-index.js
     — find-last.js
      – find.js
      – flat-map₊js
      – flat.js
     — for—each.js
      - from.js
      includes.js
      - index-of.js
     – index.js
      – is−array.js
      - iterator.js
     — join.js
      - keys.js
      – last-index-of₁js
     — map₊js
     – of.js
      – push.js
     — reduce-right.js
     – reduce.js
      – reverse⊾js
      – slice.js
      – some₌js
      – sort.js
      – splice.js
      – to-reversed.js
     – to-sorted.js
     — to-spliced.js
      unshift.js
      – values.js
      – virtual
        ⊢ at.js
        — concat.js
        — copy-within₁js
        — entries.js
         – every.js
         - fill.js
         - filter.js
         - find-index.js
```

```
- find-last-index.js
      - find-last.js
      - find.js
      – flat-map.js
      – flat.js
      – for-each.js
      – includes.js
      - index-of.js
      – index.js
      – iterator.js
      – join.js
      - keys.js
      – last-index-of.js
      — map₊js
      – push.js
      - reduce-right.js
     — reduce.js
      – reverse.js
      – slice.js
      – some₌js
      — sort.js
      – splice.js
      — to-reversed.js
     — to-sorted.js
     — to-spliced.js
      – unshift.js
      - values.js
     └ with.js
   – with.js
array-buffer
  ─ constructor.js
  — index.js
   - is−view.js
  └ slice.js
– atob.js
– btoa.js
– clear-immediate.js
data-view
 └ index.js
date
  — get-year.js
  — index.js
  — now₌js
   – set–year.js
   — to-gmt-string.js
   – to−iso−string.js
   – to−json.js
   - to-primitive.js
  └ to-string.js
dom-collections
  ─ for-each.js
   index.js
  └ iterator.js
- dom-exception
```

```
- constructor.js
    - index.js
   └ to-string-tag.js
 error
   – constructor₌js
    - index.js
  └ to-string.js
– escape.js
 function

→ bind.js

    - has-instance.js
    – index.js
   — name.js
  ∟ virtual
       – bind.js
     └ index.js
— get−iterator–method.js
 - get-iterator.js
– global-this.js
– index.js
 instance
   — at.js
   — bind.js
   - code-point-at.js
   — concat.js
   — copy-within₁js
   — ends−with.js
   — entries.js
   – every.js
   — fill.js
   – filter.js
   — find-index.js
   – find-last-index.js
   — find−last.js
    – find.js
   — flags.js
    – flat–map.js
    – flat.js
    – for-each₁js
   includes.js
   - index-of.js
   – keys.js
   — last-index-of.js
    – map.js
   — match−all.js
    – pad−end.js
    – pad−start.js
    – push.js
    - reduce−right.js
   – reduce.js
    - repeat.js
    - replace-all.js
    – reverse₌js
    - slice.js
```

```
- some.js
   - sort.js
   - splice.js
   – starts–with.js
   – to-reversed.js
   – to-sorted.js
   – to-spliced.js
  – trim-end.js
   - trim−left.js
   – trim−right.js
   – trim−start.js
   – trim.js
  – unshift.js
   - values.js
  └ with.js
- is−iterable.js
– json

─ index.js

   – stringify.js
 └ to-string-tag.js
- map
 └ index.js
- math
  — acosh.js
   – asinh.js
   – atanh.js
  — cbrt.js
  — clz32.js
  — cosh.js
  — expm1.js
  — fround.js
   hypot.js
   – imul.js
  – index.js
   - log10.js
   - log1p.js
   - log2.js
   – sign.js
  – sinh.js
   – tanh.js
   – to–string–tag₊js
 └ trunc.js
– number
  constructor.js
   epsilon.js
   - index.js
   – is−finite.js
   – is−integer.js
   – is−nan.js
  — is−safe−integer.js
   – max−safe−integer.js
   – min−safe−integer.js
   – parse−float.js
   - parse−int.js
```

```
to-exponential.js
   to-fixed.js
   - to-precision.js
 ∟ virtual
     index.js
     to-exponential.js
      - to−fixed.js
     └ to-precision.js
object

— assign.js

  — create.js
   – define–getter.js
  — define-properties.js

— define-property.js

   – define−setter.js
  — entries.js
  — freeze.js
  – from-entries.js
  get-own-property-descriptor₁js
  get-own-property-descriptors.js
  get-own-property-names.js
   – get–own–property–symbols.js
   - get−prototype−of.js
   – has−own.js
  — index.js
  — is-extensible.js
  — is−frozen.js
  — is-sealed.js
  – is.js
  – keys.js
  lookup-getter.js
   - lookup-setter.js
   prevent-extensions.js
   – proto.js
  — seal.js

    set-prototype-of.js

   - to-string.js
 └ values.js
- parse−float.js
- parse−int.js
- promise

— all−settled.js

  — any.js
   - finally.js
 └ index.js
– queue−microtask.js
- reflect
  — apply.js

    ─ construct.js

  — define-property.js
   - delete-property.js
   - get−own−property−descriptor.js
   - get-prototype-of.js
   - get.js
```

```
- has.js
   - index.js
   - is−extensible.js
  – own-keys.js
  - prevent-extensions.js
  – set-prototype-of₁js
   - set.js
 └ to-string-tag.js
regexp

    constructor.js

   - dot-all.js
   – flags.js
  — index.js
  — match.js
   – replace.js
  — search.js
  — split.js
  sticky.js
   – test.js
 └ to-string.js
- self.js
set
 └ index.js
set-immediate.js
– set-interval.js
– set−timeout.js
– string
  — anchor₁js
  — at.js
  — big.js
  blink.js
  — bold.js
  — code-point-at.js
  — ends-with.js
   fixed.js
   – fontcolor.js
  – fontsize.js
   - from-code-point.js
  – includes.js
   – index.js
  italics.js
  — iterator.js
  — link.js
   match-all.js
  — match.js
   – pad−end.js
   – pad−start.js
   – raw₌js
   – repeat.js
  - replace-all.js
   replace.js
   - search.js
   – small.js
   - split.js
```

```
starts-with.js
    - strike.js
    - sub.js
    – substr.js
    - sup.js
    – trim−end.js
    - trim-left.js
    - trim−right.js
    - trim−start.js
    - trim.js
  └ virtual
      — anchor⊾js
       – at.js
       – big.js
       - blink.js
       – bold.js
      — code−point−at.js
       - ends-with.js
       – fixed.js
       fontcolor.js
       fontsize.js
       - includes.js
       – index.js
      italics.js
       - iterator.js
       - link.js
       - match-all.js
       – pad−end.js
       – pad−start.js
       – repeat.js
      - replace-all.js
      — small.js
       – starts–with.js
      – strike.js
      – sub.js
       – substr.js
       – sup.js
       - trim−end.js
       - trim-left.js
      — trim−right.js
       - trim−start.js
     └ trim.js
⊢ structured-clone.js
 - symbol
   — async−iterator.js
    description.js
   – for.js
    – has−instance.js
    - index.js
    is-concat-spreadable.js
    iterator.js
    - key−for.js
    – match-all.js
    - match.js
```

```
replace.js
   - search.js
   - species.js
   – split.js
   - to-primitive.js
   – to–string–tag.js
 └ unscopables.js
typed—array
  — at.js
  – copy−within.js
   – entries.js
   – every⊾js
   - fill.js
   - filter.js
   - find-index.js
  – find-last-index.js
  — find−last.js
  – find.js
  float32-array.js
  – float64–array.js
  – for–each.js
   – from.js
  – includes.js
   - index-of.js
  — index.js
  — int16-array.js
  — int32–array.js
  — int8-array.js
  – iterator.js
  – join.js
   - keys.js
  – last−index–of.js
  – map₊js
  — methods.js
  – of.js
  — reduce-right.js
  – reduce.js
  – reverse⊾js
  – set.js
   – slice.js
  — some.js
  — sort.js
  — subarray.js
   to-locale-string.js
  – to−reversed.js
   – to−sorted.js
  – to-string.js
  – uint16–array.js
   – uint32–array⊾js
  — uint8-array.js
   uint8-clamped-array.js
   - values.js
 └ with.js
 unescape.js
```

```
url
       ⊢ index.js
       └ to-json.js
      url-search-params
       └ index.js
      weak-map
       └ index.js
      - weak-set
       └ index.js
  – stage
    - 1.js
     – 2.js
      - 3.js
     - 4.js
     README.md
     — index.js
    └ pre.js
  web
    ─ README.md
     — dom-collections.js
     — dom-exception.js
     — immediate.js
     — index.js
     — queue−microtask.js
     — structured-clone.js
     — timers.js
     — url-search-params.js
    └ url.js
- core-util-is
  — LICENSE
  README.md
  lib
    └ util.js
 └ package.json

    cosmiconfig

  LICENSE
  README.md
  - dist
    ─ Explorer.d.ts
     Explorer.d.ts.map
    — Explorer.js
    ─ Explorer.js.map
    ExplorerBase.d.ts
     ExplorerBase.d.ts.map
    — ExplorerBase.js
     — ExplorerBase.js.map
     — ExplorerSync.d.ts
     ExplorerSync.d.ts.map
    ─ ExplorerSync.js
    ExplorerSync.js.map
     - cacheWrapper.d.ts
     — cacheWrapper.d.ts.map
     cacheWrapper.js
```

```
- cacheWrapper.js.map
     - getDirectory.d.ts
     — getDirectory.d.ts.map
     — getDirectory.js
     — getDirectory.js.map
     — getPropertyByPath.d.ts
     getPropertyByPath.d.ts.map
     getPropertyByPath.js
     — getPropertyByPath.js.map
     — index.d.ts
      - index.d.ts.map
     - index.js
     — index.js.map
      - loaders.d.ts
      - loaders.d.ts.map
     — loaders.js
     — loaders.js.map
     — readFile.d.ts
     — readFile.d.ts.map
     — readFile.js
     — readFile.js.map
      - types.d.ts
     - types.d.ts.map
      – types.js
      - types.js.map
  – package.json
- cross-spawn
  CHANGELOG.md
  LICENSE
  README.md
  index.js
  – lib
     — enoent.js
     — parse.js
    ∟ util
        — escape.js
         readShebang.js
       resolveCommand.js
   - node_modules
    ∟ .bin
       └ node-which
 └ package.json
crypto-random-string
  index.d.ts
  - index.is
  — license
  — package₁json
 └ readme.md
css-blank-pseudo
  — CHANGELOG.md
   LICENSE.md
   - README.md
   – browser⊾js
   - dist
```

```
browser-global.js
     — browser-global.js.map
     — browser.cjs
     — browser.cjs.map
     — browser.mjs
     ├ browser.mjs.map
     — cli.cjs
      - index.cjs
     └ index.mjs
  └ package.json

    css-declaration-sorter

  ⊢ dist
     ⊢ main.cjs
     └ stable-sort.cjs
   - license.md
  — orders

─ alphabetical.mjs
      - concentric-css.mjs
    ∟ smacss.mjs
  – package.json
   – readme.md
  - src
     ─ main.d.ts
      – main.mjs
     └ shorthand-data.mjs
css-has-pseudo
  CHANGELOG.md
  LICENSE.md
  ─ README.md
  — browser.js
  ⊢ dist
     ─ browser-global.js
     ├ browser-global.js.map
     — browser⊾cjs
     — browser₌cjs.map

    browser.mjs

     — browser.mjs.map
     — cli.cjs
      - index.cjs
     └ index.mjs
  └ package json
- css-loader
  LICENSE
  — README.md
  — dist
     ─ CssSyntaxError.js
     — Warning.js
     ⊢ cjs.js
     — index.js
     — options.json
     — plugins
         - index.js
         – postcss−icss–parser.js
         postcss-import-parser.js
```

```
└ postcss-url-parser.js
                     runtime
                       ⊢ api.js

— getUrl.js

                         — noSourceMaps.js
                      ∟ sourceMaps.js
              – utils.js
node modules
          ⊢ .bin

─ semver

    webpack
    webpack

               - semver
                         LICENSE
                            - README.md
                            - bin
                                  └ semver.js
                          classes
                                   — comparator.js
                                     — index.js
                                      — range.js
                                   └ semver.js
                            - functions
                                    — clean.js
                                   — cmp.js
                                   ─ coerce.js
                                    ├ compare-build.js
                                   ├ compare-loose.js
                                    — compare.js
                                    ─ diff.js
                                      — eq.js
                                      — gt.js
                                     — gte.js
                                     — inc.js
                                     ⊢ lt.js
                                    — lte.js
                                    — major.js
                                      — minor.js
                                    — neq.js
                                       – parse.js
                                      — patch.js
                                     — prerelease.js
                                    — rcompare.js
                                    — rsort.js
                                    ─ satisfies.js
                                         - sort.js
                                   └ valid.js
                            - index.js
                            - internal

    ─ constants.js

                                    — debug₊js

— identifiers.js

                                         – parse−options.js
                                   ∟ re.js
                                package.json
```

```
preload.js
                                   - range.bnf
                              ∟ ranges
                                          — gtr.js
                                           — intersects.js
                                           — ltr.js
                                            — max-satisfying.js
                                           — min-satisfying.js
                                            — min-version.js
                                           — outside.js
                                            – simplify.js
                                            – subset.js
                                             — to-comparators.js
                                         └ valid.js
       └ package.json

    css-minimizer-webpack-plugin

       README.md
         — dist
                  index.js
                   ├ minify.js
                      - options.json
                  └ utils.js
          - node_modules
                 └ .bin
                             └ webpack
          – package.json

    types
    types

─ index.d.ts

                     - minify.d.ts
                  └ utils.d.ts

    css-prefers-color-scheme

         — CHANGELOG.md
         LICENSE.md
          README.md
         — browser₌js
          — browser.min.js
        — dist

    browser-global.js

                    — browser-global.js.map
                    — browser⊾cjs
                    — browser.cjs.map
                   — browser.mjs
                   browser.mjs.map
                    — cli.cjs
                      - index.cjs
                  └ index.mjs
           – package.json
- css-select
          LICENSE
          README.md
             - lib
                   — attributes.d.ts
                      - attributes.d.ts.map
```

```
- attributes.js
     - compile.d.ts
     - compile.d.ts.map
     — compile.js
     — general.d.ts
     — general.d.ts.map
     – general.js
      - index.d.ts
      - index.d.ts.map
     — index.js
     - procedure.d.ts
     - procedure.d.ts.map
     — procedure.js
      pseudo-selectors
        aliases.d.ts
        — aliases.d.ts.map
        — aliases.js
        – filters.d.ts
        – filters.d.ts.map
        – filters.js
        — index.d.ts
         - index.d.ts.map
        — index.js
        - pseudos.d.ts
         - pseudos.d.ts.map
         - pseudos.js
         - subselects.d.ts
        subselects.d.ts.map
       └ subselects.js
     - sort.d.ts
     — sort.d.ts.map
     – sort.js
     - types.d.ts
      - types.d.ts.map
     — types.js
  — package.json
- css-select-base-adapter

    □ .gitattributes

  LICENSE
  – index.js
  — package.json
  – readme.md
 └ test
    ─ data.js
      implementation.js
    └ index.js
- css-tree
  CHANGELOG.md

    LICENSE

  README.md
  – data
    index.js
    └ patch.json
  - dist
```

```
— csstree.js
 └ csstree.min.js
- lib
  common
     ⊢ List.js
     OffsetToLocation.js
     — SyntaxError₊js
      - TokenStream.js
    ∟ adopt-buffer.js
   - convertor
      – create.js
    └ index.js
  – definition-syntax
    — SyntaxError.js
     — generate.js
     — index.js
     — parse.js
      - tokenizer.js
    └ walk.js
   - generator
     — create.js
      - index.js
    ∟ sourceMap.js
  – index.js
   - lexer
     — Lexer.js
    — error.js
     — generic-an-plus-b.js
     — generic-urange.js
     — generic.js
     — index.js
     — match-graph.js
     – match.js
     — prepare−tokens.js
     — search.js
      - structure.js
    └ trace.js
   - parser
     — create.js
      - index.js
    └ sequence.js
  syntax
     — atrule
        ─ font-face.js
        — import.js
        index.js
        — media.js
         – page₌js
       └ supports.js
      config
        — lexer.js
         – mix.js
         – parser⊾js
        ∟ walker.js
```

```
create.js
 function
   expression.js
  ∟ var.js
index.js
node
  — AnPlusB.js
   – Atrule.js
   - AtrulePrelude.js
  AttributeSelector.js
  — Block₊js
  — Brackets.js
  CDC.js
  ├ CDO.js
   ClassSelector.js
   – Combinator₌js
  ─ Comment.js
  Declaration.js
  — DeclarationList.js
  Dimension.js
  — Function.js
  — Hash.js
  — IdSelector.js
  — Identifier.js
  — MediaFeature.js
  — MediaQuery.js
  ⊢ MediaQueryList.js
  Nth.js
  Number.js
  — Operator₊js
  Parentheses.js
  — Percentage.js
  — PseudoClassSelector₊js
  PseudoElementSelector.js
  — Ratio.js
  — Raw₊js
  — Rule₊js
  — Selector.js
  SelectorList.js
  — String.js
  — StyleSheet.js
  TypeSelector.js
  — UnicodeRange.js
  – Url.js
  — Value₊js
  WhiteSpace.js
  └ index.js
- pseudo
   - common

⊢ nth.js

      nthWithOfClause.js
     └ selectorList.js
   - dir⊾js
```

```
- index.js
            - lang.js
            – matches.js
            — not.js
           — nth-child.js
           - nth-last-child.js
            – nth-last-of-type.js
            - nth-of-type.js
           └ slotted.js
         - scope

— atrulePrelude.js

           — default.js
            — index.js
            - selector.js
           └ value.js
      - tokenizer

    ⊢ char-code-definitions.js

        ├ const.js
         - index.js
        └ utils.js
      - utils

⊢ clone.js

         - createCustomError₊js
        ∟ names.js
      - walker
         – create.js
        └ index.js

    package.json

- css-what
  LICENSE
  — lib
     commonis
        — index.d.ts
        index.d.ts.map
         – index.js
         - parse.d.ts
         - parse.d.ts.map
         – parse.js
        — stringify.d.ts
         - stringify.d.ts.map
        stringify.js
        — types.d.ts
         - types.d.ts.map
        └ types.js
      - es
        — index.d.ts
         - index.d.ts.map
         - index.js
         - parse.d.ts
         - parse.d.ts.map
         - parse.js
         - stringify.d.ts
         - stringify.d.ts.map
         – stringify.js
```

```
- types.d.ts
         - types.d.ts.map
        └ types.js
   – package.json
 └ readme.md
css<sub>e</sub>scape

    LICENSE−MIT.txt

  — README.md
  – css.escape.js
 └ package.json
- cssdb

    LICENSE.md

  README.md

    ← cssdb.json

   - cssdb.mjs
 └ package.json
cssesc

    LICENSE−MIT.txt

  — README.md
  — bin
   ∟ cssesc
   - cssesc.js
  — man
    └ cssesc.1
  └ package.json
- cssnano
  LICENSE-MIT
  README.md
  — package.json
  - src
     — index.js
      postcss-discard-comments
       └ tsconfig.tsbuildinfo
      - postcss-discard-empty
       └ tsconfig.tsbuildinfo
       postcss-normalize-whitespace

    tsconfig.tsbuildinfo

   types
     └ index.d.ts
cssnano-preset-default
  — LICENSE-MIT
  README.md
  — package.json
   - src
    └ index.js
   - types
     └ index.d.ts
- cssnano-utils
  LICENSE
   README.md
  — package.json
   - src

— getArguments.js

     index.js
```

```
- rawCache.js
     - sameParent.js
  - types

─ getArguments.d.ts

     — index.d.ts
     - rawCache.d.ts
    - CSSO
  CHANGELOG.md
  LICENSE
  README.md
  — dist
    ⊢ csso.js
    └ csso.min.js
  - lib
    ⊢ clean

⊢ Atrule.js

        – Comment.js
        Declaration.js
        – Raw₌js
        – Rule.js
         - TypeSelector.js
       ─ WhiteSpace.js
        – index.js
       └ utils.js
     - compress.js
      - index.js
     — replace

⊢ Atrule.js

        — AttributeSelector.js
        Dimension.js
        — Number₊js
        – Percentage₊js
        — String.js
        – Url.js
        – Value₊js
        atrule
         └ keyframes.js
        – color.js
         - index.js

    □ property

          ─ background.js
           — border⊾js
            font-weight.js
          └ font.js
     - restructure

─ 1-mergeAtrule.js

        - 2-initialMergeRuleset.js
        - 3-disjoinRuleset.js
        4-restructShorthand.js
         - 6-restructBlock.js
         - 7-mergeRuleset.js
         - 8-restructRuleset.js
         - index.js
```

```
prepare
           createDeclarationIndexer.js
           – index.js
            - processSelector.js
          └ specificity.js
       └ utils.js
      – usage⊾js

    package.json

- cssom

    LICENSE.txt

  - README.mdown
  lib

    ← CSSDocumentRule.js

     CSSFontFaceRule.js
     CSSHostRule.js
     CSSImportRule.js
     CSSKeyframeRule.js
     CSSKeyframesRule.js
     — CSSMediaRule₊js
     — CSSOM.js
     ─ CSSRule.js
     CSSStyleDeclaration.js
     — CSSStyleRule.js
     CSSStyleSheet.js
     ─ CSSSupportsRule.js
     — CSSValue.js
     CSSValueExpression.js
     — MatcherList.js
     ─ MediaList.js
     — StyleSheet.js
     — clone.js
      - index.js
    ∟ parse.js
 └ package.json
cssstyle
 README.md
  - lib
    ─ CSSStyleDeclaration.js
     CSSStyleDeclaration.test.js
     allExtraProperties.js
     — allProperties.js

→ allWebkitProperties.js

     — constants.js
      implementedProperties.js
     — named_colors.json
     – parsers.js
     - parsers.test.js
     properties

— azimuth.js

         background.js
         backgroundAttachment.js
         backgroundColor.js
         backgroundImage.js
```

<pre>backgroundPosition.js</pre>
<pre>backgroundRepeat.js</pre>
— border.js
<pre>borderBottom.js</pre>
— borderBottomColor.js
— borderBottomStyle.js
— borderBottomWidth.js
— borderCollapse.js
— borderColor.js
!
— borderLeft.js
— borderLeftColor.js
— borderLeftStyle.js
<pre>borderLeftWidth.js</pre>
— borderRight.js
<pre>borderRightColor.js</pre>
<pre>borderRightStyle.js</pre>
<pre>borderRightWidth.js</pre>
<pre>borderSpacing.js</pre>
— borderStyle.js
<pre>borderTop.js</pre>
— borderTopColor.js
<pre>borderTopStyle.js</pre>
borderTopWidth.js
borderWidth.js borderWidth.js
— bottom.js
— clear.js
— clip.js
— color.js
— cssFloat.js
⊢ flex.js
— flexBasis.js
— flexGrow.js
— flexShrink.js
— float.js
— floodColor.js
— font.js
— fontFamily.js
— fontSize.js
— fontStyle.js
— fontVariant.js
-
— fontWeight.js
— height.js
— left.js
├ lightingColor.js
— lineHeight.js
— margin.js
— marginBottom.js
— marginLeft.js
— marginRight.js
— marginTop.js
— opacity.js
— outlineColor.js
— padding.js
— paddingBottom.js
— paddingbottom: 15

```
paddingLeft.js
         paddingRight.js
        - paddingTop.js
        – right.js
        – stopColor₌js
        textLineThroughColor.js
        - textOverlineColor.js
        textUnderlineColor.js
        - top.js
        webkitBorderAfterColor.js
        webkitBorderBeforeColor.js
        webkitBorderEndColor.js
       webkitBorderStartColor.js
        – webkitColumnRuleColor.js
        webkitMatchNearestMailBlockguoteColor.js
        – webkitTapHighlightColor.js
       webkitTextEmphasisColor.js
        webkitTextFillColor.js
        webkitTextStrokeColor.js
       └ width.js
     - properties.js
      utils
        – colorSpace.js

    getBasicPropertyDescriptor.js

   node_modules
   ∟ cssom
        LICENSE.txt
        - README.mdown
        - lib
          — CSSDocumentRule.js
          CSSFontFaceRule.js
           - CSSHostRule.js
          CSSImportRule.js
          CSSKeyframeRule.js
          CSSKeyframesRule.js
          CSSMediaRule.js
          – CSSOM.js
           - CSSRule₊js
           CSSStyleDeclaration.js
          CSSStyleRule.js
          CSSStyleSheet.js
          — CSSSupportsRule.js
          — CSSValue.js
          CSSValueExpression.js
           – MatcherList.js
           – MediaList.js
           StyleSheet.js
           – clone.js
           - index.js
           – parse.js
        - package.json
  – package⊾json
csstype
 LICENSE
```

```
- README.md
   - index.d.ts
   index.js.flow
 └ package.json
- damerau-levenshtein

    □ CHANGELOG.md

   - LICENSE
  README.md
  — index.js
  ├ package.json
  - scripts
   └ update-changelog.sh
   - test
    └ test.js
- data-urls

─ LICENSE.txt

  README.md
  — lib
     ⊢ parser.js
    └ utils.js
 └ package.json
- debug
  README.md
  — node modules
    ∟ ms
        — index.js
        — license.md
         package.json
        └ readme.md
  — package.json
  ∟ src

    browser₁js

    common₁js

    index.js
    node.js

- decimal.js

    LICENCE.md

   README.md
  — decimal.d.ts
  — decimal.js
  — decimal.mjs
 └ package.json
dedent
  LICENSE
  — README.md
  — dist
    └ dedent.js
 └ package.json
deep-equal
  _ .editorconfig
   - .eslintrc
   - nycrc
   - CHANGELOG.md
```

```
- LICENSE
   - assert.js
   example
    └ cmp.js
   - index.js
   – package.json
   - readme.markdown
  └ test
     — _tape.js
    └ cmp.js
- deep-is

    _ travis.yml

  LICENSE
  README.markdown
   example
   └ cmp.js
  — index.js
   – package.json
  └ test
     ─ NaN.js
     — cmp.js
    └ neg-vs-pos-0.js

    deepmerge

  - editorconfig
  — changelog.md
  – dist
    ⊢ cjs.js
    _ umd.js
  index.d.ts
  — index.js
  — license.txt
  — package₌json
   - readme.md
 └ rollup.config.js
default-gateway

─ LICENSE

  README.md
  — android.js
  — darwin.js
  — freebsd.js
  — ibmi.js

— index.js

⊢ linux.js

  — openbsd.js
  — package.json
   – sunos.js
  └ win32.js
define—lazy—prop

─ index.d.ts

  — index.js
  – package.json
 └ readme.md
 define-properties
```

```
.editorconfig
   - .eslintrc
    .github
    └ FUNDING.yml
  - nycrc
  CHANGELOG.md
  - LICENSE
  README.md
   - index.js
 └ package.json
defined
 ⊢ _eslintrc
  - .github
   └ FUNDING.yml
  - CHANGELOG.md
  LICENSE
  README.md
  example
    └ defined.js
  — index.js
  — package.json
 ∟ test
    ⊢ def.js
    └ falsy.js
- delayed-stream
 - License
  Makefile
  — Readme.md
  – lib
    └ delayed_stream.js
 └ package.json
- depd

    History.md

  LICENSE
  — Readme.md
  index.js
  — lib
    └ browser
       └ index.js
 └ package.json
– destroy
 — README.md
   - index.js
 └ package.json
detect-newline
 index.d.ts
  — index.js
  — license
  - package.json
 └ readme.md
detect-node
  LICENSE
```

```
- Readme.md
   - browser.js
  index.esm.js
   - index.js
 └ package.json
– detect-port-alt
  .eslintignore
   eslintrc
   - vscode
    └ settings.json
  CONTRIBUTING.md
  HISTORY.md
   - LICENSE
   - README.md
   appveyor₁yml
  – bin
    └ detect-port
  – index.js
  – lib
    └ detect-port.js
  — logo.png
   - node_modules
    debug
        _ .coveralls.yml
         eslintrc
        - .npmignore
        travis.yml
        CHANGELOG.md
        LICENSE
        Makefile
        README.md
        — component.json
         - karma.conf.js
        — node.js
        — package.json
       L src
           — browser.js
           — debug₁js
           — index.js
            inspector-log.js
          └ node.js
      - ms
       ⊢ index.js
        license.md
         – package⊾json
       └ readme.md
  └ package.json
- detective

    ⊥travis.yml

  CHANGELOG.md
  LICENSE
   - bench
     — detect.js
      - esprima_v_acorn.txt
```

```
bin
    └ detective.js
   example
     – strings.js
    └ strings_src.js
  — index.js
   – package⊾json
   - readme.markdown
 ∟ test

→ both.js

     — chained.js
     — complicated.js
     — es2019.js
     — es6-module.js
      - files

→ both.js

        — chained.js
        — es6-module.js
        — for−await.js
         – generators.js
        isrequire.js
         – nested.js
        — optional-catch.js
        — rest-spread.js
        — set-in-object-pattern.js
        — shebang.js
        — sparse–array.js
        — strings.js
         – word.js
        └ yield.js
      - generators.js
      - isrequire.js
      – nested.js
     – noargs₌js
     — parseopts.js
     - rest-spread.js
     — return.js
     — set−in−object−pattern.js
     — shebang.js
     — sparse−array⊾js
     — strings.js
     – word.js
     └ yield.js

    didyoumean

  LICENSE
  README.md
  — didYouMean−1.2.1.js
   - didYouMean-1.2.1.min.js

    package.json

diff-sequences
 - README.md
   build

─ index.d.ts
```

```
└ index.js
   – package.json
 └ perf
     — example.md
    └ index.js
- dir-glob

─ index.js

  — license
  — package.json
 └ readme.md
- dlv

— README.md

  – dist
    ─ dlv.es.js
     ├ dlv.es.js.map
     ⊢ dlv.js

— dlv.js.map

     — dlv.umd.js
    └ dlv.umd.js.map
  index.js
 └ package.json
- dns-equal
 _ .travis.yml
  LICENSE
  README.md
 — index.js
  — package.json
 └ test.js
dns-packet

─ LICENSE

  README.md
 — classes.js
 index.js
 — opcodes.js
 — optioncodes.js
  — package.json
   - rcodes.js

    types.js

- doctrine

    ─ CHANGELOG.md

  — LICENSE

    LICENSE.closure-compiler

    LICENSE.esprima

  README.md
  — lib
    ─ doctrine.js
      - typed.js
    └ utility.js
 └ package.json

    dom-accessibility-api

   browserslistrc
   LICENSE.md
   - README.md
```

```
dist
 accessible-description.d.ts
 accessible-description.d.ts.map
 accessible-description.js
accessible-description.js.map

    accessible-description.mjs

 accessible-description.mjs.map

    accessible-name-and-description.d.ts

 accessible-name-and-description.d.ts.map
 accessible-name-and-description.js
 accessible-name-and-description.js.map
 accessible-name-and-description.mjs
 accessible-name-and-description.mjs.map
 accessible-name.d.ts
 - accessible-name.d.ts.map
 — accessible-name.js
 accessible-name.js.map
 accessible-name.mjs
 accessible-name.mjs.map
 - getRole.d.ts
 getRole.d.ts.map
 - getRole.js
 getRole.js.map
 – getRole.mjs
 - getRole.mjs.map
 - index.d.ts
 - index.d.ts.map
 - index.js
 - index.js.map
 — index.mjs
— index.mjs.map
 is-inaccessible.d.ts
 is-inaccessible.d.ts.map
 – is−inaccessible.js
 is-inaccessible.js.map
 - is−inaccessible.mjs
 is-inaccessible.mjs.map
 – polyfills
   — SetLike.d.ts
    SetLike.d.ts.map
    SetLike.is
    SetLike.js.map
    SetLike.mjs
    SetLike.mjs.map
    array.from.d.ts
    array.from.d.ts.map
    – array.from.js
    - array.from.js.map
    array.from.mjs
    array.from.mjs.map
    iterator.d.js
    - iterator.d.js.map
     iterator.d.mjs
    - iterator.d.mjs.map
```

```
- util.d.ts
      - util.d.ts.map
     — util.js
     — util.js.map
     — util.mjs
    └ util.mjs.map
   – package.json
- dom-converter
  LICENSE
  README.md
   - lib
    ─ domConverter.js
     ─ domToMarkup.js
     — objectToSaneObject.js
    └ saneObjectToDom.js
  └ package.json
– dom-serializer
  README.md
   - lib
     — esm
        foreignNames.d.ts
        — foreignNames.d.ts.map
         — foreignNames.js
        - index.d.ts
        — index.d.ts.map
         - index.js
        └ package.json
      - foreignNames.d.ts
     — foreignNames.d.ts.map
     foreignNames.js
     - index.d.ts
      - index.d.ts.map
    └ index.js
  └ package.json

    domelementtype

   LICENSE
   - lib
    ⊢ esm

─ index.d.ts

        — index.d.ts.map

─ index.js

        └ package.json
     - index.d.ts
      - index.d.ts.map
    └ index.js
   – package.json
  └ readme.md

    domexception

  LICENSE.txt
  README.md
   - index.js
   - lib

→ DOMException-impl.js
```

```
DOMException.js
      legacy-error-codes.json
    └ utils.js
  - node_modules
    LICENSE.md
        - README.md
        - lib
          └ index.js

    package.json

  – package.json

    webidl2js-wrapper.js

- domhandler
  LICENSE
   - lib

⊢ index.d.ts

     — index.d.ts.map
    index.js
     — node.d.ts
     - node.d.ts.map
    └ node.js
   package.json
 └ readme.md
domutils

    LICENSE

   - lib

─ feeds.d.ts

     — feeds.d.ts.map
    feeds.js
     — helpers.d.ts
     — helpers.d.ts.map
     — helpers.js
     index.d.ts
     — index.d.ts.map
     — index.js
     ─ legacy.d.ts
     legacy.d.ts.map
     — legacy.js
     manipulation.d.ts
     — manipulation.d.ts.map
     manipulation.js
     — querying.d.ts
     — querying.d.ts.map
     — querying.js
     — stringify.d.ts
      stringify.d.ts.map
     — stringify.js
      - traversal.d.ts
      - traversal.d.ts.map
    └ traversal.js
   - package.json
   - readme.md
dot-case
  LICENSE
```

```
- README.md
   - dist

⊢ index.d.ts

     — index.js
     ├ index.js.map
     index.spec.d.ts
      - index.spec.js
    └ index.spec.js.map
   - dist.es2015

⊢ index.d.ts

      – index.js

─ index.js.map

     index.spec.d.ts
      - index.spec.js
    └ index.spec.js.map
 └ package.json
dotenv

    □ CHANGELOG.md

  LICENSE
  — README.md
  ─ config.js
  — lib
    ⊢ cli-options.js
     ├ env-options.js
    └ main.js
   – package.json
  └ types

─ index.d.ts

     ⊢ test.ts
     - tsconfig.json
    └ tslint.json

    dotenv-expand

─ LICENSE

  — README.md
  dotenv-expand.png
  index.d.ts
   - lib
   ∟ main.js
 └ package.json
- duplexer

─ .travis.yml

  LICENCE
  README.md
  — index.js
  — package.json
 L test
    └ index.js
- ee-first
  README.md
   – index.js
 └ package.json
ejs

─ LICENSE
```

```
README.md
   - bin
    └ cli.js
  – ejs.js
  — ejs.min.js
  — jakefile.js
   – lib
    ⊢ ejs.js
    └ utils.js
  - node_modules
    └ .bin
       └ jake
  — package.json
 └ usage.txt
electron-to-chromium
  CHANGELOG.md
  — LICENSE
  — README.md
  — chromium-versions.js

    ⊢ chromium-versions.json

    full-chromium-versions.js

  full-chromium-versions.json

─ full-versions.js

─ full-versions.json

  index.js
  — package.json
   - versions.js
 └ versions.json
emittery
 index.d.ts
  index.js
  — license
  – package.json
 └ readme.md
emoji-regex

    LICENSE−MIT.txt

  README.md
  — RGI_Emoji.d.ts
  – RGI_Emoji.js
  – es2015

→ RGI_Emoji.d.ts

— RGI_Emoji.js

     index.d.ts
     — index.js
      - text.d.ts
    └ text.is
  — index.d.ts
  index.js
  – package.json
   - text.d.ts
 └ text.js
emojis-list
  CHANGELOG.md
   - LICENSE.md
```

```
README.md
  - index.js
 └ package.json
encodeurl
  HISTORY md

    LICENSE

  README.md
  - index.js
 └ package.json

    enhanced-resolve

  LICENSE
  README.md
  - lib

→ AliasFieldPlugin.js

     — AliasPlugin.js
    — AppendPlugin.js
    CachedInputFileSystem.js
    CloneBasenamePlugin.js
    ConditionalPlugin.js
    DescriptionFilePlugin.js
    DescriptionFileUtils.js
    DirectoryExistsPlugin.js
     — ExportsFieldPlugin.js
    ExtensionAliasPlugin.js
    — FileExistsPlugin.js
     ImportsFieldPlugin.js
     JoinRequestPartPlugin.js
    — JoinRequestPlugin.js
    ─ LogInfoPlugin.js
    — MainFieldPlugin.js
    ModulesInHierachicDirectoriesPlugin.js

    ModulesInHierarchicalDirectoriesPlugin.js

     – ModulesInRootPlugin.js
     — NextPlugin.js
     — ParsePlugin.js
    — PnpPlugin.js
    — Resolver.js
    — ResolverFactory.js
    — RestrictionsPlugin.js
    — ResultPlugin.js
    — RootsPlugin.js
    SelfReferencePlugin.js
    — SymlinkPlugin.js
     SyncAsyncFileSystemDecorator.js
     TryNextPlugin.js
    — UnsafeCachePlugin.js
     UseFilePlugin.js
     createInnerContext.js
     forEachBail.js
     — getInnerRequest.js
     getPaths.js
     - index.js
    └ util
       ⊢ entrypoints.js
```

```
- identifier.js
         - path.js
        └ process-browser.js
   – package.json
 └ types.d.ts
entities
  LICENSE
   - lib

⊢ decode.d.ts

     — decode.d.ts.map
     — decode.js
     — decode_codepoint.d.ts
     decode_codepoint.d.ts.map
     decode_codepoint.js
     — encode.d.ts
     — encode.d.ts.map
     — encode.js
     — index.d.ts
     — index.d.ts.map
      – index.js
     - maps
        — decode.json
        — entities.json
         – legacy.json
        └ xml.json
   – package⊾json
  └ readme.md
- error-ex
  LICENSE
  README.md

─ index.js

 └ package.json

    error-stack-parser

  README.md
  – dist
     — error-stack-parser.js
      error-stack-parser.min.js
    └ error-stack-parser.min.js.map
  — error-stack-parser.d.ts
   – error–stack–parser₊js

    package.json

es-abstract
  - editorconfig
  eslintrc
   nycrc
  - 2015

    AbstractEqualityComparison.js

     ─ AbstractRelationalComparison.js

    AdvanceStringIndex.js

— ArrayCreate.js

     ArraySetLength.js
     — ArraySpeciesCreate₊js
      – Call₁js
```

```
CanonicalNumericIndexString.js
CharacterRange.js
CompletePropertyDescriptor.js
CompletionRecord.js
CreateDataProperty.js
CreateDataPropertyOrThrow.js
CreateHTML.js
CreateIterResultObject.js
CreateListFromArrayLike.js
CreateMethodProperty.js
DateFromTime.js
— Day₊js
— DayFromYear₊js
— DayWithinYear₊js
— DaysInYear₊js
DefinePropertyOrThrow.js

→ DeletePropertyOrThrow.js

DetachArrayBuffer.js
EnumerableOwnNames.js
FromPropertyDescriptor.js
— Get.js
GetGlobalObject.js
— GetIterator.js
— GetMethod.js
─ Get0wnPropertyKeys.js
— GetPrototypeFromConstructor₁js
— GetSubstitution.js
— GetV.js
─ HasOwnProperty.js
— HasProperty.js
— HourFromTime.js

─ InLeapYear.js

InstanceofOperator₁js
— Invoke.js
IsAccessorDescriptor.js
— IsArray.js
— IsCallable.js

    IsCompatiblePropertyDescriptor.js

— IsConcatSpreadable.js
- IsConstructor.js
— IsDataDescriptor₊js
IsDetachedBuffer.js
— IsExtensible.js
IsGenericDescriptor.js
— IsInteger.js
— IsPromise.js

    IsPropertyDescriptor.js

IsPropertyKey.js
 - IsRegExp.js
— IteratorClose.js
 IteratorComplete.js
 IteratorNext.js
 - IteratorStep.js
 - IteratorValue.js
```

```
- MakeDate.js
– MakeDay₊js
MakeTime.js
– MinFromTime₊js
MonthFromTime.js
NormalCompletion.js
ObjectCreate.js
ObjectDefineProperties.js
─ OrdinaryCreateFromConstructor.js
─ OrdinaryDefineOwnProperty.js
OrdinaryGetOwnProperty.js
OrdinaryHasInstance.js
— OrdinaryHasProperty.js
— QuoteJSONString.js
RegExpCreate.js
RegExpExec.js
RequireObjectCoercible.js
SameValue.js
— SameValueZero₊js
SecFromTime.js
— Set.js
SetFunctionName.js
SetIntegrityLevel.js
SpeciesConstructor.js
SplitMatch.js
StrictEqualityComparison.js
— StringCreate.js
StringGetIndexProperty.js

    SymbolDescriptiveString.js

TestIntegrityLevel.js
TimeClip.js
 - TimeFromYear⊾js
 - TimeWithinDay.js
 - ToBoolean.js
 ToDateString.js
 - ToInt16.js
 - ToInt32.js
 - ToInt8.js
 - ToInteger.js
 - ToLength.js
– ToNumber₊js
ToObject.js
ToPrimitive.js

    ToPropertyDescriptor.js

 - ToPropertyKey.js
 - ToString.js
 - ToUint16.js
 - ToUint32.js
 - ToUint8.js
 - ToUint8Clamp.js
 - Type.js

    ValidateAndApplyPropertyDescriptor.js

– ValidateTypedArray⊾js
 WeekDay.js
```

```
YearFromTime.js
   – abs.įs
   - floor.js
  – max₌js
  — min.js
  — modulo.js
  — msFromTime.js
  thisBooleanValue.js
  — thisNumberValue.js
   - thisStringValue.js
 └ thisTimeValue.js
- 2016

    AbstractEqualityComparison.js

    AbstractRelationalComparison.js

  AdvanceStringIndex.js
  — ArrayCreate.js
  — ArraySetLength.js
  — ArraySpeciesCreate.js
  — Call.js
  CanonicalNumericIndexString.js
  CharacterRange.js
  CompletePropertyDescriptor.js
  CompletionRecord.js
  CreateDataProperty.js
  ├ CreateDataPropertyOrThrow.js
  — CreateHTML.js
  ├ CreateIterResultObject.js
  CreateListFromArrayLike.js
  CreateMethodProperty.js
  — DateFromTime.js
  — Day₊js
  — DayFromYear₊js
  — DayWithinYear₊js
  — DaysInYear₊js
  ─ DefinePropertyOrThrow.js
  ─ DeletePropertyOrThrow.js
  — DetachArrayBuffer₊js
  ─ EnumerableOwnNames.js
  FromPropertyDescriptor.js
  — Get.js
  GetGlobalObject.js
  — GetIterator.js
  ─ GetMethod.js
  — Get0wnPropertyKeys.js
  GetPrototypeFromConstructor.js
  — GetSubstitution.js
  – GetV.js
  HasOwnProperty₁js
  — HasProperty.js
  — HourFromTime₊js
   InLeapYear.js
   InstanceofOperator.js
   - Invoke.js

    IsAccessorDescriptor.js
```

```
- IsArray⊾js
 - IsCallable.js

    IsCompatiblePropertyDescriptor.js

IsConcatSpreadable.js
IsConstructor.js
— IsDataDescriptor.js
IsDetachedBuffer.js
 - IsExtensible.js

    IsGenericDescriptor.js

 - IsInteger.js
— IsPromise.js
 IsPropertyDescriptor.js
— IsPropertyKey.js
 IsRegExp.js
 IterableToArrayLike.js
 - IteratorClose.js
— IteratorComplete.js
IteratorNext.js
— IteratorStep.js
IteratorValue.js
— MakeDate.js
MakeDay.js
— MakeTime.js
— MinFromTime.js
— MonthFromTime.js
NormalCompletion.js
— ObjectCreate.js
ObjectDefineProperties.js
─ OrdinaryCreateFromConstructor.js
OrdinaryDefineOwnProperty.js
─ OrdinaryGetOwnProperty.js
─ OrdinaryGetPrototypeOf.js
OrdinaryHasInstance.js
DrdinaryHasProperty.js
─ OrdinarySetPrototypeOf.js

— QuoteJSONString.js

— RegExpCreate.js
— RegExpExec₁js
RequireObjectCoercible.js
— SameValue₊js
SameValueNonNumber.is
SameValueZero.js
— SecFromTime.js
— Set.js
SetFunctionName.js
SetIntegrityLevel.js
SpeciesConstructor₁js
SplitMatch.js
StrictEqualityComparison.js
— StringCreate₊js

    SymbolDescriptiveString.js

    TestIntegrityLevel.js

 TimeClip.js
 - TimeFromYear.js
```

```
TimeWithinDay.js
   - ToBoolean.js
   ToDateString.js
   - ToInt16.js
   - ToInt32.js
   - ToInt8.js
   - ToInteger.js
   - ToLength.js
   - ToNumber₊js
   - ToObject.js
   - ToPrimitive.js
   ToPropertyDescriptor.js
   - ToPropertyKey.js
   - ToString.js
   - ToUint16.js
   - ToUint32.js
  – ToUint8.js
   - ToUint8Clamp.js
  — Type₊js
  UTF16Decode.js
  ─ UTF16Encoding.js
  ValidateAndApplyPropertyDescriptor.js
  — ValidateTypedArray₊js
  — WeekDay₊js
  — YearFromTime.js
  – abs.js
  – floor.js
  — max.js
  — min.js
  — modulo.js
  — msFromTime.js
  thisBooleanValue.js

— thisNumberValue.js

   thisStringValue.js
 └ thisTimeValue.js
- 2017

    AbstractEqualityComparison.js

  AbstractRelationalComparison.js
  AdvanceStringIndex.js
  — ArrayCreate₊js
  ArraySetLength.js
  — ArraySpeciesCreate.js
  — Call.js
  CanonicalNumericIndexString.js
  — CharacterRange.js
  ├ CompletePropertyDescriptor.js
  ─ CompletionRecord.js
  CreateDataProperty.js
  ─ CreateDataPropertyOrThrow.js
  ├ CreateHTML.js
  CreateIterResultObject.js
  CreateListFromArrayLike.js
  CreateMethodProperty.js
  DateFromTime.js
```

```
– Day⊾js
DayFromYear.js
DayWithinYear.js
— DaysInYear.js
DefinePropertyOrThrow.js

→ DeletePropertyOrThrow.js

DetachArrayBuffer.js
— EnumerableOwnProperties.js
FromPropertyDescriptor.js
— Get.js
GetGlobalObject.js
— GetIterator.js
— GetMethod.js
Get0wnPropertyKeys.js
GetPrototypeFromConstructor.js
GetSubstitution.js
— GetV.js
HasOwnProperty.js
HasProperty.js
— HourFromTime.js
— InLeapYear.js
 InstanceofOperator.js
- Invoke.js
— IsAccessorDescriptor₁js
– IsArray.js
— IsCallable₊js
— IsCompatiblePropertyDescriptor.js
IsConcatSpreadable.js
 - IsConstructor⊾js
— IsDataDescriptor.js
— IsDetachedBuffer₊js
 - IsExtensible.js
IsGenericDescriptor.js
— IsInteger.js
─ IsPromise.js
⊢ IsPropertyDescriptor.js
— IsPropertyKey₊js
— IsRegExp.js
IsSharedArrayBuffer.js
- IterableToList.js
IteratorClose.js
IteratorComplete.js
⊢ IteratorNext.js
– IteratorStep.js
 - IteratorValue.js
– MakeDate₊js
– MakeDay⊾js
MakeTime.js
– MinFromTime₊js
— MonthFromTime.js
NormalCompletion.js
NumberToRawBytes.js
— ObjectCreate₊js

    ObjectDefineProperties.js
```

```
OrdinaryCreateFromConstructor.js
OrdinaryDefineOwnProperty.js
OrdinaryGetOwnProperty.js
OrdinaryGetPrototypeOf.js
─ OrdinaryHasInstance.js
├ OrdinaryHasProperty.js
— OrdinarySetPrototypeOf.js
OrdinaryToPrimitive.js
QuoteJSONString.js
— RawBytesToNumber₊js
RegExpCreate.js
RegExpExec.js
RequireObjectCoercible.js
— SameValue.js
SameValueNonNumber.js
— SameValueZero₊js
— SecFromTime₊js
— Set.js
SetFunctionName.js
— SetIntegrityLevel.js
— SpeciesConstructor₊js
— SplitMatch.js
StrictEqualityComparison.js
— StringCreate.js
StringGetOwnProperty.js
SymbolDescriptiveString.js
 - TestIntegrityLevel.js
TimeClip.js
 - TimeFromYear⊾js
– TimeWithinDay₊js
ToBoolean.is
 - ToDateString.js
 - ToIndex.js
 - ToInt16.js
 - ToInt32.js
 - ToInt8.js
 - ToInteger.js
 - ToLength.js
 - ToNumber₊js
 - ToObject.js
– ToPrimitive.js
ToPropertyDescriptor₁js
ToPropertyKey.js
 - ToString.js
 - ToUint16.js
 - ToUint32.js
 - ToUint8.js
 - ToUint8Clamp.js
 - Type.js
— UTF16Decode₊js
UTF16Encoding.js

    ValidateAndApplyPropertyDescriptor.js

ValidateAtomicAccess.js
 ValidateTypedArray.js
```

```
- WeekDay⊾js
   YearFromTime.js
  – abs.įs
  – floor⊾js
  – max.js
  — min.js
  — modulo.js
  — msFromTime.js
  thisBooleanValue.js
  — thisNumberValue₊js
   - thisStringValue.js
 └ thisTimeValue.js
- 2018

    AbstractEqualityComparison.js

    AbstractRelationalComparison.js

  AdvanceStringIndex.js
  — ArrayCreate₊js
  ArraySetLength.js
  — ArraySpeciesCreate₊js
  AsyncIteratorClose.js
  — Call.js
  CanonicalNumericIndexString.js
  — CharacterRange₊js
  ─ CompletePropertyDescriptor.js
  ─ CompletionRecord.js
  CopyDataProperties.js
  ─ CreateAsyncFromSyncIterator.js
  CreateDataProperty.js
  ├ CreateDataPropertyOrThrow.js
  — CreateHTML.js
  CreateIterResultObject.js
  — CreateListFromArrayLike.js
  CreateMethodProperty.js
  DateFromTime.js
  — DateString.js
  — Day₊js
  — DayFromYear₊js
  — DayWithinYear₊js
  — DaysInYear.js
  DefinePropertyOrThrow.js
  DeletePropertyOrThrow.js

→ DetachArrayBuffer.js

  ─ EnumerableOwnPropertyNames.js
  FromPropertyDescriptor.js
  — Get.is
  — GetGlobalObject.js
  — GetIterator.js
  GetMethod.js
  ─ Get0wnPropertyKeys.js
  — GetPrototypeFromConstructor₌js
  GetSubstitution.js
  – GetV.js
  – HasOwnProperty.js
  HasProperty.js
```

```
HourFromTime.js
 InLeapYear.js
 InstanceofOperator.js
– Invoke.js

    IsAccessorDescriptor.js

— IsArray₊js
- IsCallable.js

    IsCompatiblePropertyDescriptor.js

 IsConcatSpreadable.js
 - IsConstructor⊾js
– IsDataDescriptor⊾js
 IsDetachedBuffer.js
IsExtensible.js

    IsGenericDescriptor.js

 - IsInteger.js
 – IsPromise.js
— IsPropertyKey.js
IsRegExp.js
IsSharedArrayBuffer.js
IsStringPrefix.js
IterableToList.js
 - IteratorClose.js
 IteratorComplete.js
— IteratorNext.js
 IteratorStep.js
– IteratorValue.js
— MakeDate.js
— MakeDay₊js
— MakeTime₊js
— MinFromTime.js
— MonthFromTime.js
NormalCompletion.js
NumberToRawBytes.js
— NumberToString.js
- ObjectCreate.js
─ ObjectDefineProperties.js
OrdinaryCreateFromConstructor.js
— OrdinaryDefineOwnProperty.js
─ OrdinaryGetOwnProperty.js
─ OrdinaryGetPrototypeOf.js
OrdinaryHasInstance.js
─ OrdinaryHasProperty.js
─ OrdinarySetPrototypeOf.js
─ OrdinaryToPrimitive.js
— PromiseResolve.js
QuoteJSONString.js
RawBytesToNumber.js
RegExpCreate.js
— RegExpExec.js
RequireObjectCoercible.js
SameValue.js
 SameValueNonNumber.js
SameValueZero.js
 SecFromTime.js
```

```
Set.js
 SetFunctionLength.js
SetFunctionName.js
SetIntegrityLevel.js
SpeciesConstructor.js
— SplitMatch.js
StrictEqualityComparison.js
StringCreate.js
StringGetOwnProperty.js
SymbolDescriptiveString.js
 TestIntegrityLevel.js
 ThrowCompletion.js
 - TimeClip.js
 - TimeFromYear₊js
 TimeString.js
 - TimeWithinDay.js
– ToBoolean.js
 - ToDateString.js
 - ToIndex.js
 - ToInt16.js
 - ToInt32.js
 - ToInt8.js
 - ToInteger.js
 - ToLength.js
 - ToNumber₊js
 - ToObject.js
 - ToPrimitive.js
 ToPropertyDescriptor.js
 ToPropertyKey.js
- ToString.js
- ToUint16.is
 - ToUint32.js
 - ToUint8.js
 - ToUint8Clamp.js
 - Type.js
– UTF16Decode.js
UTF16Encoding.js
─ UnicodeEscape.js

    ValidateAndApplyPropertyDescriptor.js

ValidateAtomicAccess.js
ValidateTypedArray.js
WeekDay.js
— YearFromTime.js
– abs.js
 - floor⊾js
– max.js
– min.js
— modulo.js
— msFromTime.js
— thisBooleanValue.js
 - thisNumberValue.js
 - thisStringValue.js
 thisSymbolValue.js
- thisTimeValue.js
```

```
2019
AbstractEqualityComparison.js

    AbstractRelationalComparison.js

AddEntriesFromIterable.js
AdvanceStringIndex.js
— ArrayCreate₊js
ArraySetLength.js
— ArraySpeciesCreate.js
 AsyncFromSyncIteratorContinuation.js
 AsyncIteratorClose.js
 — Call.js
CanonicalNumericIndexString.js
— CharacterRange₊js
CompletePropertyDescriptor.js
CompletionRecord.js
CopyDataProperties.js
─ CreateAsyncFromSyncIterator.js
— CreateDataProperty.js
CreateDataPropertyOrThrow.js
— CreateHTML.js
CreateIterResultObject.js
CreateListFromArrayLike.js
 CreateMethodProperty.js
— DateFromTime.js
— DateString.js
— Day₊js
— DayFromYear₊js
— DayWithinYear₊js
— DaysInYear.js
DefinePropertyOrThrow.js
DeletePropertyOrThrow.js
─ DetachArrayBuffer.js
EnumerableOwnPropertyNames.js
— FlattenIntoArray.js

⊢ FromPropertyDescriptor.js

⊢ Get.js
— GetGlobalObject.js
— GetIterator.js
— GetMethod.js
— Get0wnPropertyKeys.js

    GetPrototypeFromConstructor.js

— GetSubstitution.js
— GetV.js
 — Has0wnProperty.js
 — HasProperty.js
— HourFromTime.js
 - InLeapYear.js
 InstanceofOperator.js
 - Invoke.js
 — IsAccessorDescriptor.js
 - IsArray.js
 - IsCallable.js

    IsCompatiblePropertyDescriptor.js

 IsConcatSpreadable.js
```

```
- IsConstructor⊾js
 IsDataDescriptor.js
 IsDetachedBuffer.js
IsExtensible.js
 IsGenericDescriptor.js
— IsInteger.js
IsPromise.js
 IsPropertyKey.js
 IsRegExp.js
 IsSharedArrayBuffer.js
IsStringPrefix.js
 - IterableToList.js
— IteratorClose.js
 IteratorComplete.js
 - IteratorNext.js
 - IteratorStep.js
— IteratorValue.js
– MakeDate₊įs
— MakeDay₊js
— MakeTime.js
— MinFromTime.js
MonthFromTime.js
NormalCompletion.js
NumberToRawBytes.js
NumberToString.js
— ObjectCreate.js
─ ObjectDefineProperties.js
OrdinaryCreateFromConstructor.js
─ OrdinaryDefineOwnProperty.js
— OrdinaryGetOwnProperty.js
─ OrdinaryGetPrototypeOf.js
├ OrdinaryHasInstance.js
├ OrdinaryHasProperty.js
─ OrdinarySetPrototypeOf.js
─ OrdinaryToPrimitive.js
— PromiseResolve.js
— QuoteJSONString₁js
— RawBytesToNumber₊js
RegExpCreate.js
— RegExpExec.js
RequireObjectCoercible.js
— SameValue₊js
— SameValueNonNumber₊js
SameValueZero.js
— SecFromTime.js
— Set.js
SetFunctionLength.js
SetFunctionName.js
SetIntegrityLevel.js
SpeciesConstructor.js
 SplitMatch.js

    StrictEqualityComparison.js

– StringCreate.js
 StringGetOwnProperty.js
```

```
SymbolDescriptiveString.js
   TestIntegrityLevel.js
   ThrowCompletion.js
   - TimeClip.js
   - TimeFromYear.js
   - TimeString.js
   - TimeWithinDay.js
   - ToBoolean.js
   ToDateString.js
   - ToIndex⊾js
   - ToInt16.js
   - ToInt32.js
   - ToInt8.js
   - ToInteger.js
   - ToLength.js
   - ToNumber.js
   ToObject.js
   - ToPrimitive.js

    ToPropertyDescriptor.js

   - ToPropertyKey.js
   - ToString.js
   - ToUint16.js
   - ToUint32.js
   - ToUint8.js
   - ToUint8Clamp.js
   - TrimString.js
   – Type⊾js
  — UTF16Decode.js
  UTF16Encoding.js
  — UnicodeEscape.js
  — ValidateAndApplyPropertyDescriptor.js
   ValidateAtomicAccess.js
   ValidateTypedArray.js
  — WeekDay.js
  YearFromTime.js
  — abs.js
   – floor.js
  — max.js
  — min.js
  — modulo.js
  — msFromTime.js
  — thisBooleanValue.js
  — thisNumberValue.js
  — thisStringValue.js
   thisSymbolValue.js
 └ thisTimeValue.js
- 2020

    AbstractEqualityComparison.js

  ─ AbstractRelationalComparison.js
  AddEntriesFromIterable.js
   AdvanceStringIndex.js
   ArrayCreate.js
  ArraySetLength.js
   ArraySpeciesCreate.js
```

```
AsyncFromSyncIteratorContinuation.js
 - AsyncIteratorClose.js
BigInt
   — add.js
   bitwiseAND.js
   bitwiseNOT.js
    - bitwiseOR.js
    – bitwiseXOR.js
    – divide.js
   – equal.js
   exponentiate.js
    - index.js
    leftShift.js
    - lessThan.js
    multiply.js
   – remainder₊js
   — sameValue.js
   – sameValueZero₊js
   signedRightShift.js
   – subtract.įs
   toString.js
    - unaryMinus.js
  └ unsignedRightShift.js
— BigIntBitwiseOp.js
— BinaryAnd.js
— BinaryOr.js
— BinaryXor⊾js
— Call.js
CanonicalNumericIndexString.js
— CharacterRange.js
— CodePointAt.is
CompletePropertyDescriptor.js
CompletionRecord.js
CopyDataProperties.js
CreateAsyncFromSyncIterator.js
─ CreateDataProperty.js
— CreateDataPropertyOrThrow₁js
─ CreateHTML.js
CreateIterResultObject.js
CreateListFromArrayLike.js
CreateMethodProperty.js
CreateRegExpStringIterator.js
— DateFromTime.js
— DateString.js
— Day₊js
— DayFromYear₊js
— DayWithinYear₊js
— DaysInYear₊js
├ DefinePropertyOrThrow.js

→ DeletePropertyOrThrow.js

DetachArrayBuffer.js
EnumerableOwnPropertyNames.js
– FlattenIntoArray.js

    FromPropertyDescriptor.js
```

```
– Get.js
GetGlobalObject.js
— GetIterator.js
GetMethod.js
Get0wnPropertyKeys.js
— GetPrototypeFromConstructor₁js
GetSubstitution.js
— GetV.js
— HasOwnProperty₁js
— HasProperty.js
— HourFromTime.js
- InLeapYear.js
InstanceofOperator.js
 - Invoke.js
 IsAccessorDescriptor.js
– IsArray⊾js
— IsBigIntElementType.js
IsCallable.js

    IsCompatiblePropertyDescriptor.js

— IsConcatSpreadable.js
– IsConstructor.js
 IsDataDescriptor.js
 IsDetachedBuffer.js
IsExtensible.js
IsGenericDescriptor.js
— IsInteger.js
— IsNoTearConfiguration.js
— IsNonNegativeInteger₊js
 - IsPromise.js
— IsPropertyKey.js
— IsRegExp.js

─ IsSharedArrayBuffer.js

— IsStringPrefix.js
IsUnclampedIntegerElementType.js
IsUnsignedElementType.js
⊢ IterableToList.js
— IteratorClose.js
 IteratorComplete.js
— IteratorNext.js
- IteratorStep.js
IteratorValue.js
— LengthOfArrayLike.js
— MakeDate₊js
— MakeDay₊js
— MakeTime₊js
— MinFromTime.js
MonthFromTime.js
NormalCompletion.js
– Number
  ⊢ add.js
    bitwiseAND.js
    bitwiseNOT.js
    - bitwiseOR.js
    - bitwiseXOR.js
```

```
- divide.js
    - equal.js
    - exponentiate.js
    - index.js
    leftShift.js
    - lessThan.js
   – multiply.js
   – remainder.js
    - sameValue₊js
   – sameValueZero₊js
   signedRightShift.js
   subtract.js
   – toString.js
    - unaryMinus.js
  └ unsignedRightShift.js
 - NumberBitwiseOp₊js
— NumberToBigInt.js
NumericToRawBytes.js

    ObjectDefineProperties.js

— OrdinaryCreateFromConstructor.js
OrdinaryDefineOwnProperty.js
OrdinaryGetOwnProperty.js
OrdinaryGetPrototypeOf.js
OrdinaryHasInstance.js
─ OrdinaryHasProperty.js
— OrdinaryObjectCreate.js
— OrdinarySetPrototypeOf.js
OrdinaryToPrimitive.js
— PromiseResolve.js
— QuoteJSONString.js
— RawBytesToNumeric₊js
RegExpCreate.js
– RegExpExec.js
RequireObjectCoercible.js
— SameValue.js
SameValueNonNumeric.js
SameValueZero.js
SecFromTime.js
— Set.js
SetFunctionLength.js
SetFunctionName.js
SetIntegrityLevel.js
— SpeciesConstructor₊js
SplitMatch.js
StrictEqualityComparison.js
— StringCreate.js
StringGetOwnProperty.js
StringPad.js
StringToBigInt.js
SymbolDescriptiveString.js
 TestIntegrityLevel.js
 ThrowCompletion.js
 TimeClip.js
 - TimeFromYear.js
```

```
TimeString.js
   TimeWithinDay.js
   - ToBigInt.js
   - ToBigInt64.js
   - ToBigUint64.js
   - ToBoolean.js
   ToDateString.js
   - ToIndex.js
   - ToInt16.js
   - ToInt32.js
   - ToInt8.js
   - ToInteger.js
   - ToLength.js
   - ToNumber⊾js
   - ToNumeric.js
   - ToObject.js
  — ToPrimitive.js
   ToPropertyDescriptor.js
   - ToPropertyKey.js
   - ToString.js
   - ToUint16.js
   - ToUint32.js
   - ToUint8.js
   - ToUint8Clamp.js
   - TrimString.js
   - Type.js
  — UTF16DecodeString.js
  — UTF16DecodeSurrogatePair₊js
  ─ UTF16Encoding.js
  ─ UnicodeEscape.js
  ├ ValidateAndApplyPropertyDescriptor.js
  ValidateAtomicAccess.js
  — ValidateTypedArray₊js
  — WeekDay.js
  YearFromTime.js
  — abs.js
  – floor.js
  — max.js
  — min.js
  — modulo.js
  — msFromTime.js
  — thisBigIntValue.js
  ├ thisBooleanValue.js
  thisNumberValue.js
  — thisStringValue.js
  thisSymbolValue.js
 └ thisTimeValue.js
- 2021

    AbstractEqualityComparison.js

  — AbstractRelationalComparison.js
  AddEntriesFromIterable.js
  AddToKeptObjects.js
  AdvanceStringIndex.js
   ApplyStringOrNumericBinaryOperator.js
```

```
- ArrayCreate.js
ArraySetLength.js
ArraySpeciesCreate.js
AsyncFromSyncIteratorContinuation.js
AsyncIteratorClose.js
— BigInt
   — add.js
    - bitwiseAND.js
    - bitwiseNOT.js
    – bitwiseOR.js
   − bitwiseXOR.js
   – divide.js
   — equal.js
   — exponentiate.js
    - index.js
    leftShift.js
   — lessThan.js
   – multiply.js
   — remainder.js
   – sameValue₊įs
   — sameValueZero.js
    signedRightShift.js
   – subtract.js
   toString.js
    - unaryMinus.js
  └ unsignedRightShift.js
– BigIntBitwiseOp.js
— BinaryAnd.js
— BinaryOr₊js
— BinaryXor⊾js
ByteListBitwiseOp.js
ByteListEqual.js
— Call.js
CanonicalNumericIndexString.js
─ CharacterRange.js

— ClearKeptObjects.js

— CodePointAt.js
CodePointsToString.js

    CompletePropertyDescriptor.js

CompletionRecord.js
CopyDataProperties.js
├ CreateAsyncFromSyncIterator.js
─ CreateDataProperty.js
CreateDataPropertyOrThrow.js
CreateHTML.js
─ CreateIterResultObject.js
CreateListFromArrayLike.js
CreateMethodProperty.js
CreateRegExpStringIterator.js
— DateFromTime₊js
DateString.js
– Day₊js
– DayFromYear⊾js
 DayWithinYear.js
```

```
– DaysInYear₊js
DefinePropertyOrThrow.js
DeletePropertyOrThrow.js
— DetachArrayBuffer₊js
EnumerableOwnPropertyNames.js
— FlattenIntoArray.js
FromPropertyDescriptor.js
— Get.js
— GetGlobalObject.js
— GetIterator.js
GetMethod.js
— GetOwnPropertyKeys₊js
— GetPromiseResolve.js
─ GetPrototypeFromConstructor.js
— GetSubstitution.js
— GetV.js
— HasOwnProperty₌js
— HasProperty.js
— HourFromTime.js
— InLeapYear₊js
— InstanceofOperator.js
 - Invoke.js

    IsAccessorDescriptor.js

— IsArray.js
IsBigIntElementType.js
— IsCallable.js
— IsCompatiblePropertyDescriptor.js
IsConcatSpreadable.js
 - IsConstructor⊾js
— IsDataDescriptor.js
— IsDetachedBuffer₊js
 - IsExtensible.js
— IsGenericDescriptor.js
— IsIntegralNumber.js

─ IsNoTearConfiguration.js

⊢ IsPromise.js
— IsPropertyKey₊js
— IsRegExp.js
— IsSharedArrayBuffer.js
IsStringPrefix.js

    IsUnclampedIntegerElementType.js

    IsUnsignedElementType.js

⊢ IterableToList.js
IteratorClose.js
 IteratorComplete.js
— IteratorNext.js
 - IteratorStep.js
IteratorValue.js
LengthOfArrayLike.js
— MakeDate.js
– MakeDay.js
MakeTime.js
– MinFromTime₊js
MonthFromTime.js
```

```
NormalCompletion.js
 Number
  — add.js
   – bitwiseAND.js
   bitwiseNOT.js
   bitwiseOR.js
   – bitwiseXOR.js
   – divide.js
   – equal.js
   – exponentiate.js
    - index.js
    - leftShift.js
   – lessThan.js
   – multiply.js
   remainder.js
   — sameValue₊įs
   — sameValueZero.js
   signedRightShift.js
   – subtract.js
   – toString.js
   – unaryMinus.js
  └ unsignedRightShift.js
– NumberBitwiseOp₊js
NumberToBigInt.js
NumericToRawBytes.js
ObjectDefineProperties.js
─ OrdinaryCreateFromConstructor.js
OrdinaryDefineOwnProperty.js
─ OrdinaryGetOwnProperty.js
OrdinaryGetPrototypeOf.js
─ OrdinaryHasInstance.js
─ OrdinaryHasProperty.js
├ OrdinaryObjectCreate.js
─ OrdinarySetPrototypeOf.js
─ OrdinaryToPrimitive.js
— PromiseResolve.js
— QuoteJSONString₁js
— RawBytesToNumeric₁js
RegExpCreate.js
— RegExpExec.js
RequireObjectCoercible.js
— SameValue₊js
— SameValueNonNumeric₊js
SameValueZero.js
— SecFromTime.js
– Set.js
SetFunctionLength.js
SetFunctionName.js
SetIntegrityLevel.js
SpeciesConstructor.js
 SplitMatch.js

    StrictEqualityComparison.js

– StringCreate.js
 StringGetOwnProperty.js
```

```
StringIndexOf.js
StringPad.js
StringToBigInt.js
StringToCodePoints.js

    SymbolDescriptiveString.js

 TestIntegrityLevel.js
 ThrowCompletion.js
 - TimeClip.js
 - TimeFromYear.js
 - TimeString.js
 - TimeWithinDay.js
 - ToBigInt.js
 - ToBigInt64.js
 - ToBigUint64.js
 - ToBoolean.js
 - ToDateString.js
– ToIndex₊js
 - ToInt16.js
 - ToInt32.js
 - ToInt8.js
 ToIntegerOrInfinity.js
 - ToLength.js
 - ToNumber⊾js
 - ToNumeric.js
 - ToObject.js
 - ToPrimitive.js

    ToPropertyDescriptor.js

 ToPropertyKey.js
 - ToString.js
– ToUint16.js
ToUint32.js
 - ToUint8.js
 - ToUint8Clamp.js
 - TrimString.js
 - Type.js
UTF16EncodeCodePoint.js
— UTF16SurrogatePairToCodePoint.js
─ UnicodeEscape.js
ValidateAndApplyPropertyDescriptor.js
ValidateAtomicAccess.js
ValidateIntegerTypedArray.js
— ValidateTypedArray₁js
— WeakRefDeref₊js
WeekDay.js
YearFromTime.js
— abs.js
– clamp.js
 - floor⊾js
– max⊾js
— min.js
− modulo.js
- msFromTime.js
– substring.js
 thisBigIntValue.js
```

```
thisBooleanValue.js
   - thisNumberValue.js
  — thisStringValue.js
   - thisSymbolValue.js
  └ thisTimeValue.js
- 2022

    AddEntriesFromIterable.js

  AddToKeptObjects.js
  — AdvanceStringIndex.js
  — ApplyStringOrNumericBinaryOperator.js
  — ArrayCreate.js
  ArraySetLength.js
  — ArraySpeciesCreate.js

    AsyncFromSyncIteratorContinuation.js

   AsyncIteratorClose.js
  BigInt
     — add.js
      − bitwiseAND.js
      − bitwiseNOT.js
      – bitwiseOR.js
     — bitwiseXOR.js
      - divide.js
     — equal.js
      – exponentiate.js
      – index.js
      leftShift.js
     — lessThan.js
     — multiply.js
      – remainder.js
     — sameValue₊js
     – sameValueZero.js
      signedRightShift.js
      subtract.js

─ toString.js

     — unaryMinus.js
     └ unsignedRightShift.js
  — BigIntBitwiseOp.js
  — BinaryAnd₊js
  — BinaryOr₊js
  — BinaryXor₊js
  — ByteListBitwiseOp₁js
  — ByteListEqual.js
  — Call.js
  CanonicalNumericIndexString.js
  — CharacterRange.js
  ─ ClearKeptObjects.js
  ─ CodePointAt.js
  CodePointsToString.js
  ─ CompletePropertyDescriptor.js
  ─ CompletionRecord.js
   CopyDataProperties.js
   CreateAsyncFromSyncIterator.js
  — CreateDataProperty.js
   CreateDataPropertyOrThrow.js
```

```
CreateHTML.js
CreateIterResultObject.js
CreateListFromArrayLike.js
CreateMethodProperty.js
CreateNonEnumerableDataPropertyOrThrow.js
CreateRegExpStringIterator.js
DateFromTime.js
DateString.js
— Day₊js
DayFromYear.js
DayWithinYear.js
— DaysInYear₊js
DefinePropertyOrThrow.js

→ DeletePropertyOrThrow.js

DetachArrayBuffer.js
EnumerableOwnPropertyNames.js
— FlattenIntoArray.js
— FromPropertyDescriptor.js
— Get.js
GetGlobalObject.js
─ GetIterator.js
GetMatchIndexPair.js
— GetMatchString.js
─ GetMethod.js
⊢ Get0wnPropertyKeys₊js
GetPromiseResolve.js
GetPrototypeFromConstructor.js
— GetStringIndex.js
GetSubstitution.js
— GetV.js
— HasOwnProperty.js
HasProperty.js
— HourFromTime.js
— InLeapYear₊js
InstallErrorCause.js
— InstanceofOperator₊js
— Invoke.js
 IsAccessorDescriptor.js
— IsArray.js
IsBigIntElementType.js
— IsCallable.js

    IsCompatiblePropertyDescriptor.js

— IsConcatSpreadable.js
— IsConstructor.js
 - IsDataDescriptor.js
IsDetachedBuffer.js
 - IsExtensible.js
IsGenericDescriptor.js
IsIntegralNumber.js
— IsLessThan.js
 IsLooselyEqual.js

    IsNoTearConfiguration.js

 - IsPromise.js
 IsPropertyKey.js
```

```
IsRegExp.js
 IsSharedArrayBuffer.js
 - IsStrictlyEqual.js
IsStringPrefix.js

    IsStringWellFormedUnicode.js

    IsUnclampedIntegerElementType.js

IsUnsignedElementType.js
 - IterableToList.js
 - IteratorClose.js
 IteratorComplete.js
— IteratorNext.js
 - IteratorStep.js
— IteratorValue.js
— LengthOfArrayLike.js
— MakeDate₊įs
— MakeDay₊js
— MakeMatchIndicesIndexPairArray.js
– MakeTime₊js
— MinFromTime.js
MonthFromTime.js
NormalCompletion.js
Number
   — add.is
   – bitwiseAND.js
    – bitwiseNOT.js
    – bitwiseOR.js
    – bitwiseXOR.js
   — divide.js
   – equal.js
   — exponentiate.js
   index.js
    - leftShift.js
    – lessThan.js
   multiply.js
   — remainder₊js
   — sameValue.js
   sameValueZero.js
    signedRightShift.js
   subtract.js
   — toString.js
    – unaryMinus.js
  └ unsignedRightShift.js
– NumberBitwiseOp.js
NumberToBigInt.js
NumericToRawBytes.js
─ ObjectDefineProperties.js
─ OrdinaryCreateFromConstructor.js
OrdinaryDefineOwnProperty.js
─ OrdinaryGetOwnProperty.js
├ OrdinaryGetPrototypeOf.js
─ OrdinaryHasInstance.js
OrdinaryHasProperty.js
OrdinaryObjectCreate.js
OrdinarySetPrototypeOf.js
```

```
OrdinaryToPrimitive.js
PromiseResolve.js
QuoteJSONString.js
RawBytesToNumeric₁js
RegExpCreate.js
RegExpExec.js
RegExpHasFlag.js
RequireObjectCoercible.js
SameValue.js
SameValueNonNumeric.js
SameValueZero.js
SecFromTime.js
— Set.js
SetFunctionLength.js
SetFunctionName.js
SetIntegrityLevel.js
SortIndexedProperties.js
SpeciesConstructor.js
StringCreate.js
StringGetOwnProperty.js
— StringIndexOf.js
StringPad.js
— StringToBigInt.js
StringToCodePoints.js
StringToNumber₁js
SymbolDescriptiveString.js
TestIntegrityLevel.js
ThrowCompletion.js
TimeClip.js
- TimeFromYear.js
TimeString.js
- TimeWithinDay.js
- ToBigInt.js
- ToBigInt64.js
- ToBigUint64.js
 - ToBoolean.js
- ToDateString.js
- ToIndex.js
 - ToInt16.js
- ToInt32.js
- ToInt8.js
ToIntegerOrInfinity.js
- ToLength.js
- ToNumber.js
- ToNumeric.js
- ToObject.js
 - ToPrimitive.js

    ToPropertyDescriptor.js

 - ToPropertyKey.js
- ToString.js
 - ToUint16.js
 ToUint32.js
- ToUint8.js
 ToUint8Clamp.js
```

```
ToZeroPaddedDecimalString.js
 - TrimString.js
 - Type.js
 TypedArrayElementSize.js
TypedArrayElementType.js
UTF16EncodeCodePoint.js
UTF16SurrogatePairToCodePoint.js
UnicodeEscape.js

    ValidateAndApplyPropertyDescriptor.js

ValidateAtomicAccess.js
— ValidateIntegerTypedArray.js
— ValidateTypedArray.js
— WeakRefDeref.js
— WeekDay⊾js
YearFromTime.js
— abs.js
— clamp.js
— floor.js
— max.js
— min.js
— modulo.js
— msFromTime₌js
— substring.js
— thisBigIntValue₊js
— thisBooleanValue.js
— thisNumberValue.js
— thisStringValue.js
— thisSymbolValue.js
└ thisTimeValue.js

    ⊢ AbstractEqualityComparison.js

─ AbstractRelationalComparison.js
CheckObjectCoercible.js
DateFromTime.js
— Day₊js
├ DayFromYear₊js
DayWithinYear.js
— DaysInYear₊js
FromPropertyDescriptor.js
— HourFromTime₊js
— InLeapYear₊js
— IsAccessorDescriptor.js
⊢ IsCallable.js
— IsDataDescriptor.js
 - IsGenericDescriptor₊js
 – IsPropertyDescriptor⊾js
 MakeDate.js
MakeDay.js
 – MakeTime.js
— MinFromTime.js
 MonthFromTime.js
 - SameValue₊js
 SecFromTime.js

    StrictEqualityComparison.js
```

```
TimeClip.js
    TimeFromYear.js
    - TimeWithinDay.js
    - ToBoolean.js
    - ToInt32.js
    - ToInteger.js
    - ToNumber.js
    ToObject.js
    ToPrimitive.js

    ToPropertyDescriptor.js

    - ToString.js
    - ToUint16.js
    - ToUint32.js
    - Type.js
    – WeekDay⊾js
   YearFromTime.js
   — abs.js
   — floor.js
    – modulo.js
  └ msFromTime.js
— CHANGELOG.md
 - GetIntrinsic.js
LICENSE
README.md
— es2015.js
– es2016.js
— es2017.js
— es2018.js
— es2019.js
— es2020.js
— es2021.js
— es2022.js
– es5.js
— es6.js
— es7.js
helpers
   ─ DefineOwnProperty.js
    - IsArray₊js
   — OwnPropertyKeys.js
   — assertRecord.js
   — assign.js
   — callBind.js
   — callBound₊js
   — every.js
   — forEach.js

─ fromPropertyDescriptor.js

   — getInferredName.js
   getIteratorMethod.js
   get0wnPropertyDescriptor.js
   — getProto.js
   getSymbolDescription.js
    isAbstractClosure.js
    - isByteValue.js
    - isCodePoint.js
```

```
- isFinite.js
      isFullyPopulatedPropertyDescriptor.js
      isLeadingSurrogate.js
     — isMatchRecord.js
     — isNaN.js
     — isPrefixOf.js
     — isPrimitive.js
     isPropertyDescriptor.js
     isSamePropertyDescriptor.js
     — isTrailingSurrogate.js
     maxSafeInteger.js
     — mod.js
     — modBigInt.js

→ padTimeComponent.js

      - reduce.js
     — regexTester.js
     — setProto.js
     — sign.js
      – some.js
     └ timeConstants.js
   – index.js

    operations

     ⊢ .eslintrc
     — 2015.js
     — 2016.js
     — 2017.js
     — 2018.js
     — 2019.js
     — 2020.js
      - 2021.js
     └ 2022.js
  └ package.json
- es-array-method-boxes-properly
  ⊢ .eslintrc
  - .github
    └ FUNDING.yml


    LICENSE

  — README.md
   index.js
   – package⊾json
 ∟ test
    └ index.js
es-get-iterator
  .eslintrc
   github
   └ FUNDING.yml
   - nycrc
   CHANGELOG.md

    LICENSE

   - README.md
   - index.js
   - node.js
  – node.mjs
   - package.json
```

```
└ test
    ⊢ core-js.js
    — es6-shim.js
    — index.js
    — node.js
    └ node.mjs
es-module-lexer
  — LICENSE
  README.md
  – dist
    ─ lexer.asm.js
      - lexer.cjs
    L lexer.js
  – lexer.js
  – package.json
 └ types
    └ lexer.d.ts
- es-set-tostringtag
 ⊢ .eslintrc
  CHANGELOG.md
  — LICENSE
  - README.md
 index.js
 — package.json
 ∟ test
    └ index.js
es-shim-unscopables
 ⊢ .eslintrc
  - .github
   └ FUNDING.yml
 — CHANGELOG.md
  LICENSE
  README.md
 index.js
  — package.json
 └ test
    index.js
    └ with.js
es-to-primitive
 .eslintrc
 _ .github
   └ FUNDING.yml
  - .travis.yml
  CHANGELOG.md
  LICENSE
  Makefile
  README.md
  — es2015.js
  — es5.js
 — es6.js
  - helpers
    └ isPrimitive.js
  - index.js
```

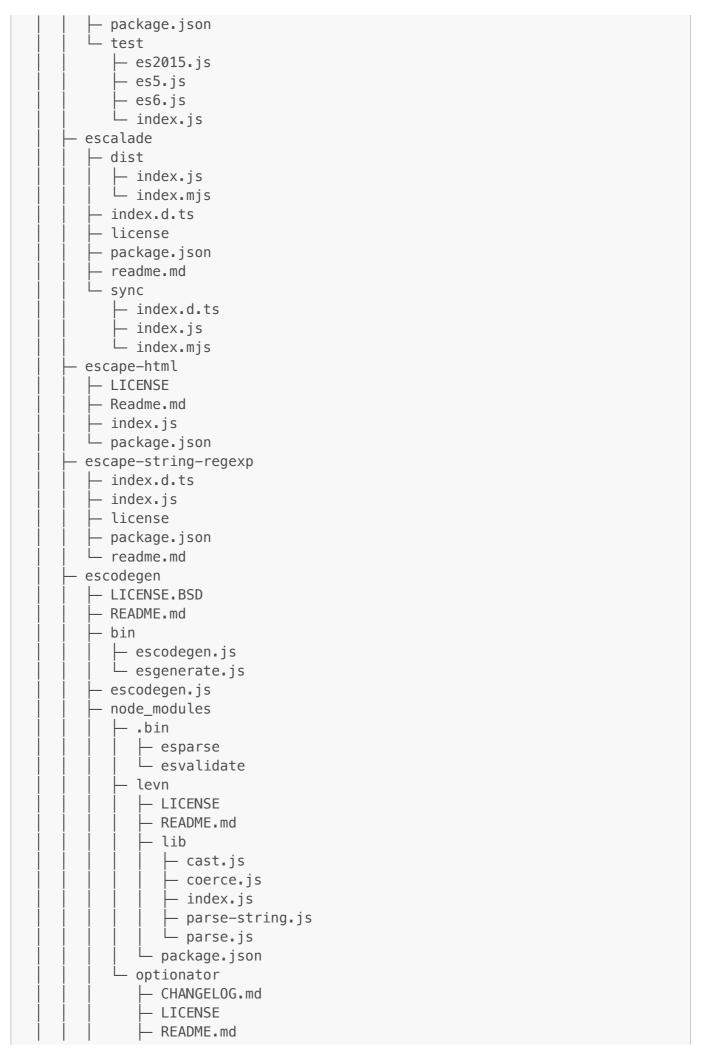

```
lib

⊢ help.js

            - index.js
          └ util.js
       └ package.json

    package.json

- eslint
 ─ LICENSE
  README.md
  – bin
    └ eslint.js
  conf

─ config-schema.js

    ─ default-cli-options.js
     — globals.js
     - replacements.json
    rule-type-list.json
  - lib
    ⊢ api.įs
     — cli-engine

    □ cli-engine.js

         - file-enumerator.js
        formatters
          — checkstyle.js
           — compact.js
           – formatters-meta.json

→ html.js

           — jslint-xml.js
           json-with-metadata.js
           — json.js
           – junit.js
           — stylish.js
           — tap.js
            - unix.js
          └ visualstudio.js
         – hash.js
         – index.js
         lint-result-cache.js
         - load-rules.js
       ∟ xml-escape.js
     — cli.js
     — config

    default-config.js

        flat-config-array.js

─ flat-config-helpers.js

         flat-config-schema.js
       └ rule-validator.js
     eslint

— eslint-helpers.js

        — eslint.js
         - flat-eslint.js
       └ index.js
      linter

→ apply-disable-directives.js
```

```
code-path-analysis
      code-path-analyzer.js
      code-path-segment.js
      — code−path−state.js
     — code-path.js
     — debug-helpers.js
      - fork-context.js
     └ id-generator.js
   – config−comment−parser.js
   – index.js
   - interpolate.js
   - linter.js
   — node-event-generator.js
  — report-translator.js
   - rule-fixer.js
   – rules.js
   — safe−emitter.js
   - source-code-fixer.js
  └ timing.js
— options.js
– rule-tester

─ flat-rule-tester.js

    - index.js
  └ rule-tester.js
- rules
  — accessor-pairs.js

— array-bracket-newline.js

  — array-bracket-spacing.js
   array-callback-return.js
   — array-element-newline.js
   — arrow-body-style.js
   – arrow–parens.js
   – arrow−spacing.js
   — block-scoped-var⊾js
   block-spacing.js

    brace-style.js

   – callback-return.js
   – camelcase.js
   capitalized-comments.js
   class-methods-use-this.js
   — comma-dangle.js
   — comma-spacing.js
  — comma−style.js
   - complexity.js
   computed-property-spacing.js
   – consistent−return.js
   – consistent-this₊js
   – constructor–super₌js
   – curly.js
   — default−case−last.js
   – default−case.js
   – default–param–last.js
   – dot−location.js
   – dot−notation.js
```

```
- eol-last.js
- eqeqeq.js
for-direction.js
func-call-spacing.js
func-name-matching.js
func-names.js
- func−style.js

    function-call-argument-newline.js

- function-paren-newline.js
- generator—star—spacing.js
- getter−return.js
- global−require.js
— grouped−accessor−pairs.js
- guard-for-in₊js
- handle-callback-err.js
- id−blacklist.js
— id-denylist.js
id-length.js
— id-match.js
– implicit−arrow−linebreak.js
— indent-legacy.js
indent.js
index.js
init-declarations.js
- jsx-quotes.js
– key−spacing.js
keyword-spacing.js
line-comment-position.js
– linebreak−style.js
— lines−around−comment.js
lines-around-directive.is
lines-between-class-members.js
- logical—assignment—operators.js
max-classes-per-file.js
– max-depth.js
– max−len.js
max-lines-per-function.js
– max−lines.js
max-nested-callbacks.js
– max-params.js
max-statements-per-line.js
– max−statements.js
— multiline-comment-style.js
– multiline−ternary.js
– new−cap.js
– new−parens.js
– newline–after–var₊js
newline-before-return.js
newline-per-chained-call.js
— no−alert.js
- no-array-constructor₊js
- no−async−promise−executor.js
- no-await-in-loop.js
- no-bitwise.js
```

```
- no-buffer-constructor.js
- no-caller.js
- no-case-declarations.js
– no−catch−shadow.js
– no−class−assign.js
- no-compare-neg-zero.js
– no−cond−assign.js
– no-confusing-arrow₁js
- no-console.js
– no−const−assign.js
no-constant-binary-expression.js
– no−constant−condition.js
– no-constructor-return.js
– no−continue.js
- no-control-regex.js
– no-debugger⊾js
— no-delete-var₊js
– no−div−regex.js
— no-dupe-args.js
— no-dupe-class-members.js
— no-dupe-else-if.js
– no-dupe-keys⊾js
— no-duplicate-case.js
— no-duplicate-imports.js
— no-else-return.js
– no-empty-character-class.js
— no−empty−function.js
— no−empty−pattern.js
no-empty-static-block.js
— no−empty.js
— no-eq-null.js
– no−eval.js
– no−ex−assign.js
no-extend-native.js
— no−extra−bind.js
– no−extra−boolean−cast.js
– no-extra-label.js
– no−extra−parens.js
— no−extra−semi.js
- no−fallthrough.js
— no-floating-decimal.js
— no-func-assign.js
— no-global-assign.js
– no-implicit-coercion.js
— no−implicit-globals.js
— no−implied−eval.js
– no−import–assign.js
— no-inline-comments.js
– no−inner–declarations.js
— no−invalid−regexp.js
- no-invalid-this.js
- no-irregular-whitespace.js
– no−iterator.js
- no−label−var.js
```

```
- no−labels.js
- no-lone-blocks.js
– no−lonely−if.js
— no-loop-func.js
no-loss-of-precision.js
— no-magic-numbers.js
no-misleading-character-class.js

— no-mixed-operators.js

– no−mixed−requires.js
no-mixed-spaces-and-tabs.js
— no-multi-assign.js
– no-multi-spaces.js
— no-multi-str.js
— no-multiple-empty-lines.js
– no−native−reassign.js
no-negated-condition.js
— no−negated−in−lhs.js
– no-nested-ternary.js
— no−new−func.js
– no−new−native−nonconstructor.js
— no-new-object.js
– no−new−require.js
– no−new−symbol.js
— no−new–wrappers.js
– no−new.js
– no−nonoctal−decimal−escape.js
— no-obj-calls.js
— no-octal-escape.js
– no−octal.js
— no−param−reassign.js
– no−path−concat.js
- no-plusplus.js
– no-process-env₊js
– no−process–exit.js
– no-promise-executor-return.js
– no−proto.js
no-prototype-builtins.js
– no−redeclare.js
– no−regex−spaces.js
– no−restricted−exports.js
— no−restricted-globals.js
– no−restricted−imports.js
— no-restricted-modules.js
no-restricted-properties.js
– no−restricted−syntax.js
– no−return–assign.js
– no−return–await.js
– no−script−url.js
– no−self−assign.js
— no−self−compare.js
- no−sequences.js
- no-setter-return.js
– no−shadow−restricted−names.js
- no-shadow⊾js
```

```
- no−spaced−func.js
 - no−sparse−arrays.js
 - no−sync⊾js
– no−tabs.js
– no-template-curly-in-string.js
— no−ternary.js
– no−this-before-super.js
– no−throw−literal.js
 – no−trailing−spaces.js
– no−undef−init.js
– no−undef.js
– no−undefined.js
— no-underscore-dangle.js

    □ no-unexpected-multiline.js

 no-unmodified-loop-condition.js
 – no−unneeded−ternary.js
— no-unreachable-loop₊js
no-unreachable.js
— no-unsafe-finally₁js
– no-unsafe-negation.js
— no-unsafe-optional-chaining.js
 no-unused-expressions.js
– no−unused−labels.js
no-unused-private-class-members.js
– no−unused−vars.js
– no-use-before-define.js
├ no-useless-backreference.js
— no-useless-call.js
 – no−useless−catch.js
no-useless-computed-key.js
— no-useless-concat.js
no-useless-constructor.js
– no-useless-escape₊js
– no-useless-rename₊js
– no-useless-return.js
 – no−var.js
— no−void.js
 no-warning-comments.js
no-whitespace-before-property.js
– no−with.js
nonblock-statement-body-position.js
— object-curly-newline.js
object-curly-spacing.js
object-property-newline.js
 object-shorthand.js
– one-var-declaration-per-line.js
 – one−var⊾js
– operator–assignment.js
 – operator−linebreak.js
- padded-blocks.js
 padding-line-between-statements.js
 - prefer—arrow—callback.js
 - prefer−const.js
 prefer-destructuring.js
```

```
prefer-exponentiation-operator.js
prefer-named-capture-group.js
prefer-numeric-literals.js
– prefer–object–has–own₊js
prefer-object-spread.js
– prefer–promise–reject–errors.js
- prefer-reflect.js
- prefer-regex-literals.js
– prefer−rest−params.js
– prefer−spread.js
prefer-template.js
- quote−props.js
— quotes.js
— radix.js
– require−atomic−updates.js
– require–await.js
— require-jsdoc.js
require-unicode-regexp.js
— require-yield.js
- rest-spread-spacing.js
— semi−spacing.js
– semi−style.js
— semi.js
— sort−imports.js
— sort-keys.js
– sort-vars.js
— space-before-blocks.js
space-before-function-paren.js
– space−in−parens.js
— space−infix−ops.js
– space−unary−ops.js
spaced-comment.js
strict.js
switch-colon-spacing.js
symbol-description.js
template-curly-spacing.js
template-tag-spacing.js
– unicode−bom.js
– use−isnan.js
– utils
  ├ ast-utils.js
    - fix−tracker.js
   – keywords.js
   lazy-loading-rule-map.js
    patterns
     └ letters.js
   unicode

─ index.js

      is-combining-character.js

    is−emoji−modifier.js

    is-regional-indicator-symbol.js

     └ is-surrogate-pair.js
 - valid—įsdoc⊾įs
 valid-typeof.js
```

```
- vars−on−top.js
      - wrap-iife.js
      – wrap−regex.js
      - yield−star−spacing.js
     └ yoda.js
   shared
     — ajv₌js
      – ast-utils.js
     — config-validator.js
     — deprecation—warnings.js
      - directives.js
      – logging.js
     — relative-module-resolver.js
     — runtime−info.js
      – string−utils.js
      - traverser⊾js
     └ types.js
    source-code

⊢ index.js

      - source−code.js
     └ token-store
        backward-token-comment-cursor₁js
         — backward-token-cursor.js
        — cursor⊾js
        — cursors.js
         — decorative−cursor.js
         - filter-cursor.js
         - forward-token-comment-cursor.js
         forward-token-cursor₁js
         – index.js
         – limit-cursor.js
         padded-token-cursor.js
         - skip−cursor.js
        └ utils.js
 └ unsupported-api.js
messages

— all-files-ignored.js

    extend-config-missing.js

  — failed-to-read-json.js
  — file-not-found.js
  no-config-found.js
  — plugin-conflict.js
  — plugin−invalid.js
  — plugin-missing.js
   print-config-with-directory-path.js
  └ whitespace-found.js
node_modules
   - .bin
    └ js-yaml

    argparse

      CHANGELOG.md
      - LICENSE
      README.md
      – argparse.js
```

```
lib
     — sub.js
     ∟ textwrap.js

    package.json

- doctrine
  — CHANGELOG.md
   - LICENSE
   LICENSE.closure-compiler
   - LICENSE.esprima
  README.md
   - lib
     — doctrine.js
     ├ typed.js
    └ utility.js

    package.json

- eslint-scope
  — LICENSE
   - README.md
  – dist
    └ eslint-scope.cjs
   - lib

    definition.js


     — index.js
     — pattern-visitor.js
     - reference.js
     — referencer.js
     — scope-manager₊js

─ scope.js

      - variable.js
    └ version.js
 └ package.json
glob-parent
  LICENSE
  README.md
  - index.js
 └ package.json
- globals

— globals.json

   - index.d.ts
  — index.js
  — license
  — package.json
 └ readme.md
 js-yaml
  CHANGELOG.md
   LICENSE
  — README.md
   - bin
    └ js-yaml.js
   - dist
     - js-yaml.min.js
    └ js-yaml.mjs
   - index.js
```

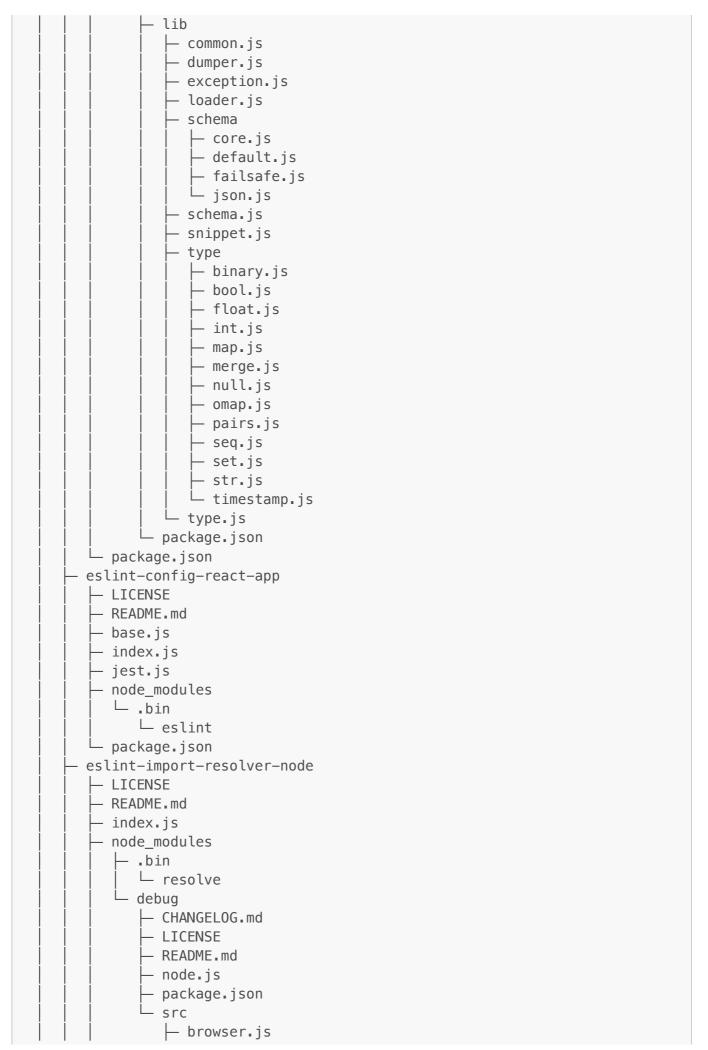

```
- common.js
            index.js
           └ node.js

    package.json

- eslint-module-utils
  ⊢ .nycrc
   CHANGELOG.md
   LICENSE
   ModuleCache.js
  — declaredScope.js
  — hash.js
  — ignore.js
  — module-require.js
  — moduleVisitor.js
   node modules
    └ debug

    ─ CHANGELOG.md

    LICENSE

         README.md
         – node.js
         – package.json
         - src

    browser.js

            — common.js
            index.js
           └ node.js
  — package.json
  — parse.js
   – pkgDir⊾js
  — pkgUp.js
  readPkgUp.js
  — resolve.js
   – unambiguous.js
  └ visit.js
eslint-plugin-flowtype

    ─ CONTRIBUTING.md

   LICENSE
  - README.md
   – dist
     ─ bin

— addAssertions.js

— checkDocs.js

        checkTests.js
        └ utilities.js
      - configs
        └ recommended.json
      – index.js
      - rules
        ─ arrayStyle

─ index.js

             isSimpleType.js
           └ needWrap.js
         arrayStyleComplexType.js
           arrayStyleSimpleType.js
```

```
- arrowParens.js
- booleanStyle.js
defineFlowType.js
— delimiterDangle.js
enforceLineBreak.js
genericSpacing.js
interfaceIdMatch.js
newlineAfterFlowAnnotation.js
noDupeKeys.js
noDuplicateTypeUnionIntersectionMembers.js
noExistentialType.js
noFlowFixMeComments.js
— noInternalFlowType₊js
— noMixed.js
– noMutableArray₊js
noPrimitiveConstructorTypes.js
noTypesMissingFileAnnotation.js
noUnusedExpressions.js
— noWeakTypes₊js
— objectTypeCurlySpacing.js
objectTypeDelimiter.js
– quotes.js
requireCompoundTypeAlias.js
— requireExactType.js
— requireIndexerName₊js
requireInexactType.js

— requireParameterType₊js

requireReadonlyReactProps.js
requireReturnType.js
requireTypesAtTop.js
requireValidFileAnnotation.js
- requireVariableType₊js
– semi.js
– sortKeys.js

    sortTypeUnionIntersectionMembers.js

spaceAfterTypeColon.js
spaceBeforeGenericBracket.js
- spaceBeforeTypeColon.js
- spreadExactType.js
typeColonSpacing
  ─ evaluateFunctions.js
   evaluateObjectTypeIndexer.js
   evaluateObjectTypeProperty.js
   evaluateReturnType.js
   evaluateTypeCastExpression.js
  ─ evaluateTypical.js
  ─ evaluateVariables.js
   - index.js
  ∟ reporter.js
- typeIdMatch.js
 typeImportStyle.js

    unionIntersectionSpacing.js

- useFlowType.js
 useReadOnlySpread.js
```

```
└ validSyntax.js
       utilities

    ⊢ checkFlowFileAnnotation.js

        fuzzyStringMatch.js
        getBuiltinRule.js
        getParameterName.js
        getTokenAfterParens.js
        getTokenBeforeParens.js
         - index.js
        – isFlowFile.js
        isFlowFileAnnotation.js
        isNoFlowFile.js
        isNoFlowFileAnnotation.js

— iterateFunctionNodes.js

         - quoteName.js
       └ spacingFixers.js

─ node_modules

    └ .bin
       ∟ eslint

    package.json

eslint-plugin-import
  CHANGELOG.md
  CONTRIBUTING.md

    LICENSE

  README.md
  RELEASE.md
  SECURITY md
  – config

─ electron.js
     — errors.js
     — react-native.js
     ⊢ react.js
     — recommended.js
     — stage-0.js
     typescript.js
    └ warnings.js
  docs
    └ rules
        consistent-type-specifier-style.md
        default.md
        dynamic-import-chunkname.md
        — export.md
        — exports—last.md
        extensions.md
        first.md
        group—exports.md
        imports-first.md
        max-dependencies.md
        named.md
        – namespace₌md
         newline-after-import.md
        no-absolute-path.md
        — no−amd.md
        no-anonymous-default-export.md
```

```
- no-commonjs.md
      - no-cycle.md
      no-default-export.md
      – no-deprecated.md
      no-duplicates.md
      – no-dynamic-require.md
      no-empty-named-blocks.md
     no-extraneous-dependencies.md
      no-import-module-exports.md
      – no−internal–modules.md
      no-mutable-exports.md
      no-named-as-default-member.md
      no-named-as-default.md
      - no-named-default.md
      no-named-export.md
      – no-namespace.md
     — no-nodejs-modules.md
      – no−relative−packages.md
     — no-relative-parent-imports.md
      – no-restricted-paths.md
     no-self-import.md
      - no−unassigned−import.md
      – no-unresolved.md
      no-unused-modules.md
      no-useless-path-segments.md
      – no-webpack-loader-syntax.md
      – order₌md
     prefer-default-export.md
     └ unambiguous.md
– lib
  ─ ExportMap.js
   core
     importType.js
      packagePath.js
    └ staticRequire.js
   – docsUrl.js
   importDeclaration.js
   - index.js
  ∟ rules
     — consistent-type-specifier-style.js
     — default.js
     dynamic-import-chunkname.js
     — export.js
      – exports−last.js
      – extensions.js
      – first.js
      – group−exports.js
      - imports-first.js
      max-dependencies.js
      – named.js
      - namespace.js
      newline-after-import.js
      – no−absolute−path.js
      – no−amd.js
```

```
no-anonymous-default-export.js
        – no-commonis.is
        – no-cycle.js
        — no-default-export.js
        – no-deprecated.js
        — no-duplicates.js
        - no-dynamic-require.js
        no-empty-named-blocks.js
        no-extraneous-dependencies.js
        — no-import-module-exports.js
        no-internal-modules.js
        - no-mutable-exports.js
        — no-named-as-default-member₊js
        – no−named−as−default.js
        no-named-default.js
        — no−named−export.js
        — no−namespace.js
        – no-nodejs-modules.js
        — no-relative-packages.js
        — no-relative-parent-imports.js
        — no-restricted-paths.js
        - no-self-import.js
        — no−unassigned−import.js
        – no-unresolved.js
        — no-unused-modules.js
        — no-useless-path-segments.js
        — no-webpack-loader-syntax.js
        — order.js
         prefer-default-export.js
       └ unambiguous.js
  - memo-parser
    LICENSE
     README.md
    └ index.js
  node_modules
     — .bin
        - eslint
         - resolve
       ∟ semver

    debug

       ─ CHANGELOG.md
        LICENSE
        — README.md
        – node.js
        – package⊾json
       ∟ src

    browser.js

           — common₁js
            - index.js
          └ node.js
 └ package json
- eslint-plugin-jest
  CHANGELOG.md
  LICENSE
```

```
- README.md
 docs
 ∟ rules
     — consistent-test-it.md
     expect-expect md
     – max-nested-describe.md
      - no−alias−methods.md
     no-commented-out-tests.md
      no-conditional-expect.md
     no-deprecated-functions.md
     no-disabled-tests.md
     no-done-callback.md
     no-duplicate-hooks.md
     – no−export.md
     no-focused-tests.md
     – no−hooks.md
     no-identical-title.md
     – no−if.md
     no-interpolation-in-snapshots.md
     – no−jasmine–globals.md
     — no-jest-import.md
      - no−large-snapshots.md
     no-mocks-import.md
     no-restricted-matchers.md
     no-standalone-expect.md
     – no−test−prefixes.md
     no-test-return-statement.md
     prefer-called-with.md
     prefer-comparison-matcher.md
     prefer-equality-matcher.md

    prefer-expect-assertions.md

      prefer-expect-resolves.md
      - prefer-hooks-on-top.md
      prefer-lowercase-title.md
      - prefer-spy-on.md
      prefer-strict-equal.md
      - prefer-to-be.md
      - prefer—to—contain.md
     prefer-to-have-length.md
      - prefer-todo.md
     require-hook.md
     require-to-throw-message.md
     — require-top-level-describe.md
     unbound-method.md
     valid-describe-callback.md
     – valid-expect-in-promise.md
     valid-expect.md
    └ valid-title.md
– lib
 — globals.json
   index.js
   - processors
    - rules
```

```
- consistent-test-it.js
        detectJestVersion.js
        expect-expect.js
        - max-nested-describe.js
        – no−alias−methods.js
        no-commented-out-tests.js
        no-conditional-expect.js
        no-deprecated-functions.js
        - no−disabled−tests.js
        – no−done−callback.js
        – no−duplicate−hooks.js
        – no−export.js
       – no-focused-tests.js
        - no-hooks.js
        no-identical-title.js
        – no−if.js
       no-interpolation-in-snapshots.js
        – no−jasmine–globals.js
       — no-jest-import.js
        no-large-snapshots.js
       - no-mocks-import.js
        no-restricted-matchers.js
        no-standalone-expect.js
        no-test-prefixes.js
        - no-test-return-statement.js
        – prefer–called–with.js
        - prefer−comparison−matcher.js
       prefer-equality-matcher.js
        prefer-expect-assertions.js
        prefer-expect-resolves.js
        prefer-hooks-on-top.is
        prefer-lowercase-title.js
        - prefer—spy—on⊾js
        - prefer-strict-equal.js
        – prefer-to-be₊js
        - prefer−to−contain.js
        prefer-to-have-length.js
        - prefer−todo.js
        require-hook.js
        - require-to-throw-message.js
       require-top-level-describe.js
       unbound-method.js
       — utils.js
        valid-describe-callback.js
        valid-expect-in-promise.js
        – valid−expect.js
       └ valid-title.js
  node_modules
   └ .bin
      ∟ eslint
 — package₁json
eslint-plugin-jsx-a11y
 – .babelrc
  eslintrc
```

```
    CHANGELOG.md

- LICENSE.md
README.md
  mocks

─ IdentifierMock.js

  — JSXAttributeMock.js
  JSXElementMock.js

    JSXExpressionContainerMock.js

  JSXSpreadAttributeMock.js
  ├ JSXTextMock.js
   LiteralMock.js
  └ genInteractives.js
  _tests__
   – ___util_
     — axeMapping.is
      - parserOptionsMapper⊾js

    □ ruleOptionsMapperFactory.js

   - index-test.js
   - src
     ⊢ rules

— accessible-emoji-test.js

         – alt–text–test.js
         anchor-ambiguous-text-test.js
        — anchor-has-content-test.js
         – anchor−is−valid−test.js
         aria-activedescendant-has-tabindex-test.js
        — aria-props-test.js
        — aria-proptypes-test.js
         – aria−role–test.js
        — aria-unsupported-elements-test.js
        — autocomplete−valid−test.js
         - click-events-have-key-events-test.js
        control-has-associated-label-test.js
        — heading-has-content-test.js

  html-has-lang-test.js

— iframe-has-title-test.js

        — img-redundant-alt-test.js
         interactive-supports-focus-test.js
         label-has-associated-control-test.js
         - label−has−for–test.js
        — lang−test.js

— media-has-caption-test.js

        — mouse-events-have-key-events-test.js
         - no-access-key-test.js
         – no−aria−hidden−on−focusable−test.js
        — no-autofocus-test.js
         no-distracting-elements-test.js
         no-interactive-element-to-noninteractive-role-test.js
         - no-noninteractive-element-interactions-test.js
         no-noninteractive-element-to-interactive-role-test.js
         no-noninteractive-tabindex-test.js
         no-onchange-test.js
         – no−redundant−roles−test.js
         no-static-element-interactions-test.js
```

```
prefer-tag-over-role-test.js
        role-has-required-aria-props-test.js
        role-supports-aria-props-test.js
         - scope−test.js

    tabindex-no-positive-test.js

     — util
        attributesComparator-test.js
         getAccessibleChildText-test.js
         getComputedRole-test.js
         getElementType-test.js
        getExplicitRole-test.js
         - getImplicitRole−test.js
        getSuggestion-test₁js
        — getTabIndex-test.js
         hasAccessibleChild-test.js
        implicitRoles
          input-test.js
           – menu−test.js
          └ menuitem-test.js
        isAbstractRole-test.js
        isContentEditable-test.js
         – isDOMElement-test.js
        isDisabledElement-test.js
        — isFocusable-test.js
         isInteractiveElement-test.js
        isInteractiveRole-test.js
         isNonInteractiveElement-test.js
        isNonInteractiveRole-test.js
         - isNonLiteralProperty-test.js
        isSemanticRoleElement-test.js
        mayContainChildComponent-test.js
         mayHaveAccessibleLabel-test.js
         parserOptionsMapper-test.js
       └ schemas-test.js
docs
 └ rules
     — accessible−emoji.md
      – alt−text.md
      anchor-ambiguous-text.md
      - anchor—has—content.md
     – anchor−is-valid.md

    aria-activedescendant-has-tabindex.md

     — aria-props₌md
      – aria−proptypes.md
     – aria−role.md
      aria-unsupported-elements.md
     autocomplete-valid.md
      click-events-have-key-events.md
      control-has-associated-label.md
      heading-has-content.md
      - html−has−lang.md
      - iframe−has−title.md
      - img−redundant−alt.md
      interactive-supports-focus.md
```

```
label-has-associated-control.md
      - label—has—for.md
     – lang.md
     — media-has-caption.md
     – mouse-events-have-key-events.md
     – no-access-key.md
     - no−aria−hidden−on−focusable.md
     – no-autofocus.md
     no-distracting-elements.md
     no-interactive-element-to-noninteractive-role.md

    no-noninteractive-element-interactions.md

    no-noninteractive-element-to-interactive-role.md

     no-noninteractive-tabindex.md
     no-onchange.md
     no-redundant-roles.md
     no-static-element-interactions.md
     — prefer-tag-over-role.md
     - role-has-required-aria-props.md
     — role-supports-aria-props.md
     – scope.md
    └ tabindex-no-positive.md
- lib
 index.js
  rules
    — accessible−emoji.js
     — alt−text.js
     anchor-ambiguous-text.js
     — anchor-has-content.js
     anchor-is-valid.js
     — aria−activedescendant−has−tabindex.js
     — aria−props.js
     – aria−proptypes.js
     — aria-role.js
    — aria-unsupported-elements.js
     autocomplete-valid.js
    — click-events-have-key-events.js
     - control-has-associated-label.js
     - heading−has−content.js
     — html−has−lang.js
     – iframe−has−title.js
    — img−redundant−alt.js
     interactive-supports-focus.js
     label-has-associated-control.js
     - label—has—for.js
     – lang.js
     – media−has−caption.js
     mouse-events-have-key-events.js
     – no−access−key.js
     – no−aria−hidden−on−focusable.js
     — no-autofocus₁js
     no-distracting-elements.js
     no-interactive-element-to-noninteractive-role.js
     no-noninteractive-element-interactions.js
     no-noninteractive-element-to-interactive-role.js
```

```
no-noninteractive-tabindex.js
  no-onchange.js
  - no-redundant-roles.js
  - no-static-element-interactions.js
  - prefer-tag-over-role.js
  – role-has-required-aria-props.js
  – role-supports-aria-props.js
   - scope.js
 └ tabindex-no-positive.js
- util
  attributesComparator.js
  getAccessibleChildText.js
  getComputedRole.js
   getElementType.js
  getExplicitRole.js
  getImplicitRole.js
  getSuggestion.js
  - getTabIndex.js
  hasAccessibleChild.js
  implicitRoles
    — a.js
     — area.js
     — article.js
     — aside.js
     — body₌js
     button.js
    — datalist.js
     – details.js
     dialog.js
     – form.js
     h1.is
     - h2.js
     – h3.js
     – h4.js
     – h5.js
     – h6.js
     – hr.js
     img.js
     index.js
     – input.js
     — li.js
     link.js
     – menu.js
     - menuitem.js
     — meter.js
     — nav₊js
     — ol.js
     – option.js
     — output.js
     – progress.js
      section.js
     select.js
     – tbody.js
     - textarea.js
```

```
– tfoot.js
            - thead.is
          └ ul.js
        – isAbstractRole.js
         isContentEditable.js
        isDOMElement.js
         - isDisabledElement.js
         - isFocusable.js
         - isHiddenFromScreenReader⊾js
         isInteractiveElement.js
         isInteractiveRole.js
         isNonInteractiveElement.js
        isNonInteractiveRole.js
         isNonLiteralProperty.js
         isPresentationRole.js
        isSemanticRoleElement.js
        mayContainChildComponent.js
         mayHaveAccessibleLabel.js
       └ schemas.js

    node modules

    ∟ .bin
         – eslint
       ∟ semver
 └ package.json
eslint-plugin-react

    LICENSE

  README.md
  — configs
    ⊢ all.js
      - jsx−runtime.js

    □ recommended.js

  – index.js
  - lib

⊢ rules

    boolean-prop-naming.js

        - button-has-type.js
        default-props-match-prop-types.js

    destructuring-assignment.js

        – display-name.js
        forbid-component-props.js
        — forbid-dom-props.js
        — forbid-elements.js
        — forbid-foreign-prop-types.js
        – forbid-prop-types₁js
        function-component-definition.js
         – hook−use−state.js
        iframe-missing-sandbox.js
        – index.js
         - jsx-boolean-value.js
        jsx-child-element-spacing.js
         jsx-closing-bracket-location.js
         jsx-closing-tag-location.js
         jsx-curly-brace-presence.js
         - jsx-curly-newline.js
```

```
jsx-curly-spacing.js
 - jsx-equals-spacing.js
 jsx-filename-extension.js
 - jsx-first-prop-new-line.js
 - jsx-fragments.js
 - jsx-handler-names.js
 - jsx−indent−props.js
 - jsx-indent.js
 - jsx−key⊾js
 - jsx-max-depth.js
 - jsx-max-props-per-line.js
 - jsx−newline.js
 – jsx−no−bind.js
 - jsx-no-comment-textnodes.js
 jsx-no-constructed-context-values.js
 - jsx-no-duplicate-props.js
— jsx-no-leaked-render⊾js
 - jsx-no-literals.js
 - jsx-no-script-url.js
 - jsx−no−target−blank.js
 - jsx-no-undef⊾js
 - jsx-no-useless-fragment.js
 - jsx-one-expression-per-line.js
 - jsx-pascal-case.js
 - jsx-props-no-multi-spaces.js
 - jsx-props-no-spreading.js
 - jsx-sort-default-props.js
– jsx–sort–props.js
 jsx-space-before-closing.js
 - jsx−tag−spacing.js
 - jsx−uses−react.js
 - jsx−uses−vars.js
 - jsx-wrap-multilines.js
no-access-state-in-setstate.js
— no-adjacent-inline-elements.js

    no−array−index−key.js

no-arrow-function-lifecycle.js
 – no−children−prop.js
no-danger-with-children.js
– no-danger⊾js
— no-deprecated.js
— no-did-mount-set-state.js
├ no-did-update-set-state.js
– no−direct–mutation–state.js
– no−find−dom−node.js
 - no-invalid-html-attribute.js
– no−is−mounted.js
– no-multi-comp.js
 – no−namespace.js
— no-object-type-as-default-prop.js

    no-redundant-should-component-update.js

 - no-render-return-value.js
 - no−set−state.js
 - no-string-refs.js
```

```
- no-this-in-sfc.js
   - no-typos.js
   no-unescaped-entities.js
  no-unknown-property.js
   – no−unsafe.js
  no-unstable-nested-components.js
   no-unused-class-component-methods.js
  no-unused-prop-types.js
   – no−unused−state.js
  – no-will-update-set-state.js
   – prefer−es6−class.js
   - prefer-exact-props.js
  — prefer-read-only-props.js
   prefer-stateless-function.js
   - prop-types.js
   - react−in−jsx−scope.js
  — require-default-props.js
   require-optimization.js
  - require-render-return.js
  self-closing-comp.js
  — sort-comp.js
   sort-default-props.js
  — sort-prop-types₊js
  — state-in-constructor.js

    □ static-property-placement.js

   - style-prop-object.js
 └ void-dom-elements-no-children.js
- types.d.ts
- util
  Components.js
  — annotations.js
   – ast.js
   componentUtil.js
  — defaultProps.js
  docsUrl.js
  — error.js
  getTokenBeforeClosingBracket.js
   isCreateElement.js
   isDestructuredFromPragmaImport.js
   - isFirstLetterCapitalized.js
  – jsx.js
  lifecycleMethods.js
  linkComponents.js
   - log.js
   makeNoMethodSetStateRule.js
   – message.js
   - pragma.js
   – propTypes⊾js
   - propTypesSort.js
   – propWrapper⊾js
   - props.js
   - report.js
   usedPropTypes.js
   – variable.js
```

```
└ version.js
node modules
_ .bin
    — eslint
    resolve
   ∟ semver
   resolve
    editorconfig
    - .eslintrc
     - .github
      └ FUNDING.yml

    LICENSE

    - SECURITY.md
     - async.js
     - bin
     ∟ resolve
    example

— async.js

      └ sync.js
    – index.js
    – index.mjs
     - lib

— async.js

⊢ caller.js

      ─ homedir.js
      mode-modules-paths.js
      h normalize-options.js
sync.js
     - package.json
    readme.markdown
    - sync.js
   └ test
      dotdot
         ⊢ abc
           └ index.js
         └ index.js
       — dotdot.js
       – faulty_basedir.js
       – filter.js
       - filter_sync.js
       – home_paths.js
       — home_paths_sync.js
       — mock.js
       — mock_sync.js
       - module_dir
         L aaa
               └ index.js
            ymodules
            ∟ aaa
               └ index.js
           - zmodules
            └ bbb
               — main.js
```

```
└ package.json
– module_dir⊾js
- node-modules-paths.js
– node_path
  ⊢ x
     ⊢ aaa
       └ index.js
     ∟ ccc
        └ index.js
      – bbb
       └ index.js
      - ccc
       └ index.js
– node_path.js
— nonstring.js
– pathfilter
  └ deep_ref
     └ main.js
pathfilter.js
- pathfilter_sync.js

    precedence

  ⊢ aaa
     — index.js
     └ main.js
  — aaa.js
   - bbb
    └ main.js
  └ bbb.js
- precedence.js
- resolver
  ⊢ baz
     ─ doom.js

— package.json

    L quux.js
   - browser_field
     — a.js
     ⊢ b.js
     _ package.json
   cup.coffee
   - dot_main
     index.js
     └ package.json
   - dot_slash_main
     — index.js
     └ package.json
   - empty_main
      - index.js
     └ package.json
   – false_main

⊢ index.js

     └ package.json
   – foo.js
    incorrect_main
```

```
- index.js
    package.json
 invalid_main
 └ package.json
- malformed_package_json

─ index.js

 └ package.json
- missing index
 └ package.json
- missing_main

⊢ index.js

 └ package.json
- mug.coffee
- mug₌js
- multirepo
 ⊢ lerna.json
  — package.json
 └ packages
     package-a
        index.js
        └ package.json
      package-b
        – index.js
       └ package.json
- nested_symlinks
 └ mylib

⊢ async.js

     — package.json
     └ sync.js
- null_main
  — index.js
 └ package.json
- other_path
 — lib
   └ other-lib.js
 └ root.js
- quux
 └ foo
    └ index.js
- same_names
  ⊢ foo
   └ index.js
 └ foo.js
symlinked
      - node_modules
       └ foo.js
      - symlink_target
       └ .gitkeep

    package

     — bar⊾js
     └ package.json
 without_basedir
 └ main.js
```

```
- resolver.js
            - resolver_sync.js

    shadowed core

             └ node_modules
                 └ util
                    └ index.js
            – shadowed_core.js
            - subdirs.js
           └ symlinks.js
 └ package.json
eslint-plugin-react-hooks
 LICENSE
  README.md
  – cjs
     eslint-plugin-react-hooks.development.js

─ eslint-plugin-react-hooks.production.min.js

— index.js

  node modules
    ∟ .bin
       ∟ eslint
 └ package.json

    eslint-plugin-testing-library

    LICENSE

  README.md
  confias
     — angular.js
     ├ dom.js

⊢ index.js

     — marko.js
      – react.js
    ∟ vue.js

    create-testing-library-rule

     — detect-testing-library-utils.js
    └ index.js
  — index.js
  node-utils
      – index.js
    └ is-node-of-type.js
  node_modules
    ∟ .bin
       ∟ eslint
  — package₁json
  — rules

— await-async-query₁js

     — await−async−utils.js
     — await-fire-event.js
     consistent-data-testid.js
     – index.js

    no−await−sync−events.js

     — no−await−sync−query.js
     — no−container.js
     — no-debugging-utils.js
     — no-dom-import.js
      - no-global-regexp-flag-in-query.js
```

```
- no-manual-cleanup.js
      - no-node-access.js
     - no-promise-in-fire-event.js
     — no-render-in-setup.js
     — no-unnecessary-act.js
     - no-wait-for-empty-callback.js
     - no-wait-for-multiple-assertions.js
     — no-wait-for-side-effects.js
     — no-wait-for-snapshot.js
     — prefer-explicit-assert.js
     – prefer-find-by.js
     – prefer-presence-queries.js
     — prefer-query-by-disappearance.js
     — prefer-screen-queries.js
     — prefer-user-event.js
      - prefer-wait-for.js

    □ render-result-naming-convention.js

   – utils
     ⊢ file−import.js
      - index.js
     ∟ types.js

    eslint-scope

— CHANGELOG.md

    LICENSE

  README.md
   - lib

    definition.js

     — index.js

    pattern-visitor.js

     — reference.js
     — referencer.js
     — scope−manager.js
      - scope.js
    └ variable.js
   node modules
    ∟ estraverse
        jshintrc
         - LICENSE.BSD
         README.md
         – estraverse₌js
         - gulpfile.js

    package.json

    package.json

eslint-utils
  LICENSE
  README.md
  — index.js
  index.js.map
  — index.mjs

─ index.mjs.map

  - node_modules
      - .bin
        ∟ eslint
      - eslint-visitor-keys
```



```
└ package.json
       supports-color
        ─ browser.js
        — index.js
        — license
         – package.json
        └ readme.md
   - package.json
 └ types

⊢ ESLintError.d.ts

      - getESLint.d.ts
      - index.d.ts
     – linter.d.ts
     — options.d.ts
      - utils.d.ts
     └ worker.d.ts
espree
  LICENSE
  README.md
  – dist
    ∟ espree.cjs
   – espree.js
  — lib
    ⊢ espree.js
     — features.js
     — options.js
      – token–translator.js
    └ version.js
   - node_modules
    └ .bin
       ∟ acorn
  └ package.json
- esprima
  ChangeLog
  LICENSE.BSD
  README.md
   – bin
    ⊢ esparse.js
    └ esvalidate.js
   – dist
   ∟ esprima.js
 └ package.json
esquery
  — README.md
  – dist
     ─ esquery.esm.js
     ─ esquery.esm.min.js
     esquery.esm.min.js.map
     — esquery.js
     — esquery.lite.js
     — esquery.lite.min.js
     — esquery.lite.min.js.map
      - esquery.min.js
      - esquery.min.js.map
```

```
- license.txt
           - package.json
       └ parser.js
 - esrecurse
        babelrc
          README.md
       — esrecurse.js
        — gulpfile.babel.js
       └ package.json
- estraverse

    ishintrc
    ishintrc

─ LICENSE.BSD

         — README.md
       — estraverse.js
            - gulpfile.js

    package.json

– estree-walker

    □ CHANGELOG.md

         README.md
        — dist
                   ─ estree-walker.umd.js
                   └ estree-walker.umd.js.map

    package.json

           - src
                   — estree-walker.js
                  └ index.ts
       └ types
                   └ index.d.ts
- esutils
        LICENSE.BSD
          README.md
          – lib
                   — ast.js
                    — code.js
                    ─ keyword.js
                   └ utils.js
       └ package.json
- etag

⊢ HISTORY.md

        LICENSE
        — README.md

— index.js

       └ package.json
- eventemitter3
        LICENSE
         README.md
        index.d.ts

— index.js

    package.json

       L umd
                   ─ eventemitter3.js
                       - eventemitter3.min.js
                   └ eventemitter3.min.js.map
 - events
```

```
- .airtap.yml
           - .github
                 └ FUNDING.yml
          - .travis.yml
         History md
         LICENSE
          – Readme.md
         – events.js
         — package.json
           - security.md
      └ tests

— add−listeners.js

                   — check-listener-leaks.js
                   — common.js
                   — errors.js
                   — events-list.js
                   — events-once.js
                   — index.js
                   — legacy−compat.js
                   — listener-count.js
                   listeners-side-effects.js
                      - listeners.js
                   — max-listeners.js
                   — method-names.js
                  — modify−in−emit.js
                   — num−args.js
                   — once.js
                   — prepend.js

⊢ remove-all-listeners.js

                   — remove−listeners.js
                  set-max-listeners-side-effects.js
                   — special-event-names.js
                     – subclass.js
                 └ symbols.js
- execa

─ index.d.ts

         – index.js
         – lib

    ─ command.js

                  — error⊾js
                   — kill.js
                  — promise.js
                   — stdio.js
                 ∟ stream.js
          license
          – package.json
      ∟ readme.md
- exit

    intrc
    intrc

        — .npmignore
           - .travis.yml
           - Gruntfile.js

    LICENSE-MIT

           - README.md
```

```
lib
    └ exit.js
    package.json
    test
    — exit_test.js
    └ fixtures
        — 10-stderr.txt
         - 10-stdout-stderr.txt
         - 10-stdout.txt
         - 100-stderr.txt
         - 100-stdout-stderr.txt
         - 100-stdout.txt
         - 1000-stderr.txt
         - 1000-stdout-stderr.txt
         - 1000-stdout.txt
        – create-files.sh
        – log-broken.js
       └ log.js
expect
 LICENSE
  README.md
   - build


─ asymmetricMatchers.d.ts

— asymmetricMatchers.js

     — extractExpectedAssertionsErrors.d.ts
     extractExpectedAssertionsErrors.js
     — index.d.ts
     — index.js
     jasmineUtils.d.ts
     — jasmineUtils.js
     — jestMatchersObject.d.ts
     — jestMatchersObject.js
     matchers.d.ts
     — matchers.js
     - print.d.ts
     — print.js
     spyMatchers.d.ts
     — spyMatchers.js
     — toThrowMatchers.d.ts
     — toThrowMatchers.js
     — types.d.ts
     — types.js
     utils.d.ts
    └ utils.js
 └ package.json
express

⊢ History.md

  - LICENSE
  — Readme.md
  — index.js
  - lib
     — application.js
     — express.js
     middleware
```

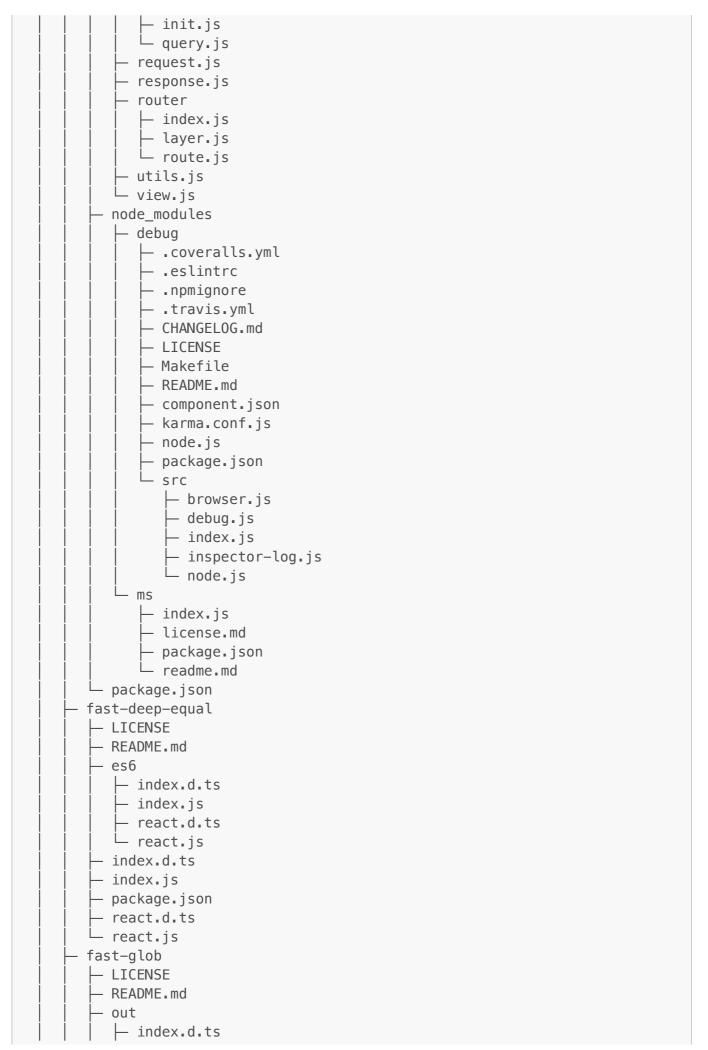

```
- index.js
- managers
  patterns.d.ts
  — patterns.js
   - tasks.d.ts
 └ tasks.js
- providers
  — async.d.ts
   – async⊾js
  filters
    — deep.d.ts
     ─ deep.js
     ─ entry.d.ts
    ├ entry.js
      - error.d.ts
    └ error.js
  matchers
    — matcher.js
     partial.d.ts
    └ partial.js
   - provider.d.ts
   - provider.js
   - stream.d.ts
   – stream.js
  - sync.d.ts
   - sync.js
 ⊢ entry.d.ts
    └ entry.js
readers
  async.d.ts
  – async.js
  — reader.d.ts
  – reader.js
  - stream.d.ts
  — stream.js
   - sync.d.ts
 ∟ sync.js
- settings.d.ts
- settings.js
types

─ index.d.ts

 └ index.js
utils

— array.d.ts

  — array₊js
   - errno.d.ts
  – errno.js
   - fs.d.ts
   - fs.js
   - index.d.ts
  – index.js
   - path.d.ts
```

```
- path.js
                                                                 - pattern.d.ts
                                                                 - pattern.js
                                                                - stream.d.ts
                                                               stream.js
                                                               - string.d.ts
                                                       └ string.js
            └ package.json

    fast-json-stable-stringify

            _ github
                          └ FUNDING.yml
                   - .travis.yml
                     - LICENSE
                     - README.md
                 benchmark

─ index.js

                                 └ test.json
                 – example
                                  — key_cmp.js
                                  ├ nested.js
                                          - str⊾js
                                 └ value_cmp.js
                   - index.d.ts
                     - index.js
                     – package.json
            └ test
                                  — cmp.js
                                   ─ nested.js
                                       – str.js
                                 └ to-json.js

    fast-levenshtein

    LICENSE.md


                README.md
                 levenshtein.js
            └ package.json
- fastq
              — .github


    dependabot.yml
    depe


    workflows
    workflo
                                                      └ ci.yml
                 LICENSE
               — README.md
             ─ bench.js
              — example.js
             — example.mjs
              index.d.ts
                  — package.json
                   – queue.js
           L test

⊢ example.ts

                                    — promise.js
                                          – test.js
                                   └ tsconfig.json
```

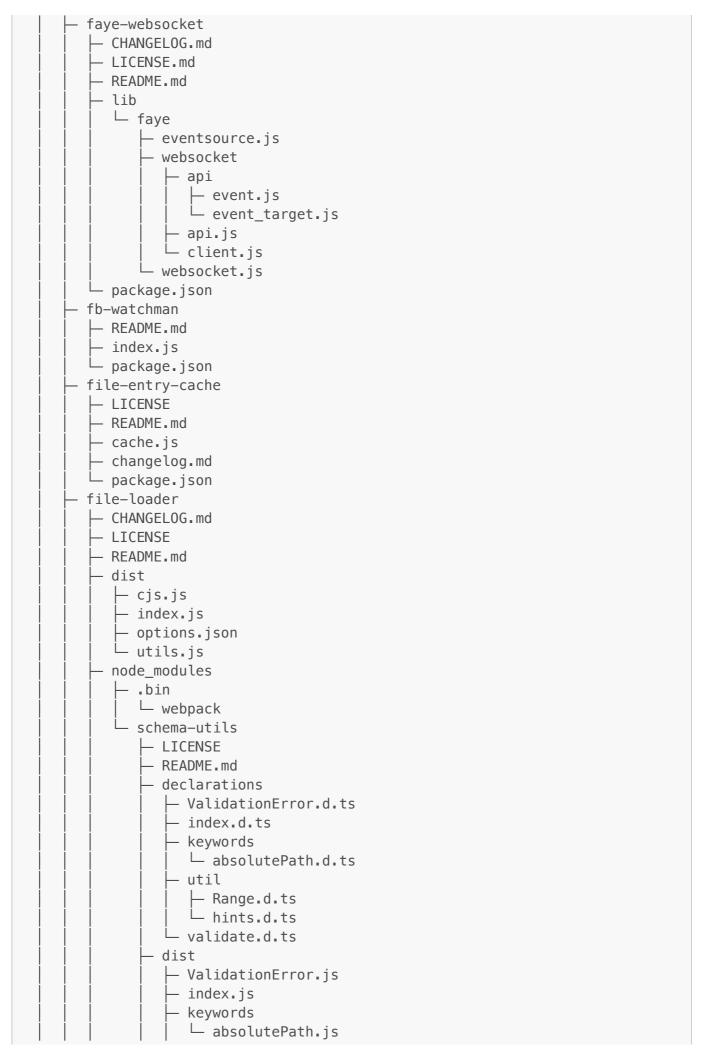

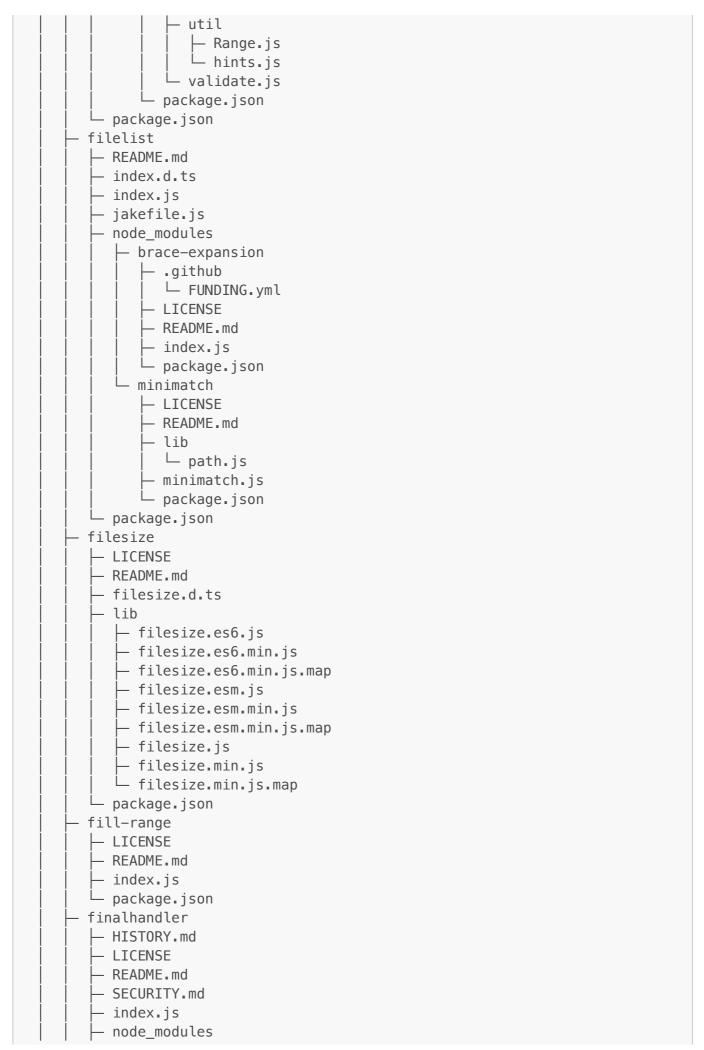

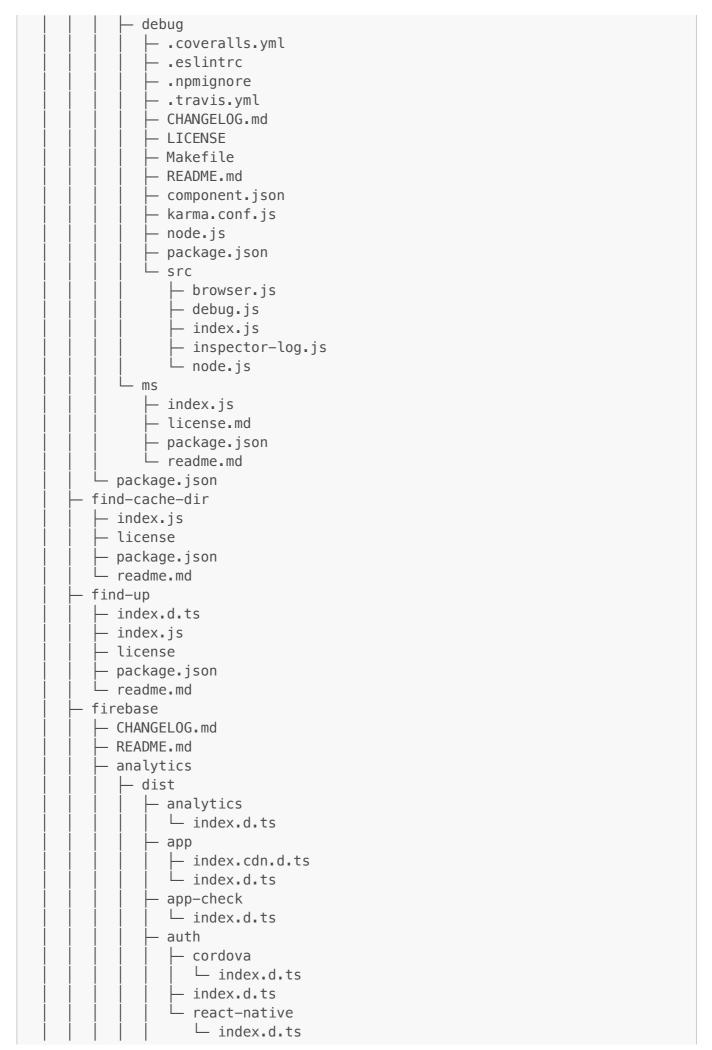

analytics	
│	
index.cdn.d.ts	
index.d.ts	
— app-check	
Lindex.d.ts	
│	
L index.d.ts	
firestore	
index.d.ts	
functions	
Lindex.d.ts	
index.cdn.d.ts	
index.d.ts	
index.node.d.ts	
index.perf.d.ts	
index.rn.d.ts	
index.d.ts	
messaging	
index.d.ts	
— performance	
L index.d.ts	
│	
│	
L storage	
index.d.ts	
database	
index.d.ts	
— analytics	
L index.d.ts	
index.cdn.d.ts	
app-check	
index.d.ts	
auth	
cordova	
index.d.ts	
index.d.ts	
│	
│	
│	
index.d.ts	
index.cdn.d.ts	
Lindex.d.ts	
553 / 0	

	index.d.ts
	index.d.ts
	tabase
	index.d.ts
	restore
	index.d.ts
	nctions
	index.d.ts
	dex.cdn.d.ts
	dex.d.ts
	dex.node.d.ts
	dex.perf.d.ts
	dex.rn.d.ts
	stallations
	index.d.ts
	ssaging
	index.d.ts
	rformance
	index.d.ts
	mote-config
	index.d.ts
	orage
	index.d.ts
datab	
	dex.d.ts
	dex.d.ts
	index.d.ts
	dex.d.ts
	.esm.js
	.esm.js.map
	llations
	dex.d.ts
│	
	dex.d.ts
	index.d.ts
	ge.json
	rmance
	dex.d.ts
	e-config
	dex.d.ts
	dex.d.ts
	e
	.d.ts
	dex.d.ts
function	S
│	.d.ts
index.cj	s.js
	554 / 017

```
- index.cjs.js.map
       - index.mjs
       - index.mjs.map
      installations
        └ index.d.ts
      - messaging
         — index.d.ts
          - SW
           └ index.d.ts
       - performance
        └ index.d.ts
       remote-config
        └ index.d.ts
       - storage
        └ index.d.ts
   – package.json

    – арр


  — dist
      — analytics
        └ index.d.ts
       - app
        index.cdn.d.ts
        └ index.d.ts
      app-check
        └ index.d.ts
       - auth
        ⊢ cordova
           └ index.d.ts
         - index.d.ts
        └ react-native
           └ index.d.ts
      - compat
         analytics
           └ index.d.ts
          - app

─ index.cdn.d.ts
           └ index.d.ts
          app-check
           └ index.d.ts
          - auth
           └ index.d.ts
         database
           └ index.d.ts
          - firestore
           └ index.d.ts
          - functions
           └ index.d.ts
         - index.cdn.d.ts
         - index.d.ts
         - index.node.d.ts
          - index.perf.d.ts
          - index.rn.d.ts

    installations


           └ index.d.ts
```

— messaging
│
├─ performance
└─ index.d.ts
remote-config
└─ index.d.ts
L storage
└ index.d.ts
— database
index.d.ts
— esm
— analytics
L index.d.ts
├─ app ├─ index.cdn.d.ts
index.cuiru.ts
app-check
— auth
Lindex.d.ts
index.d.ts
│
Lindex.d.ts
│ ├─ compat
│
L index.d.ts
index.cdn.d.ts
│
│
│
L index.d.ts
│
L index.d.ts
— firestore
index.d.ts
— functions
index.d.ts
— index.cdn.d.ts
— index.d.ts
— index.node.d.ts
— index.perf.d.ts
index.rn.d.ts
— installations
│
— messaging
index.d.ts
performance
L index.d.ts
remote-config
L index.d.ts
storage
556 / 017

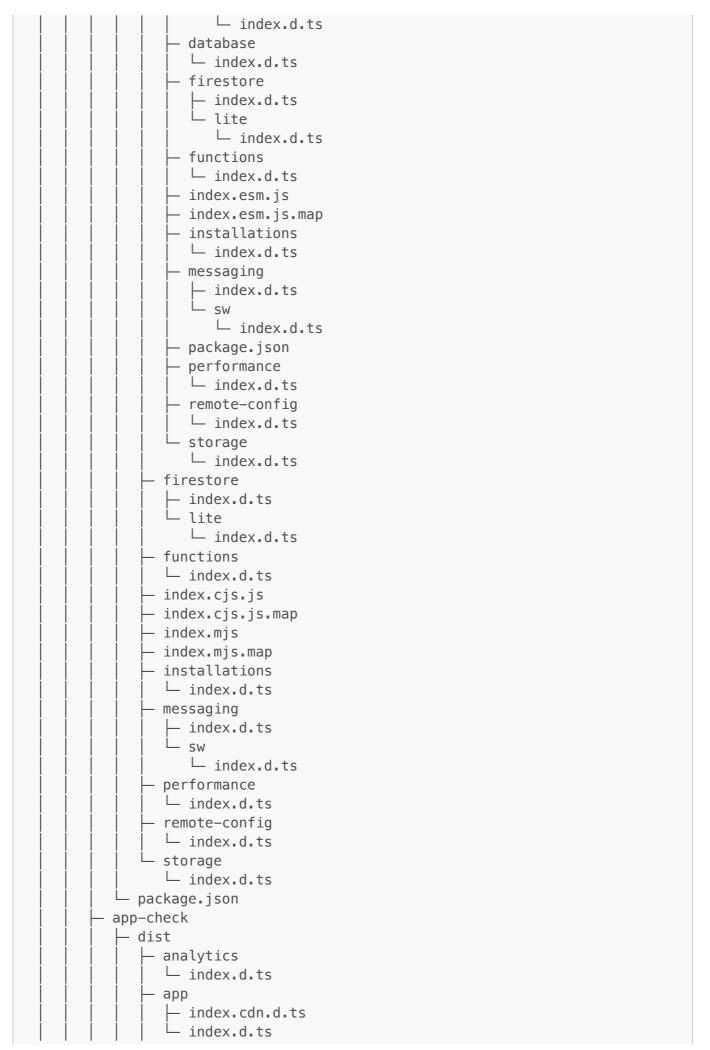

```
app-check
 └ index.d.ts
auth
  - cordova
    └ index.d.ts
  - index.d.ts
   - react-native
    └ index.d.ts
- compat
  ─ analytics
    └ index.d.ts
   - app
    index.cdn.d.ts
      - index.d.ts
   - app-check
    └ index.d.ts
  - auth
    └ index.d.ts
   - database
    └ index.d.ts
   - firestore
    └ index.d.ts
   - functions
    └ index.d.ts
   - index.cdn.d.ts
   - index.d.ts
   - index.node.d.ts
  - index.perf.d.ts
  - index.rn.d.ts
  installations
    └ index.d.ts
   messaging
    └ index.d.ts
   - performance
    └ index.d.ts
   - remote-config
    └ index.d.ts
   - storage
    └ index.d.ts
- database
 └ index.d.ts
- esm
  — analytics
    └ index.d.ts
   - app
    index.cdn.d.ts
    └ index.d.ts
   app-check
    └ index.d.ts
   - auth
    ⊢ cordova
       └ index.d.ts
      - index.d.ts
       react-native
```

	index.d.ts
	mpat
	analytics
	index.d.ts
	арр
	<pre>— index.cdn.d.ts</pre>
	└ index.d.ts
	app-check
	└ index.d.ts
	auth
	└ index.d.ts
	database
	index.d.ts
	firestore
	index.d.ts
	functions
	└ index.d.ts
	index.cdn.d.ts
	index.d.ts
	index.node.d.ts
	index.perf.d.ts
	index.rn.d.ts
	installations
	└ index.d.ts
	messaging
	index.d.ts
	performance
	index.d.ts
	remote-config
	└ index.d.ts
	storage
	└ index.d.ts
	tabase
	index.d.ts
	restore
	index.d.ts
	lite
	└ index.d.ts
ful	nctions
	index.d.ts
	dex.esm.js
	dex.esm.js.map
	stallations
	index.d.ts
me	ssaging
	index.d.ts
	SW
	└ index.d.ts
pa	ckage.json
	rformance
	index.d.ts
	mote-config
	index.d.ts
	orage
	550 / 017

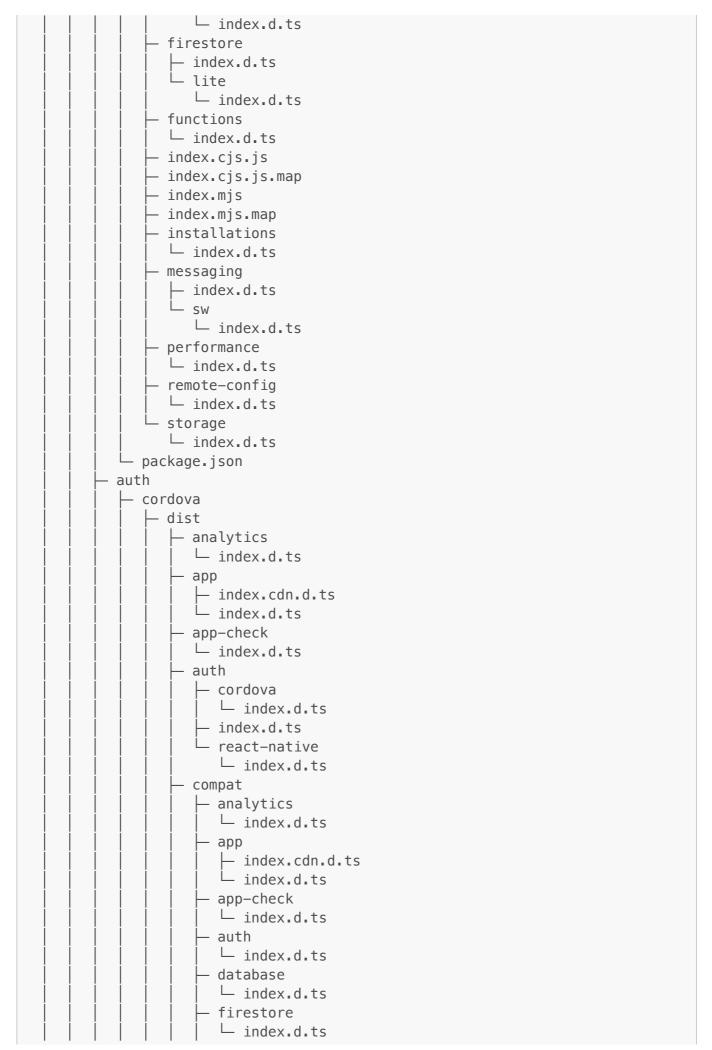


<pre>— functions</pre>	
∟ storage	
L index.d.ts	
database	
Lindex.d.ts	
index.d.ts	
— app-check	
index.d.ts	
Lindex.d.ts	
index.d.ts	
index.d.ts	
L index.d.ts	
firestore	
Lindex.d.ts	
— functions	
Lindex.d.ts	
index.cdn.d.ts	
index.d.ts	
index.node.d.ts	
561 / 017	

	ts
☐ ☐ ☐ ☐ ☐ index.d.ts ☐ ☐ firestore	
	ts
│	ар
	ts
firestore	
☐ ☐ ☐ ☐ ☐ ☐ index.d.ts ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐	
<pre>- index.cjs.js - index.cjs.js.map - index.mjs</pre>	
<pre> </pre>	
L index.d.ts Storage	62 / 017

```
└ index.d.ts
            - package.json
- dist
          – analytics
                  └ index.d.ts
            - app
                    index.cdn.d.ts
                   └ index.d.ts
            - app-check
                  └ index.d.ts
            - auth
                    — cordova
                             └ index.d.ts
                         - index.d.ts
                         - react-native
                              └ index.d.ts
          compat
                     — analytics
                              └ index.d.ts
                        app


    index.cdn.d.ts
    inde
                               └ index.d.ts
                        - app-check
                              └ index.d.ts
                         - auth
                             └ index.d.ts
                         - database
                             └ index.d.ts
                        - firestore
                              └ index.d.ts
                       - functions
                              └ index.d.ts
                        - index.cdn.d.ts
                       - index.d.ts
                       - index.node.d.ts
                       - index.perf.d.ts
                       - index.rn.d.ts
                       installations
                            └ index.d.ts
                        - messaging
                             └ index.d.ts
                        - performance
                              └ index.d.ts
                        - remote-config
                             └ index.d.ts
                       - storage
                              └ index.d.ts
            - database
                  └ index.d.ts
            - esm
                      — analytics
                              └ index.d.ts
                           app
                               index.cdn.d.ts
```

☐ index.d.ts
— app-check
└ index.d.ts
⊢ auth
├─ cordova
L index.d.ts
index.d.ts
└─ react-native
└ index.d.ts
— compat
⊢ analytics
index.cdn.d.ts
index.d.ts
!!
app-check
index.d.ts
│
│
├ firestore
├─ functions
index.d.ts
index.cdn.d.ts
index.d.ts
index.u.ts
index.perf.d.ts
index.rn.d.ts
☐ index.d.ts
— performance
index.d.ts
remote-config
L index.d.ts
index.d.ts
— database
☐ index.d.ts
— firestore
L lite
└ index.d.ts
— functions
index.d.ts
— index.esm.js
index.esm.js.map
— installations
└─ index.d.ts
— messaging

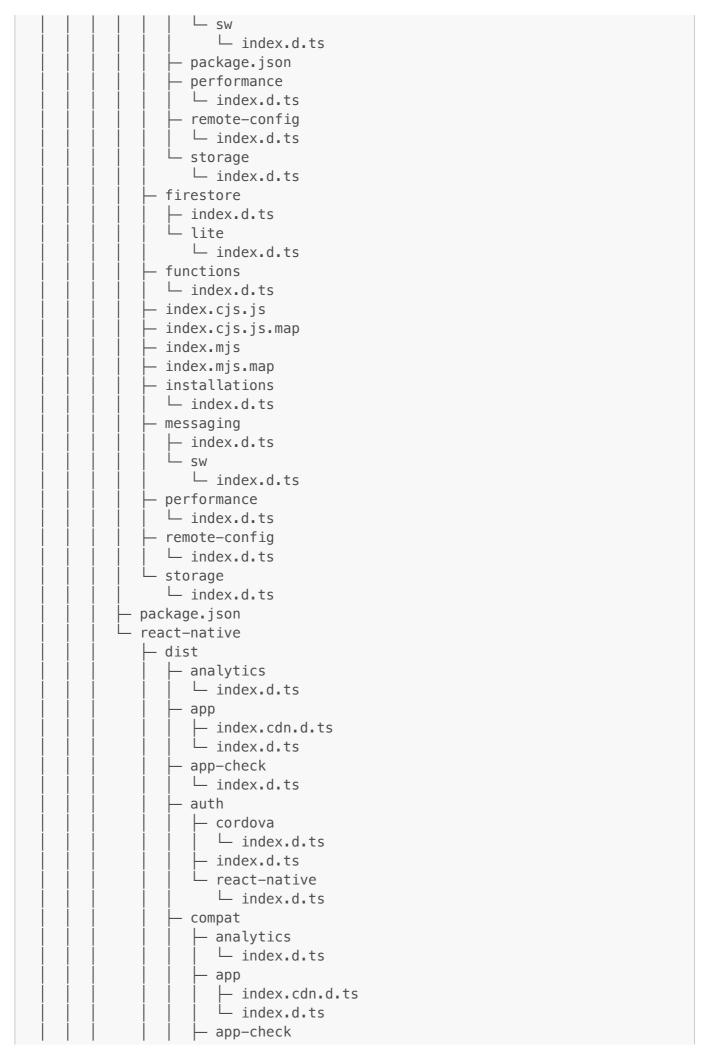


	index.d.ts
	⊢ auth
	— database
	☐ index.d.ts
i i i i	— firestore
	- functions
	index.d.ts
	index.drts index.cdn.drts
	index.d.ts
	- index.node.d.ts
	<pre>index.perf.d.ts</pre>
	index.rn.d.ts
	— installations
	— messaging
	— performance
	L index.d.ts
	remote-config
	L index.d.ts
	└─ storage
	└ index.d.ts
	— database
	└ index.d.ts
	— esm
	⊢ analytics
i i i i	
	— app
	index.cdn.d.ts
	index.d.ts
	app-check
	index.d.ts
	— auth
	│
	L index.d.ts
	index.d.ts
	react-native
	└ index.d.ts
	— compat
	— analytics
	L index.d.ts
	— app
	index.cdn.d.ts
	L index.d.ts
	│
	☐ index.d.ts
	│
	L index.d.ts
	firestore
	L index.d.ts
	566 / 017

│

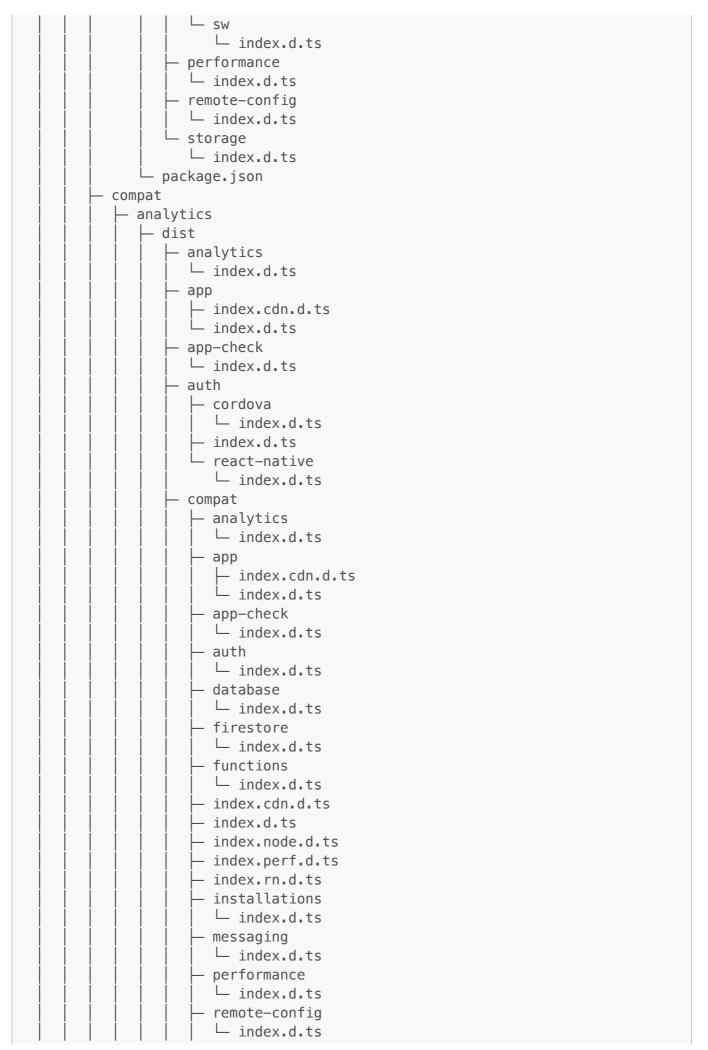


└─ storage
└─ index.d.ts
— database
│ └─ index.d.ts
— esm
│
— app
index.cdn.d.ts
app-check
│
│ ├─ auth
— cordova
L index.d.ts
index.d.ts
│
│ ├─ compat
│
L index.d.ts
index.cdn.d.ts
L index.d.ts
— app-check
L index.d.ts
— auth
L index.d.ts
L index.d.ts
— firestore
L index.d.ts
— functions
L index.d.ts
index.cdn.d.ts
index.d.ts
index.node.d.ts
index.perf.d.ts
index.rn.d.ts
— installations
L index.d.ts
│
L index.d.ts
— performance
L index.d.ts
— remote-config
L index.d.ts
L storage
│
— database
└─ index.d.ts
— firestore
index.d.ts
Lite

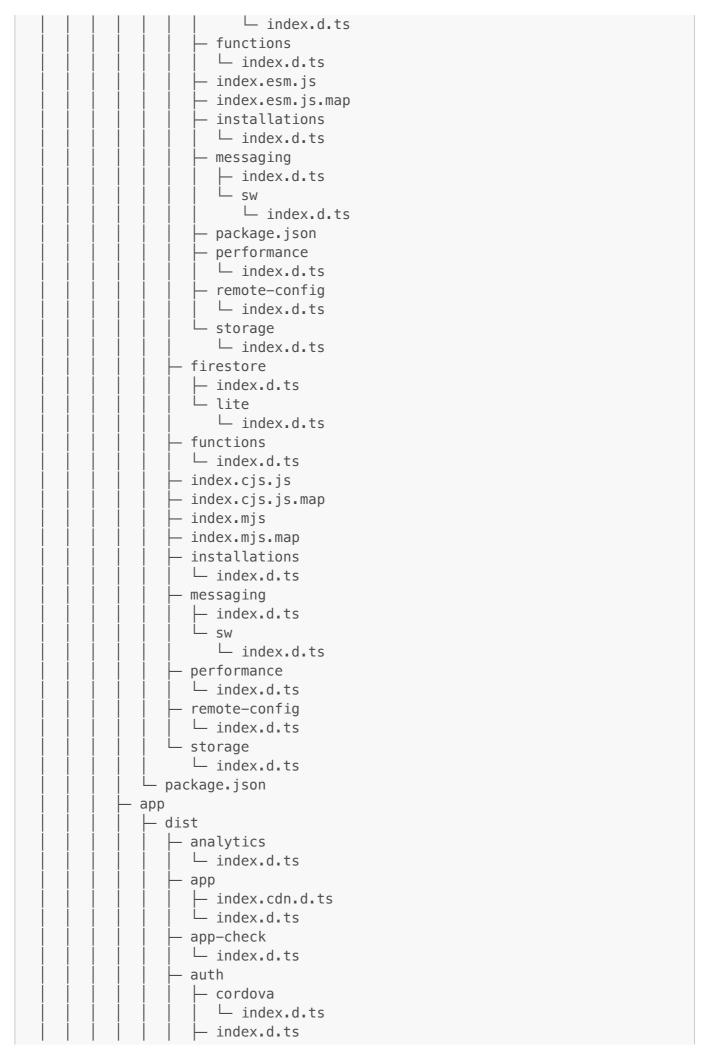


∟ react-native	
L index.d.ts	
index.cdn.d.ts	
index.d.ts	
app-check	
L index.d.ts	
auth	
L index.d.ts	
L index.d.ts	
index.node.d.ts	
index.perf.d.ts	
index.rn.d.ts	
installations	
Lindex.d.ts	
messaging	
index.d.ts	
L index.d.ts	
L index.d.ts	
analytics	
Lindex.d.ts	
index.cdn.d.ts	
index.d.ts	
app-check	
index.d.ts	
react-native	
analytics	
index.cdn.d.ts	
571 / 917	

database	
L index.d.ts	
Lindex.d.ts	
functions	
Lindex.d.ts	
index.cdn.d.ts	
index.d.ts	
index.node.d.ts	
index.rn.d.ts	
installations	
L index.d.ts	
storage	
database	
Lindex.d.ts	
index.d.ts	
— functions	
L index.d.ts	
index.esm.js	
— index.esm.js.map	
Lindex.d.ts	
package.json	
performance	
index.d.ts	
remote-config	
L index.d.ts	
L storage	
L index.d.ts	

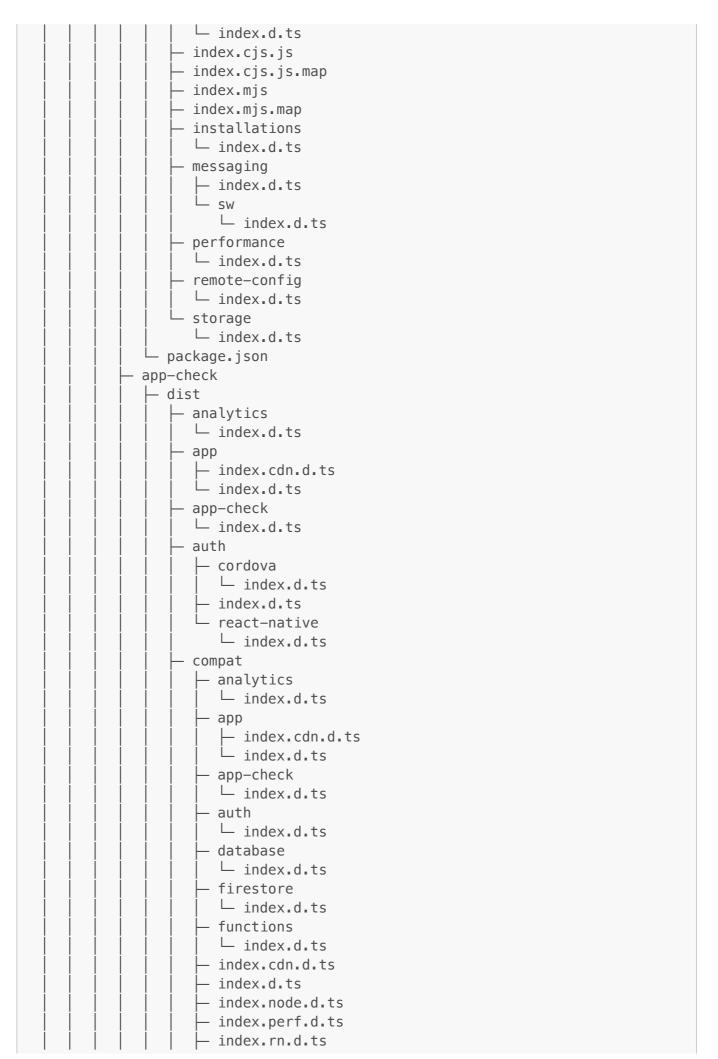

│
— messaging
— performance
index.d.ts
- remote-config
L index.d.ts
└─ storage
index.d.ts
— database
└─ index.d.ts
— esm
— analytics
— app
index.cdn.d.ts
index.d.ts
— app-check
index.d.ts
auth
L cordova
L index.d.ts
— index.d.ts
react-native
— compat
— analytics
L index.d.ts
— index.cdn.d.ts
index.d.ts
— app-check
index.d.ts
L index.d.ts
database
L index.d.ts
— index.d.ts
L index.d.ts
— functions
Lindex.d.ts
index.cdn.d.ts
index.d.ts
index.node.d.ts
index.perf.d.ts
— index.rn.d.ts
— installations
index.d.ts
messaging
L index.d.ts
— performance
L index.d.ts
— remote-config
574 / 017

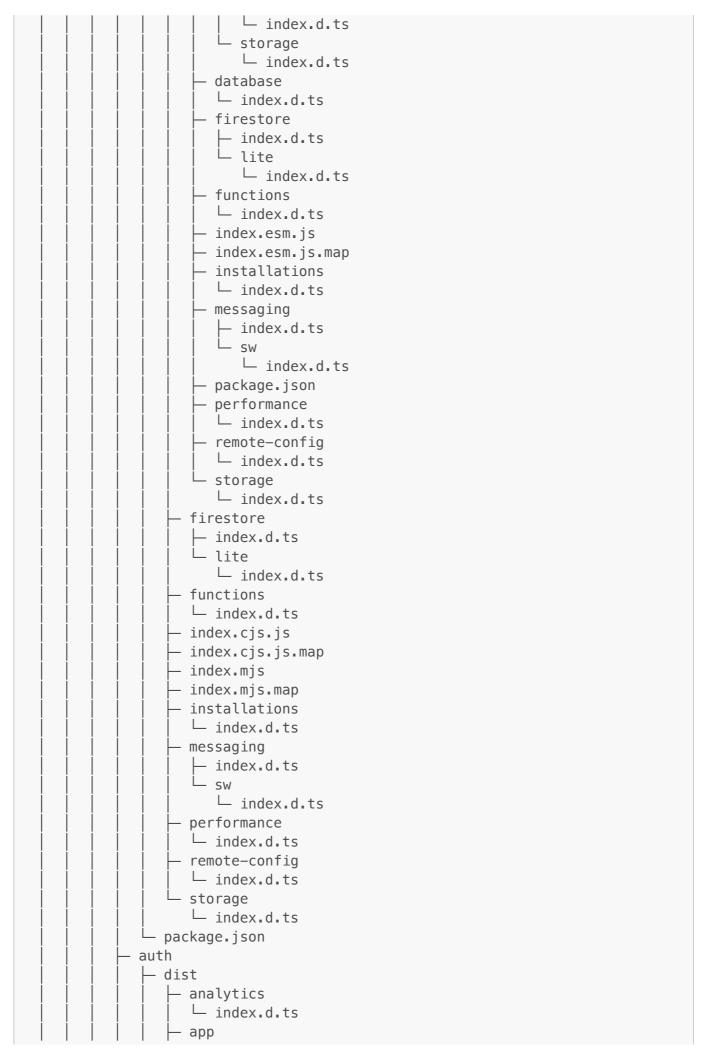

index.cdn.d.ts
☐ index.d.ts
— app-check
│ └ index.d.ts
— auth
├─ cordova
│
index.d.ts
react-native
└ index.d.ts
— compat
— analytics
L index.d.ts
index.d.ts
— app-check
— auth
index.d.ts
— database
— firestore
index.d.ts
├─ functions
│
— index.cdn.d.ts
— index.d.ts
— index.node.d.ts
index.perf.d.ts
index.rn.d.ts
installations
index.d.ts
— messaging
index.d.ts
— performance
│
— remote-config
│
└ storage
└ index.d.ts
— database
└ index.d.ts
— esm
— analytics
☐ index.d.ts
— app
index.cdn.d.ts
index.d.ts
— app-check
L index.d.ts
— index.d.ts
L index.d.ts
576 / 017

index.d.ts
└─ react-native
└ index.d.ts
— compat
— analytics
index.d.ts
⊢ app
L index.cdn.d.ts
index.cum.u.ts
— app-check
☐ index.d.ts
— auth
│
— database
│
— firestore
│
├─ functions
└ index.d.ts
— index.cdn.d.ts
— index.d.ts
— index.node.d.ts
— index.perf.d.ts
index.rn.d.ts
installations
index.d.ts
— messaging
L index.d.ts
performance
L index.d.ts
remote-config
L index.d.ts
∟ storage
└─ index.d.ts
— database
└ index.d.ts
— firestore
index.d.ts
└ lite
└ index.d.ts
— functions
└ index.d.ts
— index.esm.js
— index.esm.js.map
— installations
└ index.d.ts
— messaging
index.d.ts
SW
∟ index.d.ts
— package.json
— performance
— performance
!
— remote-config
577 / 017

```
└ index.d.ts
          storage
           └ index.d.ts
       firestore

─ index.d.ts

        └ lite
           └ index.d.ts
      - functions
       └ index.d.ts
      - index.cjs.js
     - index.cjs.js.map
      – index.mjs
     - index.mjs.map

    installations

       └ index.d.ts
      - messaging
        index.d.ts
        L SW
           └ index.d.ts
      - performance
       └ index.d.ts
      remote-config
       └ index.d.ts
      - storage
       └ index.d.ts
   package.json
- database
 ∟ dist
     — analytics
       └ index.d.ts
      - app

    index.cdn.d.ts
    index.cdn.d.ts

        └ index.d.ts
     — app-check
       └ index.d.ts
      - auth
         - cordova
          └ index.d.ts
         - index.d.ts
         - react-native
           └ index.d.ts
     - compat
        — analytics
          └ index.d.ts
         - app
           index.cdn.d.ts
           └ index.d.ts
         app-check
          └ index.d.ts
         - auth
          └ index.d.ts
         - database
           └ index.d.ts
         - firestore
```

	.ts
functions	
index.cdn.	d.ts
index.d.ts	
index.node	
index.perf	
index.rn.c	
installati	
	.ts
messaging	
performance	
remote-cor	
	.TS
L storage	1.
Lindex.c	.TS
— database	
Lindex.d.ts	
analytics	L -
	.TS
	de dita
index.c	.TS
	+-
	· LS
react-r	
	Aidits
analyti	CS
	ATGI CO
	x.cdn.d.ts
inde	
app-che	
inde	
auth	
inde	x.d.ts
databas	
inde	
inde	
function	
inde	
index.o	
index.c	
index.re	
	erf.d.ts
	570 / 017

```
∟ storage
       └ index.d.ts
   - package.json
- dist

⊢ analytics

    └ index.d.ts
   - app
     index.cdn.d.ts
    index.d.ts
   - app-check
    └ index.d.ts
   - auth

⊢ cordova

       └ index.d.ts
      - index.d.ts
     └ react-native
        └ index.d.ts
   - compat
     — analytics
       └ index.d.ts
      - app

─ index.cdn.d.ts
       └ index.d.ts
      app-check
       └ index.d.ts
      - auth
       └ index.d.ts
      - database
       └ index.d.ts
      - firestore
       └ index.d.ts
      functions
       └ index.d.ts
     - index.cdn.d.ts
     - index.d.ts
      - index.node.d.ts
     - index.perf.d.ts
      - index.rn.d.ts

    installations

       └ index.d.ts
     messaging
       └ index.d.ts
     - performance
       └ index.d.ts
      - remote-config
       └ index.d.ts
      - storage
       └ index.d.ts
   - database
    └ index.d.ts
   - esm
      analytics
       └ index.d.ts
```

index.cdn.d.ts
└─ index.d.ts
— app-check
│ └ index.d.ts
— auth
├─ cordova
└ index.d.ts
— index.d.ts
└─ react-native
└ index.d.ts
— compat
└ index.d.ts
— app
index.cdn.d.ts
index.d.ts
— app-check
index.d.ts
auth
L index.d.ts
— database
index.d.ts
- firestore
index.d.ts
- functions
index.d.ts
index.cdn.d.ts
index.d.ts
index.u.ts
index.node.d.ts
<pre>index.rn.d.ts installations</pre>
L index.d.ts
— messaging
index.d.ts
— performance
index.d.ts
remote-config
Lindex.d.ts
└─ storage
└ index.d.ts
— database Label database
index.d.ts
— firestore
index.d.ts
└─ lite
☐ index.d.ts
— functions
└─ index.d.ts
— index.esm.js
index.esm.js.map
— installations
│ └ index.d.ts
— messaging

```
- index.d.ts
         - SW
           └ index.d.ts

    performance

       └ index.d.ts
      - remote-config
       └ index.d.ts
      - storage
       └ index.d.ts
   - firestore

    index.d.ts
    index.d.ts
    index.d.ts

     └ lite
       └ index.d.ts
   - functions
    └ index.d.ts
  - index.node.cjs
  — index.node.cjs.map
  - index.rn.cjs.js
  - index.rn.cjs.js.map
  - installations
    └ index.d.ts
   - messaging


─ index.d.ts

    L sw
       └ index.d.ts
   - performance
    └ index.d.ts
   remote-config
    └ index.d.ts
 ∟ storage
    └ index.d.ts
- firestore
  — dist
     analytics
       └ index.d.ts
      - app
         - index.cdn.d.ts
        └ index.d.ts
      app-check
       └ index.d.ts
      - auth


⊢ cordova
           └ index.d.ts
         - index.d.ts
         - react-native
           └ index.d.ts
      - compat
         analytics
           └ index.d.ts
         – арр
           index.cdn.d.ts
           └ index.d.ts
          app-check
           └ index.d.ts
```

— auth	
database Lindex.d.ts	
L index.d.ts	
firestore index.d.ts functions index.d.ts index.d.ts index.d.ts index.nd.ts index.nd.ts index.nd.ts index.nd.ts index.nd.ts index.nd.ts installations index.d.ts index.d.t	
- index.d.ts	
functions index.d.ts index.cdn.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.d.ts index.d.t	
index.d.ts	! .
index.d.ts	
index.node.d.ts	
index.rn.d.ts	
— installations — index.d.ts — messaging — index.d.ts — performance — index.d.ts — remote-config — index.d.ts — index.d.ts — tindex.d.ts	<pre>index.perf.d.ts</pre>
Lindex.d.ts	— index.rn.d.ts
— messaging	├ installations
	└ index.d.ts
— performance	
	· ·
L index.d.ts L storage L index.d.ts — database L index.d.ts — esm — analytics L index.d.ts — app	
L storage L index.d.ts — database L index.d.ts — esm — analytics L index.d.ts — app — index.cdn.d.ts L index.d.ts — app-check L index.d.ts — auth — cordova L index.d.ts — index.d.ts — index.d.ts — react-native L index.d.ts — analytics L index.d.ts — app — hindex.d.ts — app — hindex.d.ts — app — index.d.ts — app-check — index.d.ts — auth — index.d.ts — auth — index.d.ts — database — index.d.ts — firestore — index.d.ts — firestore — index.d.ts — firestore — index.d.ts — firestore — index.d.ts — functions	
database	
— index.d.ts	
- esm - analytics - index.d.ts - app - index.d.ts - app-check - index.d.ts - auth - cordova - index.d.ts - index.d.ts - index.d.ts - index.d.ts - compat - analytics - index.d.ts - app - index.d.ts - app-check - index.d.ts - auth - index.d.ts - auth - index.d.ts - auth - index.d.ts - auth - index.d.ts - database - index.d.ts - firestore - index.d.ts - firestore - index.d.ts - functions	
— analytics — index.d.ts — app — index.d.ts — app-check — index.d.ts — auth — cordova — index.d.ts — index.d.ts — index.d.ts — index.d.ts — compat — analytics — index.d.ts — app — index.d.ts — app — index.d.ts — app — index.d.ts — app-check — index.d.ts — auth — index.d.ts — auth — index.d.ts — auth — index.d.ts — database — index.d.ts — firestore — index.d.ts — firestore — index.d.ts — functions	
	— арр
— app-check	
☐ index.d.ts ☐ auth ☐ cordova ☐ index.d.ts ☐ index.d.ts ☐ react—native ☐ index.d.ts ☐ compat ☐ analytics ☐ index.d.ts ☐ app ☐ index.d.ts ☐ app ☐ index.d.ts ☐ index.d.ts ☐ app—check ☐ index.d.ts ☐ auth ☐ index.d.ts ☐ auth ☐ index.d.ts ☐ database ☐ index.d.ts ☐ direstore ☐ index.d.ts ☐ firestore ☐ index.d.ts ☐ functions	index.d.ts
— auth	
— index.d.ts — react-native — index.d.ts — compat — analytics — index.d.ts — app — index.cdn.d.ts — index.d.ts — index.d.ts — app-check — index.d.ts — auth — index.d.ts — auth — index.d.ts — database — index.d.ts — firestore — index.d.ts — firestore — index.d.ts — functions	
☐ react—native ☐ index.d.ts ☐ analytics ☐ index.d.ts ☐ app ☐ index.d.ts ☐ index.d.ts ☐ index.d.ts ☐ app—check ☐ index.d.ts ☐ auth ☐ index.d.ts ☐ database ☐ index.d.ts ☐ inde	
— index.d.ts — compat — analytics — index.d.ts — app — index.cdn.d.ts — index.d.ts — app-check — index.d.ts — auth — index.d.ts — database — index.d.ts — firestore — index.d.ts — functions	
— compat — analytics — index.d.ts — app — index.d.ts — app-check — index.d.ts — auth — index.d.ts — database — index.d.ts — firestore — index.d.ts — functions	
— analytics — index.d.ts — app — index.cdn.d.ts — index.d.ts — app-check — index.d.ts — auth — index.d.ts — database — index.d.ts — firestore — index.d.ts — functions	
— app — index.cdn.d.ts — index.d.ts — app-check — index.d.ts — auth — index.d.ts — database — index.d.ts — firestore — index.d.ts — functions	
— auth ☐ index.d.ts ☐ database ☐ index.d.ts ☐ index.d.ts ☐ index.d.ts ☐ firestore ☐ index.d.ts ☐ index.d.ts ☐ functions	
— database ☐ index.d.ts ☐ firestore ☐ index.d.ts ☐ index.d.ts ☐ functions	
index.d.ts functions	
	!!!
594 / 017	• •

Lindex.d.ts index.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.nod.ts index.nod.ts installations Lindex.d.ts messaging Lindex.d.ts performance Lindex.d.ts index.d.ts index.esm.js index.esm.js index.esm.js index.esm.js installations Lindex.d.ts index.d.ts messaging index.d.ts index.d.ts
└ index.d.ts
└ index.d.ts
- index.cjs.js
<pre>- index.cjs.js.map - index.mjs</pre>
- index.mjs.map
<pre>- installations</pre>
└ index.d.ts
<pre>— messaging</pre>
_ sw

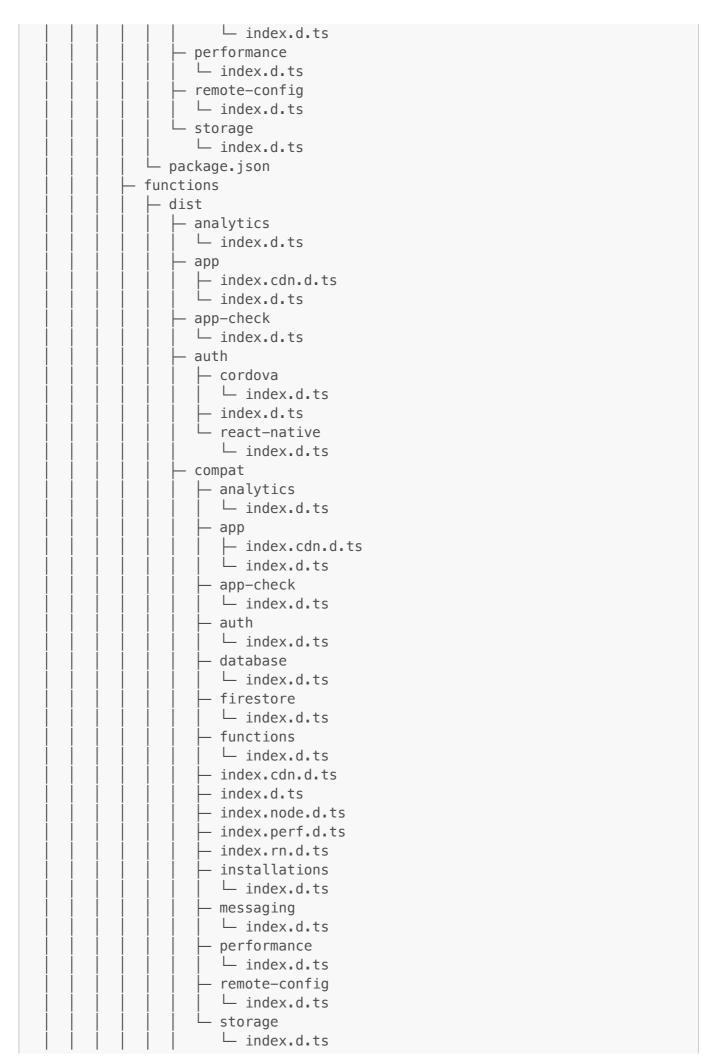


— database
☐ index.d.ts
⊢ esm
— analytics
— app
index.cdn.d.ts
index.d.ts
!!!
— app-check
index.d.ts
— auth
cordova
L index.d.ts
<pre> index.d.ts </pre>
react-native
└ index.d.ts
— compat
— analytics
L index.d.ts
— app
index.cdn.d.ts
index.d.ts
app-check
L index.d.ts
L index.d.ts
│
index.d.ts
firestore
index.d.ts
— functions
L index.d.ts
index.d.ts
!!!
index.d.ts
index.node.d.ts
index.perf.d.ts
index.rn.d.ts
installations installations
│
│
☐ index.d.ts
— performance
L index.d.ts
remote-config
L index.d.ts
L storage
index.d.ts
— database
— firestore
index.d.ts
Lite
└ index.d.ts
— functions
· ·

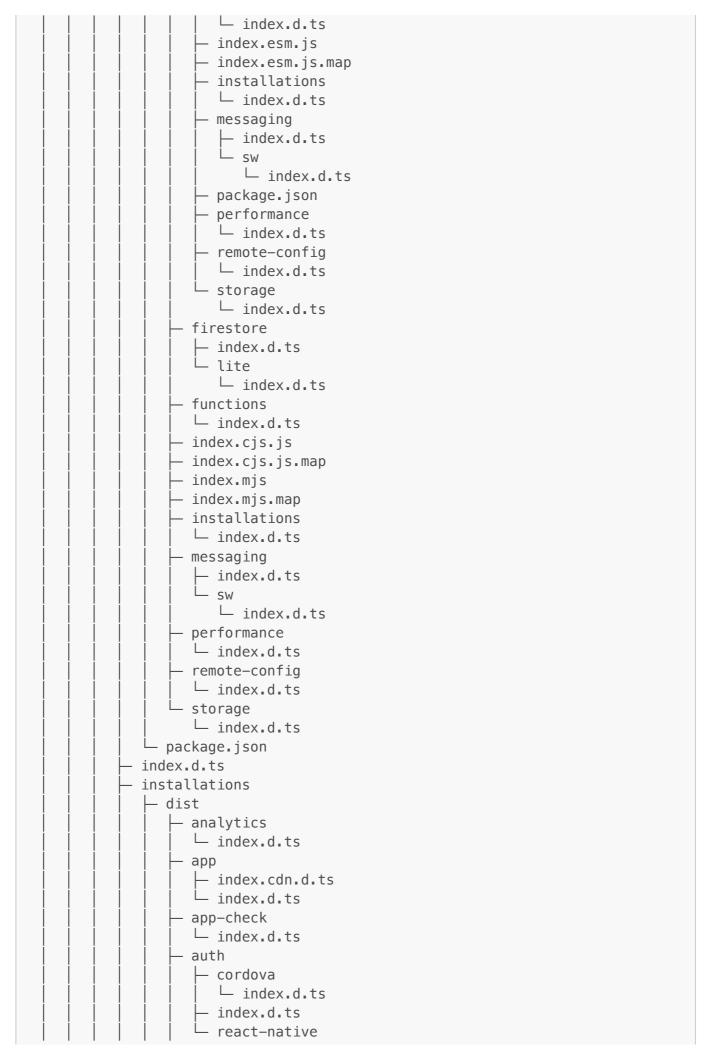


└ index.d.ts
├─ compat
— analytics
— app
index.cdn.d.ts
index.d.ts
— app-check
index.d.ts
auth
L index.d.ts
— database
index.d.ts
— firestore
L index.d.ts
— functions
— index.cdn.d.ts
— index.d.ts
— index.node.d.ts
— index.perf.d.ts
index.rn.d.ts
installations
index.d.ts
│ ├─ messaging
index.d.ts
— performance
index.d.ts
remote-config
index.d.ts
└─ storage
└ index.d.ts
— database
└ index.d.ts
— esm
— analytics
index.d.ts
index.d.ts
│
index.d.ts
— auth
│
│
index.d.ts
react-native
└ index.d.ts
- compat
L index.d.ts
— app
— index.cdn.d.ts
L index.d.ts
580 / 017

index.d.ts index.cdn.d.ts	
index.rn.d.ts installations	
Lindex.d.ts Storage	
index.d.ts remote-config	
L index.d.ts	

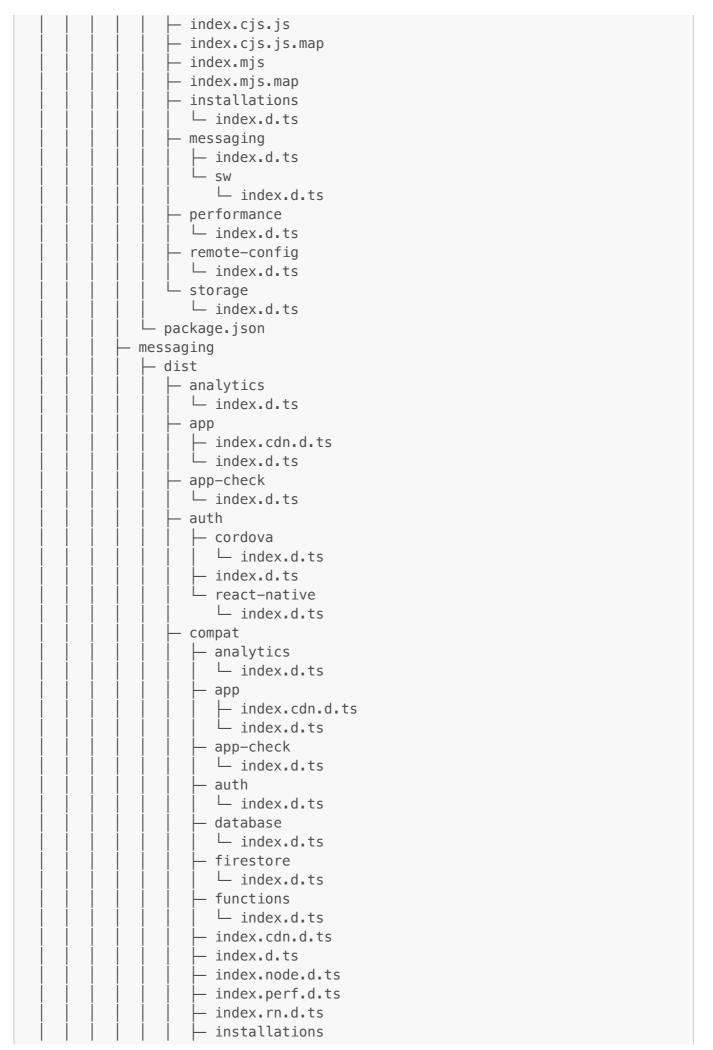

L index.d.ts	
messaging	
index.d.ts	
performance	
index.d.ts	
remote-config	
index.d.ts	
index.d.ts	
database	
L index.d.ts	
index.cdn.d.ts	
index.d.ts	
app-check	
index.d.ts	
auth	
Lindex.d.ts	
∟ react-native	
index.cdn.d.ts	
index.d.ts	
app-check	
index.d.ts	
index.d.ts	
Lindex.d.ts	
index.d.ts	
index.node.d.ts	
index.perf.d.ts	
index.rn.d.ts	
installations	
index.d.ts	
messaging	
Lindex.d.ts	

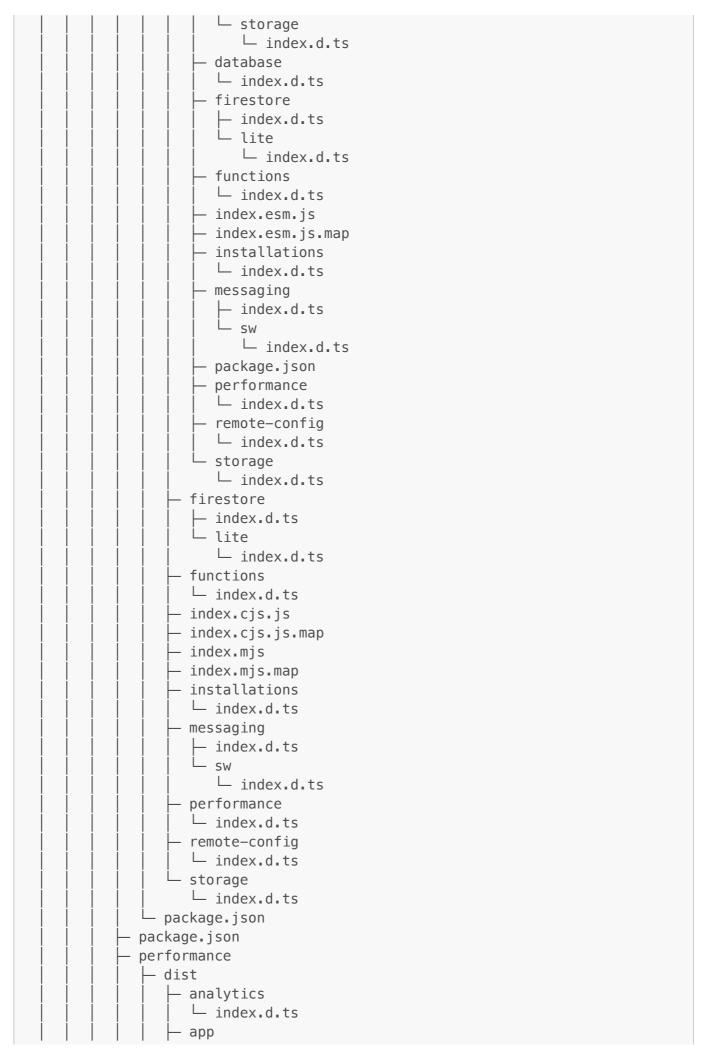

index.cdn.d.ts
☐ index.d.ts
— app-check
│ └ index.d.ts
— auth
├─ cordova
│
index.d.ts
react-native
└ index.d.ts
— compat
— analytics
L index.d.ts
index.d.ts
— app-check
— auth
│
│
├ firestore
☐ index.d.ts
— functions
☐ index.d.ts
— index.cdn.d.ts
— index.d.ts
index.node.d.ts
index.perf.d.ts
index.rn.d.ts
installations
index.d.ts
— messaging
index.d.ts
│
— remote-config
│
└ storage
└ index.d.ts
— database
└ index.d.ts
— esm
— analytics
└─ index.d.ts
— app
index.cdn.d.ts
index.d.ts
— app-check
L index.d.ts
— index.d.ts
L index.d.ts
504 / 017

L react—native	
L index.d.ts	
index.d.ts	
app-check	
L index.d.ts	
database	
index.cdn.d.ts	
index.d.ts	
index.rn.d.ts	
index.d.ts	
performance	
L index.d.ts	
remote-config	
index.d.ts	
Lindex.d.ts	
— index.esm.js	
index.d.ts	
— performance	
L index.d.ts	
505 / 017	

```
└ index.d.ts
          storage
           └ index.d.ts
       firestore

─ index.d.ts

        └ lite
           └ index.d.ts
      - functions
       └ index.d.ts
      - index.cjs.js
     - index.cjs.js.map
      – index.mjs
     - index.mjs.map

    installations

       └ index.d.ts
      - messaging
        index.d.ts
        L sw
           └ index.d.ts
      - performance
       └ index.d.ts

    remote-config

       └ index.d.ts
      - storage
       └ index.d.ts
   – package.json
remote-config
 ⊢ dist
     – analytics
       └ index.d.ts
      - app

    index.cdn.d.ts
    index.cdn.d.ts


        └ index.d.ts
     – app-check
       └ index.d.ts
      - auth
         - cordova
          └ index.d.ts
         - index.d.ts
         - react-native
           └ index.d.ts
     - compat
        analytics
           └ index.d.ts
         - app
           index.cdn.d.ts
           └ index.d.ts
         app-check
           └ index.d.ts
         - auth
           └ index.d.ts
         - database
           └ index.d.ts
         - firestore
```

index.d.ts
— functions
— index.cdn.d.ts
— index.d.ts
— index.node.d.ts
— index.perf.d.ts
— index.rn.d.ts
— installations
— messaging
index.d.ts
— performance
index.d.ts
remote-config
L index.d.ts
└─ storage └─ index.d.ts
│
— database │
├─ esm ├─ analytics
L index.d.ts
index.d.ts
— app-check
index.d.ts
— auth
├─ cordova
☐ index.d.ts
— index.d.ts
react-native
index.d.ts
├─ compat
│
index.d.ts
index.cdn.d.ts
Lindex.d.ts
— app-check
L index.d.ts
L database
— database L index.d.ts
— firestore
L index.d.ts
functions
L index.d.ts
indexidits index.cdn.d.ts
index.d.ts
index.node.d.ts
<pre>index.perf.d.ts</pre>
507 / 017

index.rn.d.ts
│ └─ index.d.ts ├─ remote-config
index.d.ts
508 / 017

```
∟ storage
       └ index.d.ts
   - package.json
storage
  — dist
     — analytics
       └ index.d.ts
      - app
       index.cdn.d.ts
       └ index.d.ts
      app-check
       └ index.d.ts
     - auth
       — cordova
          └ index.d.ts
        - index.d.ts
       └ react-native
          └ index.d.ts
      - compat
        — analytics
          └ index.d.ts
         - app
          index.cdn.d.ts
          index.d.ts
         app-check
          └ index.d.ts
         - auth
          └ index.d.ts
        database
          └ index.d.ts
        - firestore
          └ index.d.ts
         - functions
          └ index.d.ts
         - index.cdn.d.ts
        - index.d.ts
         - index.node.d.ts
         - index.perf.d.ts
        - index.rn.d.ts
         installations
          └ index.d.ts
        messaging
          └ index.d.ts
         - performance
          └ index.d.ts
        remote-config
          └ index.d.ts
         - storage
          └ index.d.ts
      - database
       └ index.d.ts
       esm
        analytics
          └ index.d.ts
```

app	
index.d.ts app-check index.d.ts auth cordova index.d.ts index.esm.js.map installations installations index.esm.js.map index.esm.js.ma	
index.d.ts auth - cordova - index.d.ts - index.d.ts - index.d.ts - compat - analytics - index.d.ts - app - index.cdn.d.ts - index.d.ts - app - index.cdn.d.ts - index.d.ts - index.esm.js - index.esm.js - index.esm.js - index.esm.js - index.esm.js - installations - installations - index.esm.js	
- auth	
	└ index.d.ts
Lindex.d.ts - index.d.ts - react-native Lindex.d.ts - compat Lindex.d.ts - app Lindex.cdn.d.ts Lindex.d.ts - app Lindex.d.ts - app-check Lindex.d.ts - auth Lindex.d.ts - database Lindex.d.ts - firestore Lindex.d.ts - index.d.ts - messaging Lindex.d.ts - performance Lindex.d.ts - performance Lindex.d.ts - remote-config Lindex.d.ts - remote-config Lindex.d.ts - remote-config Lindex.d.ts - tindex.d.ts - tindex.esm.js - index.esm.js.map - installations	— auth
index.d.ts react-native index.d.ts react-native index.d.ts anpy index.d.ts app index.d.ts app index.d.ts app-check index.d.ts auth index.d.ts athabase index.d.ts index.cd.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.d.ts index.esm.js installations installat	│
index.d.ts react-native index.d.ts react-native index.d.ts anpy index.d.ts app index.d.ts app index.d.ts app-check index.d.ts auth index.d.ts athabase index.d.ts index.cd.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.node.d.ts index.d.ts index.esm.js installations installat	
react-native	
Lindex.d.ts - compat - analytics - index.d.ts - app - index.d.ts - app-check - index.d.ts - auth - index.d.ts - database - index.d.ts - furctions - index.d.ts - index.con.d.ts - index.not.d.ts - index.perf.d.ts - index.perf.d.ts - installations - index.d.ts - messaging - index.d.ts - messaging - index.d.ts - performance - index.d.ts - remote-config - index.d.ts - storage - index.d.ts - database - index.d.ts - database - index.d.ts - firestore - index.d.ts - firestore - index.d.ts - finetions - index.d.ts - index.esm.js.map - installations	
— compat	
— analytics	
app	
index.d.ts - app-check - index.d.ts - auth - index.d.ts - database - index.d.ts - firestore - index.d.ts - index.d.ts - index.d.ts - index.d.ts - index.n.d.ts - index.node.d.ts - index.node.d.ts - index.node.d.ts - index.d.ts - installations - installations - index.d.ts - performance - index.d.ts - performance - index.d.ts - remote-config - index.d.ts - storage - index.d.ts - database - index.d.ts - firestore - index.d.ts	
app-check	
L index.d.ts - auth L index.d.ts - database L index.d.ts - firestore L index.d.ts - functions L index.d.ts - index.cd.ts - index.n.d.ts - index.perf.d.ts - installations L index.d.ts - messaging L index.d.ts - performance L index.d.ts - remote-config L index.d.ts - remote-config L index.d.ts - firestore index.d.ts - firestore index.d.ts - functions L index.esm.js.map - installations	
— auth	
Lindex.d.ts - database Lindex.d.ts - firestore Lindex.d.ts - functions Lindex.d.ts - index.cdn.d.ts - index.node.d.ts - index.perf.d.ts - index.n.d.ts - index.d.ts - index.d.ts - index.d.ts - messaging Lindex.d.ts - performance Lindex.d.ts - remote-config Lindex.d.ts - remote-config Lindex.d.ts - firestore - index.d.ts - index.d.ts	
database	
Lindex.d.ts	
— firestore — index.d.ts — functions — index.d.ts — index.cd.ts — index.d.ts — index.node.d.ts — index.perf.d.ts — index.n.d.ts — installations — index.d.ts — messaging — index.d.ts — performance — index.d.ts — remote-config — index.d.ts — storage — index.d.ts — database — index.d.ts — firestore — index.d.ts — firestore — index.d.ts — tindex.d.ts — firestore — index.d.ts — firestore — index.d.ts — finex.d.ts — functions — index.d.ts — index.esm.js — index.esm.js map — installations	
☐ index.d.ts ☐ functions ☐ index.d.ts ☐ index.d.ts ☐ index.nd.ts ☐ index.node.d.ts ☐ index.perf.d.ts ☐ index.rn.d.ts ☐ installations ☐ index.d.ts ☐ messaging ☐ index.d.ts ☐ performance ☐ index.d.ts ☐ remote-config ☐ index.d.ts ☐ storage ☐ index.d.ts ☐ database ☐ index.d.ts ☐ firestore ☐ index.d.ts ☐ firestore ☐ index.d.ts ☐ index.esm.js ☐ index.esm.js ☐ index.esm.js ☐ index.esm.js.map ☐ installations	
— functions — index.d.ts — index.cdn.d.ts — index.node.d.ts — index.perf.d.ts — index.rn.d.ts — installations — index.d.ts — messaging — index.d.ts — performance — index.d.ts — remote-config — index.d.ts — storage — index.d.ts — database — index.d.ts — firestore — index.d.ts — findex.d.ts — findex.d.ts — index.d.ts — index.esm.js — index.esm.js — index.esm.js — index.esm.js map — installations	
— index.d.ts — index.d.ts — index.node.d.ts — index.perf.d.ts — index.rn.d.ts — installations — installations — index.d.ts — messaging — index.d.ts — performance — index.d.ts — remote-config — index.d.ts — storage — index.d.ts — database — index.d.ts — firestore — index.d.ts — index.esm.js — index.esm.js — index.esm.js.map — installations	
— index.cdn.d.ts — index.node.d.ts — index.perf.d.ts — index.rn.d.ts — installations — index.d.ts — messaging — index.d.ts — performance — index.d.ts — remote-config — index.d.ts — storage — index.d.ts — database — index.d.ts — firestore — index.d.ts — index.esm.js — index.esm.js	
— index.d.ts — index.perf.d.ts — index.perf.d.ts — index.rn.d.ts — installations — index.d.ts — messaging — index.d.ts — performance — index.d.ts — remote-config — index.d.ts — storage — index.d.ts — database — index.d.ts — firestore — index.d.ts — index.d.ts	
index.node.d.ts - index.perf.d.ts - index.rn.d.ts - installations - index.d.ts - messaging - index.d.ts - performance - index.d.ts - remote-config - index.d.ts - storage - index.d.ts - database - index.d.ts - firestore - index.d.ts - index.d.ts - index.d.ts - functions - index.d.ts - functions - index.d.ts - index.esm.js - index.esm.js.map - installations	<pre>index.cdn.d.ts</pre>
— index.perf.d.ts — index.rn.d.ts — installations — index.d.ts — messaging — index.d.ts — performance — index.d.ts — remote-config — index.d.ts — storage — index.d.ts — database — index.d.ts — firestore — index.d.ts — lite — index.d.ts — functions — index.d.ts — functions — index.d.ts — index.esm.js — index.esm.js — index.esm.js.map — installations	<pre>index.d.ts</pre>
index.rn.d.ts installations index.d.ts messaging index.d.ts performance index.d.ts remote-config index.d.ts storage index.d.ts database index.d.ts firestore index.d.ts index.d.ts	<pre>index.node.d.ts</pre>
index.rn.d.ts installations index.d.ts messaging index.d.ts performance index.d.ts remote-config index.d.ts storage index.d.ts database index.d.ts firestore index.d.ts index.d.ts	<pre>index.perf.d.ts</pre>
☐ index.d.ts ☐ performance ☐ index.d.ts ☐ performance ☐ index.d.ts ☐ remote-config ☐ index.d.ts ☐ index.esm.js ☐ index.esm.js.map ☐ installations	
☐ index.d.ts ☐ performance ☐ index.d.ts ☐ performance ☐ index.d.ts ☐ remote-config ☐ index.d.ts ☐ index.esm.js ☐ index.esm.js.map ☐ installations	— installations
— messaging □ index.d.ts — performance □ index.d.ts — remote—config □ index.d.ts — storage □ index.d.ts — database □ index.d.ts — firestore □ index.d.ts □ lite □ index.d.ts — functions □ index.d.ts — index.esm.js — index.esm.js — index.esm.js.map — installations	
<pre></pre>	
□ index.d.ts □ remote-config □ index.d.ts □ storage □ index.d.ts □ database □ index.d.ts □ firestore □ index.d.ts □ lite □ index.d.ts □ functions □ index.d.ts □ index.d.ts □ index.d.ts □ index.d.ts □ index.esm.js □ installations	
<pre></pre>	
☐ index.d.ts ☐ index.esm.js ☐ index.esm.js ☐ index.esm.js.map ☐ installations	
<pre></pre>	
<pre> — firestore — index.d.ts — lite — index.d.ts — functions — index.d.ts — index.esm.js — index.esm.js.map — installations </pre>	
<pre></pre>	
☐ lite ☐ index.d.ts ☐ functions ☐ index.d.ts ☐ index.esm.js ☐ index.esm.js.map ☐ installations	
☐ index.d.ts ☐ functions ☐ index.d.ts ☐ index.esm.js ☐ index.esm.js.map ☐ installations	
<pre>— functions</pre>	
☐ index.d.ts ☐ index.esm.js ☐ index.esm.js.map ☐ installations	
<pre>- index.esm.js - index.esm.js.map - installations</pre>	
index.esm.js.map installations	
installations	
	└─ index.d.ts

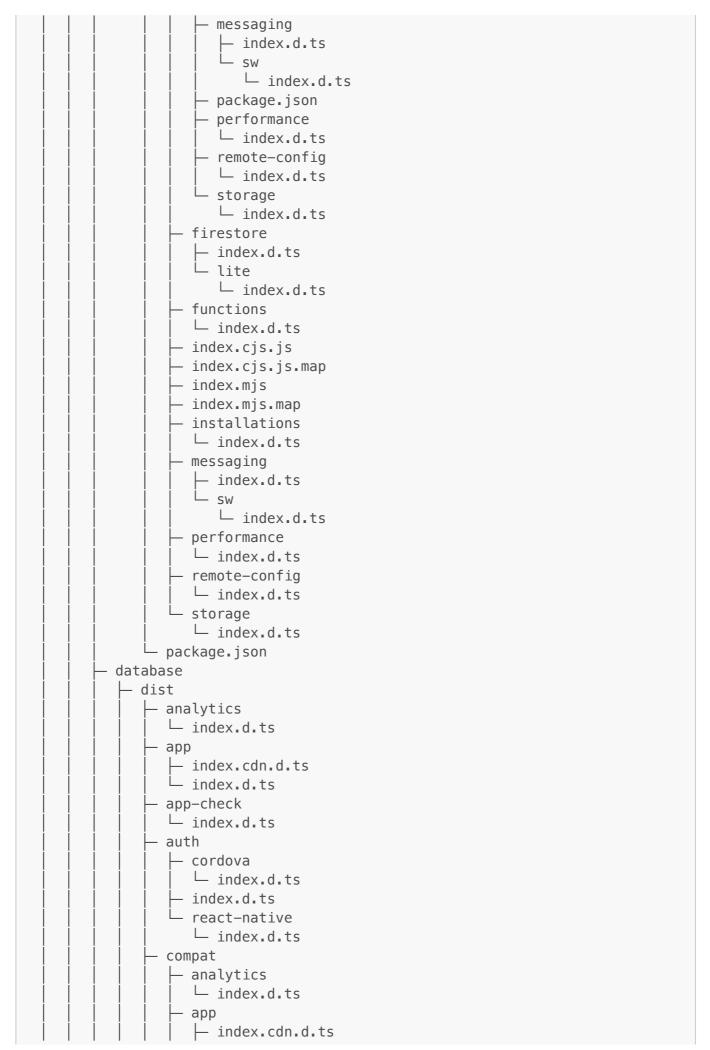

```
└ index.d.ts
    app-check
    └ index.d.ts
   - auth
    └ index.d.ts
  - database
    └ index.d.ts
   - firestore
    └ index.d.ts
  - functions
    └ index.d.ts
  - index.cdn.d.ts
  - index.d.ts
  - index.node.d.ts
  - index.perf.d.ts
  - index.rn.d.ts
  installations
   └ index.d.ts
  - messaging
    └ index.d.ts
  - performance
    └ index.d.ts
  remote-config
    └ index.d.ts
  - storage
    └ index.d.ts
- database
 └ index.d.ts
- esm
 — analytics
    └ index.d.ts
   - app

─ index.cdn.d.ts
    └ index.d.ts
  app-check
    └ index.d.ts
  - auth
    ⊢ cordova
       └ index.d.ts
     - index.d.ts
    └ react-native
       └ index.d.ts
  - compat
    — analytics
       └ index.d.ts
     - app

─ index.cdn.d.ts
       └ index.d.ts
     app-check
       └ index.d.ts
      - auth
       └ index.d.ts
      database

    index.d.ts
```

Lindex.d.ts - functions Lindex.cdn.d.ts - index.d.ts - index.not.ts - index.not.ts - index.not.ts - index.d.ts - index.d.ts - index.d.ts - index.d.ts - installations Lindex.d.ts - messaging Lindex.d.ts - remote-config Lindex.d.ts - storage Lindex.d.ts - database Lindex.d.ts - firestore - index.d.ts - firestore - index.d.ts - index.esm.js - index.esm.js - index.esm.js - index.d.ts - messaging - installations Lindex.d.ts - package.json - performance Lindex.d.ts - package.json - performance Lindex.d.ts - remote-config Lindex.d.ts - remote-config Lindex.d.ts - package.json - performance Lindex.d.ts - firestore - index.d.ts - tindex.d.ts - tindex.d.t	— firestore
	!!!
index.d.ts	
index.d.ts index.node.d.ts index.perf.d.ts index.perf.d.ts index.d.ts i	!!
index.node.d.ts	
index.perf.d.ts	!!
index.rn.d.ts	!!
installations index.d.ts messaging index.d.ts messaging index.d.ts messaging index.d.ts memote-config index.d.ts memote-config index.d.ts memote-config index.d.ts memote-config index.d.ts memote-config index.d.ts memote-config index.d.ts messaging me	
Lindex.d.ts — messaging Lindex.d.ts — performance Lindex.d.ts — renote-config Lindex.d.ts — storage Lindex.d.ts — firestore — index.d.ts — lindex.d.ts — index.d.ts — index.esm.js — installations Lindex.d.ts — messaging — index.d.ts — sw — Lindex.d.ts — package.json — performance — Lindex.d.ts — index.d.ts — remote-config — index.d.ts — tindex.d.ts — remote-config — index.d.ts — tindex.d.ts — remote-config — index.d.ts — tindex.d.ts — tindex.d.ts — tindex.d.ts — tindex.d.ts — tindex.d.ts — tindex.d.ts — index.d.ts — index.d.	
messaging	
index.d.ts remote-config Lindex.d.ts storage Lindex.d.ts database Lindex.d.ts lite Lindex.d.ts	
Lindex.d.ts - database Lindex.d.ts - firestore - index.d.ts - lite - Lindex.d.ts - functions - index.esm.js - index.esm.js.map - installations - index.d.ts - messaging - index.d.ts - package.json - performance - index.d.ts - remote-config - index.d.ts - remote-config - index.d.ts - firestore - index.d.ts - firestore - index.d.ts - firestore - index.d.ts - finedx.d.ts - firestore - index.d.ts -	
Lindex.d.ts - database Lindex.d.ts - firestore - index.d.ts - lite - Lindex.d.ts - functions - index.esm.js - index.esm.js.map - installations - index.d.ts - messaging - index.d.ts - package.json - performance - index.d.ts - remote-config - index.d.ts - remote-config - index.d.ts - firestore - index.d.ts - firestore - index.d.ts - firestore - index.d.ts - finedx.d.ts - firestore - index.d.ts -	└ storage
— index.d.ts — firestore — index.d.ts — lite — index.d.ts — functions — index.esm.js — index.esm.js.map — installations — index.d.ts — messaging — index.d.ts — package.json — performance — index.d.ts — remote—config — index.d.ts — remote—config — index.d.ts — firestore — index.d.ts — firestore — index.d.ts — findex.d.ts — findex.d.ts — index.d.ts — index.mjs — index.mjs.map — installations — index.mjs.map — installations	
firestore	— database
index.d.ts lite index.d.ts functions index.esm.js index.esm.js.map installations index.d.ts messaging index.d.ts sw index.d.ts package.json performance index.d.ts remote-config index.d.ts storage index.d.ts firestore index.d.ts firestore index.d.ts lite index.d.ts functions index.d.ts functions index.d.ts index.d.ts index.d.ts finestore index.d.ts lite index.d.ts lite index.d.ts index.mjs.map index.mjs.map installations	└ index.d.ts
Lite Lindex.d.ts — functions Lindex.d.ts — index.esm.js — index.esm.js.map — installations Lindex.d.ts — messaging — index.d.ts — sw Lindex.d.ts — package.json — performance Lindex.d.ts — remote-config Lindex.d.ts — storage Lindex.d.ts — firestore — index.d.ts — firestore — index.d.ts — functions — Lindex.d.ts — functions — index.d.ts — functions — index.d.ts — index.d.ts — index.d.ts — functions — index.d.ts	— firestore
☐ index.d.ts ☐ index.d.ts ☐ index.esm.js ☐ index.d.ts ☐ index.d.ts ☐ index.d.ts ☐ messaging ☐ index.d.ts ☐ sw ☐ index.d.ts ☐ package.json ☐ performance ☐ index.d.ts ☐ remote-config ☐ index.d.ts ☐ storage ☐ index.d.ts ☐ tindex.d.ts ☐ tindex.d.ts ☐ tindex.d.ts ☐ index.d.ts ☐ index.mjs.map ☐ index.mjs.map ☐ installations	├ index.d.ts
— functions — index.d.ts — index.esm.js — index.esm.js.map — installations — index.d.ts — messaging — index.d.ts — messaging — index.d.ts — package.json — performance — index.d.ts — remote-config — index.d.ts — storage — index.d.ts — firestore — index.d.ts — findex.d.ts — findex.d.ts — index.d.ts — index.mjs — index.mjs.map — installations — installations	└ lite
— index.esm.js.map — installations — installations — index.d.ts — messaging — index.d.ts — package.json — performance — index.d.ts — remote-config — index.d.ts — storage — index.d.ts — firestore — index.d.ts — lite — index.d.ts — lite — index.d.ts — functions — index.d.ts — index.d.ts	! .
— index.esm.js.map — installations — index.d.ts — messaging — index.d.ts — sw — index.d.ts — package.json — performance — index.d.ts — remote-config — index.d.ts — storage — index.d.ts — firestore — index.d.ts — lite — index.d.ts — functions — index.d.ts — index.d.ts — index.d.ts — index.d.ts — index.cjs.js — index.mjs — index.mjs — index.mjs — index.mjs,map — installations	
<pre></pre>	
— messaging	
index.d.ts	
sw	
<pre></pre>	
<pre></pre>	I e
<pre></pre>	
☐ index.d.ts ☐ remote—config ☐ index.d.ts ☐ storage ☐ index.d.ts ☐ index.d.ts ☐ lite ☐ index.d.ts ☐ index.cjs.js ☐ index.cjs.js.map ☐ index.mjs ☐ index.mjs ☐ index.mjs ☐ index.mjs.map ☐ installations	
<pre></pre>	
☐ index.d.ts ☐ storage ☐ index.d.ts ☐ firestore ☐ index.d.ts ☐ lite ☐ index.d.ts ☐ functions ☐ index.d.ts ☐ index.cjs.js ☐ index.cjs.js.map ☐ index.mjs.map ☐ installations	!
☐ index.d.ts ☐ index.d.ts ☐ index.d.ts ☐ index.d.ts ☐ index.d.ts ☐ index.d.ts ☐ index.cjs.js ☐ index.cjs.js ☐ index.mjs ☐ index.mjs ☐ index.mjs ☐ index.mjs.map ☐ installations	
<pre></pre>	
☐ Lite ☐ index.d.ts ☐ index.d.ts ☐ index.cjs.js ☐ index.cjs.js.map ☐ index.mjs ☐ index.mjs ☐ index.mjs.map ☐ installations	
<pre></pre>	
<pre></pre>	└ index.d.ts
<pre>- index.cjs.js - index.cjs.js.map - index.mjs - index.mjs.map - installations</pre>	- functions
<pre>- index.cjs.js.map - index.mjs - index.mjs.map - installations</pre>	└ index.d.ts
<pre> index.mjs index.mjs.map installations</pre>	<pre>- index.cjs.js</pre>
<pre> </pre>	
— installations	
	└ index.d.ts

```
messaging
         - index.d.ts
          SW
           └ index.d.ts
       performance
        └ index.d.ts
        remote-config
        └ index.d.ts
       storage
        └ index.d.ts
   package.json
 firebase-analytics-compat.js
 firebase-analytics-compat.js.map
- firebase—analytics.js
firebase-analytics.js.map
firebase-app-check-compat.js
— firebase-app-check-compat.js.map
firebase-app-check.js
firebase-app-check.js.map
– firebase–app–compat.js
- firebase-app-compat.js.map
- firebase—app.js
- firebase—app.js.map
– firebase-auth-compat.js
- firebase-auth-compat.js.map
- firebase—auth—cordova.js
- firebase-auth-cordova.js.map
firebase-auth-react-native.js
firebase-auth-react-native.js.map
– firebase−auth.js
firebase-auth.js.map
firebase-compat.js
firebase-compat.js.map
firebase-database-compat.js
– firebase-database-compat.js.map
- firebase−database.js
- firebase-database.js.map
firebase-firestore-compat.js
firebase-firestore-compat.js.map
- firebase-firestore-lite.js
firebase-firestore-lite.js.map
firebase-firestore.js
firebase-firestore.js.map
- firebase-functions-compat.js
firebase-functions-compat.js.map
firebase-functions.js
firebase-functions.js.map

    firebase-installations-compat.js

firebase-installations-compat.js.map
firebase-installations.js
firebase-installations.js.map
 firebase-messaging-compat.js
 firebase-messaging-compat.js.map
 firebase-messaging-sw.js
```

```
firebase-messaging-sw.js.map
firebase-messaging.js
– firebase-messaging.js.map
– firebase-performance-compat.js
— firebase-performance-compat.js.map

    firebase-performance-standalone-compat.es2017.js

firebase-performance-standalone-compat.es2017.js.map
firebase-performance-standalone-compat.js
firebase-performance-standalone-compat.js.map
– firebase-performance.js
– firebase-performance.js.map
– firebase-remote-config-compat.js
– firebase-remote-config-compat.js.map
firebase-remote-config.js
firebase-remote-config.js.map
— firebase−storage−compat.js
— firebase−storage−compat.js.map
─ firebase-storage.js
– firebase-storage.js.map
– firestore
  ⊢ dist
      analytics
        └ index.d.ts
       - app
         index.cdn.d.ts
        └ index.d.ts
       - app-check
        └ index.d.ts
       - auth
         — cordova
           └ index.d.ts
          - index.d.ts
          react-native
           └ index.d.ts
       compat
         — analytics
           └ index.d.ts
          - app
            index.cdn.d.ts
           └ index.d.ts
          app-check
           └ index.d.ts
          - auth
           └ index.d.ts

    database

           └ index.d.ts
          - firestore
           └ index.d.ts
          functions
           └ index.d.ts
          index.cdn.d.ts
          - index.d.ts
          - index.node.d.ts
          - index.perf.d.ts
```

```
index.rn.d.ts
   installations
    └ index.d.ts
  - messaging
    └ index.d.ts
  - performance
    └ index.d.ts
  remote-config
    └ index.d.ts
  - storage
    └ index.d.ts
- database
 └ index.d.ts
- esm
  analytics
    └ index.d.ts
  app
     — index.cdn.d.ts
    └ index.d.ts
  app-check
    └ index.d.ts
   - auth
    ⊢ cordova
       └ index.d.ts
      - index.d.ts
      react-native
       └ index.d.ts
  compat
     – analytics
       └ index.d.ts
     - app
       index.cdn.d.ts
       └ index.d.ts
     app-check
       └ index.d.ts
      - auth
       └ index.d.ts
      - database
       └ index.d.ts
      - firestore
       └ index.d.ts
     - functions
       └ index.d.ts
      - index.cdn.d.ts
      - index.d.ts
      - index.node.d.ts
     - index.perf.d.ts
      - index.rn.d.ts

    installations

       └ index.d.ts
      - messaging
       └ index.d.ts
       performance
       └ index.d.ts
```

```
remote-config
          └ index.d.ts
          storage
          └ index.d.ts
      - database
       └ index.d.ts
      firestore
        index.d.ts
       ∟ lite
          └ index.d.ts
      - functions
       └ index.d.ts
      - index.esm.js
      - index.esm.js.map

    installations

       └ index.d.ts
     messaging

    index.d.ts

        L SW

    index.d.ts


      – package.json
      - performance
       └ index.d.ts
     - remote-config
       └ index.d.ts
      - storage
       └ index.d.ts
   - firestore
    index.d.ts
    └ lite
       └ index.d.ts
  - functions
    └ index.d.ts
  - index.cjs.js
  - index.cjs.js.map
  – index.mjs
  index.mjs.map
  installations
    └ index.d.ts
   - messaging

─ index.d.ts

    L SW
       └ index.d.ts
   - performance
    └ index.d.ts
   - remote-config
    └ index.d.ts
  - storage
    └ index.d.ts
- lite
 ⊢ dist
      analytics
       └ index.d.ts
```

<pre>— index.cdn.d.ts</pre>
└ index.d.ts
app-check
└ index.d.ts
- auth
— cordova
└ index.d.ts
— index.d.ts
react-native
└ index.d.ts
- compat
— analytics
index.d.ts
— app
index.cdn.d.ts
index.d.ts
— app-check
index.d.ts
— auth
index.d.ts
— database
index.d.ts
— firestore
index.d.ts
— functions
index.d.ts
index.d.ts
index.cdi.d.ts
index.u.ts index.node.d.ts
index.perf.d.ts
index.rn.d.ts
<pre>— installations</pre>
— messaging
index.d.ts
— performance
index.d.ts
remote-config
index.d.ts
└ storage
└ index.d.ts
- database
└ index.d.ts
- esm
— analytics
└ index.d.ts
— app
index.cdn.d.ts
└ index.d.ts
— app-check
index.d.ts
— auth
cordova

— index.d.ts	
│	
│	
index.cdn.d.ts	
L index.d.ts	
Lindex.d.ts	
$ \hspace{.1cm} \hspace{.1cm} \hspace{.1cm} \hspace{.1cm} \hspace{.1cm} \hspace{.1cm} \hspace{.1cm} \perp$ auth	
L index.d.ts	
L index.d.ts	
L index.d.ts	
— functions	
L index.d.ts	
index.d.ts	
— index.node.d.ts	
index.perf.d.ts	
index.rn.d.ts	
L index.d.ts	
— messaging	
L index.d.ts	
— performance	
L index.d.ts	
— remote-config	
L index.d.ts	
L index.d.ts	
database	
— index.esm.js.map	
L index.d.ts	
messaging	
package.json	
600 / 017	

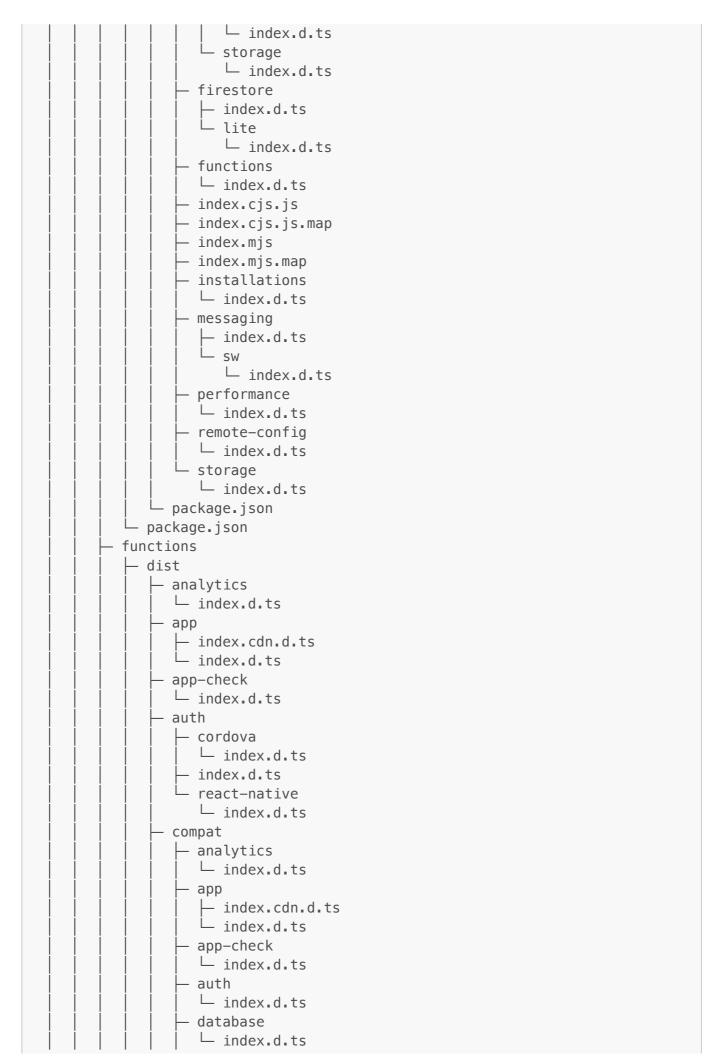

— firestore
└─ index.d.ts
— functions
└ index.d.ts
index.cdn.d.ts
— index.d.ts
— index.node.d.ts
index.perf.d.ts
index.rn.d.ts
— installations
index.d.ts
!
— messaging
index.d.ts
⊢ performance
└─ index.d.ts
— remote-config
└─ index.d.ts
∟ storage
└ index.d.ts
- database
└ index.d.ts
- esm
⊢ analytics
└ index.d.ts
— арр
index.cdn.d.ts
index.d.ts
— app-check
index.d.ts
— auth
cordova
L index.d.ts
index.d.ts
☐ react-native
index.d.ts
⊢ compat
— analytics
index.d.ts
— app
index.cdn.d.ts
index.d.ts
— app-check
L index.d.ts
— auth
☐ index.d.ts
— database
☐ index.d.ts
— firestore
index.d.ts
— functions
index.d.ts
index.cdn.d.ts
— index.cdi.d.ts
— index.node.d.ts

index.perf.d.ts
index.rn.d.ts
— messaging
L index.d.ts
performance
L index.d.ts
remote-config
☐ index.d.ts
— database
— firestore
index.d.ts
Lite
Litte Lindex.d.ts
— functions
index.d.ts
index.esm.js
├ index.esm.js.map
installations installations
☐ index.d.ts
— messaging
index.d.ts
index.d.ts
!!!
package.json
performance
index.d.ts
remote-config
│
└─ storage
└ index.d.ts
— firestore
index.d.ts index.d.ts
L lite
└ index.d.ts
— functions
index.d.ts
index.cjs.js
— index.cjs.js.map
— index.mjs
— index.mjs.map
— installations
└─ index.d.ts
— messaging
├ index.d.ts
L _{SW}
└ index.d.ts
— performance
index.d.ts
remote-config
L TEMOTE-COULT


```
└ index.d.ts
        storage
        └ index.d.ts
    - package.json

⊢ installations

   ⊢ dist
      – analytics
        └ index.d.ts
       - app

─ index.cdn.d.ts
         └ index.d.ts
       app-check
        └ index.d.ts
       - auth
         - cordova
           └ index.d.ts
         — index.d.ts
          - react-native
           └ index.d.ts
       - compat
         — analytics
           └ index.d.ts
          - app
            index.cdn.d.ts
            └ index.d.ts
          - app-check
           └ index.d.ts
          - auth
           └ index.d.ts
          database
           └ index.d.ts
          - firestore
           └ index.d.ts
          - functions
           └ index.d.ts
          - index.cdn.d.ts
          - index.d.ts
          - index.node.d.ts
          - index.perf.d.ts
          - index.rn.d.ts
         installations
           └ index.d.ts
         messaging
           └ index.d.ts
          - performance
           └ index.d.ts
          - remote-config
           └ index.d.ts
         ∟ storage
           └ index.d.ts
        database
         └ index.d.ts
        esm
         — analytics
```

L index.d.ts	
— index.cdn.d.ts	
auth	
⊢ cordova	
index.d.ts	
index.d.ts	
react-native	
— analytics	
L index.d.ts	
index.d.ts	
L index.d.ts	
database	
uatabase Lindex.d.ts	
L index.d.ts	
— functions	
index.node.d.ts	
— index.perf.d.ts	
Lindex.d.ts	
— remote-config	
L index.d.ts	
database	
∟ index.d.ts	
firestore	
index.d.ts	
Lite	
— index.esm.js	
— index.esm.js.map	
614 / 017	

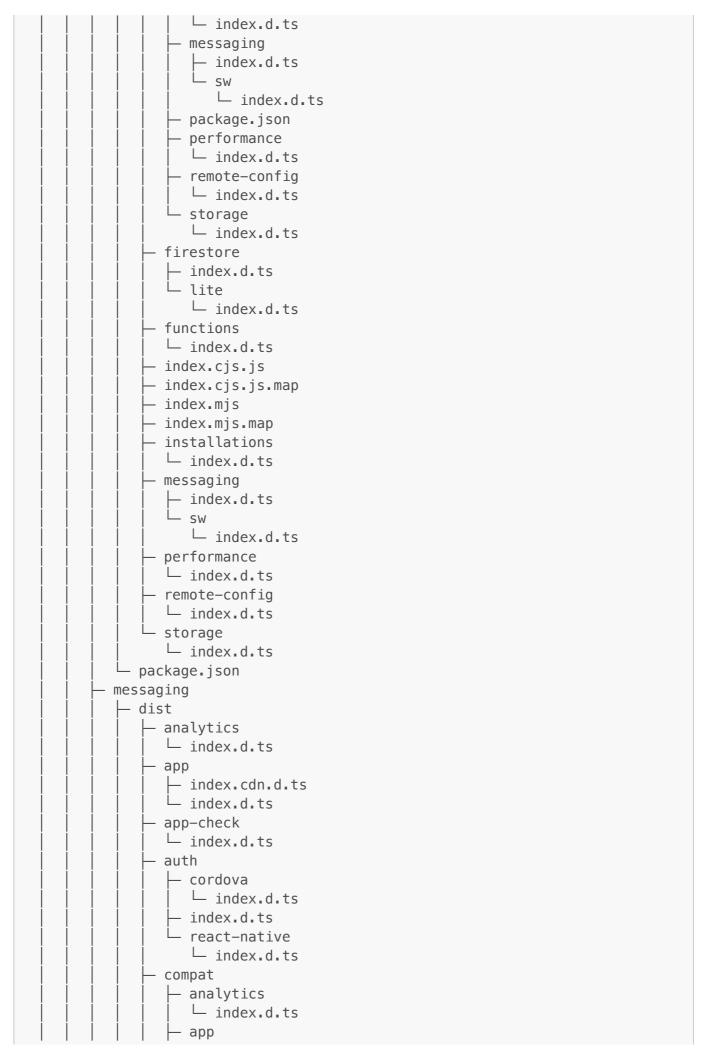

```
- index.cdn.d.ts
      - index.d.ts
    app-check
    └ index.d.ts
   - auth
    └ index.d.ts
   - database
    └ index.d.ts
   - firestore
    └ index.d.ts
   - functions
    └ index.d.ts
  - index.cdn.d.ts
  - index.d.ts
   - index.node.d.ts
  - index.perf.d.ts
  — index.rn.d.ts

    installations

    └ index.d.ts
  messaging
    └ index.d.ts
   - performance
    └ index.d.ts
  - remote-config
    └ index.d.ts
   - storage
    └ index.d.ts
- database
 └ index.d.ts
- esm
  analytics
    └ index.d.ts
   - app
    index.cdn.d.ts
    index.d.ts
   - app-check
    └ index.d.ts
   - auth
    ⊢ cordova
      └ index.d.ts
     - index.d.ts
    └ react-native
       └ index.d.ts
   compat
     analytics
       └ index.d.ts
      - арр
        index.cdn.d.ts
       └ index.d.ts
      app-check
       └ index.d.ts
      - auth
       └ index.d.ts
      - database
```

firestore
L index.d.ts
— functions
index.cdn.d.ts
index.d.ts
index.node.d.ts
index.node.drts - index.perf.d.ts
— index.perr.d.ts
— installations
L index.d.ts
messaging
L index.d.ts
│
L index.d.ts
│
L storage
index.d.ts
— database
L index.d.ts
- firestore
index.d.ts
Lite
_ index.d.ts
— functions
│
├ index.esm.js.map
☐ index.d.ts
— messaging
index.d.ts
package.json
performance
L index.d.ts
!!
remote-config
_ index.d.ts
└─ storage
└─ index.d.ts
— firestore
index.d.ts
└ lite
└ index.d.ts
— functions
└ index.d.ts
— index.cjs.js
— index.cjs.js.map
index.cjs.js.map
index.mjs.map
— installations

```
└ index.d.ts
    messaging
     index.d.ts
      - SW
       └ index.d.ts
   - performance
    └ index.d.ts
   - remote-config
    └ index.d.ts
   - storage
    └ index.d.ts
– package.json
- SW
  — dist
     analytics
       └ index.d.ts
      app
        — index.cdn.d.ts
       └ index.d.ts
      app-check
       └ index.d.ts
      - auth
        ⊢ cordova
          └ index.d.ts
         - index.d.ts
         - react-native
          └ index.d.ts
      - compat
        — analytics
          └ index.d.ts
        – app
           index.cdn.d.ts
           └ index.d.ts
         app-check
          └ index.d.ts
         - auth
          └ index.d.ts

    database

          └ index.d.ts
         - firestore
          └ index.d.ts
         - functions
          └ index.d.ts
         - index.cdn.d.ts
         - index.d.ts
         - index.node.d.ts
         - index.perf.d.ts
         - index.rn.d.ts

    installations


          └ index.d.ts
         - messaging
          └ index.d.ts
          performance
           └ index.d.ts
```

```
remote-config
    └ index.d.ts
   storage
    └ index.d.ts
- database
 └ index.d.ts
esm
 — analytics
    └ index.d.ts
  - app
    index.cdn.d.ts
    └ index.d.ts
  app-check
    └ index.d.ts
  - auth
    ─ cordova
       └ index.d.ts
     - index.d.ts
    └ react-native
       └ index.d.ts
  compat
    — analytics
       └ index.d.ts
     – арр

─ index.cdn.d.ts
       └ index.d.ts
     app-check
       └ index.d.ts
     - auth
       └ index.d.ts

    database

       └ index.d.ts
      - firestore
       └ index.d.ts
     - functions
       └ index.d.ts
     - index.cdn.d.ts
     - index.d.ts
     - index.node.d.ts
     - index.perf.d.ts
     - index.rn.d.ts
     installations
       └ index.d.ts
     - messaging
       └ index.d.ts
     - performance
       └ index.d.ts
     remote-config
       └ index.d.ts
     - storage
       └ index.d.ts
   database
    └ index.d.ts
   firestore
```

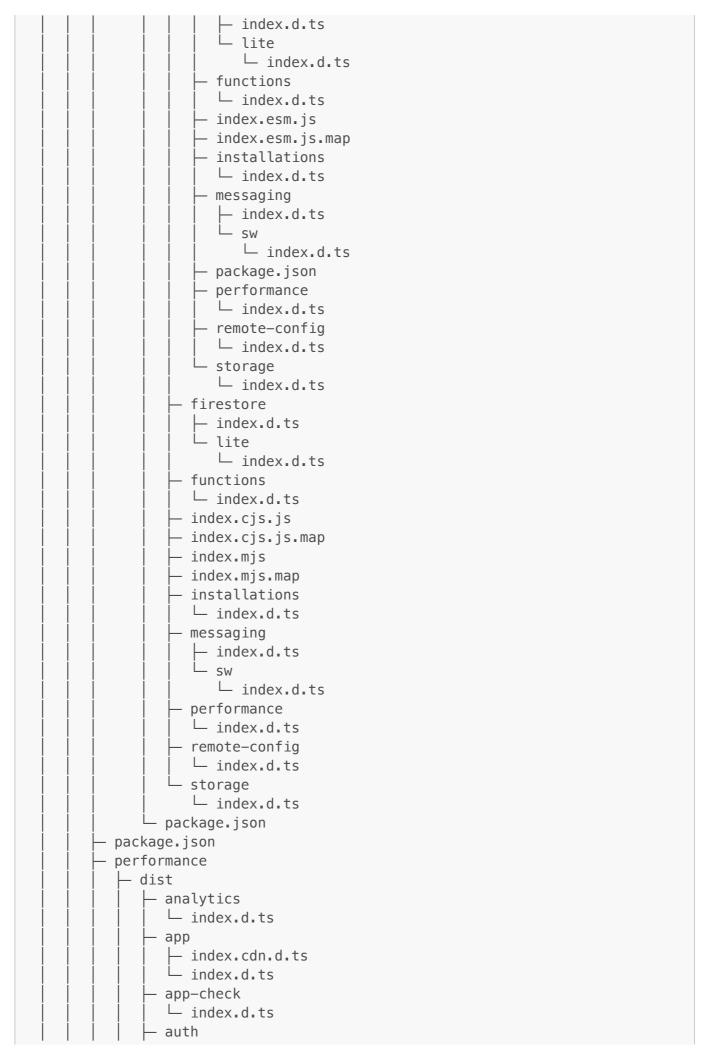

```
cordova
     └ index.d.ts
    index.d.ts
   - react-native
     └ index.d.ts
- compat
   analytics
     └ index.d.ts
   - app

    index.cdn.d.ts
    index.cdn.d.ts

     └ index.d.ts
   app-check
    └ index.d.ts
   - auth
    └ index.d.ts
   - database
    └ index.d.ts
   - firestore
    └ index.d.ts
   - functions
     └ index.d.ts
   - index.cdn.d.ts
   - index.d.ts
   - index.node.d.ts
   - index.perf.d.ts
   - index.rn.d.ts

    installations

    └ index.d.ts
   messaging
    └ index.d.ts
   - performance
    └ index.d.ts
   remote-config
    └ index.d.ts
  ∟ storage
     └ index.d.ts
- database
 └ index.d.ts
- esm
  — analytics
    └ index.d.ts
   - app
     index.cdn.d.ts
     └ index.d.ts
   app-check
    └ index.d.ts
   - auth
      – cordova
        └ index.d.ts
      - index.d.ts
      - react-native
        └ index.d.ts
    compat
      - analytics
```

	└ index.d.ts
	app
	<pre>index.cdn.d.ts</pre>
	└ index.d.ts
	app-check
	└ index.d.ts
	auth
	└ index.d.ts
	database
	└ index.d.ts
	firestore
	└ index.d.ts
	functions
	└ index.d.ts
	index.cdn.d.ts
	index.d.ts
	index.node.d.ts
	index.perf.d.ts
	index.rn.d.ts
	installations
	index.d.ts
	messaging
	└ index.d.ts
	performance
	└ index.d.ts
	remote-config
	└ index.d.ts
	storage
	└ index.d.ts
│ │ │ │ │ │	abase
	index.d.ts
	estore
	index.d.ts
	lite
	index.d.ts
	ctions
	index.d.ts
	ex.esm.js
	ex.esm.js.map
	tallations
	index.d.ts
mes	saging
	index.d.ts
	SW
	└ index.d.ts
l l l l l nac	kage.json
	formance
	index.d.ts
	ote-config
	index.d.ts
	rage
	index.d.ts
firest	
ind	ex.d.ts
	622 / 017

```
└ lite
          └ index.d.ts
      - functions
       └ index.d.ts
      - index.cjs.js
     - index.cjs.js.map
      - index.mjs
     - index.mjs.map

    installations

       └ index.d.ts
      - messaging
       index.d.ts
       L sw
          └ index.d.ts
      - performance
       └ index.d.ts
      - remote-config
       └ index.d.ts
    ∟ storage
       └ index.d.ts
  – package.json
remote-config
 ⊢ dist
    — analytics
       └ index.d.ts
      - app
       index.cdn.d.ts
index.d.ts
      - app-check
       └ index.d.ts
     - auth
        ├ cordova
          └ index.d.ts
        - index.d.ts
       └ react-native
          └ index.d.ts
      - compat
        — analytics
          └ index.d.ts
         - app
           index.cdn.d.ts
          index.d.ts
         app-check
          └ index.d.ts
         - auth
          └ index.d.ts
         - database
          └ index.d.ts
         - firestore
          └ index.d.ts
         - functions
          └ index.d.ts
         - index.cdn.d.ts
         - index.d.ts
```


```
- index.node.d.ts
   - index.perf.d.ts
   - index.rn.d.ts

    installations

    └ index.d.ts
  messaging
    └ index.d.ts
   - performance
    └ index.d.ts
   remote-config
    └ index.d.ts
 ∟ storage
    └ index.d.ts
database
 └ index.d.ts
- esm
 analytics
    └ index.d.ts
   - app
     — index.cdn.d.ts
    └ index.d.ts
   - app-check
    └ index.d.ts
  - auth
    ⊢ cordova
       └ index.d.ts
      - index.d.ts
      - react-native
       └ index.d.ts
   - compat
     — analytics
       └ index.d.ts
      - app
        index.cdn.d.ts
       index.d.ts
      - app-check
       └ index.d.ts
      - auth
       └ index.d.ts
      - database
       └ index.d.ts
      - firestore
       └ index.d.ts
      - functions
       └ index.d.ts
      - index.cdn.d.ts
     - index.d.ts
      - index.node.d.ts
      - index.perf.d.ts
      - index.rn.d.ts

    installations

       └ index.d.ts
      - messaging
       └ index.d.ts
```

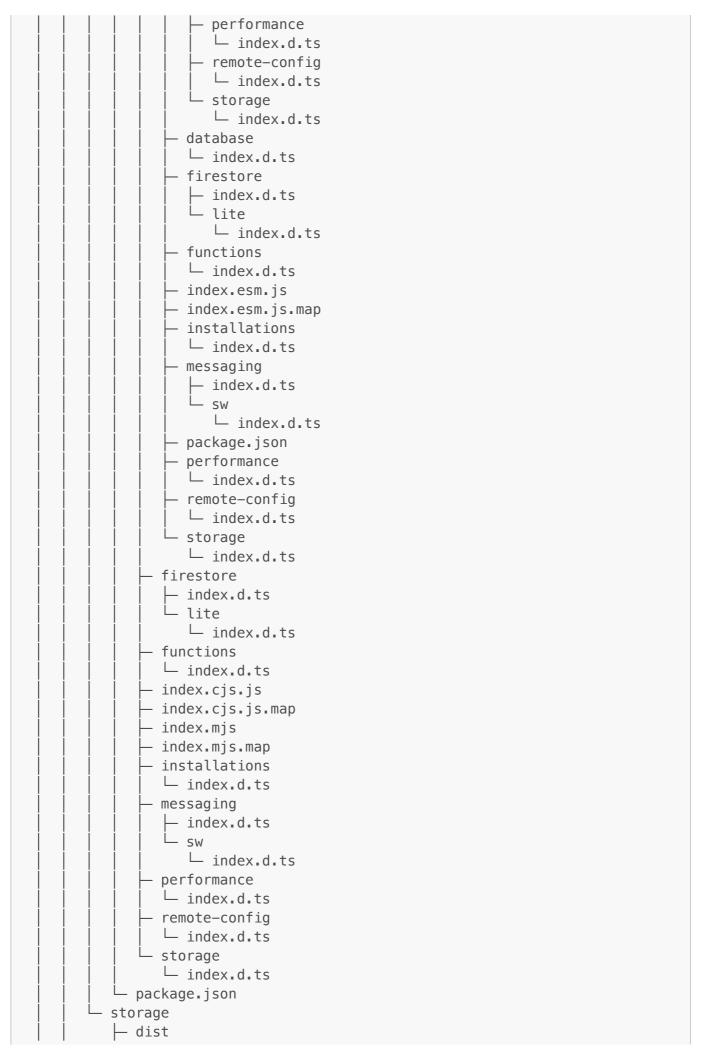


```
analytics
 └ index.d.ts
- app
  — index.cdn.d.ts
 └ index.d.ts
app-check
 └ index.d.ts
- auth
 ⊢ cordova
    └ index.d.ts
  - index.d.ts
 └ react-native
    └ index.d.ts
- compat
  analytics
    └ index.d.ts
  app

    index.cdn.d.ts
    index.cdn.d.ts

    └ index.d.ts
  app-check
    └ index.d.ts
   - auth
    └ index.d.ts
  database
    └ index.d.ts
   - firestore
    └ index.d.ts
  - functions
    └ index.d.ts
  - index.cdn.d.ts
  - index.d.ts
  - index.node.d.ts
  - index.perf.d.ts
  — index.rn.d.ts
  installations
    └ index.d.ts
  messaging
    └ index.d.ts
   - performance
    └ index.d.ts
  - remote-config
   └ index.d.ts
 ∟ storage
    └ index.d.ts
- database
 └ index.d.ts
- esm
  analytics
    └ index.d.ts
   - арр
    index.cdn.d.ts
      - index.d.ts
   app-check
    └ index.d.ts
```

auth
— cordova
└ index.d.ts
index.d.ts
└─ react-native
└ index.d.ts
compat
— analytics
└ index.d.ts
i app
├ index.cdn.d.ts
└ index.d.ts
— app−check
└ index.d.ts
— auth
└ index.d.ts
— database
index.d.ts
— firestore
└ index.d.ts
— functions
└ index.d.ts
<pre>index.cdn.d.ts</pre>
index.d.ts
index.node.d.ts
index.perf.d.ts
index.rn.d.ts
— installations
index.d.ts
— messaging
index.d.ts
— performance
index.d.ts
remote-config
└ index.d.ts
└ storage
└ index.d.ts
database
└ index.d.ts
firestore
├ index.d.ts
L lite
└ index.d.ts
functions
index.d.ts
index.esm.js
-
index.esm.js.map
installations
└ index.d.ts
messaging
— index.d.ts
L sw
└ index.d.ts
package.json
627 / 017

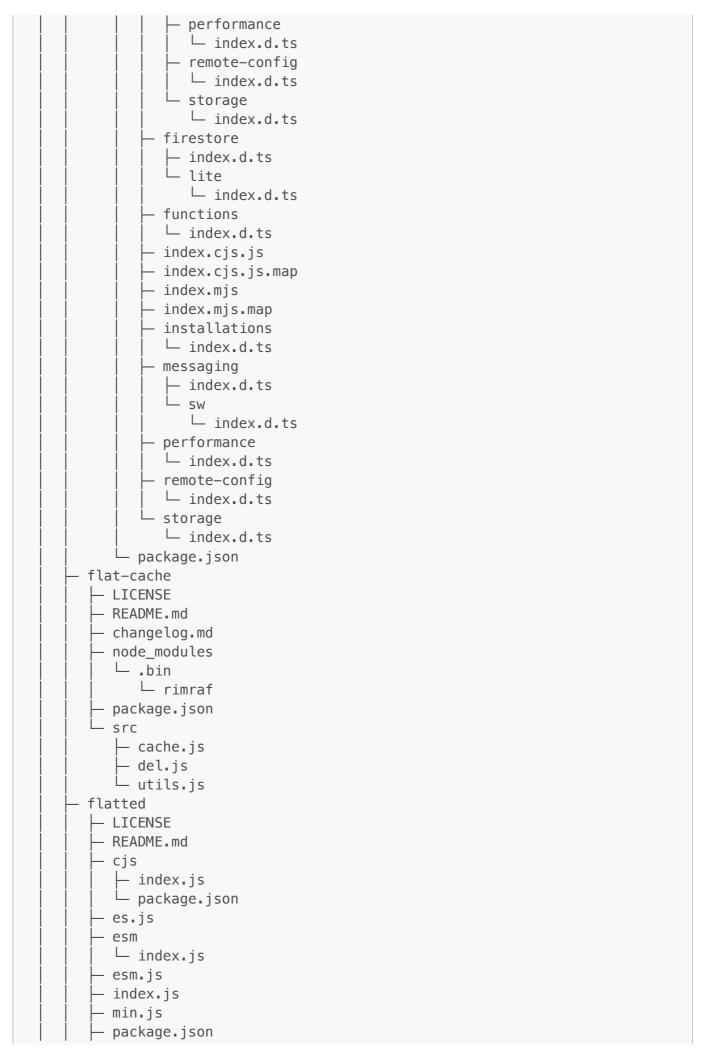

```
php
    └ flatted.php
  - types.d.ts

    follow-redirects

 LICENSE
  README.md
  — debug₁js
  — http.js
  https.js
  – index.js
 └ package.json
- for—each
 .editorconfig
   - .eslintrc
  travis.yml
  LICENSE
  README.md
  — index.js
  – package.json
 ∟ test
    ⊢ .eslintrc
    └ test.js
fork-ts-checker-webpack-plugin

─ CHANGELOG.md

    LICENSE

  README.md
  changelog.config.js
  – lib

─ ForkTsCheckerWebpackPlugin.d.ts

⊢ ForkTsCheckerWebpackPlugin.js

    ForkTsCheckerWebpackPluginConfiguration.d.ts

    ForkTsCheckerWebpackPluginConfiguration.js

     ForkTsCheckerWebpackPluginOptions.d.ts
     ForkTsCheckerWebpackPluginOptions.js
    ForkTsCheckerWebpackPluginOptions.json
    ForkTsCheckerWebpackPluginState.d.ts
     ForkTsCheckerWebpackPluginState.js
     - error
        OperationCanceledError.d.ts
       □ OperationCanceledError.js
     – eslint-reporter
       ─ EsLintReporterConfiguration.d.ts

    EsLintReporterConfiguration.js

        EsLintReporterOptions.d.ts
        EsLintReporterOptions.js
        assertEsLintSupport.d.ts
        assertEsLintSupport.js
         - issue
          EsLintIssueFactory.d.ts

    □ EsLintIssueFactory.js

         - reporter
           EsLintReporter.d.ts
            - EsLintReporter.js
           EsLintReporterRpcClient.d.ts
```

```
EsLintReporterRpcClient.js
      EsLintReporterRpcService.d.ts
    EsLintReporterRpcService.js
 └ types
     — eslint.d.ts
    └ eslint.js
- formatter
  BasicFormatter.d.ts
   - BasicFormatter.js
  CodeFrameFormatter.d.ts

    CodeFrameFormatter.js

   Formatter.d.ts
  – Formatter₊js
   FormatterConfiguration.d.ts

    FormatterConfiguration.js

  FormatterFactory.d.ts
  — FormatterFactory.js
  FormatterOptions.d.ts
  FormatterOptions.js
  WebpackFormatter.d.ts
  WebpackFormatter.js
   - index.d.ts
   - index.js
 └ types
     babel__code-frame.d.ts
      babel__code-frame.js
- hooks
 interceptDoneToGetWebpackDevServerTap.d.ts
  interceptDoneToGetWebpackDevServerTap.js
  — pluginHooks.d.ts
   – pluginHooks.js
  tapAfterCompileToAddDependencies.d.ts
   tapAfterCompileToAddDependencies.js
  tapAfterCompileToGetIssues.d.ts
   tapAfterCompileToGetIssues.js

    tapAfterEnvironmentToPatchWatching.d.ts

  tapAfterEnvironmentToPatchWatching.js
  tapDoneToAsyncGetIssues.d.ts
  tapDoneToAsyncGetIssues.js
  tapErrorToLogMessage.d.ts
  tapErrorToLogMessage.js
  — tapStartToConnectAndRunReporter.d.ts
  tapStartToConnectAndRunReporter.js
   tapStopToDisconnectReporter.d.ts

    tapStopToDisconnectReporter.js

index.d.ts
index.js
- issue
  — Issue.d.ts
  – Issue.js
   IssueConfiguration.d.ts

    IssueConfiguration.js

   IssueLocation.d.ts

    IssueLocation.js
```

```
IssueMatch.d.ts
   IssueMatch.js
   - IssueOptions.d.ts
  IssueOptions.js
   - IssuePosition.d.ts
   IssuePosition.js
   IssuePredicate.d.ts
   IssuePredicate.js
   IssueSeverity.d.ts
  IssueSeverity.js
   IssueWebpackError.d.ts
   IssueWebpackError.js
   - index.d.ts
  - index.js
 logger
  – Logger.d.ts
  — Logger.js
  LoggerConfiguration.d.ts
  LoggerConfiguration.js
   LoggerFactory.d.ts
  LoggerFactory.js
   LoggerOptions.d.ts
  LoggerOptions.js
  PartialLogger.d.ts
  ─ PartialLogger.js

    WebpackInfrastructureLogger.d.ts

  ─ WebpackInfrastructureLogger.js
- profile
  — Performance.d.ts

    □ Performance.js

- reporter
  AggregatedReporter.d.ts
   – AggregatedReporter⊾js
  FilesChange.d.ts
   FilesChange.is
   FilesMatch.d.ts
   FilesMatch.js
   Report.d.ts
   Report.js
   Reporter.d.ts
  – Reporter.is
  - index.d.ts
  – index.js
  └ reporter-rpc
     ReporterRpcClient.d.ts
     ReporterRpcClient.js
     ReporterRpcProcedure.d.ts
     ReporterRpcProcedure.js
      ReporterRpcService.d.ts

    □ ReporterRpcService.js

- rpc
   RpcClient.d.ts
   RpcClient.js
   RpcHost.d.ts
```

```
RpcHost.js
   RpcMessage.d.ts
   RpcMessage.js
   RpcMessageChannel.d.ts

    RpcMessageChannel.js

   RpcMessagePort.d.ts
   RpcMessagePort.js
   RpcProcedure.d.ts
   RpcProcedure.js
   RpcService.d.ts
   - RpcService.js
   - error
     — RpcMessagePortClosedError.d.ts
      - RpcMessagePortClosedError.js
      RpcRemoteError.d.ts
    ☐ RpcRemoteError.js
  - index.d.ts
   - index.js
 └ rpc-ipc
     ProcessLike.d.ts
      ProcessLike.js

    RpcIpcMessageChannel.d.ts

      RpcIpcMessageChannel.js
      RpcIpcMessagePort.d.ts
      RpcIpcMessagePort.js
      - error
        — RpcIpcMessagePortClosedError.d.ts
       ☐ RpcIpcMessagePortClosedError.js
      - index.d.ts
    └ index.js
typescript-reporter
  TypeScriptConfigurationOverwrite.d.ts

    TypeScriptConfigurationOverwrite.js

   TypeScriptDiagnosticsOptions.d.ts

    TypeScriptDiagnosticsOptions.js

   TypeScriptReporterConfiguration.d.ts

    TypeScriptReporterConfiguration.js

    TypeScriptReporterOptions.d.ts

   TypeScriptReporterOptions.js
   TypeScriptSupport.d.ts
  TypeScriptSupport.js
  extension
     TypeScriptEmbeddedExtension.d.ts

    TypeScriptEmbeddedExtension.js

      TypeScriptExtension.d.ts
      TypeScriptExtension.js
      - vue
         TypeScriptVueExtension.d.ts

    TypeScriptVueExtension.js

    TypeScriptVueExtensionConfiguration.d.ts

    TypeScriptVueExtensionConfiguration.js

    TypeScriptVueExtensionOptions.d.ts

         TypeScriptVueExtensionOptions.js

    TypeScriptVueExtensionSupport.d.ts
```

```
TypeScriptVueExtensionSupport.js
          types
           vue-template-compiler.d.ts
           – vue-template-compiler.js
            - vue__compiler-sfc.d.ts
           └ vue compiler-sfc.js
   - file-system
     — FileSystem.d.ts
      FileSystem.js
     – MemFileSystem.d.ts
     MemFileSystem.js
     PassiveFileSystem.d.ts
     PassiveFileSystem.js
      RealFileSystem.d.ts
    └─ RealFileSystem.js
   - issue
     TypeScriptIssueFactory.d.ts

    □ TypeScriptIssueFactory.js

   - profile
     TypeScriptPerformance.d.ts
      TypeScriptPerformance.js
   - reporter
     ControlledTypeScriptSystem.d.ts
     ControlledTypeScriptSystem.js
     ControlledWatchCompilerHost.d.ts
     ControlledWatchCompilerHost.js

    ControlledWatchSolutionBuilderHost.d.ts

    ControlledWatchSolutionBuilderHost.js

    TypeScriptConfigurationParser.d.ts

     TypeScriptConfigurationParser.js
     TypeScriptReporter.d.ts

    TypeScriptReporter js

     TypeScriptReporterRpcClient.d.ts
     TypeScriptReporterRpcClient.js
     — TypeScriptReporterRpcService.d.ts

    □ TypeScriptReporterRpcService.js

- utils
  - array
     flatten.d.ts
      – flatten.js
     - intersect.d.ts
     intersect.is
     substract.d.ts
     substract.js
      unique.d.ts
    └ unique.js
   async
     - isPending.d.ts
      isPending.js
     – pool.d.ts
      - pool.js
      - wait.d.ts
      – wait.js
```

```
forwardSlash.d.ts
        └ forwardSlash.js
   - watch
     CompilerWithWatchFileSystem.d.ts

    CompilerWithWatchFileSystem.js

    InclusiveNodeWatchFileSystem.d.ts

    InclusiveNodeWatchFileSystem.js

      WatchFileSystem.d.ts
     └─ WatchFileSystem.js
node modules
   - .bin
     — eslint
      - semver

    webpack

    cosmiconfig
      CHANGELOG.md

    LICENSE

      - README.md
      – dist
        Explorer.d.ts
         - Explorer.d.ts.map
         - Explorer.js
         Explorer.js.map
         ExplorerBase.d.ts
         ExplorerBase.d.ts.map
         – ExplorerBase.js
        ExplorerBase.js.map
        ExplorerSync.d.ts
         ExplorerSync.d.ts.map
         — ExplorerSync.js
        ExplorerSync.js.map
         cacheWrapper.d.ts
         cacheWrapper.d.ts.map
        — cacheWrapper.js
        — cacheWrapper.js.map
         getDirectory.d.ts
         - getDirectory.d.ts.map
         getDirectory.js
         - getDirectory.js.map
         getPropertyByPath.d.ts
         getPropertyByPath.d.ts.map
         getPropertyByPath.js
         — getPropertyByPath.js.map
         - index.d.ts
         - index.d.ts.map
         – index.js
         index.js.map
         loaders.d.ts
         loaders.d.ts.map
         – loaders.js
         - loaders.js.map
         - readFile.d.ts
         readFile.d.ts.map
         readFile.js
```

```
readFile.js.map
    - types.d.ts
    - types.d.ts.map
    - types.js
   L types.js.map
 package.json
schema-utils
 CHANGELOG.md
 - LICENSE
 - README.md


    declarations

    ValidationError.d.ts
    - index.d.ts
    - keywords

    □ absolutePath.d.ts

    - util
      ─ Range.d.ts
      └ hints.d.ts
   └ validate.d.ts
 - dist
   ─ ValidationError.js
    - index.js
    – keywords
      └ absolutePath.js
    util
       – Range₊js
      └ hints.js
   └ validate.js
 – package⊾json
semver
 LICENSE
 README.md
 - bin
   ∟ semver.js
 - classes
   — comparator.js
   — index.js
     - range.js
   └ semver.js
 - functions
   — clean.js
   — cmp.js
   — coerce.js
    compare-build.js
    — compare-loose.js
   — compare.js
    — diff.js
    – eq.js
    – gt.js
    – gte.js
     - inc.js
    - lt.js
    – lte.js
    - major.js
```

```
- minor⊾js
         – neq.js
         - parse.js
         – patch.js
         – prerelease.js
        – rcompare.js
        – rsort.js
         satisfies.js
         – sort.js
       └ valid.js
      index.js
      - internal
        — constants.js
        — debug.js
        identifiers.js
         – parse−options.js
       ∟ re.js
      - package.json
      - preload.js
      - range.bnf
      ranges
        — gtr.js
         – intersects.js
        — ltr.js
         – max−satisfying.js
        – min−satisfying.js
        — min-version.js
        – outside.js
        simplify.js
        — subset.js
         - to−comparators.js
       └ valid.js
   - tapable
     LICENSE
      - README.md
      - lib
        AsyncParallelBailHook.js
         AsyncParallelHook.js
        AsyncSeriesBailHook.js
        AsyncSeriesHook.js
        AsyncSeriesLoopHook.js
        AsyncSeriesWaterfallHook.js
        — Hook₊js
        HookCodeFactory.js
        – HookMap₊js
        — MultiHook.js
        SyncBailHook.js
        — SyncHook₁js
        SyncLoopHook.js
        SyncWaterfallHook.js
         - Tapable.js
        └ index.js
      - package.json
- package.json
```

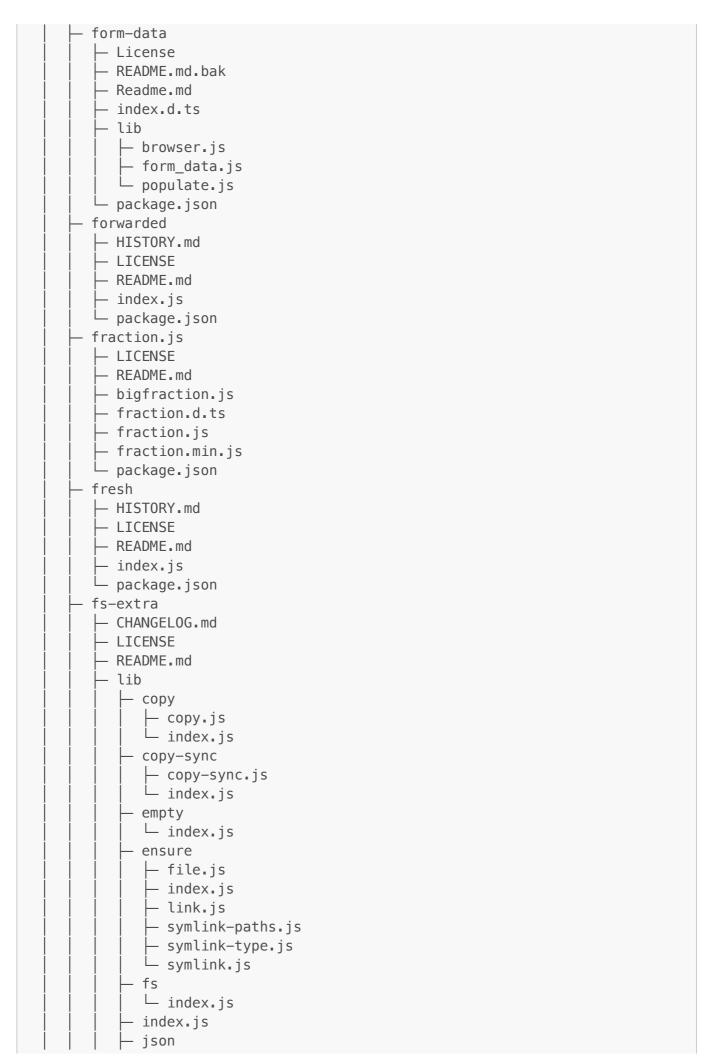

```
- index.js
         - jsonfile.js
         - output-json-sync.js
        └ output-json.js
      - mkdirs
        index.js
        └ make-dir.js
      - move

⊢ index.js

        └ move.js
      - move-sync

─ index.js

       └ move-sync.js
      - output
       └ index.js
      - path-exists
       └ index.js
      - remove
        — index.js
       └ rimraf.js
      - util
        ⊢ stat.js
        └ utimes.js
 └ package.json
- fs-monkey
  CHANGELOG.md
   - LICENSE
  README.md
  – docs
    └ api
        — patchFs.md
       _ patchRequire.md
   - lib

    — correctPath.js

     index.js
     ─ patchFs.js
      – patchRequire.js
    └ util
        └ lists.js
 └ package.json
- fs.realpath

─ LICENSE

  — README.md
 — index.js
  - old.js
 └ package.json
- fsevents
 ─ LICENSE
  README.md
  – fsevents.d.ts
 fsevents.js
   - fsevents.node
 └ package.json
function-bind
```

```
- editorconfig
  - .eslintrc
  - .jscs.json
  _ npmignore
  travis.yml
  LICENSE
  README.md
  implementation.js
  — index.js
 — package.json
 └ test
    ⊢ .eslintrc
    └ index.js
- function.prototype.name
 - editorconfig
 ⊢ .eslintignore
  — .eslintrc
  - .github
   └ FUNDING.yml
  nycrc
  — CHANGELOG.md
  - LICENSE
  README.md
 — auto.js
 helpers
   └ functionsHaveNames.js
 — implementation.js
 index.js

— package.json

  — polyfill.js
 — shim.js
 ∟ test

    implementation.js

    — index.js
    — shimmed.js
     - tests.js
    └ uglified.js
- functions-have-names
 ⊢ .editorconfig
  eslintrc
  - .github
   └ FUNDING.yml
 ⊢ .nycrc
  — CHANGELOG.md
  LICENSE
  README.md
  — index.js
  – package.json
 └ test
    └ index.js
- gensync
  LICENSE
  README.md
  - index.js
```

```
index.js.flow
  – package.json
 ∟ test
     _ .babelrc
    └ index.test.js
- get-caller-file
  LICENSE.md
  README.md
   - index.d.ts
  index.js
   - index.js.map
 └ package.json
- get-intrinsic
  ⊢ .eslintrc
   - .github
   └ FUNDING.yml
  ⊢ .nycrc
  — CHANGELOG.md
  — LICENSE
  - README.md
  — index.js
   – package.json
 ∟ test
    └ GetIntrinsic.js
get-own-enumerable-property-symbols
  CHANGELOG.md
  LICENSE
  README.md
  – lib

─ index.d.ts

     — index.is
    └ index.js.map
 └ package.json

    get-package-type

  ─ CHANGELOG.md
  LICENSE
  README.md
  — async.cjs
  — cache.cjs

─ index.cjs

  is-node-modules.cjs
  package.json
 ∟ sync.cjs
- get-stream
  buffer-stream.js
  index.d.ts
  — index.js
  — license
   – package.json
 └ readme.md
- get-symbol-description

    eslintignore

   eslintrc
   - .github
```

```
└ FUNDING.yml
   - nycrc
   - CHANGELOG.md
   LICENSE
  — README.md
  — getInferredName₊js
   – index.js
  — package.json
  └ test
    └ index.js
- glob

─ LICENSE

  README.md
  — common.js
  — glob.js
   - package.json
 └ sync.js
- glob-parent
  ─ CHANGELOG.md
  LICENSE
  — README.md
   - index.js
 └ package.json
- glob-to-regexp

    _ travis.yml

  README.md
  index.js
  — package.json
 └ test.js
global—modules

─ LICENSE

  README.md
   - index.js

    package.json

- global-prefix
  README.md
  index.js
  - node_modules
     _ .bin
       └ which
      - which
        ─ CHANGELOG.md
         - LICENSE
        README.md
         - bin
          └ which
         - package.json
       └ which.js
 └ package.json
- globals
   – globals.json
   - index.js
   - license
```

```
– package.json
   – readme.md
globalthis
  — .eslintrc
  - nycrc
  CHANGELOG.md
   LICENSE
  README.md
  — auto.js
  implementation.browser.js
  — implementation.js
  — index.js
  — package.json
  ├ polyfill.js
   - shim.js
 ∟ test

    implementation.js

     — index.js
     — native.js
     — shimmed.js
    └ tests.js
- globby
  — gitignore.js
  - index.d.ts
  index.js
   - license
  — package.json
  — readme.md
 └ stream-utils.js
gopd
 ├ .eslintrc
  - .github
   └ FUNDING.yml
  — CHANGELOG.md
  LICENSE
  README.md
  — index.js
  — package.json
 └ test
    └ index.js
- graceful-fs
 ─ LICENSE
  README.md
  — clone.js
  — graceful-fs.js

─ legacy-streams.js

  — package.json
 └ polyfills.js
grapheme—splitter
  LICENSE
  README.md
   - index.d.ts
   - index.js
   - package.json
```

```
└ tests
    ─ GraphemeBreakTest.txt
    └ grapheme_splitter_tests.js
- gzip-size
 index.d.ts
  — index.js

─ license

  — package.json
 └ readme.md
handle—thing

    _ travis.yml

  README.md
  - lib

⊢ handle.js

    └ queue.js

— package.json

 ∟ test
   └ api-test.js
- harmony-reflect
 ─ README.md
  index.d.ts
   - package.json
 └ reflect.js
– has
 README.md
  — package.json
  - src
   └ index.js
 └ test
    └ index.js
has-bigints
 ⊢ .eslintrc
  _ .github
   └ FUNDING.yml
  — inycrc
  CHANGELOG.md
  — LICENSE
  — README.md
 index.js
  — package₁json
 └ test
    └ index.js
has-flag
 index.d.ts
 index.js

─ license

  – package.json
 └ readme.md
- has-property-descriptors
 ⊢ .eslintrc
   - .github
    └ FUNDING.yml
   - nycrc
```

```
CHANGELOG.md
  - LICENSE
  README.md
  — index.js
 — package.json
 └ test
   └ index.js
- has-proto
 _ .eslintrc
  - .github
    └ FUNDING.yml
  CHANGELOG.md
  LICENSE
  README.md
  - index.js

    package.json

 └ test
   └ index.js
has-symbols
 _ .eslintrc
  - .github
   └ FUNDING.yml
  ⊢ .nycrc
  CHANGELOG.md
  LICENSE
  README.md
  — index.js
  — package.json
  – shams.js
 └ test
    index.js
     — shams
       ⊢ core-js.js
      └ get-own-property-symbols.js
    └ tests.js
has—tostringtag
 ⊢ .eslintrc
  _ .github
   └ FUNDING.yml
  CHANGELOG.md
  LICENSE
  README.md
 — index.js

─ package.json

  – shams.js
 L test
    index.js
     - shams
       ⊢ core-js.js
       └ get-own-property-symbols.js
     – tests.js
- he
  LICENSE-MIT.txt
   - README.md
```

```
- bin
    ∟ he
  - he.js
  - man
    └ he.1
 └ package.json
hoopy
 ⊢ .eslintrc
  ─ .gitlab-ci.yml
  AUTHORS
  - CHANGELOG.md
  CONTRIBUTING.md
  - LICENSE
  README.md
  — index.js
  – package.json
 └ test.js
- hpack.js
 _ npmignore
  README.md
  - bin
    └ benchmark
  - lib
    hpack

    compressor.js

       — decoder.js
        — decompressor.js
       — encoder.js
        huffman.js
        — static-table.js
        — table.js
       └ utils.js
    └ hpack.js
  - node_modules

─ isarray

        - .npmignore
        travis.yml
        Makefile
        — README.md
        - component.json

─ index.js

        — package.json
       └ test.js
       readable-stream
       _ .travis.yml
        CONTRIBUTING.md
        - GOVERNANCE.md

    LICENSE

        README.md
        – doc
          └ wg-meetings
             └ 2015-01-30 md
         - duplex-browser.js
```

```
- duplex.js
         lib
           — _stream_duplex.js
            _stream_passthrough.js
            - _stream_readable.js
            - _stream_transform.js
             _stream_writable.js
           └ internal
              ∟ streams
                 ─ BufferList.js
                 — destroy⊾js
                  – stream−browser.js
                 ∟ stream.js
         – package⊾json
         – passthrough.js
        – readable-browser.js
        — readable.js
        — transform.js
         - writable-browser.js
       └ writable.js
      - safe-buffer
        LICENSE
         - README.md
         - index.d.ts
         - index.js

    package.json

      - string_decoder
        _ .travis.yml
         LICENSE
        - README.md
         - lib
          └ string_decoder.js
        └ package.json
  — package.json
  - test

    ─ compressor-test.js

     — decoder-test.js
     — decompressor-test.js
     — encoder-test.js
    └ fixtures.js
 └ tools

    gen−huffman.js

     — gen-static-table.js
    └ utils.js
html-encoding-sniffer

    LICENSE.txt

  README.md
  - lib
    └ html-encoding-sniffer.js
 └ package.json
- html-entities
   - LICENSE
  README.md
   - lib
```

```
- index.d.ts
                      - index.js
                  — index.js.flow
                  — named-references.js
                   — numeric-unicode-map.js
                 └─ surrogate-pairs.js
      └ package.json
- html-escaper

    LICENSE.txt

        README.md
         - cjs
                 index.js
                 └ package.json
          - esm
                └ index.js
          - index.js
       ⊢ min.js
          – package.json
      └ test

⊢ index.js

                 └ package.json
- html-minifier-terser

    LICENSE

         README.md
       ⊢ cli.js
          - node_modules
                 ⊢ he
                            └ terser
                     - commander
                            LICENSE
                                – Readme.md
                                – esm.mjs
                               – index.js
                                - lib
                                       — argument.js
                                         — command.js
                                        — error.js
                                         — help.js
                                            - option.js
                                       └ suggestSimilar.js
                                – package-support.json
                                – package.json

    typings
    typings

                                      └ index.d.ts
          package.json
          sample-cli-config-file.conf
          - src

    htmlminifier.js

                  — htmlparser.js
                   — tokenchain.js
                 └ utils.js
   html-webpack-plugin
          CHANGELOG.md
```

```
- LICENSE
          README.md
         default_index.ejs
        — index.js
      ⊢ lib

    — cached-child-compiler.js

                 — child-compiler.js
                 — chunksorter.js
                 — errors.js
                 ⊢ file-watcher-api₊js
                 — hooks.js
                    – html−tags.js
                └ loader.js
          node_modules
                L .bin

    html-minifier-terser

    webpack
    webpack

          - package.json

    typings.d.ts

htmlparser2

─ LICENSE

          - README.md
        – lib
                ─ CollectingHandler.d.ts
                 CollectingHandler.d.ts.map
                 CollectingHandler.js
                 FeedHandler.d.ts
                  — FeedHandler.d.ts.map
                 ⊢ FeedHandler.js
                 MultiplexHandler.d.ts
                 MultiplexHandler.d.ts.map
                  MultiplexHandler.js
                  — Parser.d.ts
                  — Parser.d.ts.map
                   – Parser₊is
                    - Tokenizer.d.ts
                     Tokenizer.d.ts.map
                  — Tokenizer.js
                  — WritableStream.d.ts
                  — WritableStream.d.ts.map
                  WritableStream.js
                  - index.d.ts
                  — index.d.ts.map
                └ index.js
      └ package json
- http-deceiver
      _ _travis_yml
         - README.md
         lib
               └ deceiver.js
           - package.json
         test
                └ api-test.js
```

```
http-errors
  – HISTORY.md
   - LICENSE
  README.md
   – index.js
  └ package.json
- http-parser-js

    LICENSE.md

   - README.md
  http-parser.d.ts
   - http-parser.js
 └ package.json
- http-proxy
  .auto-changelog
   - .gitattributes
  ─ CHANGELOG.md
  CODE_OF_CONDUCT.md
  LICENSE
  README.md
  ─ codecov.yml
  ├ index.js
   - lib

    http-proxy

        — common.js
         index.js
         passes
           ─ web-incoming.js
            – web-outgoing.js
           └ ws-incoming.js
     └ http-proxy.js
  — package.json
 └ renovate.json
- http-proxy-agent
  ─ README.md
  – dist

    — agent.d.ts

     — agent.js
     — agent.js.map
     — index.d.ts
      - index.js
     └ index.js.map
 └ package.json
http-proxy-middleware

─ LICENSE

  README.md
  — dist
     _ _handlers.d.ts
      - _handlers.js
     — config-factory.d.ts
     — config-factory.js
      - context-matcher.d.ts
      - context-matcher.js
      – errors.d.ts
      – errors.js
```

```
handlers
       fix-request-body.js
        - index.d.ts
        – index.js
        - public.d.ts
        – public.js
         response-interceptor.d.ts
       └ response-interceptor.js
     - http-proxy-middleware.d.ts
     - http-proxy-middleware.js
      - index.d.ts
     – index.js
      logger.d.ts
      - logger.js
     — path-rewriter.d.ts
     — path−rewriter.js
      - router.d.ts
     – router.js
     - types.d.ts
     – types.js
  - package.json
https-proxy-agent

— README.md

  – dist
    — agent.d.ts
    — agent.js
     — agent.js.map

─ index.d.ts

     — index.js
     — index.js.map
     — parse-proxy-response.d.ts
     parse-proxy-response.js
    └ parse-proxy-response.js.map
 └ package.json
- human-signals
  CHANGELOG.md
  LICENSE
  README.md
  build
    ∟ src
       ⊢ core.js
        — core.js.map
        - main.d.ts
        — main.js
        - main.js.map
        - realtime.js
        — realtime.js.map
         - signals.js
       └ signals.js.map
 └ package json
- iconv-lite
  — Changelog.md
  LICENSE
```

```
- README.md
    encodings
     — dbcs-codec.js
     — dbcs−data.js
     — index.js
     — internal.js
     — sbcs-codec.js
     — sbcs-data-generated.js
     — sbcs-data.js
     tables

→ big5-added.json

        — cp936.json
        — cp949.json
        — cp950.json
         – eucjp.json
        — gb18030-ranges.json
        — gbk-added.json
       └ shiftjis.json
     - utf16.js
    └ utf7.js
  - lib
    ─ bom-handling.js
     — extend-node.js
     — index.d.ts
      - index.js
    ∟ streams.js
 └ package.json
- icss-utils
  — CHANGELOG.md
  LICENSE.md
  README.md
  — package.json
 ∟ src
    ─ createICSSRules.js
     — extractICSS.js
    ├ index.js
     replaceSymbols.js
    └ replaceValueSymbols.js
- idb
 CHANGELOG.md
  LICENSE
  — README.md
  — build

— async-iterators.cjs

     — async-iterators.d.ts
     — async-iterators.js
     — database-extras.d.ts
     – entry.d.ts
     index.cjs
     — index.d.ts
      - index.js
     – umd−with−async−ittr.js
     — umd.js
     - util.d.ts
```

```
– wrap-idb-value.cjs
     - wrap-idb-value.d.ts
    └ wrap-idb-value.js
  — package.json
  — with-async-ittr⊾cjs
  with-async-ittr.d.ts
 └─ with-async-ittr.js
- identity-obj-proxy
 eslintrc
  npmignore
   - .travis.yml
  LICENSE
  README.md
   – package.json
 ∟ src
       __tests__
       import-es6-export-test.js
        — import-es6-import-export-test.js
        — import-es6-import-test.js
        — import-vanilla-test.js
        - index-test.js
        - require-es6-export-test.js
        — require-es6-import-export-test.js
         - require-es6-import-test.js
       └ require-vanilla-test.js
      - index.js

    test-redirections

       id0bjES6Export.js
        id0bjES6Import.js
       └ idObjES6ImportExport.js
– ignore
 — README.md
  - index.d.ts

─ index.js

   - legacy.js
 └ package.json
- immer
 - compat
    └ pre-3.7
       └ dist
          └ immer.d.ts
  - dist
    ⊢ core
       — current.d.ts
        - current.d.ts.map
        - finalize.d.ts
        - finalize.d.ts.map
         - immerClass.d.ts
         - immerClass.d.ts.map
        - proxy.d.ts
         - proxy.d.ts.map
```

```
- scope.d.ts
     └ scope.d.ts.map
   - immer.cjs.development.js
   immer.cjs.development.js.map
  immer.cjs.production.min.js
  immer.cjs.production.min.js.map
   - immer.d.ts
   - immer.d.ts.map
   - immer.esm.js
   - immer.esm.js.map
   - immer.esm.mjs
  immer.umd.development.js
  — immer.umd.development.js.map
   - immer.umd.production.min.js
   immer.umd.production.min.js.map
  — index.js
  — index.js.flow
  internal.d.ts
  — internal.d.ts.map
  plugins

→ all.d.ts

      all.d.ts.map
     – es5.d.ts
      - es5.d.ts.map
      - mapset.d.ts
     - mapset.d.ts.map
      - patches.d.ts
     └ patches.d.ts.map
    types
     types-external.d.ts
      types-external.d.ts.map
      - types-internal.d.ts
     - utils
     — common.d.ts
      - common.d.ts.map
      - env.d.ts
      - env.d.ts.map
      - errors.d.ts
     - errors.d.ts.map
      - plugins.d.ts
     └ plugins.d.ts.map
– package.json
 readme.md
- src
   - core

⊢ current.ts

      finalize.ts
      immerClass.ts
      - proxy.ts
     · immer.ts
   internal.ts
    plugins
```

```
- all.ts
                                    - es5.ts
                                    - mapset.ts
                               └ patches.ts
                        types

─ globals.d.ts

                                 — index.js.flow
                                    - types-external.ts
                              └ types-internal.ts
                           utils

    ⊢ common.ts

                                   - env.ts
                                   - errors.ts
                               └ plugins.ts
- immutable

    LICENSE

         README.md
         — dist

    immutable.d.ts
    immu

    immutable.es.js

    immutable.js

                        - immutable.js.flow
                   └ immutable.min.js
       └ package.json
 - import-fresh

─ index.d.ts

        — index.js
        - node_modules
                  └ resolve-from
                               index.js
                                  license
                                    – package.json
                              └ readme.md

— package.json

       └ readme.md
import-local
        fixtures
                  └ cli.js
        — index.js
         — license
           package.json
       └ readme.md
- imurmurhash

— README.md

    imurmurhash.js

    imurmurhash.min.js

       └ package.json
indent-string
       index.d.ts
         — index.js
            - license
            – package.json
           – readme.md
```

```
- inflight
  ⊢ LICENSE
  — README.md
   - inflight.js
 └ package.json
inherits

─ LICENSE

  README.md
  inherits.js
  — inherits_browser₊js
 └ package.json
- ini
  ─ LICENSE
  README.md
   - ini.js

    package.json

internal-slot
  _ .editorconfig
  _ .eslintignore
  _ .eslintrc
  - .github
    └ FUNDING.yml
  ⊢ .nycrc
  CHANGELOG.md
  LICENSE
   README.md
  — index.js
  — package.json
  └ test
    └ index.js
– ipaddr.js
  — Changes.md
  LICENSE
  — README.md
  — ipaddr.min.js
  - lib
     — ipaddr.js
    └ ipaddr.js.d.ts
 └ package.json
- is—arguments

    ⊢ .editorconfig

  .eslintignore
  — .eslintrc
  - .github
   └ FUNDING.yml
  - nycrc
  — CHANGELOG.md
   LICENSE
  README.md
  — index.js
   – package.json
   - test
    └ index.js
is-array-buffer
```

```
- .eslintrc
   - .github
    └ FUNDING.yml
  - inycrc
  CHANGELOG.md
  LICENSE
  README.md
  - index.js
  — package.json
 └ test
    └ index.js
- is-arrayish
 - editorconfig
  - .istanbul.yml
  - .npmignore
  _ .travis.yml
  — LICENSE
  — README.md
   - index.js

    package.json

- is-bigint
 .eslintignore
  _ .eslintrc
  - .github
    └ FUNDING.yml
  - inycrc
  CHANGELOG.md
  LICENSE
  README.md
  — index.js
 — package.json
 └ test
    └ index.js
- is-binary-path

─ index.d.ts

  – index.js
  – license
  – package.json
 └ readme.md
- is-boolean-object
 .editorconfig
 .eslintignore
  - .eslintrc
  - .github
   └ FUNDING.yml
  - nycrc
  CHANGELOG.md
  LICENSE
  README.md
  — index.js
  – package.json
   - test
    └ index.js
- is-callable
```

```
.editorconfig
    .eslintrc
    .github
    └ FUNDING.yml
   - nycrc
  CHANGELOG.md
   - LICENSE
  - README.md
  – index.js
  – package.json
 └ test
    └ index.js
- is-core-module
 ⊢ .eslintrc
   - nycrc
  CHANGELOG.md
  — LICENSE
  README.md
  – core₁json
  — index.js
  – package.json
 └ test
    └ index.js
- is-date-object
 ⊢ .editorconfig

    eslintignore

   - .eslintrc
  _ github
   └ FUNDING.yml
  nycrc
  — CHANGELOG.md
  LICENSE
  README.md
  index.js
  — package.json
 └ test
    └ index.js
- is-docker
 ⊢ cli.js
  index.d.ts
  — index.js
  — license
  — package.json
 └ readme.md
is-extglob
 README.md
   - index.js

    package.json

is-fullwidth-code-point

─ index.d.ts

   - index.js
  license
   - package.json
```

```
└ readme.md
 is-generator-fn
 index.d.ts
  — index.js
  — license
  — package.json
 └ readme.md
- is-glob
 ─ LICENSE
  — README.md
   - index.js
 └ package.json
- is-map
 - .editorconfig
  - .eslintignore
  _ .eslintrc
  - .gitattributes
   - .github
    └ FUNDING.yml
  - inycrc
  — CHANGELOG.md
  LICENSE
  README.md
  — index.js
  – package.json
   - test
    └ index.js
- is-module
 — README.md
 — component.json
  index.js
 └ package.json
is-negative-zero
 - .editorconfig
  - .eslintignore
  eslintrc
  - .github
    └ FUNDING.yml
   - nycrc
  — CHANGELOG.md
  — LICENSE
  README.md
  — index.js
  — package.json
 L test
    └ index.js
- is-number
 README.md
   - index.js
 └ package.json
is-number-object
 .editorconfig
```

```
eslintrc
   - .github
    └ FUNDING.yml
   - inycrc
  CHANGELOG.md
  LICENSE
  README.md
  — index.js
  — package₌json
  └ test
    └ index.js
- is-obj
 index.js
  — license
   - package.json
 └ readme.md
- is-path-inside

    index.d.ts

  — index.js
  — license
  ├ package.json
 └ readme.md
- is-plain-obj

─ index.d.ts

  — index.js
  – license
   – package.json
 └ readme.md

    is-potential-custom-element-name

    LICENSE−MIT.txt

— README.md

  — index.js
 └ package.json
- is-regex
  - .editorconfig
  eslintignore
  eslintrc
  _ nycrc
  CHANGELOG.md
  LICENSE
  README.md

─ index.js

  — package.json
 ∟ test
    └ index.js
- is-regexp
 index.js
   – package.json
 └ readme.md
- is-root

─ index.d.ts

   - index.js
  – license
   – package.json
```

```
└ readme.md
- is-set
  ⊢ .editorconfig
  - .eslintignore
  _ .eslintrc
  gitattributes
   - .github
   └ FUNDING.yml
   - nycrc
  — CHANGELOG.md
   LICENSE
  README.md
  — index.js
   – package.json
   - test
    └ index.js
- is-shared-array-buffer
  ⊢ .eslintignore
  - .eslintrc
  - .github
   └ FUNDING.yml
   - nycrc
  — CHANGELOG.md
  LICENSE
  README.md
   – index.js
   – package.json
  └ test
    └ index.js
- is-stream

⊢ index.d.ts

  index.js

─ license

  — package.json

    readme.md

- is-string
  ⊢ .eslintignore
  _ .eslintrc
   github
   └ FUNDING.yml
  - nycrc
  — CHANGELOG.md
  — LICENSE
  — README.md
  — index.js

    package.json

 └ test
    └ index.js
- is-symbol
  - editorconfig
  .eslintignore
   - .eslintrc
    .github
    └ FUNDING.yml
```

```
nycrc
             - CHANGELOG.md
             - LICENSE
           README.md
           – index.js
           package.json
        └ test
                   └ index.js
 - is-typed-array
       ⊢ .editorconfig
            - .eslintrc
            - .github
                └ FUNDING.yml
             - nycrc
            - CHANGELOG.md
           LICENSE
          README.md
         — index.js
           — package.json
       L test
                   └ index.js
 - is-typedarray

    LICENSE.md

          README.md
        index.js
             package.json
       └ test.js
is-weakmap
        ⊢ .eslintrc
          - .github
                    ─ FUNDING.yml

    workflows
    workflo
                                └ rebase.yml
        CHANGELOG.md
           LICENSE
            README.md
         index.js
            – package.json
        └ test
                   └ index.js
is-weakref
        ⊢ .eslintignore
            eslintrc
           - .github
               └ FUNDING.yml
             - nycrc
            CHANGELOG.md
           LICENSE
           README.md
             - index.js
             – package.json
        └ test
                   └ index.js
```

```
is-weakset
 .editorconfig
   - .eslintignore
  - .eslintrc
  - .gitattributes
  - .github
   └ FUNDING.yml
  - _nycrc
  CHANGELOG.md
  LICENSE
  — README.md
  index.js
  — package.json
 └ test
    └ index.js
- is-wsl

─ index.d.ts

  — index.js
  — license
  — node_modules
    ∟ .bin
       └ is-docker
  — package.json
 readme.md
- isarray
 LICENSE
 — README.md
 index.js
 └ package.json
- isexe
 LICENSE
  — README.md
 index.js
 — mode.js
  — package.json
  test
   └ basic.js
 └ windows.js
- istanbul-lib-coverage

    ─ CHANGELOG.md

  LICENSE
  ─ README.md
 index.js
  — lib

    — coverage-map.js

    coverage-summary₁js

     — data-properties.js
      - file−coverage.js
    └ percent.js
  – package.json
- istanbul-lib-instrument
  CHANGELOG.md
  - LICENSE
```

```
README.md
    node modules
    └ .bin
        parser
        ∟ semver
   – package.json
   - src

    ─ constants.js

     — index.js
     — instrumenter.js
     — read−coverage.js
      - source-coverage.js
     └ visitor.js

    istanbul-lib-report

  — CHANGELOG.md
  — LICENSE
  README.md
  — index.js
  — lib
     ─ context.js
     — file-writer.js
     — path.js
     — report−base.js
     — summarizer–factory.js
     — tree.js
      – watermarks.js
     ∟ xml-writer.js
  └ package.json

    istanbul-lib-source-maps

  ─ CHANGELOG.md
  — LICENSE
  README.md
  – index.js
  — lib

    get-mapping.js

     — map-store.js
     — mapped.js
     — pathutils.js
      - transform-utils.js
     └ transformer.js
  └ package json
istanbul-reports
  ─ CHANGELOG.md
  LICENSE
  README.md
  index.js
  lib
     – clover
       └ index.js
      cobertura
       └ index.js
      - html
         – annotator.js
         assets
```

```
- base.css
            block-navigation.js
            - favicon.png
           — sort-arrow-sprite.png
           — sorter.js
          ∟ vendor

→ prettify.css

              └ prettify.js
         - index.js
       └ insertion-text.js
      - html-spa
        _ .babelrc
         assets
          ─ bundle.js
            - sort-arrow-sprite.png
          ∟ spa.css
        — index.js
         - src
           ─ fileBreadcrumbs.js
           — filterToggle.js

→ flattenToggle.js

           — getChildData.js
           index.js

─ routing.js

           — summaryHeader.js
            summaryTableHeader.js
          └ summaryTableLine.js
         webpack.config.js
      json
       └ index.js
      - ison-summary
       └ index.js
      - lcov
       └ index.js
      - lcovonly
       └ index.js
      - none
       └ index.js
      - teamcity
       └ index.js
      - text
       └ index.js
      - text-lcov
       └ index.js
      - text-summary
       └ index.js
 └ package.json
- iake
  ─ Makefile
  README.md
  – bin
    ─ bash_completion.sh
    └ cli.js
   - jakefile.js
```

```
lib
     — api.js
      - jake.js
     — loader.js
     — namespace₊js
     — package_task.js
      — parseargs.js
     — program.js
     — publish_task.js
     — rule.js
      – task
        — directory_task.js
        — file_task.js
         - index.js
        └ task.js
      - test_task.js
     └ utils
        ├ file.js
         – index.js
        └ logger.js
  — package.json
   - test

─ integration

    concurrent.js

         - file.js
         - file_task.js
         – helpers.js
         — jakefile.js
         – jakelib
           — concurrent.jake.js

→ publish.jake.js

           required_module.jake.js
           └ rule.jake.js
         — publish_task.js
         – rule.js
         - selfdep.js
        └ task_base.js
      - unit

— jakefile.js

         - namespace⊾js
        ∟ parseargs.js
 ∟ usage.txt
– jest

─ LICENSE

  README.md
   - bin
     └ jest.js
   build

─ jest.d.ts

     └ jest.js
   - node_modules
     └ .bin
         - import—local—fixture
        ∟ jest
```

```
└ package.json
jest-changed-files
 LICENSE
  README.md
  — build

— git.d.ts

    — git.js
    — hg.d.ts
     — hg.js
     — index.d.ts
     – index.js
     - types.d.ts
    └ types.js
  – package⊾json
- jest-circus
  LICENSE
  README.md
  - build
    ─ eventHandler.d.ts
    ─ eventHandler.js
    — formatNodeAssertErrors.d.ts
     formatNodeAssertErrors.js
     globalErrorHandlers.d.ts
    — globalErrorHandlers.js
    — index.d.ts
     - index.js
    — legacy-code-todo-rewrite

─ jestAdapter.d.ts

        — jestAdapter.js
       — jestAdapterInit.d.ts
        — jestAdapterInit.js
        — jestExpect.d.ts
       └ jestExpect.js
     — run.d.ts
    — run.js
    — state.d.ts
    — state.js
    testCaseReportHandler.d.ts
    testCaseReportHandler.js
     — types.d.ts
     — types.js
     - utils.d.ts
    └ utils.js
  - package.json
 └ runner.js
iest-cli
 LICENSE
  README.md
  – bin
    └ jest.js
  build
     - cli
        – args.d.ts
        - args.js
```

```
- index.d.ts
         index.js
      - index.d.ts
     - index.js
    └ init
       — errors.d.ts
        - errors.js
        generateConfigFile.d.ts
        generateConfigFile.js
        - index.d.ts
        - index.js
        - modifyPackageJson.d.ts
        modifyPackageJson.js
        questions.d.ts
        - questions.js
        - types.d.ts
       └ types.js
  node modules
    └ .bin
       └ import-local-fixture
 └ package.json
jest-config
 — LICENSE
  build

    □ Defaults.d.ts

    — Defaults.js
    Deprecated.d.ts
    — Deprecated.js
    Descriptions.d.ts
    ─ Descriptions.js
    ReporterValidationErrors.d.ts
     ReporterValidationErrors.js
     ValidConfig.d.ts
    ValidConfig.js
     — color.d.ts
     — color₁js
     - constants.d.ts
     — constants.js
     getCacheDirectory.d.ts
     getCacheDirectory.js
     — getMaxWorkers.d.ts
     — getMaxWorkers.js
    — index.d.ts
    — index.js
     - normalize.d.ts
    — normalize.js
     readConfigFileAndSetRootDir.d.ts
     readConfigFileAndSetRootDir.js
    resolveConfigPath.d.ts

⊢ resolveConfigPath.js

     - setFromArgv.d.ts
     – setFromArgv.js
     utils.d.ts
     - utils.js
```

```
validatePattern.d.ts
     – validatePattern.js
  – package.json
- jest-diff
  LICENSE
  README.md
  build

    □ cleanupSemantic.d.ts

    ⊢ cleanupSemantic.js

    — constants.d.ts
     – constants.js
     — diffLines.d.ts
    — diffLines.js
    diffStrings.d.ts
     — diffStrings.js
    — getAlignedDiffs.d.ts

— getAlignedDiffs.js

    — index.d.ts
     — index.js
    — joinAlignedDiffs.d.ts
    — joinAlignedDiffs.js
     normalizeDiffOptions.d.ts
     normalizeDiffOptions.js
    — printDiffs.d.ts
     — printDiffs.js
      - types.d.ts
    ∟ types.js
  package.json
jest-docblock
  LICENSE
  README.md
  build

⊢ index.d.ts

    └ index.js
 └ package.json
- jest-each

    LICENSE

  README.md
  build

→ bind.d.ts

     — bind.is
    — index.d.ts
    — index.js
     table
        — array.d.ts
        – array₌js
        — interpolation.d.ts
        interpolation.js
         template.d.ts
       └ template.js
      validation.d.ts
      validation.js
  – package.json
jest-environment-jsdom
```

```
- LICENSE
   build

⊢ index.d.ts

    └ index.js
 └ package.json
- jest-environment-node
  LICENSE
  - build

⊢ index.d.ts

    └ index.js
 └ package.json
- jest-get-type
  — LICENSE
   build

─ index.d.ts

    └ index.js

    package.json

- jest-haste-map
  LICENSE
  build
    ─ HasteFS.d.ts
      HasteFS.is
     — ModuleMap.d.ts
     — ModuleMap₊js
     — blacklist.d.ts
     — blacklist.js
     — constants.d.ts
     — constants.js
     - crawlers

─ node.d.ts

        — node.js
        — watchman.d.ts
       └ watchman.js
     getMockName.d.ts
     — getMockName.js
      - index.d.ts
      - index.js
     — lib
        dependencyExtractor.d.ts
        dependencyExtractor.js
        — fast_path.d.ts
        — fast_path.js

    □ getPlatformExtension.d.ts

        getPlatformExtension.js
        isRegExpSupported.d.ts
        isRegExpSupported.js
        - normalizePathSep.d.ts
        └ normalizePathSep.js
       types.d.ts
      - types.js
      watchers
         FSEventsWatcher.d.ts
         FSEventsWatcher.js
         NodeWatcher.js
```

```
- RecrawlWarning.js
        - WatchmanWatcher.js
       └ common.js
     - worker.d.ts
    └ worker.js
 └ package.json
- jest-jasmine2
 — LICENSE
  - build
    ─ ExpectationFailed.d.ts
     ExpectationFailed.js
     PCancelable.d.ts
    PCancelable.js
    — assertionErrorMessage.d.ts
     assertionErrorMessage.js
    — each.d.ts
    — each.js
    — errorOnPrivate.d.ts
    — errorOnPrivate.js
    expectationResultFactory.d.ts
    expectationResultFactory.js
     index.d.ts
     index.js
     — isError.d.ts
     - isError⊾js
     - jasmine
       — CallTracker.d.ts
        CallTracker₁js
        – Env.d.ts
        — Env.js
        JsApiReporter.d.ts
        JsApiReporter.js
        ReportDispatcher.d.ts
        ReportDispatcher.js
        Spec.d.ts
        - Spec.js
        SpyStrategy.d.ts
        - SpyStrategy⊾js
        Suite.d.ts
        - Suite.js
        - Timer.d.ts
        – Timer.js
        — createSpy.d.ts
        createSpy.js
        jasmineLight.d.ts
        - jasmineLight.js
        spyRegistry.d.ts
        spyRegistry.js
      jasmineAsyncInstall.d.ts
     jasmineAsyncInstall.js
      jestExpect.d.ts
      jestExpect.js
     - pTimeout.d.ts
       pTimeout.js
```

```
queueRunner.d.ts
      - queueRunner.js
     — reporter.d.ts
     — reporter.js
     — setup_jest_globals.d.ts
     — setup_jest_globals.js
      - treeProcessor.d.ts
     — treeProcessor.js
      - types.d.ts
     – types.js
  — package.json
jest-leak-detector
  - LICENSE
   - README.md
   - build

─ index.d.ts

    └ index.js
  └ package.json
jest-matcher-utils
  — LICENSE
  README.md
   build
    ─ Replaceable.d.ts

— Replaceable.js

     deepCyclicCopyReplaceable.d.ts
     deepCyclicCopyReplaceable.js
      - index.d.ts
    └ index.js
  └ package json
jest-message-util
  LICENSE
  build

─ index.d.ts

     — index.js
      - types.d.ts
     └ types.js
  └ package.json
- iest-mock
  LICENSE
  README.md
  build
     index.d.ts
    └ index.js
  └ package json
- jest-pnp-resolver
  README.md
  — createRequire.js

— getDefaultResolver.js

  - index.d.ts
  — index.js
 └ package.json
jest-regex-util
  LICENSE
   build
```

```
- index.d.ts
      - index.js
   - package.json
jest-resolve
  LICENSE
   build
     ─ ModuleNotFoundError.d.ts
     ModuleNotFoundError.js
     — defaultResolver.d.ts
     defaultResolver.js
      - fileWalkers.d.ts
     — fileWalkers.js
     — index.d.ts
     — index.js
      - isBuiltinModule.d.ts
     — isBuiltinModule.js
     — nodeModulesPaths.d.ts
     — nodeModulesPaths.js
     — resolver.d.ts
     — resolver.js
     — shouldLoadAsEsm.d.ts
      - shouldLoadAsEsm.js
      – types.d.ts
     — types.js
      - utils.d.ts
     └ utils.js
   - node_modules
     └ .bin
        ∟ resolve
  └ package.json

    jest-resolve-dependencies

  ─ LICENSE
   build
     index.d.ts
     └ index.js
  └ package.json
- jest-runner
  — LICENSE
   - build

─ index.d.ts

     — index.is
     — runTest.d.ts
     — runTest.js
     — testWorker.d.ts
     — testWorker.js
      - types.d.ts
      – types.js
   – package.json
- jest-runtime
  — LICENSE
   - build
     — helpers.d.ts
     – helpers.js
      - index.d.ts
```

```
- index.js
      - types.d.ts
     – types.js
  - node_modules
    └ strip-bom
        index.d.ts
         - index.js
        license
         - package.json
        └ readme.md
 └ package.json
- jest-serializer
  LICENSE
   - README.md
   - build

⊢ index.d.ts

    └ index.js
   - package.json
 └ v8.d.ts
jest-snapshot

─ LICENSE

   - build
    ─ InlineSnapshots.d.ts
     — InlineSnapshots.js
     SnapshotResolver.d.ts
     SnapshotResolver.js
     — State.d.ts
     — State.js
     — colors.d.ts
     — colors.js
     — dedentLines.d.ts
     — dedentLines.js
     — index.d.ts
     — index.js
     — mockSerializer.d.ts

─ mockSerializer.js

     — plugins.d.ts
     — plugins.js
     — printSnapshot.d.ts
     — printSnapshot.js
     - types.d.ts
     — types.js
     — utils.d.ts
    └ utils.js
  - node_modules
      - .bin
       ∟ semver
      - semver
        — LICENSE
         - README.md
         - bin
          └ semver.js
         - classes
            — comparator.js
```

```
- index.js
           - range.js
          ∟ semver.js
         functions
          — clean.js
           — cmp.js
           — coerce.js
          — compare-build.js
           — compare-loose.js
          — compare.js
          — diff.js
           – eq.js
           — gt.js
          — gte.js
           – inc.js
           — lt.js
          — lte.js
          — major⊾js
          — minor.js
           — neq.js
          — parse.js
          — patch.js
          — prerelease.js
           — rcompare.js
          ─ rsort.js
           — satisfies.js
           - sort.js
          └ valid.js
        - index.js
        internal
          — constants.js
          — debug₌js

    identifiers.js

           – parse−options.js
          ∟ re.js
        - package⊾json
        - preload.js
        range.bnf
        - ranges
          — gtr.js
          — intersects.js
          ⊢ ltr.js
          — max−satisfying.js
           — min−satisfying.js
           — min−version.js
           — outside.js
           simplify.js
          — subset.js
           - to−comparators.js
          └ valid.js
└ package.json
jest-util
 LICENSE
  – build
```

```
ErrorWithStack.d.ts
     ErrorWithStack.js
     — clearLine.d.ts
    — clearLine.js
    convertDescriptorToString.d.ts
    convertDescriptorToString.js
     createDirectory.d.ts
    createDirectory.js
    createProcessObject.d.ts
    createProcessObject.js
     — deepCyclicCopy.d.ts
     deepCyclicCopy.js
    — formatTime.d.ts
     - formatTime.js
     — globsToMatcher.d.ts
    globsToMatcher.js
    — index.d.ts
    — index.is
    installCommonGlobals.d.ts
    installCommonGlobals.js
    interopRequireDefault.d.ts
     interopRequireDefault.js
     isInteractive.d.ts
     isInteractive.js
     - isPromise.d.ts
     isPromise.js
    — pluralize.d.ts
    — pluralize.js
    — preRunMessage.d.ts
    — preRunMessage.js
    replacePathSepForGlob.d.ts
    replacePathSepForGlob.js
     requireOrImportModule.d.ts
    requireOrImportModule.js
     - setGlobal.d.ts
     setGlobal.js
    — specialChars.d.ts
    specialChars.js
    — testPathPatternToRegExp.d.ts
     testPathPatternToRegExp.js
     tryRealpath.d.ts
    └ tryRealpath.js
 └ package json

    jest-validate

  LICENSE
  README.md
  build
    — condition.d.ts
    — condition.js
    — defaultConfig.d.ts
     defaultConfig.js
     deprecated.d.ts
     deprecated.js
     - errors.d.ts
```

```
– errors.js
      - exampleConfig.d.ts
     — exampleConfig.js
     — index.d.ts
     – index.js
     — types.d.ts
      – types.js
     — utils.d.ts
     utils.js
     — validate.d.ts
      – validate.js
     validateCLIOptions.d.ts
     validateCLIOptions.js
      - warnings.d.ts
     └ warnings.js
  └ package.json
- jest-watch-typeahead

─ LICENSE

  README.md
  build

    ⊢ file_name_plugin

⊢ plugin.js

       └ prompt.js
      — index.js
      – lib

    pattern_mode_helpers.js


         - scroll.js
       L utils.js
      - test_name_plugin
         — plugin.js
        └ prompt.js
      types
        └ Config.js
  — filename.js
   - node_modules
     ⊢ .bin
        └ jest
      - ansi-regex
        — index.d.ts
         – index.js
        — license
         – package.json
        └ readme.md
      - char-regex


─ index.d.ts

         - index.js
        — license
         - package.json
        └ readme.md
      - jest-regex-util

─ LICENSE

         - build
            - index.d.ts
           └ index.js
```

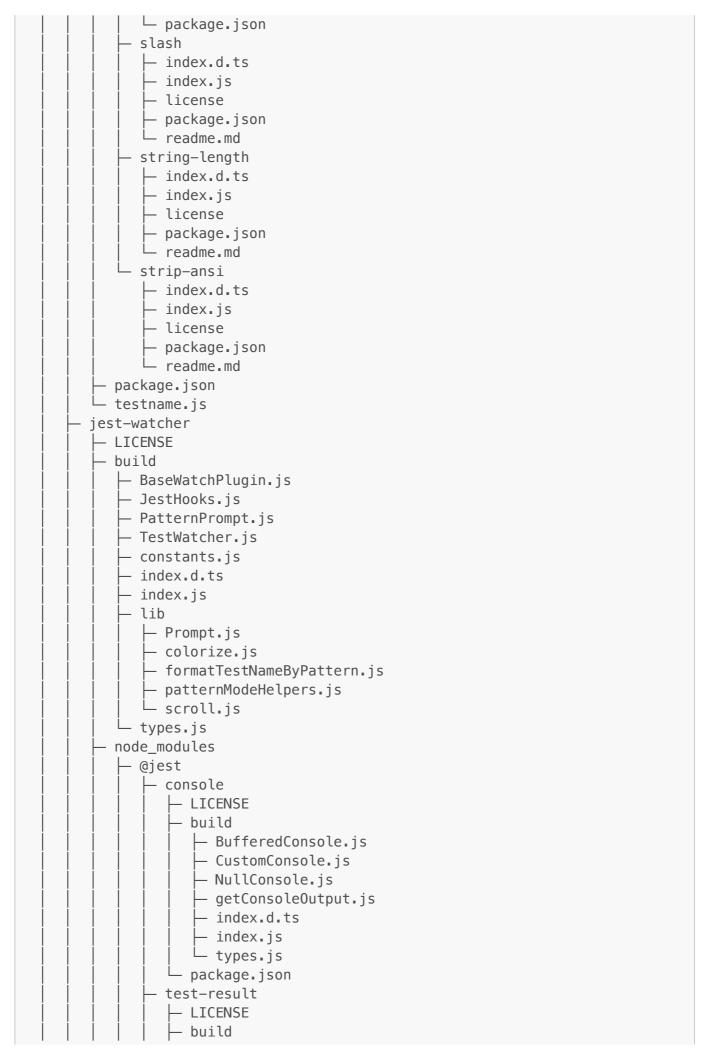

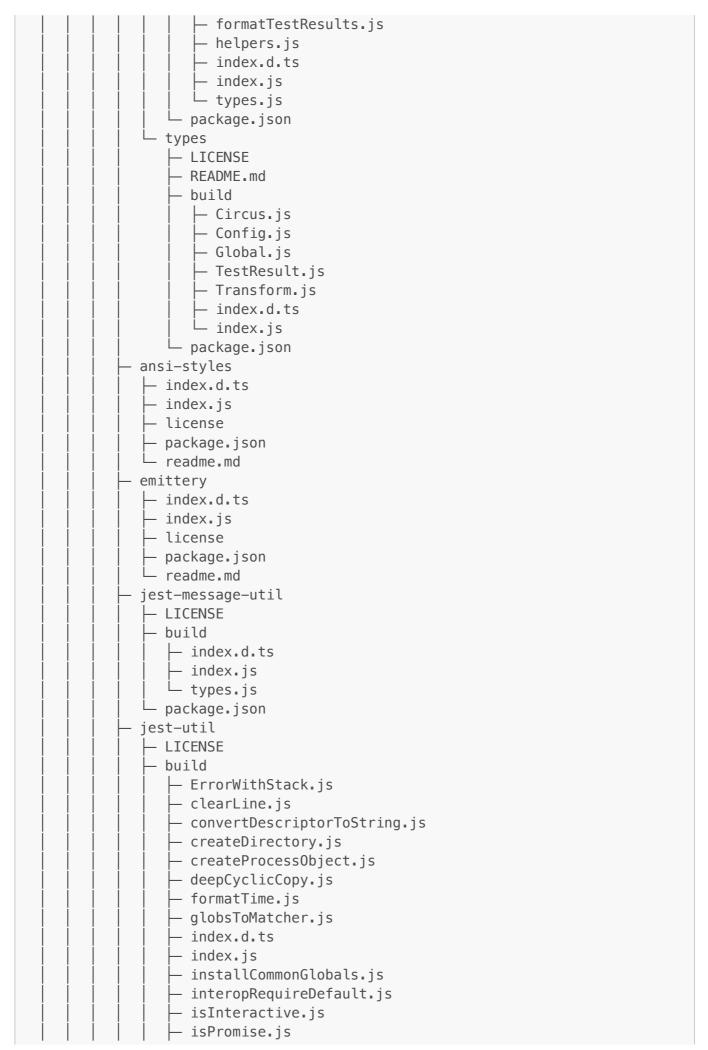

```
- pluralize.js
            – preRunMessage₊js
            replacePathSepForGlob.js
           requireOrImportModule.js
           — setGlobal.js
           specialChars.js
            testPathPatternToRegExp.js
           └ tryRealpath.js
         package.json
       pretty-format

    LICENSE

         - README.md
         build

— collections.js

            - index.d.ts
            – index.js
           — plugins
              AsymmetricMatcher.js
              ─ ConvertAnsi.js


→ DOMCollection.js


→ DOMElement.js


               Immutable.js
              ─ ReactElement.js
              ─ ReactTestComponent.js
              └ lib
                  escapeHTML.js
                 └ markup.js
           └ types.js
         – package⊾json


    package.json

iest-worker
  LICENSE
   README.md
  — build
    ⊢ Farm.d.ts
     – Farm₊js
     — FifoQueue.d.ts
     — FifoQueue.js
     — PriorityQueue.d.ts
     — PriorityQueue.js
     — WorkerPool.d.ts
     — WorkerPool₊js
     base
        BaseWorkerPool.d.ts
       L BaseWorkerPool.js
      - index.d.ts
     — index.js
      - types.d.ts
      - types.js
      - workers
        ─ ChildProcessWorker.d.ts
         ChildProcessWorker.js
         NodeThreadsWorker.d.ts
         NodeThreadsWorker.js
```

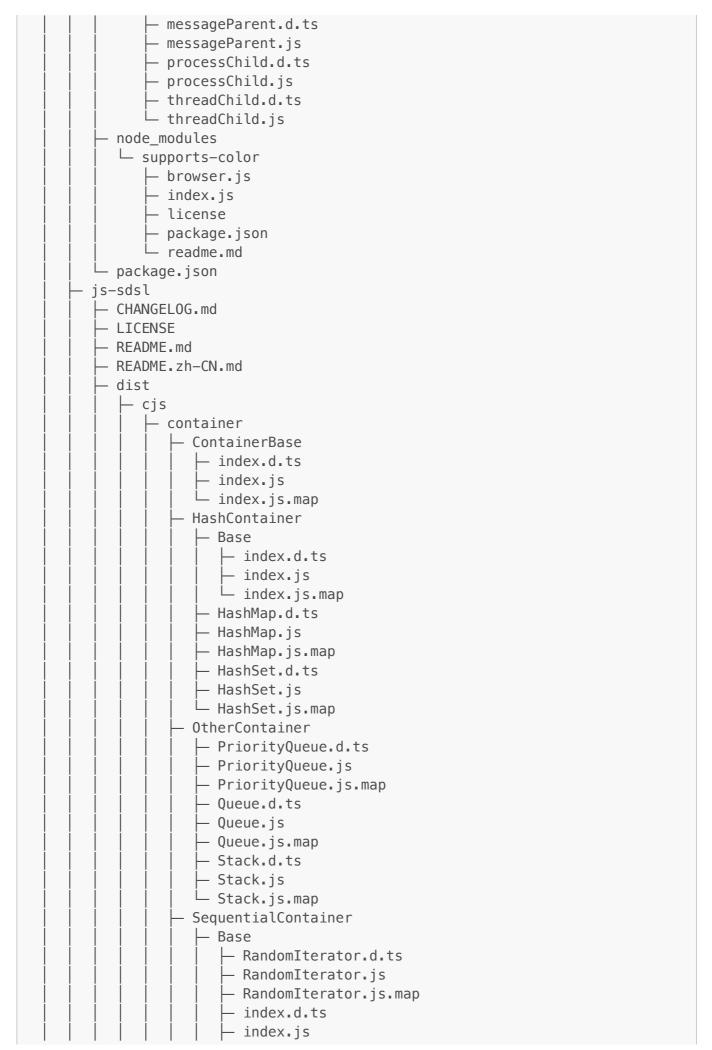

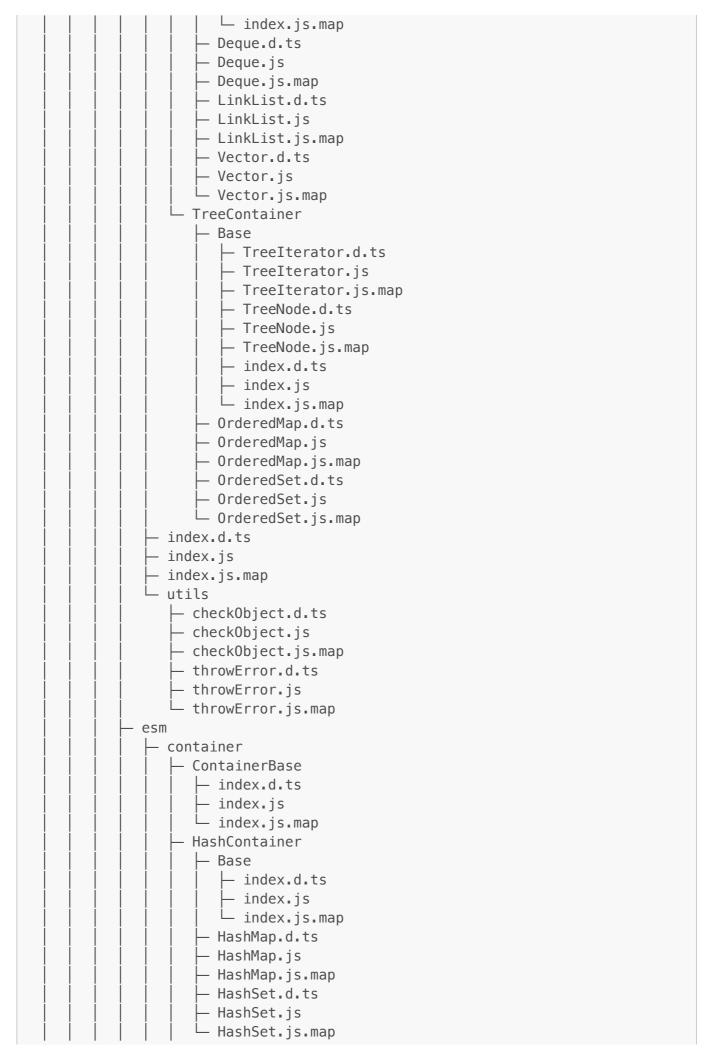

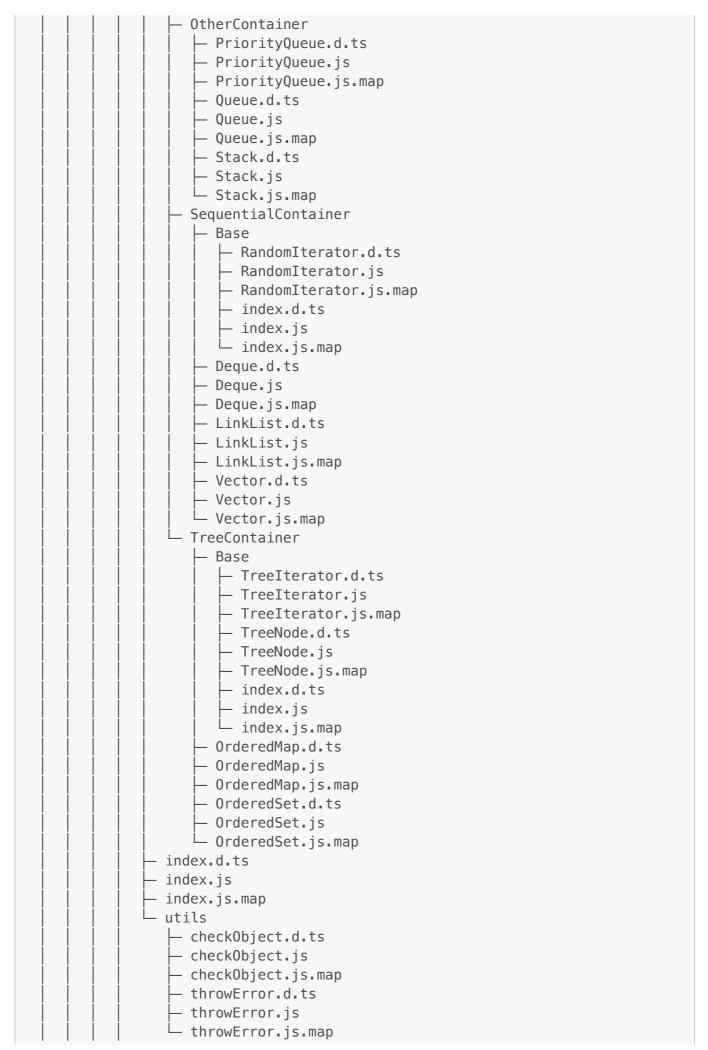

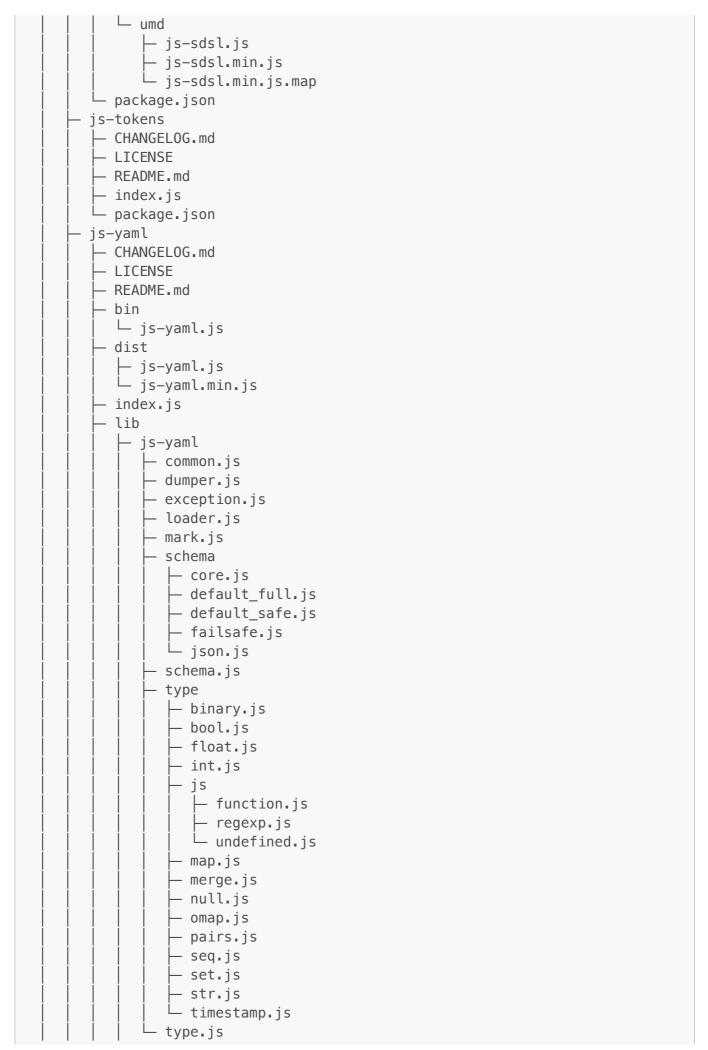

```
└ js-yaml.js
    node modules
    └ .bin
        esparse
       ∟ esvalidate

    package.json

- įsdom
 LICENSE.txt
  README.md
  lib
    — api.js
    └ jsdom
        browser
           — Window₊js
           default-stylesheet.js
            - js-globals.json
           — not-implemented.js
           - parser

⊢ html.js

               – index.js
             └ xml.js
            - resources

— async-resource-queue₁js

— no-op-resource-loader.js

    per-document-resource-loader.js

              ⊢ request–manager.js
               - resource-loader₌js
             resource-queue.js
         level2
          └ style.js
         - level3
          └ xpath.js
         living
           aborting
             ─ AbortController-impl.js

    △ AbortSignal-impl.js

           attributes

    ⊢ Attr-impl.js

    □ NamedNodeMap-impl.js

           – attributes.js
           constraint-validation

    DefaultConstraintValidation-impl.js

             └─ ValidityState-impl.js
           - cssom
             └─ StyleSheetList-impl.js
           custom-elements
             └─ CustomElementRegistry-impl.js
           documents.js

    domparsing

→ DOMParser-impl.js

               - InnerHTML-impl.js
               XMLSerializer-impl.js
               parse5-adapter-serialization.js
```

<pre>- events - CloseEvent-impl.js - CompositionEvent-impl.js - CustomEvent-impl.js - ErrorEvent-impl.js - Event-impl.js - EventModifierMixin-impl.js - EventTarget-impl.js - FocusEvent-impl.js - HashChangeEvent-impl.js - HashChangeEvent-impl.js - MessageEvent-impl.js - MessageEvent-impl.js - MouseEvent-impl.js - PageTransitionEvent-impl.js - PopStateEvent-impl.js - ProgressEvent-impl.js - StorageEvent-impl.js - StorageEvent-impl.js - UIEvent-impl.js - UIEvent-impl.js - WheelEvent-impl.js - fetch - Headers-impl.js - header-list.js - header-list.js - header-types.js - file-api - Blob-impl.js - FileList-impl.js - FileList-impl.js - FileAeader-impl.js - SenageEvent-impl.js - FileAeader-impl.js - Blob-impl.js - FileAeader-impl.js - Blob-impl.js - FileAeader-impl.js - Blob-impl.js - Blob-impl.js - AbstractRange.js - AddEventListenerOptions.js - AssignedNodesOptions.js - AssignedNodesOptions.js - BlobCallback.js - BlobCallback.js - BlobCallback.js - BlobCallback.js - BlobCalback.js - BlobCalback.js - BlobCalback.js - BlobCalback.js - ConarAsyTypeResult.js - CloseEvent.js - CloseEvent.js - CloseEvent.js - CloseEvent.js - CloseEvent.js - Comement.js - Comment.js - C</pre>
<pre>CDATASection.js CanPlayTypeResult.js</pre>
— CloseEvent.js
— CompositionEventInit.js
CustomElementConstructor.jsCustomElementRegistry.js
— CustomEvent.js
— CustomEventInit.js

→ DOMImplementation.js
⊢ DOMParser.js
├─ DOMStringMap.js
├─ DOMTokenList.js
├─ Document.js
☐ DocumentFragment.js
☐ DocumentReadyState.js
DocumentType.js
Element.js
├─ ElementCreationOptions.js
├─ ElementDefinitionOptions.js
├─ EndingType.js
⊢ ErrorEvent.js
├ ErrorEventInit.js
⊢ Event.js
├─ EventHandlerNonNull.js
├─ EventInit.js
├ EventListener.js
─ EventListenerOptions.js
⊢ EventModifierInit.js
⊢ EventTarget.js
⊢ External.js
File.js
FileList.js
FilePropertyBag.js
FileReader.js
FocusEvent.js
-
FormPote is
├─ FormData.js
Function.js
GetRootNodeOptions.js
HTMLAnchorElement.js
HTMLAreaElement.js
├─ HTMLAudioElement.js
├─ HTMLBRElement.js
├─ HTMLBaseElement.js
├─ HTMLBodyElement.js
├─ HTMLButtonElement.js
HTMLCanvasElement.js
— HTMLCollection.js
├─ HTMLDListElement.js
├─ HTMLDataElement.js
⊢ HTMLDataListElement.js
⊢ HTMLDetailsElement.js
HTMLDialogElement.js
HTMLDirectoryElement.js
HTMLDirectoryLtement.js
HTMLElement.js
HTMLEmbedElement.js
HTMLFieldSetElement.js
HTMLFontElement.js
HTMLFormElement.js
HTMLFrameElement.js
├─ HTMLFrameSetElement.js

— HTMLHRElement.js
— HTMLHeadElement.js
— HTMLHeadingElement.js
⊢ HTMLHtmlElement.js
— HTMLIFrameElement.js
— HTMLImageElement.js
— HTMLInputElement.js
— HTMLLIElement.js
— HTMLLabelElement.js
— HTMLLegendElement.js
— HTMLLinkElement.js
— HTMLMapElement.js
— HTMLMarqueeElement.js
— HTMLMediaElement.js
HTMLMenuElement.js
HTMLMetaElement.js
— HTMLMeterElement.js
— HTMLModElement.js
HTMLOListElement.js
HTMLObjectElement.js
HTMLObjectLtement.js HTMLOptGroupElement.js
HTMLOptionElement.js
HTMLOptionsCollection.js
HTMLDaragraphElement.js
HTMLParagraphElement.js
HTMLParamElement.js
HTMLPictureElement.js
HTMLPreElement.js
HTMLProgressElement.js
HTMLQuoteElement.js
— HTMLScriptElement.js
— HTMLSelectElement.js
— HTMLSlotElement.js
— HTMLSourceElement.js
— HTMLSpanElement.js
— HTMLStyleElement.js
HTMLTableCaptionElement.js
— HTMLTableCellElement.js
— HTMLTableColElement.js
— HTMLTableElement.js
├─ HTMLTableRowElement.js
— HTMLTableSectionElement.js
— HTMLTemplateElement.js
— HTMLTextAreaElement.js
— HTMLTimeElement.js
— HTMLTitleElement.js
— HTMLTrackElement.js
— HTMLUListElement.js
— HTMLUnknownElement.js
— HTMLVideoElement.js
— HashChangeEvent.js
─ HashChangeEventInit.js
Headers.js
History.js
687 / 017

<pre>— InputEvent.js</pre>
<pre>InputEventInit.js</pre>
KeyboardEvent.js
─ KeyboardEventInit.js
<pre>Location.js</pre>
— MessageEvent.js
<pre>— MessageEventInit.js</pre>
— MimeType.js
— MimeTypeArray.js
— MouseEvent.js
— MouseEventInit.js
— MutationCallback.js
— MutationObserver.js
<pre>MutationObserverInit.js</pre>
— MutationRecord.js
─ NamedNodeMap.js
— Navigator.js
— Node.js
— NodeFilter.js
— NodeIterator.js
— NodeList.js
— OnBeforeUnloadEventHandlerNonNull.js
— OnErrorEventHandlerNonNull.js
<pre>PageTransitionEvent.js</pre>
<pre>PageTransitionEventInit.js</pre>
— Performance.js
— Plugin.js
— PluginArray.js
<pre>PopStateEvent.js</pre>
— PopStateEventInit.js
— ProcessingInstruction.js
— ProgressEvent.js
— ProgressEventInit.js
— Range.js
─ SVGAnimatedString.js
<pre>SVGBoundingBoxOptions.js</pre>
— SVGElement.js
<pre>— SVGGraphicsElement.js</pre>
— SVGNumber.js
— SVGSVGElement.js
— SVGStringList.js
— SVGTitleElement.js
— Screen.js
— ScrollBehavior.js
— ScrollIntoViewOptions.js
— ScrollLogicalPosition.js
— ScrollOptions.js
— ScrollRestoration.js
— Selection.js
— SelectionMode.js
— ShadowRoot.js
— ShadowRootInit.js
— ShadowRootMitt.js — ShadowRootMode.js
— StaticRange.js

```
StaticRangeInit.js
   - Storage.js
   StorageEvent.js
  StorageEventInit.js
  StyleSheetList.js
  SupportedType.js
   - Text.js
   TextTrackKind.js
   - TouchEvent.js
  TouchEventInit.js
 ⊢ TreeWalker₊js
 ─ UIEvent.js
 ├ UIEventInit.js
 ─ ValidityState.js
  VisibilityState.js
 ─ VoidFunction.js
  — WebSocket.js
 ─ WheelEvent.js
  — WheelEventInit.js
 XMLDocument.js
  XMLHttpRequest.js
  XMLHttpRequestEventTarget.js
  XMLHttpRequestResponseType.js

— XMLHttpRequestUpload.js

   - XMLSerializer.js
 └ utils.js
- helpers

— agent-factory.js

  – binary–data.js
  – create-element.js
  — create-event-accessor.js
  custom-elements.js
  — dates−and−times.js
  — details.js
  document-base-url.js
 — events.js
  focusing.js
  form-controls.js
  html-constructor.js
  - http-request.js
  internal-constants.js
  — iterable-weak-set.js
  – json.js
  — mutation—observers.js
  — namespaces.js
 — node.js
 ├ number-and-date-inputs.js
  — ordered-set₁js
  — runtime−script−errors.js
  — selectors.js
   - shadow-dom.js
   - strings.js
  – style−rules.js
  - stylesheets.js
```

```
svg
      - basic-types.js
     └ render.js

─ text.js

   - traversal.js
  └ validate-names.js
 hr-time
  └ Performance-impl.js
- interfaces.js
- mutation-observer
   MutationObserver-impl.js
  └─ MutationRecord-impl.js
— named-properties-window₁js
– navigator

    ⊢ MimeType-impl.js

    MimeTypeArray−impl.js

⊢ Navigator-impl.js

  NavigatorConcurrentHardware-impl.js
  NavigatorCookies-impl.js
  ─ NavigatorID-impl.js
  — NavigatorLanguage−impl.js

─ NavigatorOnLine-impl.js

─ NavigatorPlugins-impl.js

   — Plugin−impl.js
  └ PluginArray-impl.js
node-document-position.js
– node−type.js
— node.is
– nodes

    □ CDATASection-impl.js

  ─ CharacterData-impl.is
   ChildNode-impl.js
  ─ Comment-impl.js

→ DOMImplementation—impl.js

→ DOMStringMap-impl.js

→ DOMTokenList-impl.js

  — Document-impl.js
   DocumentFragment-impl.js
  ─ DocumentOrShadowRoot-impl.js

→ DocumentType-impl.js

    □ Element-impl.js

    □ ElementCSSInlineStyle-impl.js

─ ElementContentEditable-impl.js

  GlobalEventHandlers-impl.js
   HTMLAnchorElement-impl.js
   HTMLAreaElement-impl.js
  HTMLAudioElement-impl.js
   HTMLBRElement-impl.js
   HTMLBaseElement-impl.js
   HTMLBodyElement-impl.js

    HTMLButtonElement-impl.js

    HTMLCanvasElement-impl.js

   HTMLCollection-impl.js
   HTMLDListElement-impl.js
```

HTMLDataElement-impl.js	
│	
HTMLDetailsElement-impl.js	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	S
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
│	
HTMLProgressElement-impl.js	
│	
│	
HTMLSelectElement-impl.js	
HTMLSlotElement-impl.js	
HTMLSourceElement-impl.js	
HTMLSpanElement-impl.js	
HTMLStyleElement-impl.js	
HTMLTableCaptionElement-impl.js	
HTMLTableCellElement-impl.js	
│	
601 / 017	

```
HTMLTableElement-impl.js
  HTMLTableRowElement-impl.js
  HTMLTableSectionElement-impl.js
  HTMLTemplateElement-impl.js
  — HTMLTextAreaElement-impl.js
  — HTMLTimeElement-impl.js
  HTMLTitleElement-impl.js
  HTMLTrackElement-impl.js
  HTMLUListElement-impl.js

⊢ HTMLUnknownElement-impl.js

⊢ HTMLVideoElement-impl.js

  LinkStyle-impl.js

─ Node-impl.js

 ─ NodeList-impl.js
  NonDocumentTypeChildNode-impl.js
  ─ NonElementParentNode-impl.js
  ─ ParentNode-impl.js

─ ProcessingInstruction—impl.js

  ─ SVGElement-impl.js

─ SVGGraphicsElement-impl.js

  SVGSVGElement-impl.js
  SVGTests-impl.js

─ SVGTitleElement-impl.js

 ─ ShadowRoot-impl.js
  – Slotable−impl.js

    ⊢ Text-impl.js

   WindowEventHandlers-impl.js
 └ XMLDocument-impl.js
- post−message.js
- range

    AbstractRange−impl.js

  ─ Range-impl.js
   StaticRange-impl.js
 └ boundary-point.js
selection
 └ Selection-impl.js
- svg
 – SVGListBase₊js
   - SVGNumber-impl.js
 └─ SVGStringList-impl.js
– traversal

─ NodeIterator-impl.js

   - TreeWalker-impl.js
 └ helpers.js

    websockets

 ─ WebSocket-impl-browser.js

    WebSocket−impl.js

- webstorage
 └ Storage-impl.js
window
  BarProp-impl.js
  External-impl.js
  History-impl.js
```

```
Location-impl.js
               Screen-impl.js
               SessionHistory.js
             └ navigation.js
          ∟ xhr
             ├─ FormData-impl.js

— XMLHttpRequest−impl.js

               XMLHttpRequestEventTarget-impl.js
              XMLHttpRequestUpload-impl.js
              — xhr-sync-worker₌js
             └ xhr-utils.js
         named-properties-tracker.js
        – utils.js
         - virtual-console.js
       └ vm-shim.js
  node modules
     — acorn

    escodegen

       ∟ esgenerate
      - WS
        LICENSE
        README.md
         – browser₌js
         – index.js
         - lib
          buffer-util.js
           – constants.js
           — event-target.js
           — extension.js
           — limiter.js
           — permessage-deflate.js
           – receiver.js
           — sender⊾js
           — stream.js
          ─ validation.js
            - websocket-server₌js
          └ websocket.js
         - package.json
 └ package.json
- isesc
  — LICENSE-MIT.txt
  README.md
  — bin
    └ jsesc
  ⊢ jsesc.js
  — man
    └ jsesc.1
 └ package.json
json-parse-even-better-errors
  CHANGELOG.md
   - LICENSE.md
  README.md
   - index.js
```

```
└ package.json
 ison-schema
  LICENSE
  README.md
  — lib

⊢ links.js

    └ validate.js
 └ package.json
- json-schema-traverse

        ⊢ .eslintrc.yml

  travis.yml
  — LICENSE
  README.md
  — index.js
   - package.json
 ∟ spec
    ⊢ .eslintrc.yml
     — fixtures
       └ schema.js
    └ index.spec.js

    json-stable-stringify-without-jsonify

  - _npmignore
  LICENSE
  – example

    key_cmp₁js

     nested.js
     — str.js
    └ value_cmp.js
  - index.js
  — package.json
   - readme.markdown
 └ test
     ⊢ cmp.js
     — nested.js
     — replacer.js
     — space.js
     – str.js
     └ to-json.js
- json5
  — LICENSE.md
  README.md
  — dist
    index.js

    index.min.js

    index.min.mjs
    index.mjs

   - lib
     ⊢ cli.js
     — index.d.ts
      - index.js
      - parse.d.ts
      – parse₊js
      - register.js
```

```
– require.js
     - stringify.d.ts
     — stringify.js
     unicode.d.ts
     — unicode.js
     - util.d.ts
    └ util.js
 └ package.json

    isonfile

— CHANGELOG.md

   - LICENSE
  README.md
  - index.js
   - package.json
 └ utils.js
- jsonpointer
 LICENSE.md
  README.md
  — jsonpointer.d.ts
  – jsonpointer⊾js
 └ package.json
- įsx—ast—utils
  ⊢ .babelrc
  - .eslintignore
  eslintrc
   - .github
   └ FUNDING.yml
  CHANGELOG.md
  LICENSE.md
  README.md
    tests
     — helper.js
    ∟ src

— elementType−test.js

        eventHandlers-test.js
        - getProp-parser-test.js
        – getProp−test.js
         getPropLiteralValue-babelparser-test.js
        getPropLiteralValue-flowparser-test.js
         getPropValue-babelparser-test.js
        - getPropValue-flowparser-test.js
        — hasProp-test₁js
        — index-test.js
       └ propName-test.js

— elementType.js

 — eventHandlers.js
 ─ eventHandlersByType.js
  getLiteralPropValue.js
  — getProp.js

— getPropValue.js


  – hasAnyProp.js
   – hasEveryProp.js
  – hasProp₊js
  – lib
```


```
- elementType.js
    eventHandlers.js
    – getProp⊾js
    – getPropValue.js
    – hasProp.js
    - index.js
    propName.js
    - values
      — JSXElement.js
       - JSXFragment.js
       - JSXText.js
       - Literal.js
       - expressions
         ─ ArrayExpression.js
          AssignmentExpression.js
          BinaryExpression.js
         — BindExpression.js
         CallExpression.js
         ChainExpression.js
         ConditionalExpression.js
         FunctionExpression.js
         Identifier.js
         LogicalExpression.js
         — MemberExpression.js
         NewExpression.js
         ObjectExpression.js
         OptionalCallExpression.js
          OptionalMemberExpression.js
          SequenceExpression.js
          SpreadElement.js
         TSNonNullExpression.js
         TaggedTemplateExpression.js
         TemplateLiteral.js
          ThisExpression.js
          TypeCastExpression.js
         UnaryExpression₁js
          UpdateExpression.js
         └ index.js
       - index.js
 – package⊾json
 - propName.js
∟ src

— elementType.js

   eventHandlers.js
    – getProp.js
    – getPropValue.js
    – hasProp₊js
    - index.js
    - propName.js
    - values
      — JSXElement.js
       - JSXFragment.js
       JSXText.js
       Literal.js
```



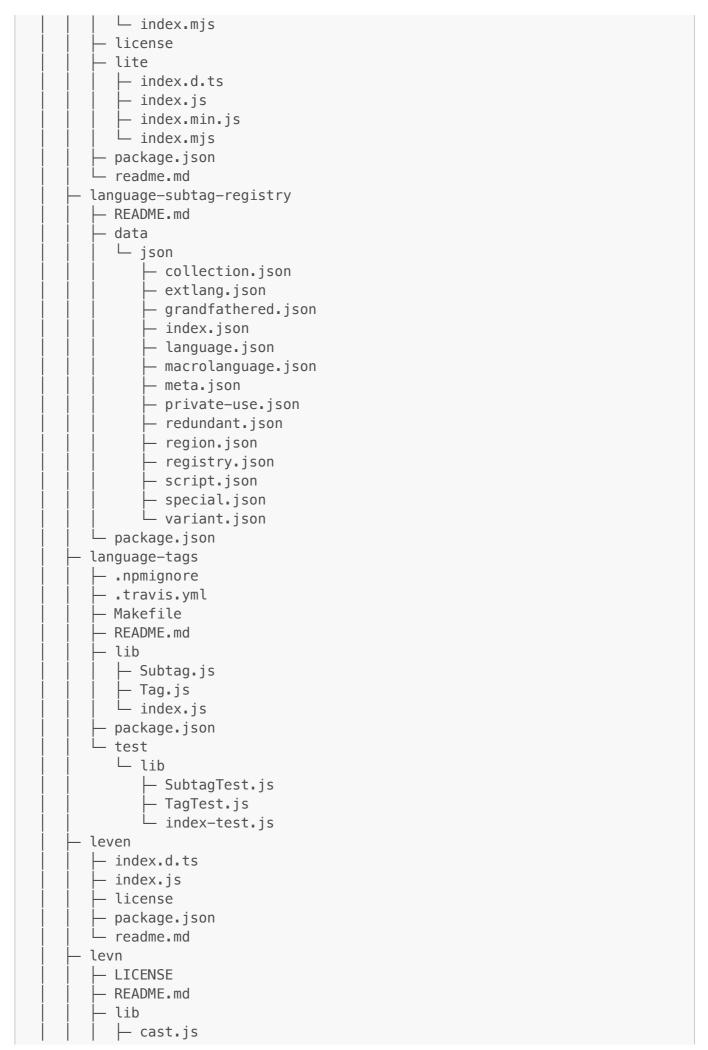

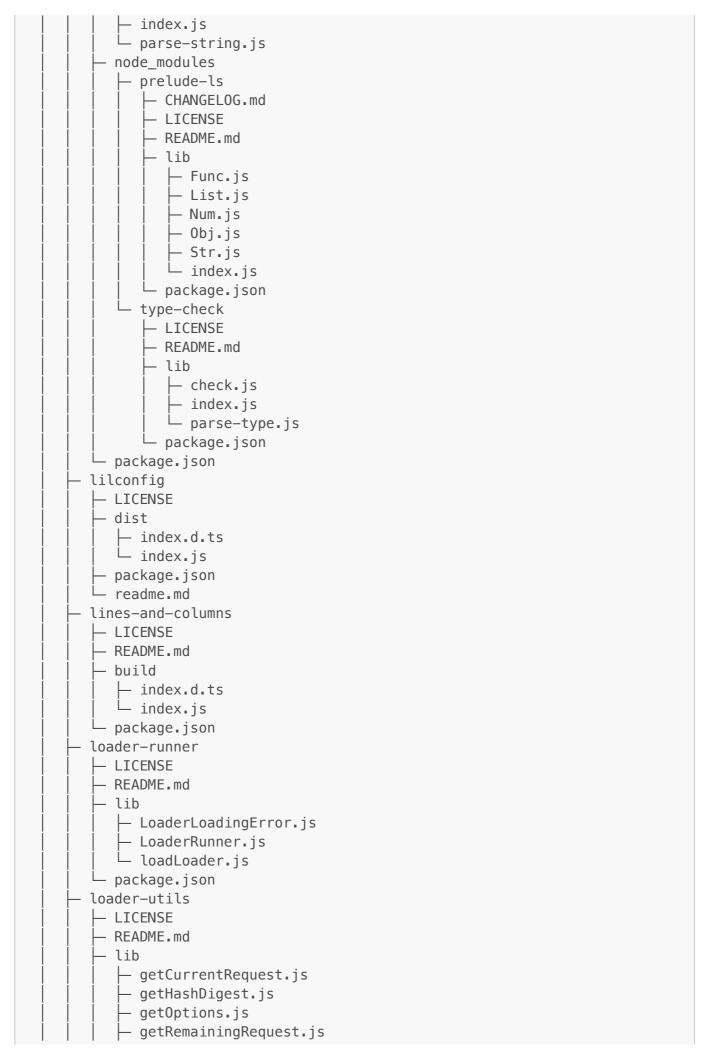

```
hash
        BatchedHash.js
         - md4.js
       └ wasm-hash.js
      - index.js
      interpolateName.js
      - isUrlRequest.js
     — parseQuery₁js
     – parseString.js
      stringifyRequest.js
    └ urlToRequest.js
  node_modules
    └ .bin
       └ json5
 └ package.json

    locate-path

  index.d.ts
  - index.js
  – license
  – package.json
 └ readme.md
lodash
  ├ LICENSE
  README.md
  – _DataView.js
   - _Hash.js
  – _LazyWrapper₌js
   - _ListCache.js
   -_LodashWrapper.js
   - _Map₊js
   - _MapCache.js
  - _Promise.js
  – _Set.js
  - _SetCache.js
  – _Stack.js
  - _Symbol.js
   - _Uint8Array.js
   -_WeakMap₊js
   - _apply.js
   - _arrayAggregator.js
  – _arrayEach.js
   _arrayEachRight.js
  – _arrayEvery⊾js
  – _arrayFilter.js
  _arrayIncludes.js
  _arrayIncludesWith.js
   -_arrayLikeKeys.js
  – _arrayMap.js
  _arrayPush.js
  – _arrayReduce.js
  _arrayReduceRight.js
   _arraySample.js
   - _arraySampleSize.js
   - _arrayShuffle.js
```

```
_arraySome.js
 asciiSize.js
 _asciiToArray.js
 _asciiWords.js
 assignMergeValue.js
 _assignValue.js
 _assocIndexOf.js
 _baseAggregator.js
 _baseAssign.js
 _baseAssignIn.js
- _baseAssignValue.js
 _baseAt.js
- _baseClamp.js
- _baseClone.js
- _baseConforms.js
 _baseConformsTo.js
 _baseCreate.js
 _baseDelay.js
baseDifference.js
 _baseEach.js
 _baseEachRight.js
- _baseEvery.js
 _baseExtremum.js
- _baseFill.js
 _baseFilter.js
_baseFindIndex.js
 _baseFindKey.js
baseFlatten.js
 _baseFor.js
- _baseForOwn.js
 baseForOwnRight.js
_baseForRight.js
_baseFunctions.js
– _baseGet.js
_baseGetAllKeys.js
 _baseGetTag.js
– _baseGt₊js
_baseHas.js
- _baseHasIn.js
- _baseInRange.js
- _baseIndexOf.js
 _baseIndexOfWith.js
_baseIntersection.js
- _baseInverter.js
- _baseInvoke.js
_baseIsArguments.js
 _baseIsArrayBuffer.js
- _baseIsDate.js
 _baseIsEqual.js
– _baseIsEqualDeep₊js
 _baseIsMap.js
- _baseIsMatch.js
 _baseIsNaN.js
 _baseIsNative.js
```

```
_baseIsRegExp.js
 baseIsSet.js
 _baseIsTypedArray.js
- _baseIteratee.js
 baseKeys.js
 _baseKeysIn.js
 _baseLodash.js
baseLt.js
- _baseMap₊js
 _baseMatches.js
_baseMatchesProperty.js
 _baseMean.js
- _baseMerge.js
- _baseMergeDeep.js
baseNth.js
 _baseOrderBy.js
- _basePick.js
_basePickBy.js
_baseProperty.js
_basePropertyDeep.js
_basePropertyOf.js
– _basePullAll.js
– _basePullAt.js
– _baseRandom.js
- _baseRange₊js
– _baseReduce₊js
_baseRepeat.js
- _baseRest.js
_baseSample.js
_baseSampleSize.js
_baseSet.js
- _baseSetData.js
_baseSetToString.js
_baseShuffle.js
- _baseSlice.js
– _baseSome.js
_baseSortBy.js
_baseSortedIndex.js
_baseSortedIndexBy.js
_baseSortedUniq.js
– _baseSum₊js
_baseTimes.js
_baseToNumber.js
– _baseToPairs.js
- _baseToString.js
- _baseTrim.js
_baseUnary.js
_baseUniq.js
_baseUnset.js
– _baseUpdate₊js
- _baseValues.js
_baseWhile.js
 _baseWrapperValue.js
- _baseXor.js
```

```
_baseZipObject.js
- cacheHas.js
 _castArrayLikeObject.js
_castFunction.js
castPath.js
castRest.js
_castSlice.js
charsEndIndex.js
_charsStartIndex.js
 _cloneArrayBuffer.js
_cloneBuffer.js
- _cloneDataView.js
– _cloneRegExp.js
– _cloneSymbol₊js
_cloneTypedArray.js
_compareAscending.js
- _compareMultiple.js
_composeArgs.js
_composeArgsRight.js
– _copyArray.js
- _copyObject.js
_copySymbols.js
- _copySymbolsIn.js
_coreJsData.js
_countHolders.js
- _createAggregator.js
– _createAssigner.js
_createBaseEach.js
- _createBaseFor.js
_createBind.js
_createCaseFirst.js
– _createCompounder₊js
_createCtor.js
— _createCurry.js
_createFind.js
— _createFlow.js
– _createHybrid.js
-_createInverter.js
_createMathOperation.js
- _createOver.js
_createPadding.js
_createPartial.js
– _createRange.js
_createRecurry.js
_createRelationalOperation.js
- _createRound.js
-_createSet.js
_createToPairs.js
— _createWrap.js
— _customDefaultsAssignIn.js
- _customDefaultsMerge.js
_customOmitClone.js
- _deburrLetter.js
_defineProperty.js
```

```
_equalArrays.js
- _equalByTag.js
 _equalObjects.js
- _escapeHtmlChar.js
 escapeStringChar.js
 flatRest.js
 _freeGlobal.js
_getAllKeys.js
- _getAllKeysIn.js
 _getData.js
_getFuncName.js
_getHolder.js
– _getMapData.js
_getMatchData.js
_getNative.js
 _getPrototype.js
– _getRawTag₊js
- _getSymbols.js
- _getSymbolsIn.js
- _getTag.js
_getValue.js
- _getView.js
_getWrapDetails.js
- _hasPath.js
 _hasUnicode.js
_hasUnicodeWord.js
 _hashClear.js

    hashDelete.js

 _hashGet.js
- _hashHas.js
 hashSet.js
- _initCloneArray.js
_initCloneByTag.js
_initCloneObject.js
_insertWrapDetails.js
 _isFlattenable.js
- _isIndex.js
_isIterateeCall.js
- _isKey.js
-_isKeyable.js
- _isLaziable.js
 _isMaskable.js
- _isMasked.js
_isPrototype.js
_isStrictComparable.js
– _iteratorToArray.js
 _lazyClone.js
_lazyReverse.js
 _lazyValue.js
_listCacheClear.js
-_listCacheDelete.js
_listCacheGet.js
 _listCacheHas.js
 _listCacheSet.js
```

```
_mapCacheClear.js
 mapCacheDelete.js
 _mapCacheGet.js
– _mapCacheHas₊js
 mapCacheSet.js
 _mapToArray.js
- _matchesStrictComparable.js
_memoizeCapped.js
- _mergeData.js
 _metaMap.js
- _nativeCreate.js
_nativeKeys.js
– _nativeKeysIn.js
- _nodeUtil.js
- _objectToString.js
 _overArg.js
- _overRest.js
- _parent.js
- _reEscape.js
– _reEvaluate.js
- _reInterpolate.js
- _realNames.js
- _reorder⊾js
_replaceHolders.js
-_root.js
- _safeGet.js
-_setCacheAdd.js
- _setCacheHas.js
- _setData.js
– _setToArray.js
setToPairs.js
_setToString.js
_setWrapToString.js
– _shortOut.js
_shuffleSelf.js
– _stackClear.js
_stackDelete.js
_stackGet.js
- _stackHas.js
- _stackSet.js
- _strictIndexOf.js
_strictLastIndexOf.js
– _stringSize.js
- _stringToArray.js
_stringToPath.js
– _toKey.js
-_toSource.js
_trimmedEndIndex.js
_unescapeHtmlChar.js
– _unicodeSize.js
- _unicodeToArray.js
- _unicodeWords.js
- _updateWrapDetails.js
- _wrapperClone.js
```

```
– add.js
 – after.js
 – array⊾js
– ary₌js
— assign.js
— assignIn.js
 assignInWith.js
— assignWith.js
— at.js
— attempt.js
– before.js
─ bind.js
— bindAll.js

→ bindKey.js

 - camelCase.js
— capitalize.js
— castArray.js
— ceil.js
— chain.js
— chunk.js
— clamp.js
— clone.js

— cloneDeep.js

─ cloneDeepWith.js

— cloneWith.js

 collection.js
├ commit.js
— compact.js
— concat.js
— cond.js

    ─ conforms.js

— conformsTo.js
— constant.js
— core.js
core.min.js

    — countBy₁js

— create.js

⊢ curry.js

⊢ curryRight.js
— date.js
— debounce.js
⊢ deburr.js
─ defaultTo.js
─ defaults.js
— defaultsDeep.js
— defer.js
— delay.js

    difference.js

— differenceBy₁js

─ differenceWith.js
— divide.js
 - drop.js
 – dropRight.js
 - dropRightWhile.js
```

```
– dropWhile.js
– each.js
– eachRight.js
— endsWith.js
— entries.js
— entriesIn.js
– eq.js
— escape₊js
— escapeRegExp.js
— every.js
extend.js
– extendWith.js
fill.js
— filter.js
 - find.js
— findIndex.js

─ findKey.js

— findLast.js
- findLastIndex.js
— findLastKey.js
– first.js
 flake.lock
– flake.nix
– flatMap₊js
– flatMapDeep.js
 flatMapDepth.js
 - flatten.js
flattenDeep.js
 flattenDepth.js
– flip.js
– floor.js
— flow.js
– flowRight.js
– forEach.js
forEachRight.js
 - forIn.js
 - forInRight.js
 - forOwn.js
 forOwnRight.js
 - fp
   ⊢ F.js
   — T.js
   – <u>   </u>js
    - _baseConvert.js
    _convertBrowser.js
    – _falseOptions.js
    - _mapping.js
    - _util.js
    – add.js
   — after.js
    – all.js
    - allPass.js
    – always⊾js
    - any⊾js
```

```
anyPass.js
 - apply.js
 - array⊾js
– ary⊾js
– assign.js
— assignAll.js
assignAllWith.js
— assignIn.js
— assignInAll.js
— assignInAllWith.js
assignInWith.js
— assignWith.js
— assoc.js
— assocPath.js
— at.js
— attempt.js
— before.js
— bind.js
bindAll.js
— bindKey.js
camelCase.js
— capitalize.js
— castArray.js
— ceil.js
— chain.js
chunk.js
— clamp.js
— clone.js
— cloneDeep.js
cloneDeepWith.js
— cloneWith.js
— collection.js
commit.js
— compact.js
— complement.js
— compose.js
— concat.js
— cond.js
— conforms.js
— conformsTo.js
constant.js
— contains.js
— convert.js
– countBy₌js
– create.js
⊢ curry.js
– curryN.js
– curryRight.js
curryRightN.js
— date.js
debounce.js
– deburr⊾js
— defaultTo.js
- defaults.js
```

```
defaultsAll.js
defaultsDeep.js
— defaultsDeepAll.js
— defer.js
— delay₊js
— difference.js
— differenceBy.js
— differenceWith.js
— dissoc.js
— dissocPath.js
– divide.js
— drop.js
— dropLast.js
— dropLastWhile.js
— dropRight.js
dropRightWhile.js
— dropWhile.js
— each.js
— eachRight.js
— endsWith.js
— entries.js
– entriesIn.js
– eq.js
— equals.js
– escape.js
escapeRegExp.js
— every.js
— extend.js
— extendAll.js
extendAllWith.js
— extendWith.js
— fill.js
– filter.js
— find.js
- findFrom.js
- findIndex.js
– findIndexFrom.js
– findKey.js
– findLast.js
— findLastFrom.js
— findLastIndex.js
— findLastIndexFrom.js
— findLastKey.js
– first.js
– flatMap₊js
– flatMapDeep.js
flatMapDepth.js
- flatten.js
flattenDeep.js
flattenDepth.js
 - flip.js
 - floor.js
- flow.js
 - flowRight.js
```

```
forEach.js
 forEachRight.js
 - forIn.js
- forInRight.js
- forOwn.js
forOwnRight.js
 - fromPairs.js
 function.js
 - functions.js
 - functionsIn.js
– get.js
– get0r.js
— groupBy₌js
– gt.js
– gte⊾js
– has₊js
— hasIn.js
— head₁is
identical.js
identity.js
— inRange.js
includes.js
includesFrom.js
— indexBy₊js
 - indexOf.js
 - indexOfFrom.js
— init.js
— initial.js
– intersection.js
intersectionBy.js
intersectionWith.js
- invert.js
invertBy.js
— invertObj.js
— invoke.js
⊢ invokeArgs.js
— invokeArgsMap₊js
— invokeMap.js
— isArguments.js
– isArray.js
— isArrayBuffer₁js
— isArrayLike.js
— isArrayLikeObject.js
isBoolean.js
— isBuffer.js
— isDate.js
– isElement.js
— isEmpty.js
– isEqual.js
— isEqualWith.js
 - isError⊾js
 - isFinite.js
 - isFunction.js
 - isInteger.js
```

```
isLength.js
- isMap.js
- isMatch.js
- isMatchWith.js
isNaN.js
isNative.js
- isNil.js
isNull.js
– isNumber.js
— isObject.js
— isObjectLike.js
— isPlainObject.js
— isRegExp.js
– isSafeInteger₊js
- isSet.js
— isString.js
— isSymbol.js
— isTypedArray₊įs
— isUndefined.js
— isWeakMap₊js
isWeakSet.js
- iteratee.js
— join.js
— juxt.js
- kebabCase.js
— keyBy.js
— keys.js
– keysIn.js
- lang.js
— last.js
— lastIndexOf.js
— lastIndexOfFrom.js
- lowerCase.js
— lowerFirst.js
- lt.js
- lte.js
— map₊js
— mapKeys.js
— mapValues.js
— matches.js
matchesProperty.js
— math.js
— max.js
— maxBy₊js
— mean.js
— meanBy₊js
– memoize.js
– merge₌js
— mergeAll.js
— mergeAllWith.js
- mergeWith.js
- method.js
— methodOf.js
- min.js
```

```
– minBy.js
– mixin.js
- multiply.js
— nAry₊js
— negate.js
— next.js
– noop⊾js
— now.js
— nth.js
— nthArg.js
— number.js
— object.js
— omit.js
— omitAll.js
— omitBy.js
— once.js
— orderBy₊js
— over.js
— overArgs⊾js
— overEvery.js
— overSome₌js
— pad.js
– padChars.js
– padCharsEnd.js
- padCharsStart.js
– padEnd.js
padStart.js
– parseInt.js
– partial.js
— partialRight.js
— partition.js
— path.js
– pathEq.js
— pathOr.js
– paths.js
– pick.js
pickAll.js
– pickBy.js
— pipe.js
placeholder.js
– plant.js
– pluck.js
— prop₊js
– propEq.js
– prop0r⊾js
— property.js
- propertyOf.js
– props.js
– pull.js
— pullAll.js
 - pullAllBy.js
pullAllWith.js
– pullAt.js
- random₁js
```

```
– range.js
 rangeRight.js
rangeStep.js
— rangeStepRight.js
— rearg.įs
— reduce.js
reduceRight.js
— reject.js
— remove.js
— repeat.js
— replace.js
— rest.js
— restFrom.js
— result.js
— reverse.js
— round.js
— sample.js
— sampleSize.js
— seq.js
— set.js
setWith.js
shuffle.js
— size.js
— slice.js
— snakeCase.js
— some.js
— sortBy₊js
— sortedIndex.js
— sortedIndexBy.js
— sortedIndexOf.js
— sortedLastIndex.js
⊢ sortedLastIndexBy₊js
— sortedLastIndexOf.js
— sortedUniq.js

— sortedUniqBy₁js

— split.js
— spread.js
— spreadFrom₊js
— startCase.js
— startsWith.js
— string.js
— stubArray.js
— stubFalse.js
— stubObject.js
— stubString.js
— stubTrue.js
subtract.js
— sum.js
— sumBy₌js
symmetricDifference.js
symmetricDifferenceBy.js
symmetricDifferenceWith.js
– tail.js
- take.js
```

```
takeLast.js
 takeLastWhile.js
 takeRight.js
takeRightWhile.js
takeWhile.js
– tap.js
 - template.js
templateSettings.js
 - throttle.js
– thru.js
– times.js
– toArray⊾js
— toFinite.js
– toInteger.js
 - toIterator.js
— toJSON.js
— toLength.js
– toLower.js
– toNumber₊js
— toPairs.js
— toPairsIn.js
— toPath.js
– toPlainObject.js
— toSafeInteger.js
toString.js
 - toUpper.js
— transform.js
— trim.js
trimChars.js
— trimCharsEnd.js
— trimCharsStart.js
 - trimEnd.js
– trimStart.js
– truncate.js
— unapply.js
— unary.js
— unescape.js
— union.js
— unionBy.js
— unionWith.js
— uniq.js
— uniqBy.js
— uniqWith.js
uniqueId.js
– unnest.js
— unset.js
– unzip.js
– unzipWith.js
– update.js
— updateWith.js
- upperCase.js
- upperFirst.js
— useWith.js
– util.js
```

```
- value.js
    - valueOf.js
    - values.js
    – valuesIn.js
    where is
    – whereEq.js
    – without.js
    — words.js
   — wrap.js
    – wrapperAt.js
    wrapperChain.js
    wrapperLodash.js
   — wrapperReverse.js
    – wrapperValue₊js
    – xor₊js
   — xorBy.js
   — xorWith.js
   — zip.js
   — zipAll.js
   — zipObj.js
   — zipObject.js
    - zipObjectDeep.js
   └ zipWith.js
 – fp.js
 – fromPairs.js
 - function.js
 functions.js
 functionsIn.js
 – get.js
 – groupBy⊾js
– qt.js
— gte.js
– has.js
— hasIn.js
─ head.js

    identity.js

— inRange₊js
includes.js
— index.js
index0f₁js
— initial.js

    intersection.js

─ intersectionBy.js

─ intersectionWith.js
invert.js
— invertBy.js
— invoke.js
invokeMap.js

    isArguments.js

— isArray₊js
 isArrayBuffer.js
 - isArrayLike.js
 - isArrayLikeObject.js
 - isBoolean.js
```

```
- isBuffer.js
 - isDate.js
 isElement.js
– isEmpty.js
– isEqual.js
– isEqualWith.js
– isError.js
 – isFinite.js
 - isFunction.js
– isInteger⊾js
- isLength.js
– isMap₊js
— isMatch.js
— isMatchWith.js
 – isNaN.js
 – isNative.js
— isNil.js
isNull.js
– isNumber₊js

— isObject.js

— is0bjectLike.js
 isPlainObject.js
— isRegExp.js
– isSafeInteger.js
— isSet.js
– isString.js

─ isSymbol.js

— isTypedArray.js
 isUndefined.js
— isWeakMap₊js
— isWeakSet₊įs
— iteratee.js
– join.js
— kebabCase.js
— keyBy.js
— keys₊js
– keysIn.js
– lang₊js
– last.js
 - lastIndexOf.js
lodash.js
- lodash.min.js
⊢ lowerCase.js
— lowerFirst.js
– lt.js
⊢ lte.js
— map₊js
— mapKeys₊js
— mapValues.js
— matches₊js
matchesProperty.js
 – math.js
– max₌js
 – maxBy₊js
```

```
– mean.js
 – meanBy₊js
– memoize.js
— merge.js
— mergeWith.js
— method.js
— methodOf.js
— min.js
— minBy.js
⊢ mixin.js

    multiply.js

— negate.js
— next.js
— noop.js
— now₌js
— nth.js
— nthArg.js
─ number.js
— object.js
— omit.js
├ omitBy.js
— once.js
⊢ orderBy.js
— over.js
— overArgs.js
— overEvery.js
— overSome.js
— package.json
 – pad.js
— padEnd.js
— padStart.js
— parseInt.js
partial.js
— partialRight.js
— partition.js
– pick.js
– pickBy.js
 – plant.js
– property.js
 – propertyOf⊾js
– pull.js
pullAll.js
— pullAllBy.js
— pullAllWith.js
— pullAt.js
— random₊js
— range.js
rangeRight.js
⊢ rearg.js
─ reduce.js
 reduceRight.js
 reject.js
 - release.md
 - remove.js
```

```
- repeat.js
 - replace.js
 - rest.js
 – result.js
 - reverse.js
– round.js
 sample.js
— sampleSize₊js
– seq.js
— set.js
setWith.js
— shuffle.js
— size.js
— slice.js
 - snakeCase.js
— some.js
⊢ sortBy.js
- sortedIndex.js
 sortedIndexBy.js

─ sortedIndexOf.js
— sortedLastIndex.js

─ sortedLastIndexBy.js

─ sortedLastIndexOf.js

─ sortedUniq.js

─ sortedUniqBy.js

– split.js

— spread.js

- startCase.js

─ startsWith.js

─ string.js

— stubArray.js

— stubFalse.js

— stubObject.js

─ stubString.js

─ stubTrue.js

— subtract.js
— sum₌js

— sumBy₁js

— tail.js
— take.js
— takeRight.js

    ─ takeRightWhile.js

─ takeWhile.js

— tap.js
— template.js

    templateSettings.js

— throttle.js
– thru.js
— times.js
— toArray.js
 - toFinite.js
 - toInteger.js
 - toIterator.js
 - toJSON.js
```

```
toLength.js
  - toLower.js
  - toNumber⊾js
  – toPairs.js
  – toPairsIn.js
 – toPath.js
  – toPlainObject.js
 — toSafeInteger.js
 — toString.js
 — toUpper.js
 – transform.js
 — trim.js
 — trimEnd.js

⊢ trimStart.js

  - truncate.js
 — unary.js
 — unescape.js
 — union.js
 unionBy.js
 — unionWith.js
 — uniq.js
 — uniqBy.js
 — uniqWith.js
 — uniqueId.js
 — unset.js
 – unzip.js
 — unzipWith.js
 — update.js
 updateWith.js
 — upperCase.js
 — upperFirst.js
 — util.js
 — value.js

— valueOf₁js

 — values.js
 — valuesIn.js
 — without.js
 ─ words.js
 — wrap.js
 — wrapperAt.js
 wrapperChain.js
 ─ wrapperLodash.js
 — wrapperReverse.js
 — wrapperValue.js
 — xor₌js

─ xorBy.js

 ⊢ xorWith.js
 — zip.js
 – zipObject.js
 – zipObjectDeep.js
 └ zipWith.js
lodash.camelcase
 LICENSE
  - README.md
```

```
- index.js
 └ package.json

    lodash.debounce

─ LICENSE

  — README.md
  — index.js
 └ package.json
lodash.memoize

    LICENSE

  — README.md
   - index.js

    package.json

- lodash.merge

─ LICENSE

  README.md
  — index.js
 └ package.json
lodash.sortby

─ LICENSE

 — README.md
  index.js
 └ package.json
lodash.uniq

─ LICENSE

  — README.md
   - index.js
 └ package.json
- long

─ LICENSE

  README.md
 ⊢ dist
    ─ long.js
    └ long.js.map
 — index.js
  — package₊json
 ∟ src
    └ long.js
loose-envify
 ─ LICENSE
  — README.md
  ⊢ cli.js

⊢ custom.js

─ index.js

 ─ loose-envify.js
  – package.json
 └ replace.js
lower-case
 README.md
  - dist
    ⊢ index.d.ts
      - index.js
     — index.js.map
      - index.spec.d.ts
```

```
- index.spec.js
    └ index.spec.js.map
  - dist.es2015
    index.d.ts
     — index.js
     index.js.map
     — index.spec.d.ts
      - index.spec.js
    └ index.spec.js.map
 └ package.json
- lru-cache
 LICENSE
  README.md
  - index.js
 └ package.json
lz-string
  LICENSE.txt
  README.md
  – bin
    └ bin.js
  — bower₌json
  - libs

    base64-string.js

     — lz-string.js
    └ lz-string.min.js
  - package.json
   - reference
    └ lz-string-1.0.2.js
   - tests

— SpecRunner.html

     – lib
       \sqsubseteq jasmine-1.3.1
           — MIT.LICENSE
           — jasmine-html.js
           - jasmine.css
          └ jasmine.js
     – lz–string–spec.js
  - typings
    └ lz-string.d.ts
magic-string

─ LICENSE

  README.md
  — dist
    — magic-string.cjs.js.map
    ─ magic-string.es.js
    magic-string.es.js.map
     magic-string.umd.js
    └ magic-string.umd.js.map
  - index.d.ts
 └ package.json
- make-dir
  index.d.ts
  - index.js
```

```
- license

    node modules

    ∟ .bin
       ∟ semver
  – package.json
 └ readme.md
- makeerror
 - lib
    └ makeerror.js

─ license

   – package.json
 └ readme.md
- mdn-data
  LICENSE
  README.md
  — api

    index.js

      - inheritance.json
    └ inheritance.schema.json
  - css

— at-rules.json

— at-rules.schema.json

     ─ definitions.json
     index.js
     — properties.json
     properties.schema.json
     — selectors.json
      selectors.schema.json
     — syntaxes.json
     — syntaxes.schema.json
     — types.json
     types.schema.json
      - units.json
    └ units.schema.json
  – index.js
   - l10n

⊢ css.json

    └ index.js
 └ package.json
- media-typer

⊢ HISTORY.md

  — LICENSE
 README.md
   - index.js
 └ package.json
- memfs

    LICENSE

  README.md
  - lib
     ─ Dirent.d.ts
     – Dirent.js
     – Stats.d.ts
      - Stats.js
```

```
- constants.d.ts
      constants.js
     — encoding.d.ts
     — encoding.js
     — getBigInt.js
     — index.d.ts
      - index.js
     internal

    buffer.d.ts

        buffer.js
         - errors.d.ts
       └ errors.js
     - node.d.ts
     — node.js
     - process.d.ts
     — process.js
     — promises.d.ts
     — promises.js
     — setImmediate.d.ts
     — setImmediate.js
     — setTimeoutUnref.d.ts
     - setTimeoutUnref.js
     — volume-localstorage.d.ts
     volume-localstorage.js
     volume.d.ts
    └ volume.js
 └ package.json
merge-descriptors
 ⊢ HISTORY.md
  LICENSE
  — README.md
  — index.js
 └ package.json
merge-stream

─ LICENSE

  README.md
   - index.js

    package.json

- merge2

─ LICENSE

  README.md
  – index.js
 └ package.json
- methods

⊢ HISTORY.md

  LICENSE
  ─ README.md
   - index.js
 └ package.json
- micromatch

    LICENSE

   - README.md
   - index.js
   - package.json
```



```
hotModuleReplacement.d.ts
        └ normalize-url.d.ts
      - index.d.ts
      - loader.d.ts
     └ utils.d.ts
- minimalistic-assert

─ LICENSE

  — index.js
  — package.json
 └ readme.md
- minimatch

    LICENSE

  README.md
   - minimatch.js
 └ package.json
- minimist
 ⊢ .eslintrc
   - .github
   └ FUNDING.yml
  - nycrc
  — CHANGELOG.md
   - LICENSE
  README.md
  – example
    └ parse.js
   - index.js
   – package.json
 └ test

→ all_bool.js

     — bool.js
     — dash.js

─ default_bool.js

     — dotted.js
     — kv_short.js
     — long.js
     — num.js
     — parse₌js
     — parse_modified.js
     — proto.js
     — short.js
     — stop_early.js
     — unknown.js
     └ whitespace.js
- mkdirp
  LICENSE
  – bin
    ⊢ cmd.js
    └ usage.txt
  — index.js
  package.json
 └ readme.markdown
- ms
  index.js
   - license.md
```

```
– package.json
 └ readme.md
- multicast-dns
 — LICENSE
  README.md
  — appveyor.yml
  ⊢ cli.js
  — example.js

— index.js

   – package.json
 └ test.js
nanoid
 README.md
  — async
    index.browser.cjs
     index.browser.js
     — index.cjs
     — index.d.ts
     — index.js
      - index.native.js
    └ package.json
  - bin
    └ nanoid.cjs
  - index.browser.cjs

─ index.browser.js

  — index.cjs
  index.d.ts
  — index.js
  — nanoid.js
  — non-secure
    — index.cjs
     — index.d.ts
     – index.js
    └ package.json
   – package.json
 └ url-alphabet
    index.cjs
      - index.js

    package.json

natural-compare

— README.md

   - index.js
 └ package.json
- natural-compare-lite
 ─ README.md
   - index.js

    package.json

    negotiator

⊢ HISTORY.md

   - LICENSE
  README.md
   - index.js
```

```
lib
    — charset.js
    — encoding.js
     - language.js
    └ mediaType.js
 └ package.json
- neo-async
 README.md
 ⊢ all.js

— allLimit.js

 — allSeries.js
 — angelFall.js
 — any.js
  — anyLimit.js
 — anySeries.js
 — apply.js
 — applyEach.js
 applyEachSeries.js

— async.js

 — async.min.js
  — asyncify.js
 — auto.js
 — autoInject.js

— cargo₁js

  — compose.js
 — concat.js
 — concatLimit.js
  – concatSeries.js
 — constant.js

⊢ createLogger.js

 — detect.js
 — detectLimit.js
 ─ detectSeries.js
 ⊢ dir.js
 ─ doDuring.js
 ⊢ doUntil.js

─ doWhilst.js

 ─ during.js
 — each.js
 — eachLimit.js

⊢ eachOf.js

— eachOfLimit.js

 ─ eachOfSeries.js
 — eachSeries.js
 ─ ensureAsync.js
 — every.js
  — everyLimit.js
 — everySeries.js
 — fast.js
  - filter.js
  - filterLimit.js
  - filterSeries.js
  - find.js
```

```
findLimit.js
 findSeries.js
 - foldl.js
– foldr.js
forEach.js
 forEachLimit.js
 - forEachOf₊js
 forEachOfLimit.js
 forEachOfSeries.js
 forEachSeries.js
 – forever₌js
– groupBy⊾js
— groupByLimit.js
— groupBySeries.js
 - inject.js
 - iterator.js
— log.js
— map₊js
— mapLimit.js
— mapSeries.js
— mapValues.js
— mapValuesLimit.js
— mapValuesSeries.js
— memoize.js
— nextTick.js
— omit.js
— omitLimit.js
— omitSeries.js
 – package.json
— parallel.js
– parallelLimit.js
— pick.js
– pickLimit.js
— pickSeries.js
— priorityQueue.js
— queue.js
– race.js
– reduce.js
— reduceRight₁js
 – reflect.js
reflectAll.js
⊢ reject.js

⊢ rejectLimit.js

– rejectSeries.js
– retry.js
— retryable.js
— safe.js
– select.js
— selectLimit.js
⊢ selectSeries.js
 - seq.js
 – series.js
 - setImmediate.js
 - some.js
```

```
- someLimit.js
  - someSeries.js
  — sortBy₊js
  — sortByLimit.js
 — sortBySeries.js
  — timeout.js
  – times.js
  — timesLimit.js

─ timesSeries.js

 — transform.js

─ transformLimit.js

─ transformSeries.js

 — tryEach.js
 — unmemoize.js
  – until.js
  waterfall.js
  — whilst.js
 └ wrapSync.js
- no-case
 README.md
  - dist

⊢ index.d.ts

     — index.js

─ index.js.map

     — index.spec.d.ts
      - index.spec.js
    └ index.spec.js.map
  - dist.es2015
    index.d.ts
     — index.js
    index.js.map
    index.spec.d.ts
      - index.spec.js
    └ index.spec.js.map
  – package.json
node-fetch

    LICENSE.md

  README.md
  — browser⊾js
  – lib

─ index.es.js

     — index.js
    └ index.mjs
  node_modules

⊢ tr46

        – index.js
        - lib
          ⊢ .gitkeep
          └ mappingTable.json
        – package.json
      webidl-conversions
        - LICENSE.md
```

```
- README.md
          lib
           └ index.js

    package.json

      - whatwg-url
        — LICENSE.txt
         - README.md
         - lib
           ─ URL-impl.js
           ├ URL.js

— public-api.js

            - url-state-machine.js
           └ utils.js
         - package.json
 └ package.json
- node-forge
 ─ CHANGELOG.md
  LICENSE
  README.md
  — dist
    ├ forge.all.min.js
     forge.all.min.js.map
     — forge.min.js
     ├ forge.min.js.map
     - prime.worker.min.js
    └ prime.worker.min.js.map
   - flash
     ─ README.md
     — package.json
    L swf

    □ SocketPool.swf

  – lib
     ⊢ aes.js
     — aesCipherSuites.js
     — asn1-validator.js
     — asn1.js
     — baseN.js
     — cipher.js
     _ cipherModes.js
     — des.js
     — ed25519.js
     — forge.js
     — form.js
     — hmac.js
     — http.js
     — index.all.js
     — index.js
      – jsbn.js
      – kem.js
     — log.js
     - md.all.js
      – md.js
     — md5.js
      – mgf.js
```

```
– mgf1.js
      - oids.js
      - pbe.js
     – pbkdf2.js
     – pem₊js
     – pkcs1.js
     – pkcs12.js
     – pkcs7.js
     – pkcs7asn1.js
     – pki.js
     – prime.js
     – prime.worker.js
     — prng.js
     — pss.js
     – random.js
     — rc2.js
     — rsa.js
     — sha1.js
     — sha256.js
     — sha512.js
     — socket.js
     — ssh.js
     — tls.js
     — tlssocket.js
     — util.js
     - x509.js
    ∟ xhr.js
 └ package.json
- node-int64

─ Int64.js

  LICENSE
 — README.md
  – package.json
 └ test.js
- node-releases
  LICENSE
  README.md
  – data
     processed
       └ envs.json
    └ release-schedule
       └ release-schedule.json
 └ package json
- normalize-path
 — README.md
   - index.js
 └ package.json
normalize-range

— index.js

   - license
   – package⊾json
   - readme.md
```

```
normalize-url

─ index.d.ts

   - index.js
  — license
  — package.json
 └ readme.md
- npm-run-path
 index.d.ts
  - index.js
 ─ license
  package.json
 └ readme.md
- nth-check
 - README.md
  — lib

    ─ compile.d.ts

     compile.d.ts.map
     — compile.js
     — compile.js.map
     — esm
        - compile.d.ts

    ─ compile.d.ts.map

        — compile.js
        — compile.js.map
        - index.d.ts
        — index.d.ts.map
        - index.js
        - index.js.map
        — package.json
        - parse.d.ts
        — parse.d.ts.map
         – parse.js
       └ parse.js.map
      - index.d.ts
     - index.d.ts.map
     — index.js
     — index.js.map
     - parse.d.ts
     — parse.d.ts.map
      – parse.js
    └ parse.js.map
 └ package.json
– nwsapi
  LICENSE
  README.md
  — dist
    └ lint.log
  — package.json
 L src
     ─ modules
         – nwsapi−jquery.js
       └ nwsapi-traversal.js
      – nwsapi⊾js
```

```
object-assign
  index.js
  – license
  - package.json
 └ readme.md
object-hash

─ LICENSE

  – dist
   └ object_hash.js
  index.js
   package.json
 └ readme.markdown
- object-inspect
 _ .eslintrc
   - .github
   └ FUNDING.yml
  — .nycrc
  CHANGELOG.md
  LICENSE
  — example
    ⊢ all.js
     — circular.js
      - fn.js
    inspect.js
  – index.js
   - package-support.json
   – package⊾json
   readme.markdown
   - test
     — bigint.js
     — browser
       └ dom.js
     — circular.js
     — deep.js
     — element.js
     — err.js
     – fakes.js
     — fn.js
     — has₊js
     — holes.js
     — indent-option.js
     inspect.js
     — lowbyte.js
     — number₌js
     — quoteStyle.js
     — toStringTag.js
     — undef.js
    └ values.js
   - test−core−js.js
 └ util.inspect.js
- object-is

    eslintignore

   - .eslintrc
   - nycrc
```

```
- CHANGELOG.md
   - LICENSE
   README.md
  — auto.js
  implementation.js
  — index.js
   – package.json
  – polyfill.js
   – shim.js
  └ test

    implementation.js

     index.js
     — shimmed.js
     └ tests.js
- object-keys

    ⊢ .editorconfig

  eslintrc
  - .travis.yml
  — CHANGELOG.md
  — LICENSE
  README.md
  implementation.js
  index.js
  ─ isArguments.js
   – package.json
   - test
    └ index.js
- object.assign
  - .editorconfig
  eslintrc
  _ .github
   └ FUNDING.yml
   nycrc
  — CHANGELOG.md
   LICENSE
  README.md
  — auto.js
  — dist
    ∟ browser.js

    hasSymbols.js

  implementation.js
  index.js
  — package.json

→ polyfill.js

  — shim.js
  – test

    implementation.js

     index.js
     — native.js
     — ses−compat.js
      - shimmed.js
    └ tests.js
   test.html
 object.entries
```

```
- editorconfig
   - .eslintrc
   - nycrc
  CHANGELOG.md
  LICENSE
  README.md
  — auto.js
  implementation.js
  index.js
  — package.json
  – polyfill.js
   - shim.js
 └ test
     ⊢ .eslintrc
     implementation.js
     — index.js
     — shimmed.js
    └ tests.js
object.fromentries
 - .editorconfig
  - .eslintrc
   - nycrc
  — CHANGELOG.md
  LICENSE
  — README.md
  — auto.js

    implementation.js

  — index.js
  — package.json
  — polyfill.js
 ⊢ shim.js
 ∟ test

    implementation.js

     — index.js
     – shimmed.js
    └ tests.js
object.getownpropertydescriptors

    ⊢ .editorconfig

  eslintrc
  ⊢ .nycrc
  — CHANGELOG.md
  — LICENSE
  ─ README.md
 — auto.js
  implementation.js

— index.js

  — package.json
  – polyfill.js
   - shim.js
 L test

    implementation.js

     — index.js
      - shimmed.js
     └ tests.js
```

```
- object.hasown
  .github
    └ FUNDING.yml
  nycrc
  CHANGELOG.md
  LICENSE
  README.md
  — auto.js
  implementation.js
  — index.js
  — index.mjs
  package.json
  — polyfill.js
   - shim.js
 ∟ test

    implementation.js

     index.js
     ∟ index.mjs
     — shimmed.js
    └ tests.js
object.values
 ⊢ .editorconfig
  eslintrc
   - nycrc
  CHANGELOG.md
  LICENSE
  README.md
  — auto.js
  implementation.js

⊢ index.js

  — package.json
  — polyfill.js
 ⊢ shim.js
 ∟ test
    ⊢ .eslintrc
     — implementation.js
     — index.js
     — shimmed.js
    └ tests.js
obuf

─ LICENSE


  README.md

— index.js

  — package.json
 L test
    └ buffer-test.js
- on-finished

⊢ HISTORY.md

  LICENSE
  — README.md
   - index.js
 └ package.json
- on-headers
```

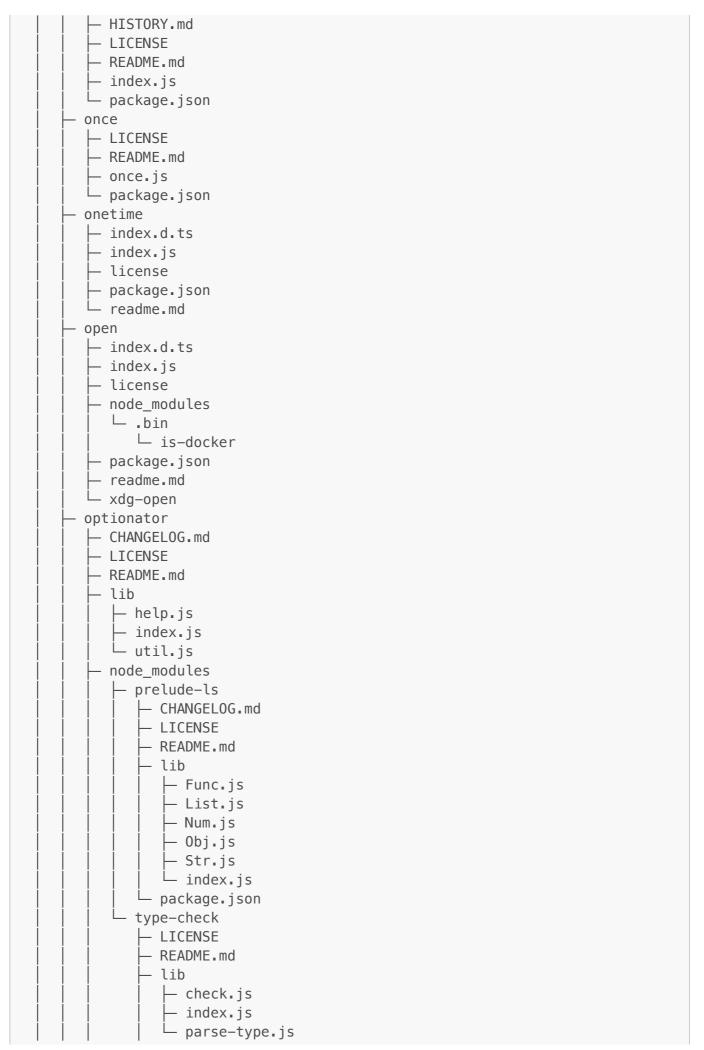

```
└ package.json
  └ package.json
- p-limit
  — index.d.ts
  — index.js
  — license
   – package.json
 └ readme.md
- p-locate
  index.d.ts
   – index.js
  ⊢ license
  - node_modules
    └ p-limit
        — index.d.ts
         – index.js
        — license
         package.json
       └ readme.md
  — package.json
  └ readme.md
- p-retry
  index.d.ts
  — index.js
  ─ license
   – package.json
 └ readme.md
- p-try
  index.d.ts
  — index.js
  ─ license
  — package.json
 └ readme.md
- param-case
  LICENSE
  README.md
   - dist

─ index.d.ts

     — index.js

─ index.js.map

     index.spec.d.ts
      - index.spec.js
    └ index.spec.js.map
   - dist.es2015
     index.d.ts
     — index.js

─ index.js.map

     index.spec.d.ts
      - index.spec.js
    └ index.spec.js.map
   – package.json
parent-module
  – index.js
   - license
```

```
package.json
 └ readme.md
- parse—json
  — index.js
 — license
  — package.json
 └ readme.md
- parse5

    LICENSE

  README.md
  - lib
    ⊢ common
        — doctype.js
        — error-codes.js
         - foreign-content.js
         – html.js
       └ unicode.js
      extensions
        — error-reporting
          ├ mixin-base.js
           — parser-mixin.js
            - preprocessor-mixin.js
          └ tokenizer-mixin.js
         - location-info
           — open-element-stack-mixin.js
            – parser–mixin₊js
          └ tokenizer-mixin.js
         position—tracking
          └ preprocessor-mixin.js
      – index.js
     - parser

─ formatting-element-list.js

         - index.js
       └ open-element-stack.js

    serializer

       └ index.js
      - tokenizer

⊢ index.js

         - named-entity-data.js
       └ preprocessor.js
      - tree-adapters
       └ default.js
      - utils
        - merge-options.js
       └ mixin.js

    package.json

parseurl
  - HISTORY.md
  LICENSE
  README.md
   index.js
 └ package.json
 pascal-case
  — LICENSE
```

```
- README.md
   - dist

⊢ index.d.ts

     — index.js
     ├ index.js.map
     index.spec.d.ts
      - index.spec.js
     └ index.spec.js.map
   - dist.es2015

⊢ index.d.ts

      - index.js
     — index.js.map
     index.spec.d.ts
      - index.spec.js
     └ index.spec.js.map
  └ package.json
path-exists
  index.d.ts
  – index.js
  — license
  — package.json
 └ readme.md

    path-is-absolute

  index.js
  — license
   - package.json
 └ readme.md
- path-key

    index.d.ts

  – index.js
  — license
  — package.json
 └ readme.md
path-parse

─ LICENSE

  README.md
   - index.js

    package.json

- path-to-regexp

⊢ History.md

  — LICENSE
  — Readme.md
  — index.js
 └ package.json
- path-type
  index.d.ts
  — index.js
  – license
   – package.json
 └ readme.md
- performance-now
   npmignore
   - .tm_properties
   - .travis.yml
```

```
README.md
   - lib

    performance-now₁js

    └ performance-now.js.map
  — license.txt
  — package.json
   - src

─ index.d.ts

    └ performance-now.coffee
 └ test
     — mocha.opts
     — performance-now.coffee
     — scripts
       ─ delayed-call.coffee
        ─ delayed-require.coffee
        — difference.coffee
        └ initial-value.coffee
      - scripts.coffee
- picocolors

─ LICENSE

  README.md
  — package.json
  — picocolors.browser.js
  ─ picocolors.d.ts
  – picocolors.js
 └ types.ts
picomatch

— CHANGELOG.md

  - LICENSE
  README.md
 index.js
  — lib

    ─ constants.js


     — parse.js

→ picomatch.js

     – scan.js
    └ utils.js
 └ package.json
- pify

─ index.js

  — license
  — package₊json
 └ readme.md
- pirates
  LICENSE
  — README.md
  index.d.ts
   - lib
   └ index.js
 └ package.json
- pkg-dir
   index.d.ts
   - index.js
   - license
```

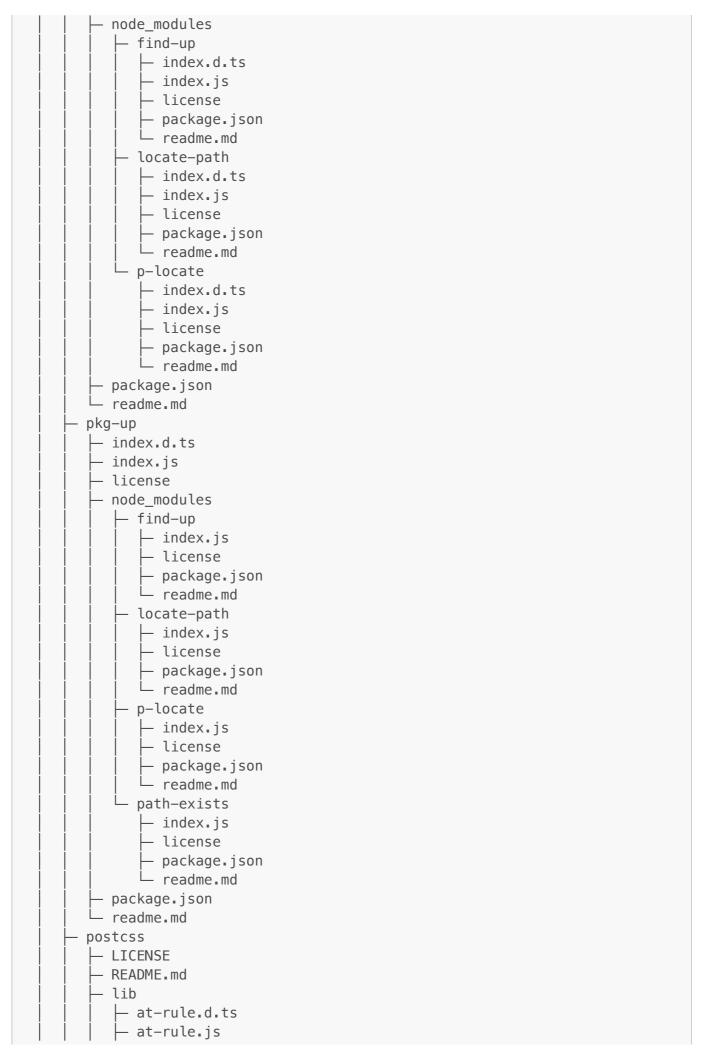

```
- comment.d.ts
    – comment.js
    — container.d.ts
    — container.js
   — css-syntax-error.d.ts
   — css-syntax-error₌js
    declaration.d.ts
    declaration.js
    — document.d.ts
    document.js
    - fromJSON.d.ts
    fromJSON.js
    — input.d.ts
    — input.js
     lazy-result.d.ts
    — lazy-result.js
    — list.d.ts
    - list.js
    — map-generator₊js
   — no-work-result.d.ts
   — no-work-result.js
    - node.d.ts
    — node.js
    - parse.d.ts
    – parse.js
    – parser₌js
    - postcss.d.ts
    – postcss.js
    - postcss.mjs
    - previous-map.d.ts
    — previous-map.js
    — processor.d.ts
    – processor₌js
    - result.d.ts
    - result.is
   root.d.ts
    — root.js
   — rule.d.ts
   — rule.js
   — stringifier.d.ts
   — stringifier.js
   — stringify.d.ts

    ¬ stringify.js

   — symbols.js
    — terminal-highlight.js
   — tokenize.js
   — warn−once.js
    - warning.d.ts
   ∟ warning.js
 - node_modules
   └ .bin
      └ nanoid

    package.json

postcss-attribute-case-insensitive
```

```
- CHANGELOG.md
   - LICENSE
  README.md
  – dist
    ⊢ index.cjs
     - index.d.ts
    └ index.mjs
 └ package.json

    postcss-browser-comments

— CHANGELOG.md

  - LICENSE.md
  — README.md
  — index.cjs
 ├ index.cjs.map
  - index.mjs

─ index.mjs.map

 mode_modules
    └ .bin
       └ browserslist

    package.json

- postcss-calc

    LICENSE

  README.md
  — package.json
  - src
     – ___tests___
         convertUnit.js
       └ index.js
      - index.js
     - lib

    ⊢ convertUnit.js

       — reducer.js
         – stringifier.js
       └ transform.js
     - parser.d.ts
      - parser.jison
      – parser.js
   types
     index.d.ts
     - lib
        convertUnit.d.ts
        reducer.d.ts
        stringifier.d.ts
       - postcss-clamp

─ INSTALL.md

  LICENSE
  README.md

— index.js

─ index.test.js

 └ package.json

    postcss-color-functional-notation

  CHANGELOG.md
  LICENSE.md
```

```
README.md
  - dist
    — index.cjs
    index.d.ts
     - index.mjs
    └ on-css-function.d.ts
 └ package.json
postcss-color-hex-alpha

    ⊢ CHANGELOG.md

  - LICENSE.md
  — README.md
  – dist

─ index.cjs

      - index.d.ts
    └ index.mjs
 └ package.json

    postcss-color-rebeccapurple

 ─ CHANGELOG.md
  LICENSE.md
  README.md
  – dist

─ index.cjs

     - index.d.ts
    └ index.mjs
 └ package.json
- postcss-colormin

    LICENSE−MIT

  - README.md
  - node_modules
    └ .bin

    browserslist

  – package.json
  - src
    — index.js
    └ minifyColor.js
 └ types
    index.d.ts
    └ minifyColor.d.ts
postcss-convert-values
  — LICENSE-MIT
  README.md
  — node_modules
    ∟ .bin

    browserslist

  — package.json
  - src
     – index.js
    └ lib
       └ convert.js
  - types
     - index.d.ts
    └ lib
       └ convert.d.ts
```

```
postcss-custom-media
  CHANGELOG.md
   - LICENSE.md
  — README.md
  — dist
    ⊢ index.cjs
    └ index.mjs
 └ package.json

    postcss-custom-properties

    ⊢ CHANGELOG.md

  - LICENSE.md
  — README.md
  - dist

⊢ index.cjs

     - index.d.ts
      - index.mjs
    ∟ lib

    □ get-custom-properties-from-imports.d.ts

        — get-custom-properties-from-root.d.ts
        — is-ignored.d.ts
        — options.d.ts
        transform-properties.d.ts
        transform-value-ast.d.ts
       write-custom-properties-to-exports.d.ts
  - package.json
- postcss-custom-selectors
 ─ CHANGELOG.md
  LICENSE.md
  README.md
  — dist
    index.cjs
    └ index.mjs
 └ package json
postcss-dir-pseudo-class
 — CHANGELOG.md
  LICENSE.md
  README.md
  — dist
    index.cjs
    └ index.mjs
 └ package.json
- postcss-discard-comments
 README.md
  — package.json
  - src

⊢ index.js

     - lib

    ─ commentParser.js

       └ commentRemover.js
   - types
     index.d.ts
    └ lib
       commentParser.d.ts
```

```
└ commentRemover.d.ts

    postcss-discard-duplicates

─ LICENSE-MIT

  README.md
  — package.json
  - src
    └ index.js
 └ types
    └ index.d.ts
postcss-discard-empty
  — LICENSE-MIT
  README.md
  – package⊾json
   - src
    └ index.js
 └ types
    └ index.d.ts
 postcss-discard-overridden
  — LICENSE
  README.md
  — package.json
 ∟ src
    └ index.js

    postcss-double-position-gradients

— CHANGELOG.md

   - LICENSE.md
  — README.md
  – dist
    — index.cjs

─ index.d.ts

     — index.mjs
    └ is-gradient.d.ts
 └ package.json
- postcss-env-function
  ─ CHANGELOG.md
  LICENSE.md
  — README.md
  - dist

⊢ index.cjs

    └ index.mjs
 └ package.json
postcss-flexbugs-fixes
 ─ CHANGELOG.md
  LICENSE
  README.md
  bugs
    ⊢ bug4.js
      – bug6.js
    └ bug81a.js
   - index.js
  – package.json
 postcss-focus-visible
  CHANGELOG.md
```

```
LICENSE.md
   README.md
  – dist

─ index.cjs

     — index.d.ts
    └ index.mjs
  └ package.json
- postcss-focus-within

— CHANGELOG.md

  — LICENSE.md
  README.md
  — dist
    index.cjs
      - index.d.ts
    └ index.mjs
 └ package.json
- postcss-font-variant

    □ CHANGELOG.md

  — LICENSE
  — README.md
  index.js
 └ package.json

    postcss-gap-properties

  ─ CHANGELOG.md
   LICENSE.md
  — README.md
  – dist
     index.cjs
    └ index.mjs
 └ package.json
- postcss-image-set-function
  ─ CHANGELOG.md
   LICENSE.md
  — README.md
  – dist
    ⊢ index.cjs
     index.d.ts
      - index.mjs
    └ lib

— get−comma.d.ts

        — get-image.d.ts
        — get-media.d.ts

    handle-invalidation.d.ts

        └ process-image-set.d.ts
 └ package.json
- postcss-import
  README.md
  — index.js
  – lib
     — join-layer.js
      - join−media.js
      - load−content.js
      - parse-statements.js
```

```
- process-content.js
     - resolve-id.js
  - node_modules
    L bin
       ∟ resolve
 └ package.json
postcss-initial
 .editorconfig
  - .github
    └ workflows
       └ npm-publish.yml
  - .vscode
    └ settings.json
  - CHANGELOG.md
  - LICENSE
  README.md
 — index.js
  – lib

    decls.json

    └ rules-fabric.js
  – package.json
    └ configstore
          └ update-notifier-npm.json
- postcss-js
 ─ LICENSE
  - README.md
  — async.js
  — index.js
 ⊢ index.mjs
 — objectifier.js
  — package.json
 — parser⊾js
  – process-result.js
 ∟ sync.js

    postcss-lab-function

 CHANGELOG.md
  LICENSE.md
  README.md
  – dist

    ─ convert-lab-to-display-p3.d.ts

    convert-lab-to-srgb.d.ts
    convert-lch-to-display-p3.d.ts
     - convert-lch-to-srgb.d.ts
     - css-color-4
       — conversions.d.ts
        deltaE0K.d.ts
        — map-gamut.d.ts
        — multiply-matrices.d.ts
       └ utilities.d.ts
      - has-fallback-decl.d.ts
      has-supports-at-rule-ancestor.d.ts
      - index.cjs
```


```
- index.d.ts
      - index.mjs
     - modified-values.d.ts
    └ on-css-function.d.ts
 └ package.json
postcss-load-config
  LICENSE
  README.md
  — package.json
 ∟ src

─ index.d.ts

     index.js
     — options.js
     — plugins.js
    └ req.js
 postcss-loader
  LICENSE
  README.md
  – dist
    — Error.js
     — Warning.js
    ⊢ cjs.js
     — index.js
     — options.json
    └ utils.js
   - node_modules
    ⊢ .bin
        - semver
       - semver
       LICENSE
        README.md
         - bin
          ∟ semver.js
        classes
          — comparator.js
           — index.js
            - range.js
          _ semver.js
         - functions

─ clean.js

           — cmp.js
           — coerce.js
           — compare-build.js
           — compare-loose.js
           — compare.js
           — diff.js
           — eq.js
           — gt.js
           — gte.js
            - inc.js
            - lt.js
           – lte.js
            – major.js
```

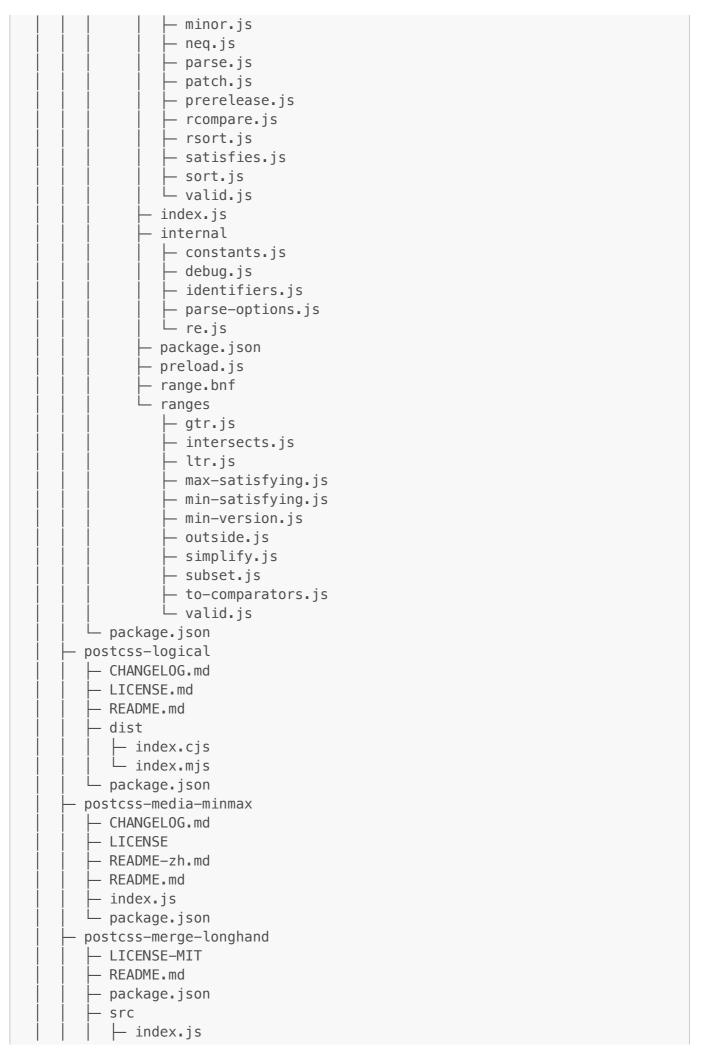

```
└ lib

— canExplode.is

      – canMerge₊js
     — colornames.js
     – decl
        borders.js
        — boxBase.js
        — columns.js
        — index.js
        — margin.js
       └ padding.js
      - getDecls.js
      - getLastNode.js
      - getRules.js
      - getValue.js
      hasAllProps.js
     insertCloned.js
     - isCustomProp.js
     mergeRules.js
     — mergeValues.js
     minifyTrbl.js
      - minifyWsc.js
     – parseTrbl.js
     – parseWsc.js
      - trbl.js
    └ validateWsc.js
- types
 index.d.ts
   - lib
    canExplode.d.ts
     — canMerge.d.ts
     — colornames.d.ts
     - decl
        ─ borders.d.ts
        boxBase.d.ts
        - columns.d.ts
        - index.d.ts
         - margin.d.ts

    padding.d.ts

      getDecls.d.ts
      - getLastNode.d.ts
     getRules.d.ts
     getValue.d.ts
     - hasAllProps.d.ts
     insertCloned.d.ts
      isCustomProp.d.ts
     mergeRules.d.ts
     - mergeValues.d.ts
     - minifyTrbl.d.ts
     minifyWsc.d.ts
      parseTrbl.d.ts
      parseWsc.d.ts
      - remove.d.ts
      - trbl.d.ts
```

```
└ validateWsc.d.ts
- postcss-merge-rules

─ LICENSE-MIT

  README.md
  node modules
    └ .bin
       └ browserslist
  – package.json
   - src

─ index.js

     - lib
       └ ensureCompatibility.js
   - types
    index.d.ts
      - lib

    □ ensureCompatibility.d.ts

- postcss-minify-font-values
 README.md
  — package.json
  — src

⊢ index.js

    └ lib

    ⊢ keywords.js

       minify-family.js
         - minify-font.js
       __ minify-weight.js
   types

─ index.d.ts

    └ lib

    ⊢ keywords.d.ts

    minify-family.d.ts

        - minify-font.d.ts
       └─ minify-weight.d.ts
postcss-minify-gradients
 - README.md
  — package.json
  - src
    index.js
    └ isColorStop.js
 └ types
    index.d.ts
    └ isColorStop.d.ts
postcss-minify-params
 README.md
  - node_modules
    └ .bin

    browserslist

  — package.json
   - src
    └ index.js
   types
```

```
└ index.d.ts
 postcss-minify-selectors
  ─ LICENSE-MIT
  README.md
  — package.json
  - src
    index.js
    └ lib
       └ canUnquote.js
   - types
    index.d.ts
    └ lib
       └ canUnquote.d.ts
 postcss-modules-extract-imports
  CHANGELOG.md
  LICENSE
  README.md
  — package.json
 ∟ src

⊢ index.js

    └ topologicalSort.js

    postcss-modules-local-by-default

  CHANGELOG.md
  LICENSE
  README.md
  – package.json
 ∟ src
    └ index.js
 postcss-modules-scope
 ─ CHANGELOG.md
  — LICENSE
  README.md
  — package.json
 L src
    └ index.js
postcss-modules-values
  CHANGELOG.md
  LICENSE
  README.md
  – package.json
 ∟ src
    └ index.js
- postcss-nested

─ LICENSE

  README.md
  - index.d.ts
  — index.js
 └ package.json
postcss-nesting
  LICENSE.md
  README.md
   - dist
    index.cjs
     - index.d.ts
```

```
— index.mjs
    └ lib

─ atrule-within-atrule.d.ts

        - atrule-within-rule.d.ts
        - cleanup-parent.d.ts
        - is-type-of-rule.d.ts
         - list.d.ts
        - merge-params.d.ts
        - merge-selectors

─ combinations—of—size—n.d.ts

           - compound-selector-order.d.ts
            - merge-selectors.d.ts
          └ specificity.d.ts
         - nest-rule-within-rule.d.ts
         - options.d.ts
         - rule-within-rule.d.ts
        – shift-nodes-before-parent.d.ts
        - valid-atrules.d.ts
        - walk-func.d.ts
       └ walk.d.ts
  — mod.js

    package.json

postcss-normalize
  — LICENSE.md
  README.md
  index.cjs
  — index.d.ts
  index.mjs
  - node_modules
    └ .bin

    browserslist

 └ package.json
- postcss-normalize-charset
  LICENSE
  README.md
  — package.json
   - src
    └ index.js
  types
    └ index.d.ts

    postcss-normalize-display-values

 README.md
  — package.json
  - src
    index.js
    └ lib
       └ map.js
   - types

─ index.d.ts

      - lib
       └ map.d.ts
 postcss-normalize-positions
  LICENSE-MIT
```

```
README.md
    package.json
  - src
    └ index.js
 └ types
    └ index.d.ts
 postcss-normalize-repeat-style
 ─ LICENSE-MIT
  README.md
  — package.json
  - src
    index.js
    └ lib
       └ map.js
  - types
    ├ index.d.ts
└ lib
       └ map.d.ts
postcss-normalize-string
 README.md
  – package.json
  - src
    └ index.js
  – types
    └ index.d.ts
postcss-normalize-timing-functions
 README.md
  — package.json
  - src
    └ index.js
  – types
    └ index.d.ts

    postcss-normalize-unicode

 ├ LICENSE-MIT
  README.md
  - node_modules
    └ .bin
       └ browserslist
  — package.json
  - src
    └ index.js
 └ types
    └ index.d.ts

    postcss-normalize-url

 README.md
  — package.json
  - src
    └ index.js
  - types
    └ index.d.ts
 postcss-normalize-whitespace
```

```
- LICENSE-MIT
  - README.md
  – package⊾json
  - src
    └ index.js
  - types
    └ index.d.ts
postcss-opacity-percentage

    LICENSE.md

  README.md
  - index.js
 └ package.json

    postcss-ordered-values

 LICENSE-MIT
  README.md
  — package.json
  — src
    index.js
     — lib
        — addSpace.js
        — getValue.js
        joinGridValue.js
         - mathfunctions.js
       └ vendorUnprefixed.js
      - rules
        animation.js
        ─ border.js
        boxShadow.js
         – columns.js
        – flexFlow.js
        — grid.js
        — listStyle.js
         listStyleTypes.json
       └ transition.js
  - types
    index.d.ts
      - lib
       — addSpace.d.ts
        – getValue.d.ts

─ joinGridValue.d.ts

        - mathfunctions.d.ts

    vendorUnprefixed.d.ts

      - rules
        animation.d.ts
        - border.d.ts
        - boxShadow.d.ts
        - columns.d.ts
        - flexFlow.d.ts
        - grid.d.ts
         - listStyle.d.ts
        └ transition.d.ts
postcss-overflow-shorthand
  CHANGELOG.md
  - LICENSE.md
```

```
- README.md
   - dist

⊢ index.cjs

     └ index.mjs
 └ package.json
postcss-page-break
  — CHANGELOG.md
  — LICENSE
  README.md
  — index.js
 └ package.json
postcss-place
  — CHANGELOG.md
   - LICENSE.md
   - README.md
  — dist
     — index.cjs
     └ index.mjs
 └ package.json
- postcss-preset-env
  ─ CHANGELOG.md
   - LICENSE.md
  README.md
  – dist
     ⊢ index.cjs
     └ index.mjs
  - node_modules
     └ .bin
        autoprefixer
        browserslist
        — css-blank-pseudo
        — css-has-pseudo
        └ css-prefers-color-scheme
 └ package.json
postcss-pseudo-class-any-link
  ─ CHANGELOG.md
   LICENSE.md
  README.md
   - dist

⊢ index.cjs

     └ index.mjs
 └ package.json

    postcss-reduce-initial

─ LICENSE-MIT

  README.md
  - node_modules
    ∟ .bin

    browserslist

    package.json

   - src
     — data
         – fromInitial.json
        └ toInitial.json
      - index.js
```

```
└ types
    └ index.d.ts
 postcss-reduce-transforms
  — LICENSE-MIT
  README.md
  — package.json
   - src
    └ index.js
 └ types
    └ index.d.ts

    postcss-replace-overflow-wrap

— CHANGELOG.md

  LICENSE
  — README.md
   - index.js
 └ package.json
- postcss-selector-not

    □ CHANGELOG.md

  LICENSE
  README.md
  — dist

    index.cjs

      - index.d.ts
    └ index.mjs
 └ package.json

    postcss-selector-parser

  — API.md
  CHANGELOG.md
  LICENSE-MIT
  README.md
  ├ dist
    index.js
     — parser₊js
     ⊢ processor.js
      selectors

— attribute.js

        — className.js
         combinator.js
        — comment.js
        — constructors.js
        — container.js
        — guards.js
        — id.js
         — index.js
        — namespace.js
        — nesting.js
        — node.js
         – pseudo.js
        – root.js
         – selector.js
         – string.js
         - tag.js
         - types.js
         - universal.js
```

```
sortAscending.js
      - tokenTypes.js
      - tokenize.js
      - util
        — ensureObject.js
        — getProp.js
        — index.js
         - stripComments.js
       └ unesc.js
  - node_modules
    └ .bin
       ∟ cssesc
  – package.json
 └ postcss-selector-parser.d.ts
- postcss-svgo
  LICENSE-MIT
  README.md
  node modules
     _ .bin
       ∟ svgo
      - commander
        CHANGELOG.md
         LICENSE
         – Readme.md
        — esm.mjs
         – index.js

    package−support.json

        — package.json
         - typings
          └ index.d.ts
      - svqo

─ LICENSE

         - README.md
         - bin
          ∟ svgo
         - dist
          └ svgo.browser.js
         - lib
           — css-tools.js
           — parser⊾js
           — path.js
           — stringifier.js
           — style.js
            - svgo
              ⊢ coa.js

    ─ config.js

    ← css-class-list.js

              — css-select-adapter.d.ts
              — css-select-adapter.js
               – css-style-declaration.js
               - jsAPI.d.ts
               - jsAPI.js
               - plugins.js
               - tools.js
```

```
- svgo−node.js
   - svgo.js
   - types.ts
 ∟ xast.js
- package.json
plugins
  _applyTransforms.js
  – _collections.js
  – _path.js
   _transforms.js
  addAttributesToSVGElement.js
  addClassesToSVGElement.js
  — cleanupAttrs.js
  — cleanupEnableBackground.js
  – cleanupIDs.js
  cleanupListOfValues.js
  cleanupNumericValues.js
  — collapseGroups.js
  — convertColors.js
  convertEllipseToCircle.js
  – convertPathData₊js
  convertShapeToPath.js
  convertStyleToAttrs.js
  — convertTransform.js
  — inlineStyles.js
  mergePaths.js
  — mergeStyles.js
  minifyStyles.js
  moveElemsAttrsToGroup.js
  moveGroupAttrsToElems.js
  – plugins.js
  – prefixIds.js
  – preset–default.js
  removeAttributesBySelector.js
  — removeAttrs.js
   removeComments.js
  – removeDesc.js
   removeDimensions.js
   removeDoctype.js
  – removeEditorsNSData.js
  removeElementsByAttr₁js
  removeEmptyAttrs.js
  removeEmptyContainers.js
  removeEmptyText.js
   - removeHiddenElems.js
  – removeMetadata.js
   removeNonInheritableGroupAttrs.js
  removeOffCanvasPaths.js
  – removeRasterImages₊js
  removeScriptElement.js
   removeStyleElement.js
   removeTitle.js
  removeUnknownsAndDefaults.js
  removeUnusedNS.js
```

```
- removeUselessDefs.js
           removeUselessStrokeAndFill.js
           - removeViewBox.js
           — removeXMLNS.js
           — removeXMLProcInst.js
           — reusePaths.js
            - sortAttrs.js
          └ sortDefsChildren.js
  — package.json
  - src
    — globals.d.ts
     index.js
    └ lib
       └ url.js
   - types

    index.d.ts
    lib

       └ url.d.ts
- postcss-unique-selectors
 README.md
  — package.json
  - src
    └ index.js
   types
    └ index.d.ts
postcss-value-parser
  LICENSE
  - README.md
  — lib

─ index.d.ts

     ├ index.js
     — parse.js
     — stringify.js
     — unit.js
    └ walk.js
  — package.json
- prelude-ls
  CHANGELOG.md
  LICENSE
  README.md
  — lib
    ⊢ Func.js
     List.js
     — Num₊js
     — Obj.js
     – Str.js
    └ index.js
 └ package.json
- pretty-bytes

─ index.d.ts

   - index.js
   - license
   - package.json
```

```
└ readme.md
pretty-error
  - .github
   └ workflows
      └ main.yml
 _ .mocharc.yaml
 - .travis.yml
 — CHANGELOG.md
 - LICENSE
 README.md
 - index.d.ts
 – lib

⊢ ParsedError.js

   PrettyError.js
     defaultStyle.js
   └ nodePaths.js
 — package.json
 - src

⊢ ParsedError.coffee

    PrettyError.coffee
    — defaultStyle.coffee

    □ nodePaths.coffee

  – start.js
∟ test
   ⊢ ParsedError.coffee
   └─ PrettyError.coffee
pretty-format
 LICENSE
 README.md
 build

    ─ collections.d.ts

─ collections.js

    index.d.ts
    — index.js
    plugins

    ⊢ AsymmetricMatcher.d.ts

        AsymmetricMatcher.js
       - ConvertAnsi.d.ts
        – ConvertAnsi.js
       DOMCollection.d.ts
       DOMCollection.is
       — DOMElement.d.ts

→ DOMElement.js

       - Immutable.d.ts
       Immutable.is
        ReactElement.d.ts
       — ReactElement.js
       — ReactTestComponent.d.ts
        ReactTestComponent.js
      └ lib
          — escapeHTML.d.ts
           escapeHTML.js
           - markup.d.ts
          ∟ markup.js
```

```
types.d.ts
                      - types.js
           - node_modules
                  ⊢ ansi−styles
                             index.d.ts
                               — index.js
                               license
                                 – package⊾json
                            └ readme.md
                           react-is
                               LICENSE
                                 - README.md
                                - build-info.json
                                - cjs
                                         — react-is.development.js
                                       └ react-is.production.min.js
                              — index.js
                                 package.json
                            ∟ umd
                                        react-is.development.js
                                       └ react-is.production.min.js
      └ package.json
process-nextick-args
      index.js
       — license.md
           – package.json
      └ readme.md
- promise

    intre
    intre

        LICENSE
       — Readme.md
       — build.js
       — core.js
        — domains
                 ⊢ core.js
                  ─ done.js
                   — es6−extensions.js
                   — finally.js
                  ├ index.js
                  ─ node-extensions.js
                     rejection-tracking.js
                 └ synchronous.js
       — index.d.ts
         — index.js
         index.js.flow
        — lib
                 ⊢ core.js
                  — done.js
                    — es6−extensions.js
                  — finally.js
                  index.js
                   — node-extensions.js
                      rejection-tracking.js
                     - synchronous.js
```

```
package.json
   - polyfill-done.js
   - polyfill.js
  setimmediate
    ⊢ core.is
     — done⊾js
     — es6-extensions.js
     — finally.js
     — index.js

    node-extensions.js

      rejection-tracking.js
    └ synchronous.js
  - src
    ⊢ core.js
     — done.js
     — es6−extensions.js
     ⊢ finally.js
     — index.js
     ├ node-extensions.js
     rejection-tracking.js
    └ synchronous.js
- prompts
  — dist

    ⊢ dateparts

        ─ datepart.js
         – day.js
         – hours.js
        – index.js
         – meridiem.js
        — milliseconds.js

    minutes.js

        — month.js
         - seconds.js
        ∟ year.js
      elements
        — autocomplete.js
        autocompleteMultiselect.js
        — confirm.js
        — date.js
         - index.js
        — multiselect.js
        — number.js
        — prompt.js
        — select.js
         - text.js
       └ toggle.js
      - index.js
       prompts.js
      - util

— action.js

         – clear.js
         entriesToDisplay.js
         – figures.js
         – index.js
```

```
- lines.js
        - strip.js
        - style.js
       ∟ wrap.js
 ├ index.js
  — lib
    dateparts
       — datepart.js
        - day₌js
        – hours.js
        – index.js
        – meridiem.js
        — milliseconds.js
       — minutes.js
        — month.js
        - seconds.js
       ∟ year.js
     - elements
       — autocomplete.js
        autocompleteMultiselect.js
        — confirm.js
        — date.js
        — index.js
        multiselect.js
        – number.js
        – prompt.js
        — select.js
        – text.js
       └ toggle.js
     – index.js
     — prompts.js
    └ util
        — action.js
       ⊢ clear.js
        entriesToDisplay.js
        – figures.js
        – index.js
        lines.js
        – strip.js
        - style.js
       ∟ wrap.js

⊢ license

 — package.json
 └ readme.md
prop-types
 README.md

    ⊢ checkPropTypes.js

⊢ factory.js

    factoryWithThrowingShims.js

 - index.js
  – lib
    — ReactPropTypesSecret.js
```

```
└ has.js
    node modules
     - .bin
       └ loose-envify
       react-is

─ LICENSE

         - README.md
         - build-info.json
        - cis
           |- react-is.development.js
           └ react-is.production.min.js
        – index.js
        — package.json
        ∟ umd
           - react-is.development.js
           └ react-is.production.min.js
 package.json
   – prop−types.js
 └ prop-types.min.js
protobufjs
 ├ CHANGELOG.md
   - LICENSE
  README.md
  – bin

→ pbjs

    └ pbts
  – cli

─ LICENSE

     README.md
     — bin

→ pbjs

       L pbts
     - index.d.ts
     — index.js
      - lib

─ tsd-jsdoc

           — LICENSE
            – README.md
            – plugin.js
           └ publish.js
       └ tsd-jsdoc.json
     — node_modules
     — package.json
     - package.standalone.json
     - pbjs.d.ts
     — pbjs.js
     - pbts.d.ts
      – pbts.js
      targets
        — json-module.js
         - json.js
         - proto.js
         - proto2.js
         - proto3.js
```

```
- static-module.js
     └ static.js
   - util.js
    wrappers
     — amd.js
      – closure.js
     — commonjs.js
      default.js
     └ es6.js
– dist
  ⊢ README.md
   - light
     ─ README.md
      – protobuf.js
      - protobuf.js.map
      - protobuf.min.js
     └ protobuf.min.js.map
   - minimal

— README.md

      – protobuf₌js
     — protobuf.js.map
      - protobuf.min.js
     └ protobuf.min.js.map
   – protobuf₁js
  — protobuf.js.map
   protobuf.min.js
  └ protobuf.min.js.map
– ext
  debug
     README.md
     └ index.js
   – descriptor
     ─ README.md
     index.d.ts
      – index.js
     └ test.js
- google
  — LICENSE
   - README.md
   – api

— annotations.json

     — annotations.proto
      — http.json

    http.proto

    protobuf
     — api.json
      – api.proto
      – descriptor.json
      — descriptor.proto
      — source_context.json
      - source_context.proto
      - type.json

    type.proto

 index.d.ts
```

```
- index.js
- light.d.ts
- light.js
- minimal.d.ts
minimal.js
— node_modules
  └ @types
     ∟ node
         — LICENSE
         README.md
         assert
           └ strict.d.ts
         - assert.d.ts
         async_hooks.d.ts
         - buffer.d.ts
         - child_process.d.ts
         cluster.d.ts
         - console.d.ts
         - constants.d.ts
         – crypto.d.ts
         - dgram.d.ts
          diagnostics_channel.d.ts

    □ promises.d.ts

         - dns.d.ts
          - dom-events.d.ts
          - domain.d.ts
         - events.d.ts
          - fs
           └ promises.d.ts
         — fs.d.ts
         — globals.d.ts
         - globals.global.d.ts
         - http.d.ts
         – http2.d.ts
         – https.d.ts
         - index.d.ts
         - inspector.d.ts
         module.d.ts
         - net.d.ts
         - os.d.ts
         — package.json
         — path.d.ts
         - perf_hooks.d.ts
         - process.d.ts
         - punycode.d.ts
          querystring.d.ts
          readline
           └ promises.d.ts
         - readline.d.ts
          repl.d.ts
          - stream
            — consumers.d.ts
             - promises.d.ts
```

```
└ web.d.ts
- stream.d.ts
- string_decoder.d.ts
- test.d.ts
- timers
 └ promises.d.ts
- timers.d.ts
- tls.d.ts
- trace events.d.ts
- ts4.8
  ⊢ assert
    └ strict.d.ts
   - assert.d.ts
  async_hooks.d.ts
   - buffer.d.ts
  child_process.d.ts

─ cluster.d.ts

⊢ console.d.ts

   - constants.d.ts

⊢ crypto.d.ts

  — dgram.d.ts
  diagnostics_channel.d.ts
   – dns
    └ promises.d.ts
  ─ dns.d.ts
   - dom-events.d.ts
  — domain.d.ts
  — events.d.ts
   – fs
    └ promises.d.ts

⊢ fs.d.ts

  — globals.d.ts

─ globals.global.d.ts

    http.d.ts

  http2.d.ts
  https.d.ts
   - index.d.ts
   - inspector.d.ts
  — module.d.ts
  — net.d.ts
  - os.d.ts
  — path.d.ts
  — perf_hooks.d.ts
   - process.d.ts
   - punycode.d.ts
   – querystring.d.ts
  — readline
    └ promises.d.ts
   - readline.d.ts
   - repl.d.ts
   - stream
     — consumers.d.ts
      - promises.d.ts
     └ web.d.ts
```

```
stream.d.ts
             - string_decoder.d.ts
             - test.d.ts
             - timers
              └ promises.d.ts
            - timers.d.ts
             - tls.d.ts
             trace events.d.ts
             – tty.d.ts
            – url.d.ts
             - util.d.ts
             - v8.d.ts
             - vm.d.ts
            wasi.d.ts
             - worker_threads.d.ts
           └ zlib.d.ts
         — tty.d.ts
          - url.d.ts
          - util.d.ts
          - v8.d.ts
          - vm.d.ts
          - wasi.d.ts
          - worker_threads.d.ts
        └ zlib.d.ts
— package-lock.json
- package.json
- scripts

— changelog.js

  └ postinstall.js
- src
  ⊢ common.js

    converter.js

  — decoder.js
  — encoder.js
  — enum.js
  — field.js
  — index−light.js
  — index-minimal.js
  — index.js
  — mapfield.js
  — message₌js
  — method.js
  — namespace.js
  — object.js
  — oneof.js
  — parse.js
   — reader.js
   – reader_buffer.js
   — root.js
   — roots.js
    - rpc
     └ service.js
   - rpc⊾js
   - service.js
```

```
- tokenize.js
      - type.js
      - types.js
     typescript₁jsdoc
     – util
       ─ longbits.js
       └ minimal.js
     — util.js
     — verifier.js
     — wrappers.js
     – writer.js
    └─ writer_buffer.js

    tsconfig.json

- proxy-addr
  – HISTORY.md
  LICENSE
  README.md
  — index.js
  - node_modules
    └ ipaddr.js
       - README.md
        ipaddr.min.js
        - lib
          ipaddr.js
          └ ipaddr.js.d.ts
       └ package.json
 └ package.json
- psl
  _ .env
  LICENSE
  — README.md
  browserstack-logo.svg
  — data
   ∟ rules.json
  – dist
     — psl.js
    └ psl.min.js
  – index.js
 └ package.json
punycode

    LICENSE−MIT.txt

  — README.md

    package.json

  - punycode.es6.js
 └ punycode.js
  - CHANGES.md
  LICENSE
  README.md

    package.json

   - q.js
 └ queue.js
```

```
.editorconfig
   - .eslintrc
    .github
    └ FUNDING.yml
  - nycrc
  CHANGELOG.md
   - LICENSE.md
  README.md
  - dist
    └ qs.js
  - lib

    formats.js

     index.js
     — parse.js
      - stringify.js
    └ utils.js
  — package.json
  test
    ⊢ parse.js
     — stringify.js
    └ utils.js

    querystringify

 README.md
  – index.js
 └ package.json
- queue-microtask
  LICENSE
  — README.md
  index.d.ts
 ⊢ index.js
 └ package.json
- quick-lru

─ index.d.ts

  index.js
 ─ license
  – package.json
 └ readme.md
- raf

─ LICENSE

  README.md

— index.js

— package.json

→ polyfill.js

   - test.js
 └ window.js
randombytes

    ⊥travis.yml

 LICENSE
  — README.md
   - browser.js
  — index.js
   - package.json
```

```
└ test.js
- range-parser

⊢ HISTORY.md

  LICENSE
  README.md
  — index.js

    package.json

raw-body

⊢ HISTORY.md

  — LICENSE
  README.md
  SECURITY.md
  - index.d.ts
   - index.js
 └ package.json
- react
 README.md
  — cis
    react-jsx-dev-runtime.development.js
     react-jsx-dev-runtime.production.min.js
     react-jsx-dev-runtime.profiling.min.js

⊢ react-jsx-runtime.development.js

     react-jsx-runtime.production.min.js
    react-jsx-runtime.profiling.min.js
     — react.development.js

⊢ react.production.min.js

     — react.shared-subset.development.js
    └─ react.shared-subset.production.min.js
  — index.js

    jsx-dev-runtime.js

  — jsx−runtime.js
  node_modules
    ∟ .bin
       └ loose-envify

─ package.json

   react.shared-subset.js
 L umd

    ⊢ react.development.js

     react.production.min.js
    └ react.profiling.min.js
- react-app-polyfill
 README.md
  — ie11.js
 ⊢ ie9.js
 – package.json
 └ stable.js
- react-dev-utils
 FileSizeReporter.js

    ForkTsCheckerWarningWebpackPlugin.js

  ForkTsCheckerWebpackPlugin.js
  InlineChunkHtmlPlugin.js
```

```
InterpolateHtmlPlugin.js
 - LICENSE
ModuleNotFoundPlugin.js
— ModuleScopePlugin.js
README.md
WebpackDevServerUtils.js
browsersHelper.js
— chalk.js
checkRequiredFiles.js
⊢ clearConsole.js
— crossSpawn.js
— error0verlayMiddleware.js
— eslintFormatter.js
— evalSourceMapMiddleware.js
 formatWebpackMessages.js

─ getCSSModuleLocalIdent.js

⊢ getCacheIdentifier₊js
– getProcessForPort.js
getPublicUrlOrPath.js
— globby⊾js
— ignoredFiles.js
 - immer.js
– launchEditor.js
launchEditorEndpoint.js
node modules
   – ⊾bin
      browserslist
       detect
     └ detect-port
    - loader—utils
      LICENSE
      - README.md
       - lib
         ├ getHashDigest.js
          – hash
           ─ BatchedHash.js
            ─ BulkUpdateDecorator.js
           ⊢ md4.js
            – wasm−hash.js
           ∟ xxhash64.js
         — index.js
         — interpolateName.js
         – isUrlRequest.js
        └ urlToRequest.js
       – package⊾json
noopServiceWorkerMiddleware.js
— openBrowser₌js
openChrome.applescript
– package⊾json
— printBuildError.js
printHostingInstructions.js
 redirectServedPathMiddleware.js
 refreshOverlayInterop.js
 webpackHotDevClient.js
```

```
react-dom

    LICENSE

  - README.md
  – cjs
    react-dom-server-legacy.browser.development.js
     react-dom-server-legacy.browser.production.min.js
     — react-dom-server-legacy.node.development.js
     — react-dom-server-legacy.node.production.min.js
     — react-dom-server.browser.development.js
     — react-dom-server.browser.production.min.js
     — react-dom-server.node.development.js
     — react-dom-server.node.production.min.js
    react-dom-test-utils.development.js
    react-dom-test-utils.production.min.js
     — react-dom.development.js
     react-dom.production.min.js
    └ react-dom.profiling.min.js
  client.js
  — index.js
  — node modules
    └ .bin
       └ loose-envify
  — package.json
  — profiling.js
  server.browser.js
  - server.js
  - server.node.js
  - test-utils.js
  umd
    react-dom-server-legacy.browser.development.js
    react-dom-server-legacy.browser.production.min.js
    react-dom-server.browser.development.js
     — react-dom-server.browser.production.min.js
    react-dom-test-utils.development.js
    react-dom-test-utils.production.min.js
    react-dom.development.js
     react-dom.production.min.js
    └ react-dom.profiling.min.js
react-error-overlay
  LICENSE
  README.md
  ├ lib
    └ index.js
 └ package json
- react—is
  LICENSE
  README.md
  — cjs
    react-is.development.js

    react-is.production.min.js

  – index.js
  - package.json
 L umd
    react-is.development.js
```

```
└ react-is.production.min.js
react-refresh

    LICENSE

  README.md
  babel.js
  — cjs
    react-refresh-babel.development.js
     react-refresh-babel.production.min.js
     - react-refresh-runtime.development.js
    └ react-refresh-runtime.production.min.js
  – package⊾json
 └ runtime.js
- react-router

— CHANGELOG.md

  LICENSE.md
  README.md
  — dist

⊢ index.d.ts

     — index.js
     — index.js.map
     — lib
        — components.d.ts
        — context.d.ts
         - hooks.d.ts

    use-sync-external-store-shim

           — index.d.ts
            useSyncExternalStoreShimClient.d.ts
          └ useSyncExternalStoreShimServer.d.ts
     – main.js
     react-router.development.js
     react-router.development.js.map
     react-router.production.min.js
     react-router.production.min.js.map
    ∟ umd
       react-router.development.js
       |- react-router.development.js.map
         react-router.production.min.js
       └ react-router.production.min.js.map
 └ package json
react-router-dom
  — CHANGELOG.md
  LICENSE.md
  README.md
  – dist
    dom.d.ts
     - index.d.ts
     — index.js
     – index.js.map
     — main.js
     react-router-dom.development.js
     - react-router-dom.development.js.map
     - react-router-dom.production.min.js
     react-router-dom.production.min.js.map
     - server.d.ts
```


```
– server.js
     – server.mjs
     — umd
       react-router-dom.development.js
       react-router-dom.development.js.map
        — react-router-dom.production.min.js
       └─ react-router-dom.production.min.js.map
  - package.json
  - server.d.ts
  – server⊾js
 ∟ server.mjs
react-scripts
  — LICENSE
  - README.md
  - bin
   └ react-scripts.js
  — config
    — env.js
     getHttpsConfig.js
     — jest
       ─ babelTransform.js
         - cssTransform.js
       └ fileTransform.js
     — modules.js
     – paths.js
     webpack
       └ persistentCache
          └ createEnvironmentHash.js
     webpack.config.js

    webpackDevServer.config.js

  — lib
    └ react-app.d.ts
  - node_modules
    browserslist
        - eslint
        – jest
        - resolve
        - semver
        tailwind
        — tailwindcss
        webpack
       └ webpack-dev-server
      fs-extra
        LICENSE
        README.md
        - lib
           – copy

    ⊢ copy-sync.js

              – copy₌js
             └ index.js
            empty
             └ index.js
            ensure
```

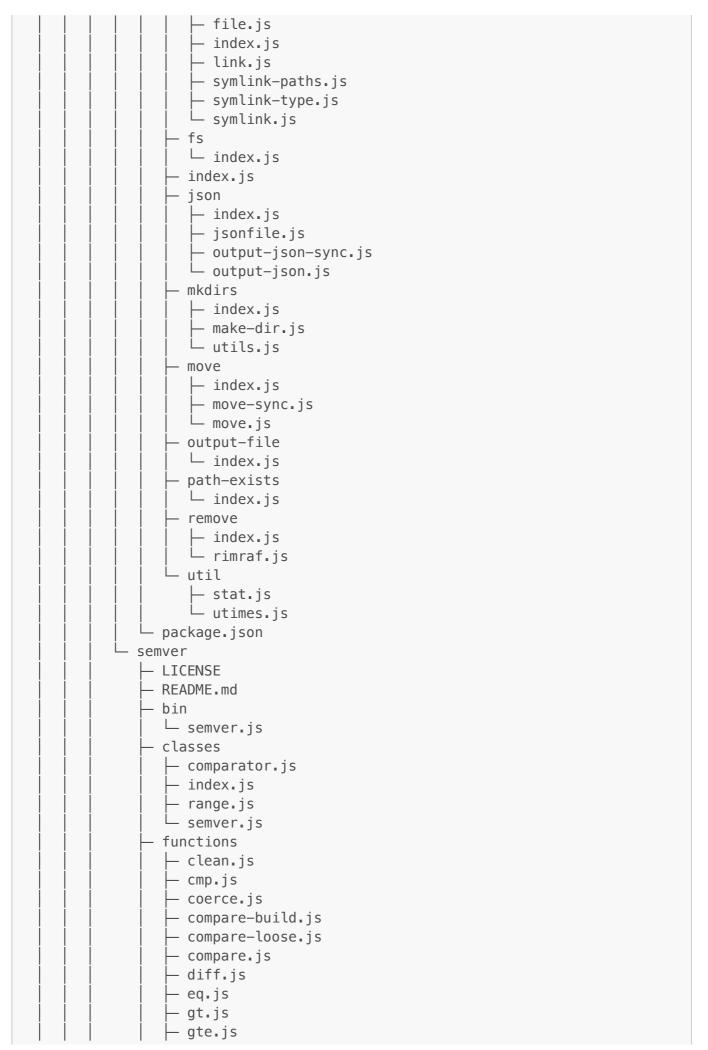

```
- inc.js
            - lt.js
            - lte.js
           — major⊾js
           – minor.js
           — neq.js
           – parse.js
           — patch.js
           — prerelease.js
           — rcompare.js
           — rsort.js
           — satisfies.js
            – sort.js
           └ valid.js
         - index.js
         - internal
           ─ constants.js
           ├ debug.js

— identifiers.js

— parse-options.js

          ∟ re.js
         – package⊾json
         - preload.js
         range.bnf
        ∟ ranges
           — gtr.js
           intersects.js
           — ltr.js
           — max-satisfying.js
           — min−satisfying.js

    min−version.js

           — outside.js
           simplify.js
           — subset.js
           — to-comparators.js
          └ valid.js
  — package.json
  – scripts
    ─ build.js
     — eject.js
     — init.js
     — start.js
     — test.js
    └ utils
        createJestConfig.js
       └ verifyTypeScriptSetup.js
  template
    └─ README.md
  template-typescript
    └─ README.md
- read-cache

    LICENSE

  README.md
  - index.js
```

```
└ package.json
 readable-stream
  CONTRIBUTING.md
  GOVERNANCE.md
  LICENSE
  README.md
  – errors-browser₊js
  — errors.js
  experimentalWarning.js
  — lib
     ____stream_duplex.js
     — _stream_passthrough.js
      _stream_readable.js
      - _stream_transform.js
      - _stream_writable.js
     _
internal
        ∟ streams

— async_iterator.js

           - buffer_list.js
           — destroy.js
           — end−of−stream.js
            - from-browser.js
           — from.js
           — pipeline.js
           — state.js
            - stream−browser.js
           ∟ stream.js
  package.json
   - readable-browser.js
 └ readable.js
readdirp

─ LICENSE

  README.md
  index.d.ts
  — index.js
 └ package.json
- recursive-readdir

─ LICENSE

  README.md
   - index.js

    package.json

redent

─ index.d.ts

  – index.js
  — license

─ package.json

 └ readme.md

    regenerate

    LICENSE−MIT.txt

  README.md
   - package.json
 └ regenerate.js
 regenerate-unicode-properties
  Binary_Property
```

```
- ASCII.js
 ASCII Hex Digit.js
 Alphabetic.js
 – Any₌js
 Assigned.js
 — Bidi Control₊js
 — Bidi_Mirrored.js
 Case_Ignorable.js
 Cased.js
Changes_When_Casefolded.js
Changes_When_Casemapped.js
Changes_When_Lowercased.js
Changes_When_NFKC_Casefolded.js
Changes_When_Titlecased.js
 Changes_When_Uppercased.js
— Dash.js
— Default_Ignorable_Code_Point.js
 Deprecated.is
 — Diacritic.js
 Emoji.js
— Emoji_Component.js
— Emoji_Modifier.js
 — Emoji_Modifier_Base.js
— Emoji_Presentation.js
Extended_Pictographic.js
 — Extender.js
— Grapheme_Base₊js
— Grapheme_Extend.js
 — Hex_Digit.js
 — IDS_Binary_Operator⊾js
— IDS_Trinary_Operator.js
 - ID_Continue.js
 – ID_Start.js
 — Ideographic.js
— Join_Control.js
Logical_Order_Exception.js
 — Lowercase.js
— Math.js
 Noncharacter_Code_Point.js
 — Pattern_Syntax.js
 Pattern_White_Space.js
 — Quotation_Mark.js
— Radical.js
 Regional_Indicator.js
Sentence_Terminal.js
 Soft_Dotted.js
 Terminal_Punctuation.js
 Unified_Ideograph.js
 – Uppercase.js
 — Variation_Selector₊js
 – White_Space.js
  - XID_Continue.js
└ XID_Start.js
General_Category
```

```
– Cased_Letter₊js
  Close_Punctuation.js
  Connector_Punctuation.js
  — Control.js
  Currency_Symbol.js
  — Dash_Punctuation.js
  Decimal_Number.js
  — Enclosing_Mark₊js
  — Final_Punctuation.js
  — Format.js
  Initial_Punctuation.js
  — Letter.js
  — Letter_Number₊js
  — Line_Separator.js
  – Lowercase_Letter.js
  — Mark.js
  — Math_Symbol.js
  — Modifier Letter.js
  Modifier_Symbol.js
  — Nonspacing_Mark.js
  — Number₊js
  Open_Punctuation.js
  — Other⊾js
  ─ Other_Letter.js
  ─ Other_Number.js
  Other_Punctuation.js
  ─ Other_Symbol.js
  — Paragraph_Separator.js
  — Private_Use₊js
  — Punctuation.js
  — Separator₊įs
  — Space_Separator.js
  — Spacing_Mark₊js
  — Surrogate.js
  Symbol.js
   - Titlecase_Letter.js
   Unassigned.js
 └ Uppercase_Letter.js
LICENSE-MIT.txt
Property_of_Strings
  ─ Basic_Emoji.js
  ─ Emoji_Keycap_Sequence.js
  ├ RGI_Emoji.js
  RGI_Emoji_Flag_Sequence.js
  — RGI_Emoji_Modifier_Sequence.js
   RGI_Emoji_Tag_Sequence.js
 └─ RGI_Emoji_ZWJ_Sequence.js
README.md
Script

⊢ Adlam.js

⊢ Ahom.js

   – Anatolian_Hieroglyphs.js
  – Arabic₊js
   – Armenian.js
```

```
- Avestan⊾js
 - Balinese.js
– Bamum₊js
– Bassa_Vah₊js
– Batak₊js
— Bengali.js
Bhaiksuki.js
— Bopomofo.js
— Brahmi.js
– Braille.js
— Buginese.js
Buhid.js
— Canadian_Aboriginal.js
— Carian.js
Caucasian_Albanian.js
— Chakma.js
— Cham₊js
— Cherokee.js
— Chorasmian.js
— Common₊js
— Coptic.js
Cuneiform.js
– Cypriot.js
— Cypro_Minoan.js
Cyrillic.js
— Deseret.js
— Devanagari.js
— Dives_Akuru.js
— Dogra.js
— Duployan.js
Egyptian_Hieroglyphs.js
— Elbasan.js
— Elymaic.js
— Ethiopic.js
— Georgian.js
├ Glagolitic.js
— Gothic.js
— Grantha.js
— Greek.js
— Gujarati.js
— Gunjala_Gondi.js
— Gurmukhi.js
— Han.js
— Hangul.js
— Hanifi_Rohingya₊js
— Hanunoo⊾js
– Hatran₊js
Hebrew.js
– Hiragana.js
— Imperial_Aramaic.js
 Inherited.js
 Inscriptional_Pahlavi.js
 - Inscriptional_Parthian.js
- Javanese.js
```

```
- Kaithi.js
- Kannada.js
– Katakana.js
— Kawi⊾js
– Kayah Li.js
– Kharoshthi.js
Khitan_Small_Script.js
— Khmer₊js
– Khojki.js
— Khudawadi.js
– Lao.js
Latin.js
— Lepcha.js
— Limbu.js
– Linear_A.js
– Linear_B₊js
— Lisu.js
Lycian.js
— Lydian.js
— Mahajani.js
— Makasar⊾js
– Malayalam₊js
— Mandaic⊾js
Manichaean.js
– Marchen₊js
— Masaram_Gondi₊js
— Medefaidrin.js
— Meetei_Mayek₊js
— Mende_Kikakui.js
— Meroitic_Cursive.js
Meroitic_Hieroglyphs.js
— Miao.js
Modi.įs
— Mongolian.js
– Mro₊js
– Multani.js
— Myanmar₊js
— Nabataean.js
— Nag_Mundari.js
— Nandinagari.js
— New_Tai_Lue₊js
— Newa.js
— Nko.js
– Nushu₁js
Nyiakeng_Puachue_Hmong.js
– Ogham₊js
– Ol_Chiki.js
— Old_Hungarian.js
– Old_Italic.js
— Old_North_Arabian.js
– Old_Permic.js
– Old_Persian.js
— Old_Sogdian.js
- Old_South_Arabian.js
```

```
- Old_Turkic.js
   Old_Uyghur.js
   – Oriya.js
  – Osage⊾js
  — Osmanya.js
  — Pahawh_Hmong.js
  – Palmyrene₊js
  — Pau_Cin_Hau.js
  — Phags_Pa₊js
  — Phoenician.js
   Psalter_Pahlavi.js
  – Rejang.js
  — Runic.js
   – Samaritan.js
   - Saurashtra.js
  — Sharada.js
  — Shavian₊js
  Siddham.js
  — SignWriting.js
  — Sinhala.js
  Sogdian.js
  Sora_Sompeng.js
  Soyombo₁js
  — Sundanese.js
   – Syloti_Nagri.js
   - Syriac.js
   - Tagalog.js
   – Tagbanwa.js
   - Tai_Le₊js
   - Tai_Tham.js
   - Tai_Viet.js
   - Takri.js
   - Tamil.js
   - Tangsa.js
   - Tangut.js
   - Telugu.js
   - Thaana.js
   - Thai.js
   - Tibetan.js
   - Tifinagh.js
   - Tirhuta.js
   – Toto.js
  — Ugaritic.js
   – Vai.js
   Vithkuqi.js
   – Wancho.js
   – Warang_Citi.js
   - Yezidi.js
   - Yi.js
  – Zanabazar_Square₊js
Script_Extensions
   – Adlam₁js
  – Ahom₌js
   - Anatolian_Hieroglyphs.js
```

```
- Arabic.js
- Armenian.js
 - Avestan.js
– Balinese₊js
– Bamum₊js
— Bassa_Vah₊js
– Batak.js
— Bengali.js
Bhaiksuki.js
Bopomofo₁js
— Brahmi.js
– Braille.js
Buginese.js
— Buhid.js
Canadian_Aboriginal.js
— Carian.js
— Caucasian_Albanian.js
— Chakma.js
— Cham₊js
— Cherokee₊js
— Chorasmian.js
— Common.js
— Coptic.js
— Cuneiform.js
— Cypriot.js
— Cypro_Minoan.js
— Cyrillic.js
— Deseret.js
— Devanagari.js
— Dives_Akuru.js
— Dogra₊js
— Duployan.js
Egyptian_Hieroglyphs.js
— Elbasan.js
— Elymaic.js
— Ethiopic.js
— Georgian.js
— Glagolitic.js
— Gothic.js
— Grantha.js
— Greek.js
— Gujarati.js
— Gunjala_Gondi.js
— Gurmukhi.js
— Han₊js
— Hangul.js
Hanifi_Rohingya.js
Hanunoo.js
– Hatran.js
— Hebrew.js
– Hiragana.js
 - Imperial_Aramaic.js
 - Inherited.js
 - Inscriptional_Pahlavi.js
```

```
Inscriptional_Parthian.js
- Javanese.js
– Kaithi.js
– Kannada₊js
– Katakana.js
– Kawi.js
– Kayah_Li.js
– Kharoshthi.js
Khitan_Small_Script.js
– Khmer₊js
– Khojki.js
– Khudawadi.js
— Lao₊js
– Latin.js
Lepcha.js
— Limbu.js
— Linear_A.js
– Linear_B.js
– Lisu.js
– Lycian.js
– Lydian.js
– Mahajani⊾js
– Makasar⊾js
– Malayalam.js
– Mandaic₊js
Manichaean.js
– Marchen₊js
— Masaram Gondi₊js
— Medefaidrin.js
— Meetei_Mayek₊js
— Mende Kikakui.js
— Meroitic_Cursive.js
Meroitic_Hieroglyphs.js
— Miao₊js
– Modi₌js
– Mongolian.js
— Mro₊js
– Multani.js
— Myanmar⊾js
— Nabataean.js
— Nag_Mundari.js
— Nandinagari.js
— New_Tai_Lue₊js
– Newa.js
– Nko.js
– Nushu₊js
Nyiakeng_Puachue_Hmong.js
– Ogham.js
- Ol_Chiki.js
— Old_Hungarian.js
- Old_Italic.js
Old_North_Arabian.js
— Old_Permic.js
– Old_Persian.js
```

```
- Old_Sogdian.js
  Old_South_Arabian.js
  - Old_Turkic.js
 — Old_Uyghur.js
 – Oriya.js
 — Osage.js
  – Osmanya.js
 – Pahawh_Hmong.js
 – Palmyrene.js
 – Pau_Cin_Hau.js
 – Phags_Pa.js
 — Phoenician.js
 — Psalter_Pahlavi.js
 – Rejang.js
  - Runic.js
 – Samaritan.js
 — Saurashtra.js
 – Sharada.js
 Shavian.js
 Siddham.js
 — SignWriting.js
  - Sinhala.js
 — Sogdian.js
 Sora_Sompeng.js
 — Soyombo₁js
  Sundanese.js
  – Syloti_Nagri.js
  – Syriac.js
  - Tagalog.js
  - Tagbanwa.js
  - Tai Le.įs
  - Tai_Tham.js
  - Tai_Viet.js
  - Takri.js
  - Tamil.js
  - Tangsa.js
  - Tangut.js
  - Telugu.js
  - Thaana.js
  - Thai.js
  - Tibetan.js
  - Tifinagh.js
  - Tirhuta.js
  - Toto.js
 Ugaritic.js
  – Vai⊾js
  Vithkuqi.js
  - Wancho₁js
  - Warang_Citi.js
  - Yezidi.js
  - Yi.js
  - Zanabazar_Square.js
index.js
package.json
```

```
└ unicode-version.js

    regenerator-runtime

─ LICENSE

         README.md

— package.json

       — path.js
      └ runtime.js

    regenerator-transform

       LICENSE
         README.md
          - lib
                 ⊢ emit.js
                  — hoist.js
                  — index.js
                  — leap₊js
                  — meta.js

— replaceShorthandObjectMethod.js

                     - util.js
                 └ visit.js
          – package.json
      ∟ src
                 ⊢ emit.js
                  ─ hoist.js
                  — index.js
                  — leap.js
                   — meta.js

⊢ replaceShorthandObjectMethod.js

                   — util.js
                 └ visit.js
regex-parser
       LICENSE
          README.md
          - lib
                 — index.js

    typings
    typings

    □ regex-parser.d.ts

      └ package.json
regexp.prototype.flags
      - .editorconfig
        — .eslintrc
        - nycrc
        — CHANGELOG.md
       LICENSE
       — README.md
       — auto.js

    implementation.js

       index.js
         — package.json

→ polyfill.js

       — shim.js
      └ test

    implementation.js

                   — index.js
                     – shimmed.js
```

```
└ tests.js
 regexpp

─ LICENSE

  README.md
  — index.d.ts
  — index.js
  — index.js.map
  — index.mjs
   - index.mjs.map
  └ package.json
- regexpu-core

    LICENSE−MIT.txt

  — README.md
  – data
     — character-class-escape-sets.js
     └ iu-mappings.js

─ node_modules

    └ .bin
        ∟ regjsparser
  — package.json
  └ rewrite-pattern.js
- regisparser

─ LICENSE.BSD

  README.md
  — bin
    ∟ parser
   - node_modules
     _ .bin
        ∟ jsesc
       jsesc
        — LICENSE-MIT.txt
         README.md
         - bin
          ∟ jsesc
         – jsesc.js
         - man
           └ jsesc.1
        └ package.json
  — package.json
   - parser.d.ts
  └ parser.js
- relateurl
  — README.md
   - lib


    constants.js


     — format.js
     — index.js
      – options.js
      parse

⊢ host.js

⊢ hrefInfo.js

         - index.js
         – path.js
         - port.js
```

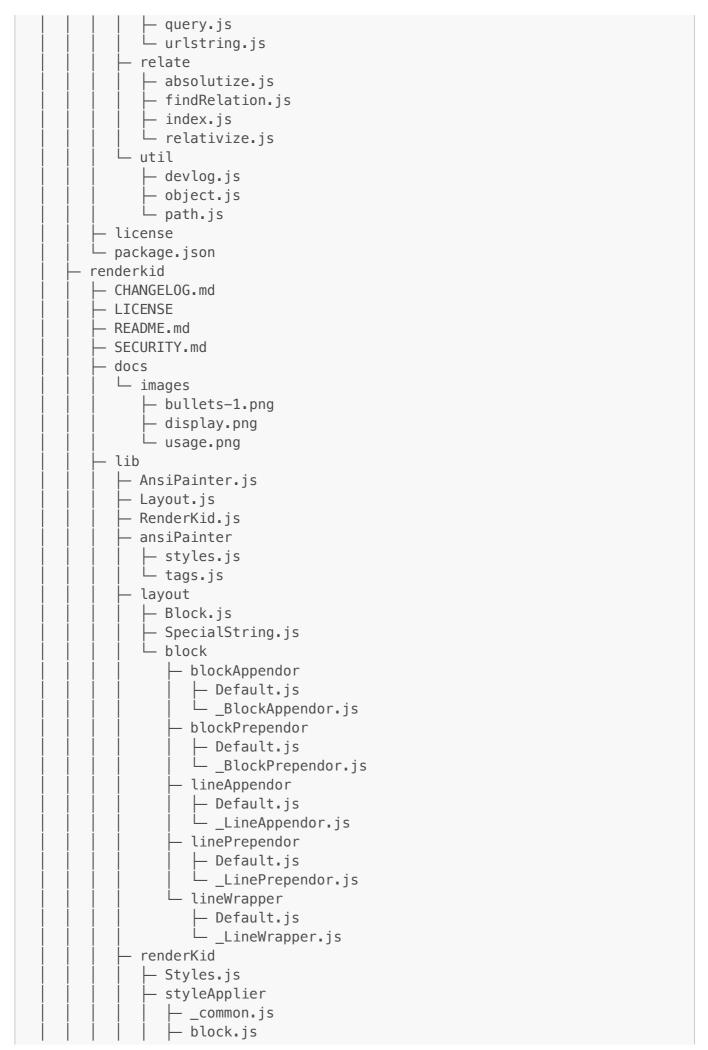

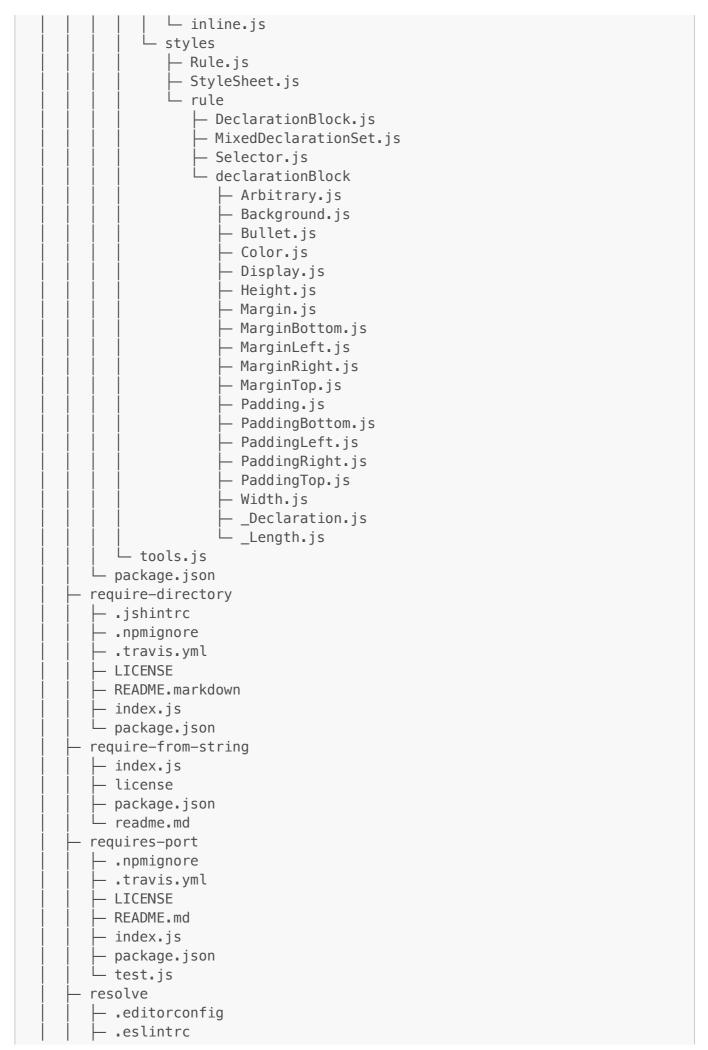

```
.github
  └ FUNDING.yml
 - LICENSE
 SECURITY.md
 – async₁js
– bin
  └ resolve
 - example
   — async.js
  └ sync.js
– index.js
- lib

— async.js

   — caller.js
   — core.js
   — core.json
   — homedir⊾js
   — is-core.js

    h node-modules-paths.js

   — normalize-options.js
   └ sync.js
 – package.json
 - readme.markdown
 - sync.js
└ test
   — core₌js
   — dotdot
      ⊢ abc
        └ index.js
     └ index.js
   — dotdot.js
   — faulty_basedir.js
    – filter.js
   – filter_sync.js
   – home_paths.js
   — home_paths_sync.js
   — mock.js
   — mock_sync.js
   — module_dir
      xmodules
         L aaa
            └ index.js
       - ymodules
         ∟ aaa
            └ index.js
       zmodules
         ∟ bbb
             – main.js

    package.json

   — module_dir.js
    node-modules-paths.js
    - node_path
```

```
└ index.js
       CCC
        └ index.js
      bbb
        └ index.js
      - ccc
        └ index.js
- node_path.js
– nonstring.js
- pathfilter
  └ deep_ref
     └ main.js
- pathfilter.js
- precedence
  — aaa

─ index.js

     └ main.js
   — aaa.js
   - bbb
     └ main.js
  └ bbb.js
- precedence.js
- resolver
  ⊢ baz
     ─ doom.js

    package.json
    quux.js

   - browser_field
     — a.js
      – b.js
     └ package.json
   - cup.coffee
   — dot_main
     — index.js
     └ package.json
   - dot_slash_main

    index.js
    package.json

   - false_main
     index.js

    package.json

   – foo.js
   - incorrect_main
      – index.js
     └ package.json
   - invalid_main
     └ package.json
   malformed_package_json

─ index.js

     └ package.json
   - mug.coffee
   - mug₌js
   - multirepo
```



```
- license
    – package.json
  └ readme.md
resolve-url-loader
    CHANGELOG.md
    LICENSE
    README.md
   — docs

— advanced—features.md

         — basic-problem.svg
         — contributing.md

    detailed-problem.svg

         — how−it−works.md
         ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ldsymbol{ld}}}}}}
    - index.js
   — lib
        — engine

⊢ fail-initialisation.js

                — fail-processing.js
                 – postcss.js
               └ rework.js
           - file-protocol.js
           - join-function

— debug₁js

                  - fs-utils.js
               └ index.js
           - log-to-test-harness.js
          – position–algerbra.js
         └ value-processor.js
    - node_modules
         picocolors

─ LICENSE

                 - README.md
                — package₌json
                 picocolors.browser.js
                — picocolors.d.ts
                  - picocolors.js
               └ types.ts
              postcss
                — LICENSE
                 - README.md
                 – lib
                      — at-rule.js
                      — comment.js
                       — container.js
                       — css-syntax-error.js
                      ─ declaration.js
                       — input.js
                       — lazy−result.js
                       – list.js
                        - map-generator.js
                        - node.js
                        – parse⊾js
                        – parser⊾js
```



```
- rollup
  ─ CHANGELOG.md
   - LICENSE.md
  README.md
  — dist
    ⊢ bin
       └ rollup
      – es

— package.json

        rollup.browser.js
         - rollup.js
       └ shared
           — rollup.js
            – watch.js
     — loadConfigFile.js
     ├ rollup.browser.js
     ├ rollup.browser.js.map
     rollup.d.ts
     - rollup.js
     ∟ shared
        ⊢ index.js
         loadConfigFile.js
        — mergeOptions.js
        rollup.js
         – watch-cli.js
        └ watch.js
  └ package.json
- rollup-plugin-terser

─ LICENSE

  README.md

─ node modules

     ⊢ .bin
        - rollup
       └ terser
      - jest-worker

─ LICENSE

         - README.md
         - build
           Farm.d.ts
            – Farm.js
           — WorkerPool.d.ts
           WorkerPool.js
            base
              ─ BaseWorkerPool.d.ts
             └─ BaseWorkerPool.js
           index.d.ts
           – index.js
            - types.d.ts
            - types.js
           └ workers
              ─ ChildProcessWorker.d.ts
               - ChildProcessWorker.js
              NodeThreadsWorker.d.ts
              NodeThreadsWorker.js
```

```
- messageParent.d.ts
               messageParent.js
               - processChild.d.ts
               - processChild.js
               - threadChild.d.ts
              └ threadChild.js
         - package.json

    serialize-javascript

        - vscode
          ∟ settings.json
         - LICENSE
         - README.md
         - index.js
         – package.json
   – package.json

    ⊢ rollup-plugin-terser.d.ts

    ⊢ rollup-plugin-terser.js

   - rollup-plugin-terser.mjs
 └ transform.js
run-parallel
  - README.md
   – index.js
 └ package.json
- safe-buffer
  README.md
   - index.d.ts
   - index.js
  └ package.json
- safe-regex-test
  ⊢ .eslintrc
   - .github
   └ FUNDING.yml
   - CHANGELOG.md
  LICENSE
   README.md
  — index.js
   – package.json
  test
    └ index.is
- safer-buffer
  – Porting-Buffer.md
  — Readme.md
  — dangerous.js
  — package.json
   - safer.js
 └ tests.js
- sanitize.css

    LICENSE.md

   - README.md
   - assets.css
   - forms.css
```

```
- package.json
   reduce-motion.css
   – sanitize.css
  — system-ui.css
   typography.css
  └ ui-monospace.css
sass

─ LICENSE

   README.md
  — package.json
  - sass.dart.js
   sass.default.dart.js
   – sass.js
  └ types
     — compile.d.ts
     — exception.d.ts
     importer.d.ts
      - index.d.ts
      – legacy
        — exception.d.ts
        — function.d.ts
         - importer.d.ts
        — options.d.ts
         - plugin_this.d.ts
        └ render.d.ts
      - logger
        — index.d.ts
         source location.d.ts
        └ source_span.d.ts
      - options.d.ts
      - util
        └ promise_or.d.ts
      - value

─ argument_list.d.ts

         - boolean.d.ts
         - color.d.ts
         - function.d.ts
         - index.d.ts
         - list.d.ts
         - map.d.ts
         - number.d.ts

    □ string.d.ts

sass-loader
  ─ CHANGELOG.md
  LICENSE
  README.md
  – dist
     ─ SassError.js
     ─ SassWarning.js
     ⊢ cjs.js
      - index.js
      - options.json
     └ utils.js
    node_modules
```

```
∟ .bin
        ⊢ sass
        └ webpack

    package.json

- sax

    LICENSE

  README.md
  — lib
    ∟ sax.js

    package.json

- saxes

— README.md

  — package.json
  - saxes.d.ts
   - saxes.įs
 └ saxes.js.map
scheduler
  README.md
  ⊢ cis
    - scheduler-unstable_mock.development.js
      scheduler-unstable_mock.production.min.js
      scheduler-unstable_post_task.development.js
     scheduler-unstable_post_task.production.min.js
     scheduler.development.js

    □ scheduler.production.min.js

  — index.js
  — node_modules
    ∟ .bin

    Loose-envify


  — package.json
  — umd
      scheduler-unstable_mock.development.js
     scheduler-unstable_mock.production.min.js
      scheduler.development.js
      scheduler.production.min.js

    □ scheduler.profiling.min.js


   unstable_mock.js
 └ unstable_post_task.js
- schema-utils
  LICENSE
  README.md
  declarations
     ValidationError.d.ts
      - index.d.ts
      keywords

    □ absolutePath.d.ts

      - util
        — Range.d.ts
       └ hints.d.ts
      validate.d.ts
    dist
     — ValidationError₊js
      - index.js
```

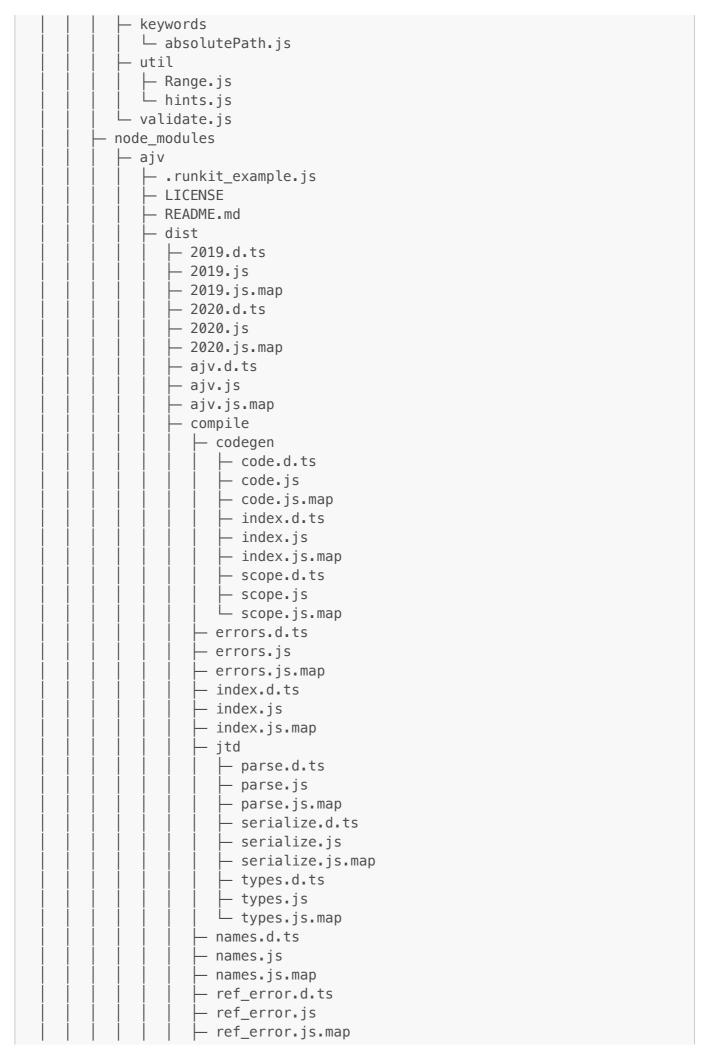


```
resolve.d.ts
     resolve.js
    resolve.js.map
   - rules.d.ts
   - rules.js
   - rules.js.map
   - util.d.ts
   - util.js
   - util.js.map
  └ validate
     applicability.d.ts
     applicability.js
      applicability.js.map
      boolSchema.d.ts
      - boolSchema.js
     — boolSchema.js.map
     dataType.d.ts
     dataType.js
      — dataType.js.map
     — defaults.d.ts
     defaults.js
      - defaults.js.map
      - index.d.ts
      – index.js
      - index.js.map
      keyword.d.ts
      – keyword⊾js
      - keyword.js.map
      subschema.d.ts
      - subschema.js
     └ subschema.js.map
- core.d.ts
- core.js
- core.js.map
- jtd.d.ts
- jtd.js
jtd.js.map
refs
  ─ data.json
   - json-schema-2019-09
     — index.d.ts
      – index.js
     — index.js.map
      meta
        — applicator₌json
        — content.json
        — core₌json
        — format.json
         – meta−data.json
        └ validation.json
      - schema.json
    json-schema-2020-12
      - index.d.ts
       index.js
```

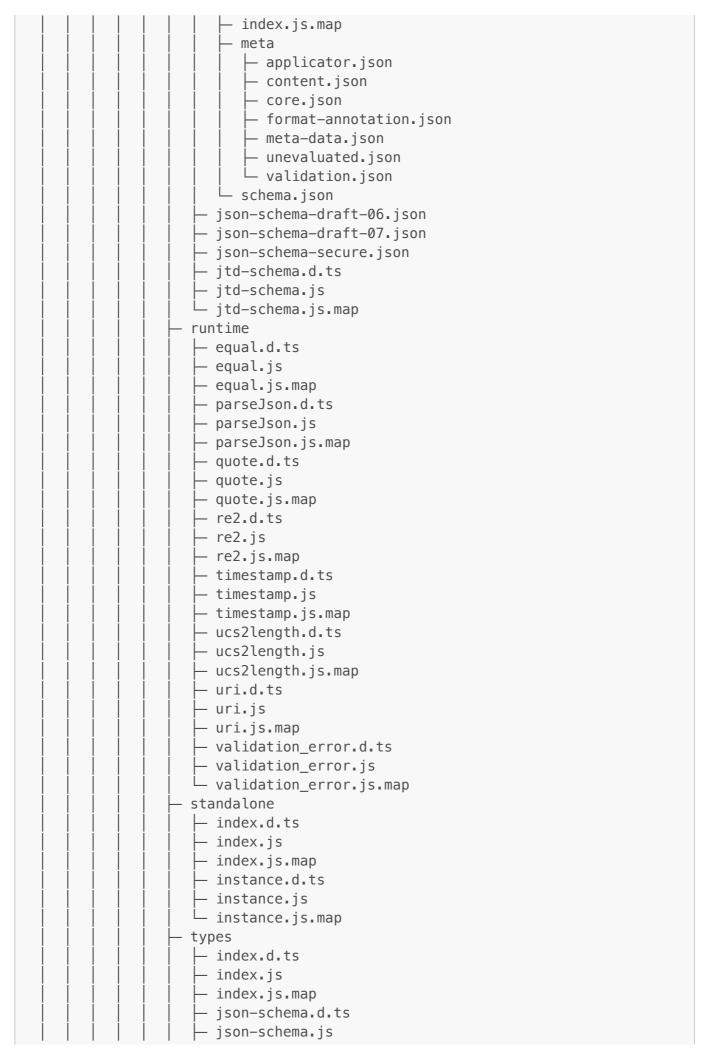


json-schema.js.map jtd-schema.js jtd-schema.js jtd-schema.js jtd-schema.js jtd-schema.js jtd-schema.js jtd-schema.js jtd-schema.js map vocabularies additionalItems.js additionalProperties.js additionalProperties.js additionalProperties.js additionalProperties.js additionalProperties.js allof.js allof.js allof.js allof.js allof.js anyof.js anyof.j		
jtd-schema.js jtd-schema.js jtd-schema.js vocabularies applicator additionalItems.js additionalProperties.d.ts additionalProperties.js additionalProperties.js additionalProperties.js additionalProperties.js additionalProperties.js allOf.d.ts allOf.js anyOf.js _		
- jtd-schema.js.map - vocabularies - applicator - additionalItems.d.ts - additionalItems.js - additionalProperties.d.ts - additionalProperties.js - additionalProperties.js - additionalProperties.js - additionalProperties.js.map - allOf.d.ts - allOf.js - allOf.js - allOf.js.map - anyOf.js - anyOf.js - anyOf.js - anyOf.js - anyOf.js.map - contains.js.map - dependencies.js - dependencies.js - dependencies.js - dependencies.js - dependentSchemas.d.ts - dependentSchemas.js.map - if.d.ts - if.js - if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js.map - items.ol.ts - items.o		
- applicator - additionalItems.js - additionalProperties.d.ts - additionalProperties.js - additionalProperties.js - additionalProperties.js - additionalProperties.js - additionalProperties.js - additionalProperties.js.map - allof.d.ts - allof.js.map - anyof.d.ts - anyof.js - anyof.js - anyof.js.map - contains.js.map - contains.js.map - dependencies.d.ts - dependencies.js - dependencies.js - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js - if.d.ts - if.js - if.js.map - index.d.ts - index.js - items.d.ts - items.ls - items.ls - items.lo.ts - items.2020.js - items.2020.js - items.2020.js - items.2020.js - not.js.map - not.d.ts - not.js.map - poerties.d.ts - patternProperties.js - patternProperties.js - patternProperties.js - prefixItems.d.ts - prefixItems.js - prefixItems.js - prefixItems.js.map - properties.js - properties.js - properties.d.ts - properties.js - properties.js		
- applicator - additionalItems.js map - additionalProperties.js - additionalProperties.js - additionalProperties.js - additionalProperties.js - additionalProperties.js.map - allof.d.ts - allof.js - allof.js - allof.js.map - anyof.js.map - contains.js - contains.js - contains.js - contains.js - dependencies.d.ts - dependencies.js - dependencies.js - dependencies.js - dependentSchemas.d.ts - dependentSchemas.js - if.js - if.js - if.js - if.js - if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js.map - items.d.ts - items2020.js - items2020.js - items2020.js.map - not.d.ts - not.js - not.js.map - poeff.d.ts - one0f.js - one0f.js.map - patternProperties.js - patternProperties.js - prefixItems.d.ts - prefixItems.js.map - properties.d.ts		
additionalItems.js additionalItems.js additionalProperties.d.ts additionalProperties.js additionalProperties.js.map additionalProperties.js.map additionalProperties.js.map allOf.js additionalProperties.js.map allOf.js allOf.js allOf.js.map anyOf.js anyOf.js.map contains.js contains.js contains.js dependencies.js.map dependencies.js.map dependentSchemas.js.map dependentSchemas.js.map if.d.ts if.js if.js.map index.d.ts index.js index.js index.js items.js items.js items.js items.jo.js items.js not.js.map oncof.d.ts oncof.js.map patternProperties.js patternProperties.js patternProperties.js prefixItems.js prefixItems.js prefixItems.js prefixItems.js properties.js properties.js	L vocabularies	
- additionalTtems.js.map - additionalProperties.d.ts - additionalProperties.js - additionalProperties.js.map - allof.d.ts - allof.js - allof.js.map - anyOf.d.ts - anyOf.js.map - contains.js - contains.js - contains.js - contains.js - contains.js - dependencies.js - dependencies.js - dependencies.js - dependentSchemas.js - dependentSchemas.js - if.js - if.js.map - index.d.ts - index.js - index.d.ts - index.js - index.d.ts - items.js - items.d.ts - items.2020.js - items2020.js - not.js - not.js.map - patternProperties.js - patternProperties.js - patternProperties.js - prefixItems.js - prefixItems.js.map - preperties.js - prefixItems.js.map - properties.js - prefixItems.js - prefixItems.js - prefixItems.js - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.d.ts - properties.js - prefixItems.js.map - properties.d.ts - properties.js - prefixItems.js.map - properties.d.ts - prefixItems.js.map - properties.d.ts - properties.js		
- additionalTroperties.d.ts - additionalProperties.js - additionalProperties.js - additionalProperties.js.map - allof.d.ts - allof.js - allof.js - allof.js.map - anyof.d.ts - anyof.js - anyof.js - anyof.js.map - contains.js - contains.js - contains.js - contains.js - dependencies.d.ts - dependencies.js - dependencies.js - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js - if.js - if.js - if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js.map - items.d.ts - items.js.map - items2020.d.ts - items2020.d.ts - items2020.js - items2020.js - not.d.ts - not.js - not.d.ts - oneOf.js.map - oneOf.d.ts - oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - prefixItems.js	additionalItems.d.ts	
- additionalTroperties.d.ts - additionalProperties.js - additionalProperties.js - additionalProperties.js.map - allof.d.ts - allof.js - allof.js - allof.js.map - anyof.d.ts - anyof.js - anyof.js - anyof.js.map - contains.js - contains.js - contains.js - contains.js - dependencies.d.ts - dependencies.js - dependencies.js - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js - if.js - if.js - if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js.map - items.d.ts - items.js.map - items2020.d.ts - items2020.d.ts - items2020.js - items2020.js - not.d.ts - not.js - not.d.ts - oneOf.js.map - oneOf.d.ts - oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - prefixItems.js	additionalItems.js	
- additionalProperties.d.ts - additionalProperties.js - additionalProperties.js.map - allOf.d.ts - allOf.js - allOf.js.map - anyOf.d.ts - anyOf.js.map - contains.d.ts - contains.js - contains.js - contains.js.map - dependencies.d.ts - dependencies.js.map - dependencies.js - dependencies.js - dependentSchemas.js - dependentSchemas.js - if.d.ts - if.js - if.js - if.js - if.js - if.js - index.js.map - items.d.ts - items.js.map - items.d.ts - items.2020.d.ts - items2020.d.ts - items2020.js - items2020.js - not.js.map - not.d.ts - not.js - not.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - prefixItems.js.map - properties.d.ts - prefixItems.js.map - properties.d.ts - prefixItems.js.map - properties.d.ts - prefixItems.js.map - properties.d.ts - properties.js.map - properties.d.ts - properties.d.ts - properties.js.map - properties.d.ts - properties.js.map - properties.js.map - properties.d.ts - properties.js.		
- additionalProperties.js - additionalProperties.js.map - allOf.js - allOf.js - allOf.js - allOf.js - anyOf.js - anyOf.js - anyOf.js.map - contains.js - contains.js - contains.js - contains.js - dependencies.d.ts - dependencies.js - dependencies.js - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js - if.js - if.js - if.js.map - index.d.ts - index.js - index.js - index.js - items.js - items.js - items.js - items.goo.d.ts - items.goo.d.ts - items2020.js - items2020.js - items2020.js - not.js.map - oneOf.d.ts - oneOf.js - oneOf.js - oneOf.js - patternProperties.d.ts - patternProperties.js - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts - prefixItems.js.map - properties.d.ts		
- additionalProperties.js.map - allof.jts - allof.js.map - anyof.jts.map - anyof.js.map - contains.js - contains.js - contains.js - contains.js - dependencies.js - dependencies.js - dependentSchemas.dts - dependentSchemas.js - dependentSchemas.js - if.js - if.js.map - if.d.ts - if.js - if.js.map - index.js - index.js - index.js - index.js - items.js - items.js - items.js - items.js - items.js - items.js - items.go20.dts - items2020.js - items2020.js - items2020.js - not.js.map - not.dts - not.js - not.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.d.ts - properties.js.map - properties.d.ts - properties.js.map - properties.d.ts - properties.js.map - properties.d.ts - properties.js.map		
allOf.js		
- allof.js - allof.js.map - anyof.d.ts - anyof.js.map - contains.d.ts - contains.js.map - dependencies.d.ts - dependencies.js.map - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js - if.js - if.js - if.js - index.d.ts - index.js - index.js - inems.js.map - items.d.ts - items.js - items.js - items.js - items.go.go.js - not.js.map - not.d.ts - not.js - not.js - not.js.map - noeof.d.ts - oneof.js - oneof.js - patternProperties.js.map - prefixItems.js.map - prefixItems.js.map - properties.js - prefixItems.js - prefixItems.js.map - properties.js - prefixItems.js.map - properties.js - prefixItems.js.map - properties.js - prefixItems.js.map - properties.js.map - properties.js.map - prefixItems.js.map - prefixItems.js.map - properties.js.map		
- allof.js.map - anyof.d.ts - anyof.js - anyof.js.map - contains.d.ts - contains.js - contains.js - contains.js.map - dependencies.d.ts - dependencies.js.map - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js - if.d.ts - if.js - if.js.map - index.d.ts - index.js - index.js - index.js - items.js - items.js - items.2020.d.ts - items2020.js - items2020.js - items2020.js.map - not.d.ts - not.js - not.js - not.js.map - notef.d.ts - oneOf.js - oneOf.js - oneOf.js - patternProperties.d.ts - patternProperties.js.map - prefixItems.js.map - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.d.ts - properties.d.ts - prefixItems.js.map - prefixItems.js.map - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts		
- anyOf.js - anyOf.js.map - contains.d.ts - contains.js.map - dependencies.d.ts - dependencies.js.map - dependentSchemas.d.ts - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js.map - if.d.ts - if.js - if.js.map - index.d.ts - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js.map - items.2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js - not.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.js.map - prefixItems.js.map - prefixItems.js.map - prefixItems.js.map - prefixItems.js.map - prefixItems.js.map - properties.d.ts - prefixItems.js.map - properties.d.ts - properties.d.ts - properties.js.map - prefixItems.js.map - properties.js.map - properties.d.ts - properties.d.ts - properties.js.map - properties.js.map - properties.js.map - properties.js.map - properties.js.map - properties.js.map - properties.d.ts - properties.js.map - properties.d.ts - properties.js.map - properties.js.map - properties.js.map - properties.js.map - properties.js.map - properties.js.map		
- anyOf.js - anyOf.js.map - contains.d.ts - contains.js - contains.js.map - dependencies.d.ts - dependencies.js - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js - dependentSchemas.js - if.js - if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js.map - items.2020.d.ts - items2020.js - items2020.js - not.js - not.js - not.js - not.js - not.js.map - oneOf.js - oneOf.js - oneOf.js - patternProperties.js - patternProperties.js - patternProperties.js.map - prefixItems.js.map - properties.d.ts		
- anyOf.js.map - contains.d.ts - contains.js.map - dependencies.d.ts - dependencies.js.map - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js - dependentSchemas.js - dependentSchemas.js.map - if.d.ts - if.js - if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js.map - items.2020.d.ts - items2020.js - items2020.js - items2020.js - items2020.js - not.js.map - not.d.ts - not.js - not.js.map - oneOf.d.ts - oneOf.js - oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.js.map - prefixItems.js.map - properties.d.ts		
- contains.d.ts - contains.js - contains.js.map - dependencies.d.ts - dependencies.js.map - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js - dependentSchemas.js.map - if.d.ts - if.js - if.js.map - index.d.ts - index.js.map - items.d.ts - items.js - items.js.map - items.2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js - not.js - not.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - prefixItems.js.map - prefixItems.js.map - properties.js.map - properties.d.ts - properties.js.map - properties.js.map - properties.js.map - properties.js.map - properties.d.ts - properties.js.map - properties.d.ts		
- contains.js - contains.js.map - dependencies.d.ts - dependencies.js - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js.map - if.d.ts - if.js - if.js.map - index.d.ts - index.js - index.js.map - items.js.map - items.js.map - items.js.map - items.2020.d.ts - items.2020.js - items.2020.js - not.d.ts - not.js - not.js.map - oneOf.d.ts - oneOf.js.map - patternProperties.d.ts - patternProperties.js.map - prefixItems.d.ts - prefixItems.js.map - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts - properties.js.map - properties.d.ts - properties.js.map - properties.d.ts - properties.js.map - properties.d.ts - properties.d.ts - properties.d.ts - properties.js.map - properties.d.ts - properties.js.map - properties.js		
- contains.js.map - dependencies.d.ts - dependencies.js.map - dependentSchemas.d.ts - dependentSchemas.js.map - if.d.ts - if.js - if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.2020.d.ts - items.2020.js - items.2020.js - not.d.ts - not.js.map - not.d.ts - not.js.map - patternProperties.d.ts - patternProperties.js.map - prefixItems.js.map - prefixItems.js.map - properties.d.ts - properties.js.map - properties.d.ts		
<pre>dependencies.d.ts - dependencies.js - dependentSchemas.d.ts - dependentSchemas.js - dependentSchemas.js.map - if.d.ts - if.js - if.js.map - index.d.ts - index.js - index.js - items.js - items.js.map - items2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js - not.js - not.js.map - oneOf.d.ts - oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.d.ts - prefixItems.js.map - properties.js.map - properties.js.map - properties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - prefixItems.js.map - properties.js.map - properties.js.map - properties.js.map - properties.js.map - prefixItems.js.map - properties.js.map - properties.js.map</pre>		
<pre>dependencies.js dependentSchemas.d.ts dependentSchemas.js dependentSchemas.js dependentSchemas.js.map if.d.ts if.js if.js if.js index.d.ts index.js index.js index.js index.js items.js items.js items2020.d.ts items2020.js items2020.js.map not.d.ts not.js not.js.map onof.d.ts not.js nonof.js.map one0f.d.ts patternProperties.d.ts patternProperties.js patternProperties.js prefixItems.d.ts prefixItems.js.map properties.js.map properties.js.map properties.js.map prefixItems.d.ts prefixItems.js prefixItems.js prefixItems.js.map properties.js.map properties.js.map properties.js.map properties.js.map properties.js.map properties.js.map properties.js.map properties.js.map properties.js.map</pre>		
<pre>dependencies.js.map dependentSchemas.d.ts dependentSchemas.js dependentSchemas.js.map if.d.ts if.js if.js if.js.map index.d.ts index.js index.js.map items.d.ts items.js items.js items2020.d.ts items2020.js items2020.js.map not.d.ts not.js.map oneOf.d.ts not.js.map patternProperties.d.ts patternProperties.js patternProperties.js.map prefixItems.d.ts prefixItems.js.map properties.js.map properties.js.map properties.js.map prefixItems.js.map prefixItems.js.map properties.js.map properties.js.map prefixItems.js.map prefixItems.js.map properties.js.map properties.js.map</pre>		
dependentSchemas.js dependentSchemas.js.map if.d.ts if.js if.js if.js.map index.d.ts index.js index.js index.js items.js.map items.d.ts items.js items.js.map items2020.d.ts items2020.js items2020.js items2020.js not.js not.js not.js not.js noe0f.d.ts noe0f.js.map patternProperties.d.ts patternProperties.js prefixItems.d.ts prefixItems.js.map properties.js prefixItems.js.map properties.js prefixItems.js prefixItems.js prefixItems.js prefixItems.js properties.js		
<pre>dependentSchemas.js dependentSchemas.js.map if.d.ts if.js if.js if.js.map index.d.ts index.js index.js.map items.d.ts items.js items.js.map items.2020.d.ts items.2020.js items.2020.js items2020.js not.d.ts not.js not.js not.js not.js.map oneOf.d.ts oneOf.js.map patternProperties.d.ts patternProperties.js patternProperties.js prefixItems.d.ts prefixItems.js properties.js</pre>		
<pre>dependentSchemas.js.map - if.d.ts - if.js - if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js - items2020.d.ts - items2020.js - items2020.js - items2020.js - not.d.ts - not.js - not.js.map - oneOf.d.ts - oneOf.js - oneOf.js - oneOf.js.map - patternProperties.d.ts - patternProperties.js - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.d.ts - prefixItems.js - prefixItems.js</pre>		
- if.d.ts - if.js - if.js.map - index.d.ts - index.js - index.js - index.js - items.d.ts - items.js - items.js - items2020.d.ts - items2020.js - items2020.js - items2020.js - not.d.ts - not.js - not.js.map - one0f.d.ts - one0f.js - one0f.js - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js.map - properties.d.ts		
- if.js - if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js.map - items2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js.map - one0f.d.ts - one0f.js - one0f.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.js.map - properties.d.ts - prefixItems.js.map - properties.d.ts - prefixItems.js.map - properties.d.ts - prefixItems.js.map - properties.d.ts		
- if.js.map - index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js.map - items2020.d.ts - items2020.js - items2020.js - items2020.js.map - not.d.ts - not.js - not.js - not.js.map - oneOf.d.ts - oneOf.js - oneOf.js - patternProperties.d.ts - patternProperties.js - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.js		
<pre>- index.d.ts - index.js - index.js.map - items.d.ts - items.js - items.js.map - items2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js - not.js.map - one0f.d.ts - one0f.js - one0f.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - patternProperties.js - prefixItems.d.ts - prefixItems.js - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.d.ts - prefixItems.js.map - properties.d.ts - prefixItems.js.map - properties.d.ts - properties.d.ts</pre>		
- index.js - index.js.map - items.d.ts - items.js - items.js.map - items2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js.map - one0f.d.ts - one0f.js - one0f.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts		
- index.js.map - items.d.ts - items.js - items.js.map - items2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js.map - one0f.d.ts - one0f.js - one0f.js - patternProperties.d.ts - patternProperties.js - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts		
- items.d.ts - items.js - items.js.map - items2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js.map - oneOf.d.ts - oneOf.js - oneOf.js - patternProperties.d.ts - patternProperties.js - patternProperties.js - prefixItems.d.ts - prefixItems.js - properties.d.ts		
- items.js - items.js.map - items2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js.map - one0f.d.ts - one0f.js - one0f.js - patternProperties.d.ts - patternProperties.js - patternProperties.js - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.js.map - properties.js.map - properties.js.map - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts - properties.js		
<pre>- items.js.map - items2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js.map - oneOf.d.ts - oneOf.js - oneOf.js - oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.d.ts - properties.js.map - properties.js.map - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts</pre>		
<pre>- items2020.d.ts - items2020.js - items2020.js.map - not.d.ts - not.js - not.js.map - one0f.d.ts - one0f.js.map - one0f.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.js</pre>		
<pre>- items2020.js - items2020.js.map - not.d.ts - not.js - not.js.map - one0f.d.ts - one0f.js - one0f.js - patternProperties.d.ts - patternProperties.js - patternProperties.js - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.js.map - properties.js</pre>		
<pre>- items2020.js.map - not.d.ts - not.js - not.js.map - one0f.d.ts - one0f.js - one0f.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js.map - properties.js.map - properties.js.map - properties.js.map</pre>		
<pre>- items2020.js.map - not.d.ts - not.js - not.js.map - one0f.d.ts - one0f.js - one0f.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js.map - properties.js.map - properties.js.map - properties.js.map</pre>		
<pre>- not.d.ts - not.js - not.js.map - oneOf.d.ts - oneOf.js - oneOf.js - patternProperties.d.ts - patternProperties.js - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts</pre>		
<pre>- not.js.map - oneOf.d.ts - oneOf.js - oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts</pre>		
<pre>- not.js.map - oneOf.d.ts - oneOf.js - oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts</pre>		
- oneOf.d.ts - oneOf.js - oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts		
<pre>- oneOf.js - oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.d.ts</pre>		
<pre>- oneOf.js.map - patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js - properties.d.ts - properties.d.ts - properties.d.ts</pre>		
<pre>- patternProperties.d.ts - patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.d.ts</pre>		
<pre>- patternProperties.js - patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.d.ts</pre>		
<pre>- patternProperties.js.map - prefixItems.d.ts - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.js</pre>		
<pre>- prefixItems.d.ts - prefixItems.js - prefixItems.js.map - properties.d.ts - properties.js</pre>		
<pre>- prefixItems.js - prefixItems.js.map - properties.d.ts - properties.js</pre>		
<pre>- prefixItems.js.map - properties.d.ts - properties.js</pre>		
<pre>properties.d.ts properties.js</pre>		
— properties.js		
higher ries 12 illigh		
806 / 017		


nronortyMamas d ts	
henElse.d.ts	
— thenElse.js	
│	
index.d.ts	
index.js.map	
ref.js.map	
discriminator	
index.d.ts	
index.js	
index.js.map	
types.d.ts	
types.js	
types.js.map	
draft/ijsimap dynamic	
dynamic dynamicAnchor.d.ts	
dynamicAnchor.js	
recursiveRef.d.ts	
recursiveRef.js	
errors.d.ts	
errors.js.map	
807 / 017	

├ format.js.map
<pre>index.d.ts</pre>
index.js
index.js.map
jtd
⊢ discriminator.d.ts
— discriminator.js
— discriminator.js.map
— elements.d.ts
— elements.js
— elements.js.map
enum.d.ts
— enum.js
— enum.js.map
- error.d.ts
- error.js
- error.js.map
- index.d.ts
├ index.js
— index.js.map
— metadata.d.ts
— metadata.js
— metadata.js.map
— nullable.d.ts
— nullable.js
— nullable.js.map
<pre>poptionalProperties.d.ts</pre>
— optionalProperties.js
─ optionalProperties.js.map
<pre> properties.d.ts </pre>
<pre> properties.js </pre>
─ properties.js.map
— ref.d.ts
⊢ ref.js
— ref.js.map
— type.d.ts
type.js
type.js.map
— union.d.ts
union.js
union.js.map
— values.d.ts
— values.js
└ values.js.map
metadata.d.ts
metadata.js
metadata.js metadata.js.map
next.d.ts
next.js
next.js.map
unevaluated
index.d.ts
index.js
├ index.js.map
808 / 017

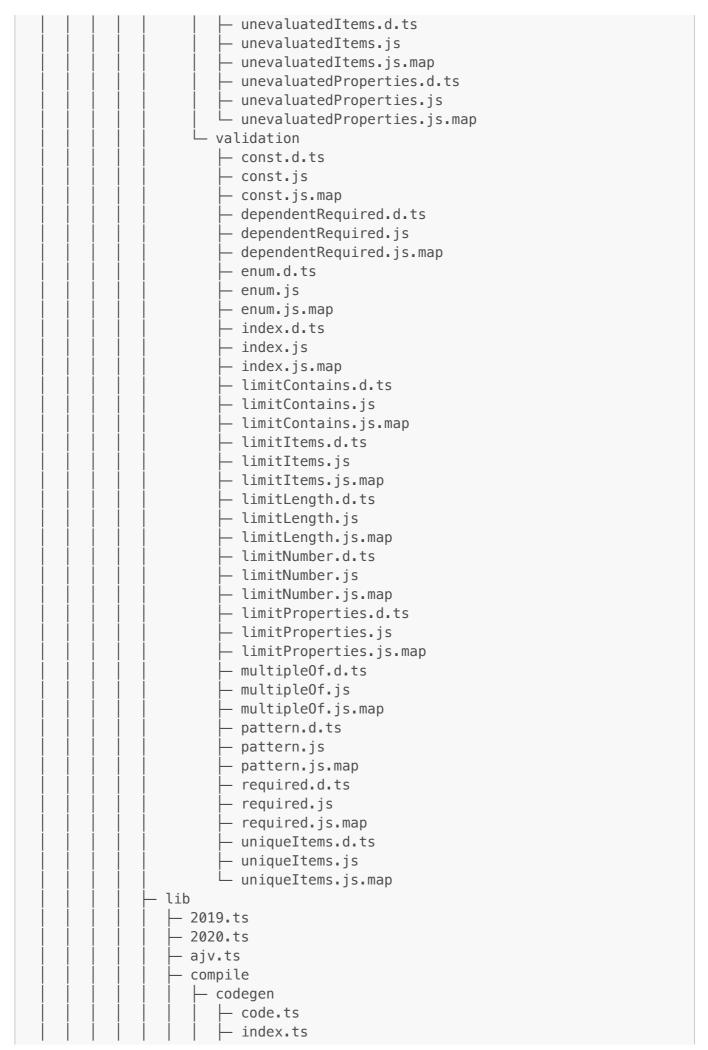

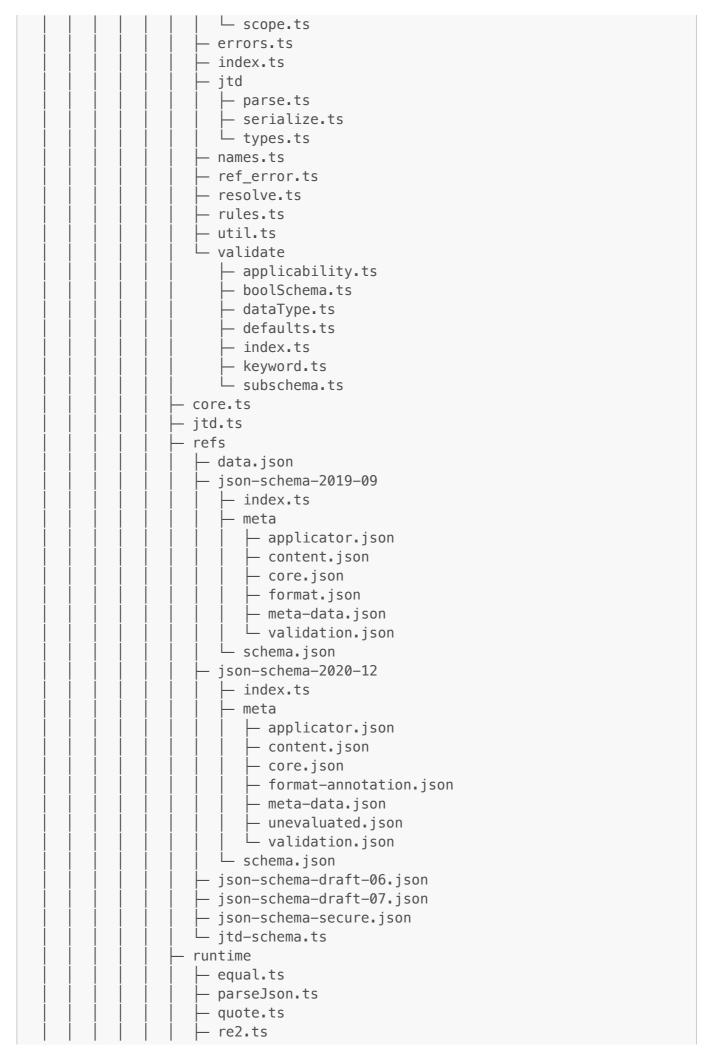



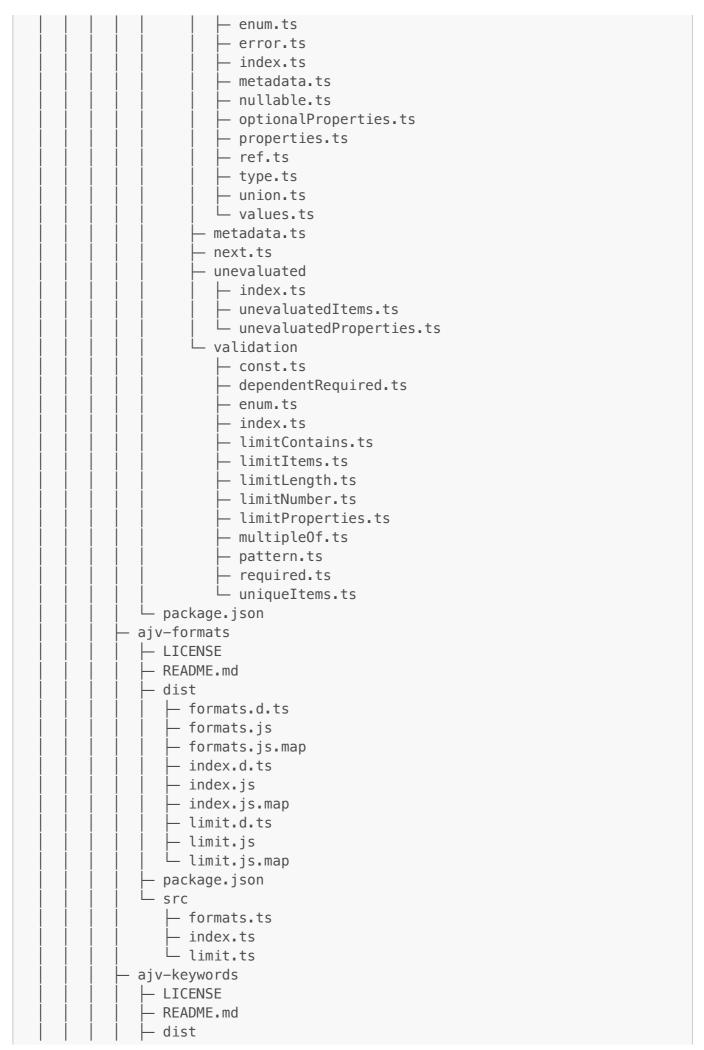

— definitions
range.js
— _required.d.ts
required.js
required.js.map
types.d.ts
<pre>types.js</pre>
<pre>types.js.map</pre>
util.d.ts
util.js
util.js.map
— allRequired.d.ts
— allRequired.js
— allRequired.js.map
— anyRequired.d.ts
— anyRequired.js
— anyRequired.js.map
— deepProperties.d.ts
— deepProperties.js
— deepProperties.js.map
— deepRequired.d.ts
— deepRequired.js
— deepRequired.js.map
— dynamicDefaults.d.ts
— dynamicDefaults.js
— dynamicDefaults.js.map
— exclusiveRange.d.ts
— exclusiveRange.js
— exclusiveRange.js.map
index.d.ts
— index.js
- index.js.map
instanceof.d.ts
- instanceof.js
instanceof.js.map
— oneRequired.d.ts
— oneRequired.is
— oneRequired.js.map
patternRequired.d.ts
patternRequired.is patternRequired.js
— patternRequired.js — patternRequired.js.map
patternkequired.js.map prohibited.d.ts
prohibited.is
prohibited.js.map
range.d.ts
range.js
range.js.map
- regexp.d.ts
- regexp.js
— regexp.js.map
— select.d.ts
— select.js
813 / 017

├ select.js.map
─ transform.d.ts
⊢ transform.js
— transform.js.map
typeof.d.ts
- typeof.js
— typeof.js.map
<pre>uniqueItemProperties.d.ts</pre>
─ uniqueItemProperties.js
└ uniqueItemProperties.js.map
<pre>- index.d.ts</pre>
<pre>- index.js</pre>
<pre>- index.js.map</pre>
- keywords
⊢ allRequired.d.ts
— allRequired.js
— allRequired.js.map
— anyRequired.d.ts
├ anyRequired.js
— anyRequired.js.map
— deepProperties.d.ts
— deepProperties.js
— deepProperties.js.map
— deepRequired.d.ts
— deepRequired.js
— deepRequired.js.map
— dynamicDefaults.d.ts
— dynamicDefaults.js
— dynamicDefaults.js.map
— exclusiveRange.d.ts
— exclusiveRange.js
— exclusiveRange.js.map
— index.d.ts
— index.js
— index.js.map
instanceof.d.ts
instanceof.js
!
instanceof.js.map
— oneRequired.d.ts
— oneRequired.js
— oneRequired.js.map
<pre>patternRequired.d.ts</pre>
— patternRequired.js
— patternRequired.js.map
— prohibited.d.ts
— prohibited.js
— prohibited.js.map
range.d.ts
— range.js
— range.js.map
- regexp.d.ts
— regexp.js
— regexp.js.map
├ select.d.ts
814 / 017

```
- select.js
       - select.js.map
       - transform.d.ts
       - transform.js
       - transform.js.map
       - typeof.d.ts
       - typeof.js
       - typeof.js.map
       uniqueItemProperties.d.ts
       uniqueItemProperties.js
      └ uniqueItemProperties.js.map
 – package⊾json
∟ src

    definitions

       range.ts
       - _required.ts
       - _types.ts
        util.ts
       allRequired.ts
       anyRequired.ts
       - deepProperties.ts
       deepRequired.ts
       dynamicDefaults.ts
       exclusiveRange.ts
       index.ts
       instanceof.ts
       oneRequired.ts
       patternRequired.ts
       prohibited.ts
       range.ts
      regexp.ts
      select.ts
       - transform.ts
       - typeof.ts

    uniqueItemProperties.ts

     index.ts
     keywords

— allRequired.ts

       anyRequired.ts
       deepProperties.ts
       deepRequired.ts
       – dynamicDefaults.ts
       exclusiveRange.ts
       – index.ts
       instanceof.ts
       oneRequired.ts
       patternRequired.ts
       - prohibited.ts
       – range.ts
       – regexp.ts
       select.ts
       - transform.ts
       - typeof.ts
       uniqueItemProperties.ts
```

```
└ json-schema-traverse
                                                                                         _ .eslintrc.yml
                                                                                                    - .github
                                                                                                                        ─ FUNDING.yml
                                                                                                                    └ workflows
                                                                                                                                                      — build.yml
                                                                                                                                                      └ publish.yml
                                                                                                  - LICENSE
                                                                                                  - README.md
                                                                                                 - index.d.ts
                                                                                                  – index.js
                                                                                                    - package.json
                                                                                       ∟ spec

        ⊢ .eslintrc.yml
        .eslint
                                                                                                                                 - fixtures
                                                                                                                                      ∟ schema.js
                                                                                                                    └ index.spec.js
                     └ package.json
- select-hose

⊢ .jscsrc

    ijshintrc
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
    i
                                  npmignore
                             - .travis.yml
                             README.md
                              – lib
                                               └ hose.js

    package.json
    test

→ api-test.js


                                                    └ fixtures.js
 selfsigned


    intrc
    intrc

                              LICENSE
                        — README.md
                             - index.d.ts
                     — index.js
                              – package⊾json
                    └ test
                                                   └ tests.js
     - semver
                     ─ CHANGELOG.md
                            LICENSE
                          — README.md
                          - bin
                                            ∟ semver.js
                              — package.json
                             — range.bnf
                    └ semver.js
  - send

⊢ HISTORY.md

                                LICENSE
                                  - README.md
                                 SECURITY.md
                                  - index.js
```

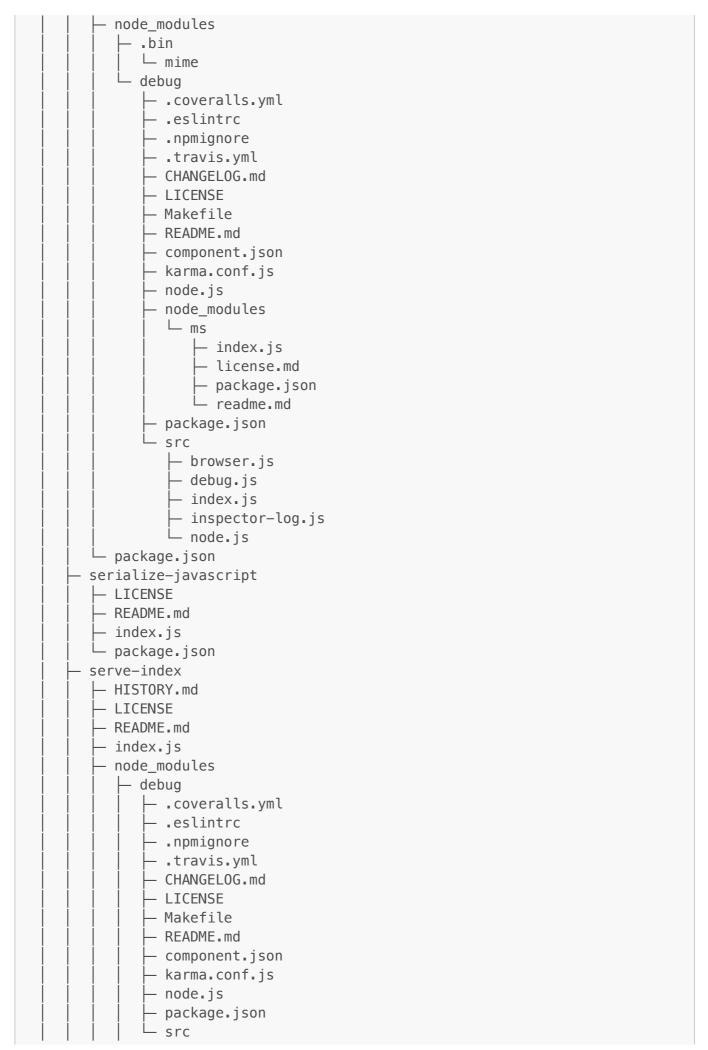

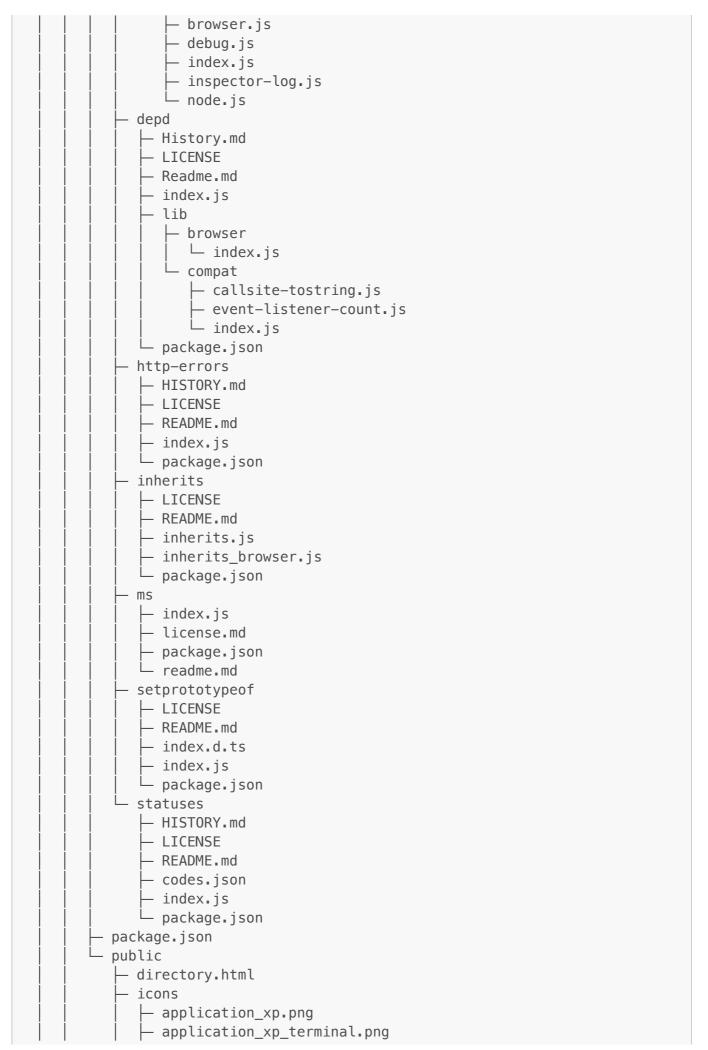

```
box.png
- cd.png
- controller.png
- drive.png
film.png
folder.png
font.png
image.png
map.pnq
page.png
page_add.png
- page_attach.png
page_code.png
page_copy.png
- page delete.png
- page_edit.png
– page_error.png
page excel.png
page find.png
- page_gear.png
- page_go.png
page_green.png
page_key.png
page_lightning.png
page_link.png
– page_paintbrush.png
page_paste.png
- page red.png
- page_refresh.png
page_save.png
page white.png
page white acrobat.png

    page white actionscript.png

– page_white_add.png
– page_white_c.png
page_white_camera.png
page_white_cd.png
page_white_code.png
page_white_code_red.png
page_white_coldfusion.png
page_white_compressed.png
– page_white_copy.png
page_white_cplusplus.png
page_white_csharp.png
page_white_cup.png
page_white_database.png
page_white_delete.png
page_white_dvd.png
page_white_edit.png
page_white_error.png
page_white_excel.png
page_white_find.png
page_white_flash.png
page_white_freehand.png
```

```
page_white_gear.png
         page white get.png
         - page_white_go.png
         - page_white_h.png

    page white horizontal.png

         page white key.png
         page_white_lightning.png
         page white link.png

    page white magnify.png

         page_white_medal.png
         page_white_office.png
         page_white_paint.png
         page_white_paintbrush.png
         - page_white_paste.png
         page white php.png
         page_white_picture.png
        page_white_powerpoint.png
         page white put.png
         page white ruby.png
         page_white_stack.png
         – page_white_star.png

    page white swoosh.png

         page_white_text.png
         - page_white_text_width.png
         - page_white_tux.png
         page_white_vector.png
         - page_white_visualstudio.png
         page white width.png
         page_white_word.png
         – page_white_world.png
         page white wrench.png
         – page white zip.png
         - page_word.png

    page_world.png

      - style.css
serve-static
  HISTORY.md
  LICENSE
  README.md
   - index.js
 └ package.json
setprototypeof
  LICENSE
  README.md
   - index.d.ts
  - index.js
  – package.json
   - test
    └ index.is
shebang-command
  index.js
   - license
   – package.json
   - readme.md
```

```
- shebang-regex

─ index.d.ts

  - index.js
  license
  package.json
 └ readme.md
- shell-quote
 ⊢ .eslintrc
  - .github
   └ FUNDING.yml
  - Inycrc
  CHANGELOG.md
  LICENSE
  README.md
  example
    ⊢ env.js
    — op.js
     — parse.js
    └ quote.js
  – index.js
  — package.json
  – parse.js
  – quote.js
  - security.md
 └ test
    — comment.js
    — env.js
     — env_fn.js
     — op.js
     — parse.js
     — quote.js
    └ set.js
- side-channel
 .eslintignore
  - .eslintrc
  - .github
    └ FUNDING.yml
  - nycrc
  CHANGELOG.md
  LICENSE
  README.md
 — index.js
  — package.json
 ∟ test
    └ index.js
- signal-exit
 LICENSE.txt
  README.md
  — index.js
  — package.json
 └ signals.js
- sisteransi
 — license
  – package.json
```

```
- readme.md
   - src

⊢ index.js

     └ sisteransi.d.ts
slash

─ index.d.ts

   – index.js
  — license
   – package.json
 └ readme.md
- sockjs

─ COPYING

  ├ Changelog
  — LICENSE
   README.md
  — index.js
  — lib

    ⊢ chunking-test.js

     — iframe.js
     — sockjs.js
     — trans−eventsource.js

─ trans-htmlfile.js

     — trans−jsonp.js
     — trans-websocket.js
     ⊢ trans-xhr.js
     — transport.js
      - utils.js
     └ webjs.js
   - node_modules
     ∟ .bin
        └ uuid
 └ package.json
- source-list-map
  README.md
   - lib
     ─ CodeNode.js

    MappingsContext₁js

     ⊢ SingleLineNode.js
     ⊢ SourceListMap₊js
     — SourceNode.js
     — base64-vlq.js

─ fromStringWithSourceMap.js

      - helpers.js
    └ index.js
  └ package.json
- source-map
   CHANGELOG.md
  LICENSE
  README.md
   – dist
      source-map.debug.js
      – source–map₌js
      - source-map.min.js
```

```
└ source-map.min.js.map
    lib

⊢ array-set.js

     — base64−vlq.js
     — base64.js

→ binary-search.js

     — mapping-list.js
     — quick-sort.js
     — source-map-consumer₊js
     — source-map-generator.js
     – source-node.js
    └ util.js
  – package.json
   source-map.d.ts
 └ source-map.js
- source-map-js

    ⊢ CHANGELOG.md

  LICENSE
  README.md
  — lib

⊢ array-set.js

     — base64-vlq.js
     — base64.js
     — binary−search.js
     — mapping−list.js
     — quick-sort.js
     ├ source-map-consumer.js
     — source-map-generator₊js
      - source−node.js
    └ util.js

─ package.json

  — source-map.d.ts
 └ source-map.js
- source-map-loader
 LICENSE
  README.md
  - dist
    ⊢ cjs.js
     — index.js

─ labels-to-names.js

     — options.json
     – parse-data-url.js
    └ utils.js
  - node_modules
     └ webpack
      iconv-lite
         github

    dependabot.yml

         - .idea
           - codeStyles
               Project.xml
              └ codeStyleConfig.xml
            - iconv-lite.iml
```

```
inspectionProfiles
              └─ Project Default.xml
            - modules.xml
           └ vcs.xml
         Changelog.md

    LICENSE

         - README.md
         encodings
           — dbcs-codec.js
           — dbcs–data.js
            — index.js
            internal.js
            — sbcs-codec.js
           — sbcs-data-generated.js
            - sbcs-data.js
            tables

    big5−added.json

— cp936.json

               — cp949.json
              — cp950.json
              ⊢ eucjp.json

— gb18030−ranges.json

               – gbk-added.json
              └ shiftjis.json
           — utf16.js
            - utf32.js
           └ utf7.js
         - lib

    bom−handling.js

            — index.d.ts
            index.js
           └ streams.js
         – package⊾json

    package.json

source-map-support

— LICENSE.md


   README.md
  — browser-source-map-support.js
  — package.json

    register-hook-require.js

   - register.js
 └ source-map-support.js
sourcemap-codec

— CHANGELOG.md

   LICENSE
  README.md
  – dist
      sourcemap-codec.es.js
      sourcemap-codec.es.js.map
     — sourcemap-codec.umd.js
      sourcemap-codec.umd.js.map
      - types
        └ sourcemap-codec.d.ts
   - package.json
```

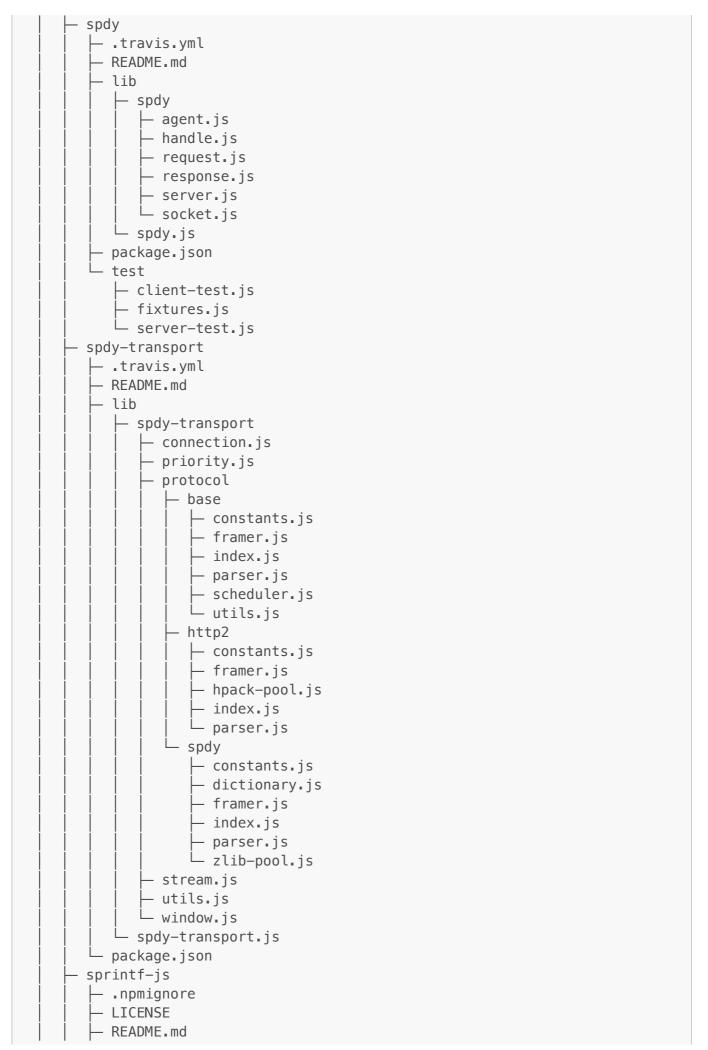

```
– bower₌json
   - demo
    └ angular.html
  – dist

    □ angular-sprintf.min.js

     — angular-sprintf.min.js.map
     — angular-sprintf.min.map
     ├ sprintf.min.js
     — sprintf.min.js.map
    └ sprintf.min.map
  gruntfile.js
  – package.json
  - src

— angular-sprintf.js

    └ sprintf.js
 ∟ test
    └ test.js
stable

— README.md

  — index.d.ts
  — package.json
   - stable.js
 └ stable.min.js
stack-utils

    LICENSE.md

  index.js
  - node_modules
    └ escape-string-regexp
        index.d.ts
        – index.js
         license
         – package⊾json
        └ readme.md
   – package.json
 └ readme.md

    stackframe

  LICENSE
  README.md
  - dist

    □ stackframe.js

     - stackframe.min.js
    └ stackframe.min.js.map
 package.json
   - stackframe.d.ts
 └ stackframe.js

    statuses

⊢ HISTORY.md

  LICENSE
  README.md
 ─ codes.json
   - index.js
 └ package.json
stop-iteration-iterator
  eslintrc
```

```
.github
    └ FUNDING.yml
    nycrc
   CHANGELOG.md
   - LICENSE
   README.md
   – index.js
   – package.json
  ∟ test
    └ index.js
- string-length

─ index.d.ts

  — index.js
  ─ license
   - package.json
 └ readme.md
string-natural-compare

    LICENSE.txt

  README.md

— natural-compare.js

 └ package.json
- string-width

─ index.d.ts

  index.js
  — license
   - node_modules
    └ emoji-regex
        LICENSE-MIT.txt
         - README.md
         - es2015
           — index.js
          └ text.js
         - index.d.ts
        — index.js
         – package.json
        └ text.js
   – package.json
 └ readme.md
string.prototype.matchall
  ⊢ .editorconfig
  - .eslintrc
  - .github
    └ FUNDING.yml
   - nycrc
  CHANGELOG.md
  LICENSE
  README.md
  — auto.js
  implementation.js
  index.js
  — package.json
   polyfill-regexp-matchall.js
   polyfill.js
   regexp-matchall.js
```

```
– shim.js
  test
    index.js
     – shimmed.js
    L tests.js
string.prototype.trimend
  .editorconfig
  eslintrc
   - nycrc
  — CHANGELOG.md
  LICENSE
  README.md
  — auto.js

─ implementation.js

  — index.js

    package.json

  ─ polyfill.js
   - shim.js
 ∟ test

    implementation.js

     — index.js
      - shimmed.js
    └ tests.js
string.prototype.trimstart
 ⊢ .editorconfig
  eslintrc
   - nycrc
  CHANGELOG.md
  LICENSE
  README.md
 — auto.js

    implementation.js

  — index.js
  — package.json
  polyfill.js
  – shim.js
  test

    implementation.js

     — index.js
     — shimmed.js
    └ tests.js
- string_decoder
 README.md
  — lib
   └ string_decoder.js
 └ package.json
stringify-object
 — index.js
  – package.json
 └ readme.md
- strip—ansi

─ index.d.ts
```

```
– index.js
   - license
   - package.json
  └ readme.md
- strip-bom

— index.js

─ license

   – package.json
 └ readme.md
- strip-comments
  ─ CHANGELOG.md
  LICENSE
  - README.md
  — index.js
   - lib
     ─ Node.js

    compile.js

      - languages.js
     └ parse.js

    package.json

- strip-final-newline
  index.js

─ license

  — package.json
 └ readme.md
- strip-indent

─ index.d.ts

  — index.js

─ license

   – package.json
 └ readme.md
- strip-json-comments
  index.d.ts
  index.js
  license
   – package.json
 └ readme.md
- style-loader
  LICENSE
  README.md
  — dist
     ⊢ cjs.js
     — index.js
     — options.json
      - runtime

— injectStylesIntoLinkTag.js

        injectStylesIntoStyleTag.js
        insertBySelector₁js

    insertStyleElement.js

        — isEqualLocals.js
         - isOldIE.js
         setAttributesWithAttributes.js
         setAttributesWithAttributesAndNonce.js
         setAttributesWithoutAttributes.js
```

```
singletonStyleDomAPI.js
         - styleDomAPI.js

    □ styleTagTransform.js

    └ utils.js
  — node modules
    └ .bin
       └ webpack
 └ package.json

    stylehacks

 README.md
  mode_modules
    ∟ .bin
       └ browserslist
  – package.json
  ⊢ src

    dictionary

       ─ browsers.js
        — identifiers.js
        – postcss.js
       └ tags.js
     — exists.js
      - index.js
     isMixin.js
      - plugin.js
      - plugins
       ─ bodyEmpty.js
        htmlCombinatorCommentBody.js
        htmlFirstChild.js
        — important.js
        – index.js
         leadingStar.js
         leadingUnderscore.js
        — mediaSlash0.js
        mediaSlash0Slash9.js
        — mediaSlash9.js
        — slash9.js
         - starHtml.js
       trailingSlashComma.js
   - types
     ─ dictionary
       browsers.d.ts
        — identifiers.d.ts
         - postcss.d.ts
       └ tags.d.ts
     - exists.d.ts
      - index.d.ts
      isMixin.d.ts
      - plugin.d.ts
     - plugins
       bodyEmpty.d.ts
         htmlCombinatorCommentBody.d.ts
         - htmlFirstChild.d.ts
         - important.d.ts
```

```
- index.d.ts
         - leadingStar.d.ts
        - leadingUnderscore.d.ts
         - mediaSlash0.d.ts
        – mediaSlash0Slash9.d.ts
        - mediaSlash9.d.ts
         - slash9.d.ts
         - starHtml.d.ts
       └ trailingSlashComma.d.ts
supports-color

    browser.js

  — index.js
  – license
   – package.json
 └ readme.md
supports-hyperlinks

    browser.js

  — index.js
  — license
  — package.json
 └ readme.md

    supports-preserve-symlinks-flag

 ⊢ .eslintrc
  _ .github
    └ FUNDING.yml
  - inycrc
  CHANGELOG.md
  LICENSE
  README.md
  — browser.js

─ index.js

  — package.json
 └ test
    └ index.js
- svg-parser

    ─ CHANGELOG.md

  - README.md
  — dist

─ svg-parser.esm.js
     ├ svg-parser.esm.js.map
     - svg-parser.umd.js
    └ svg-parser.umd.js.map
 └ package.json
- svgo
 — CHANGELOG.md
  — LICENSE

    Makefile

  README.md
  README.ru.md
   - bin
    ∟ svgo
   - lib
    ⊢ css-tools.js
```

```
svgo
     — coa.js
     – config.js
     — css-class-list.js
     — css-select-adapter.js
     css-style-declaration.js
      – js2svg⊾js
      – jsAPI.js
      – plugins.js
      – svg2js⊾js
    └ tools.js
  └ svgo.js
- node_modules
  — .bin
      - js-yaml
    └ mkdirp
  — ansi-styles

— index.js


     — license
      – package⊾json
     └ readme.md
   - chalk

─ index.js

      index.js.flow
     license
      – package.json
      - readme.md
      - templates.js
     └ types
        └ index.d.ts
   - color-convert
     ─ CHANGELOG.md
      - LICENSE
     README.md
     — conversions.js
     — index.js
      - package.json
     ∟ route.js
   - color-name
     - npmignore
     LICENSE
     — README.md
     — index.js
      - package.json
    └ test.js
   - css-select


    LICENSE

      README.md
      - index.d.ts
     — index.js
      - lib
        — attributes.js
         - compile.js
```

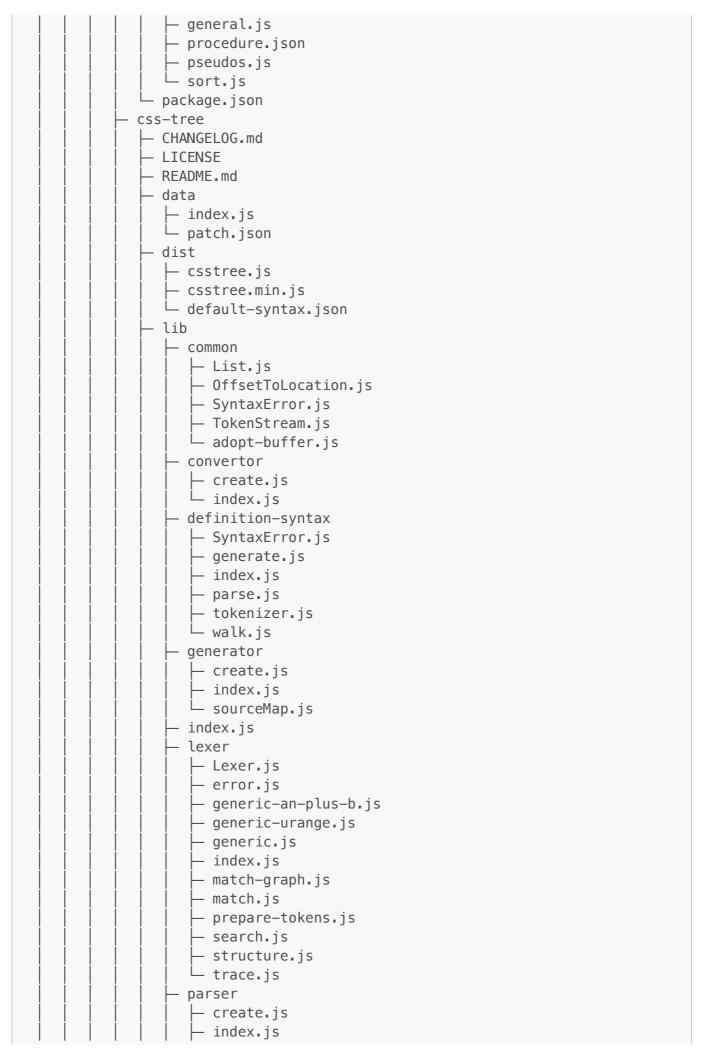

└─ sequence.js
— syntax
— atrule
│
import.js
index.js
│
— page.js
☐ supports.js
— config
Lexer.js
mix.js
parser.js
│
— create.js
— function
├ element.js
— expression.js
var.js
— index.js
— node
├ AnPlusB.js
— Atrule.js
— AtrulePrelude.js
— AttributeSelector.js
⊢ Brackets.js
CDC.js
CD0.js
ClassSelector.js
Combinator.js
Comment.js
Declaration.js
DeclarationList.js
Dimension.js
Function.js
HexColor.js
IdSelector.js
Identifier.js
│
│
│
Nth.js
Number.js
│
Parentheses.js
Percentage.js
- PseudoClassSelector.js
Ratio.js
Raw.js
│
— Selector.js
│
824 / 017



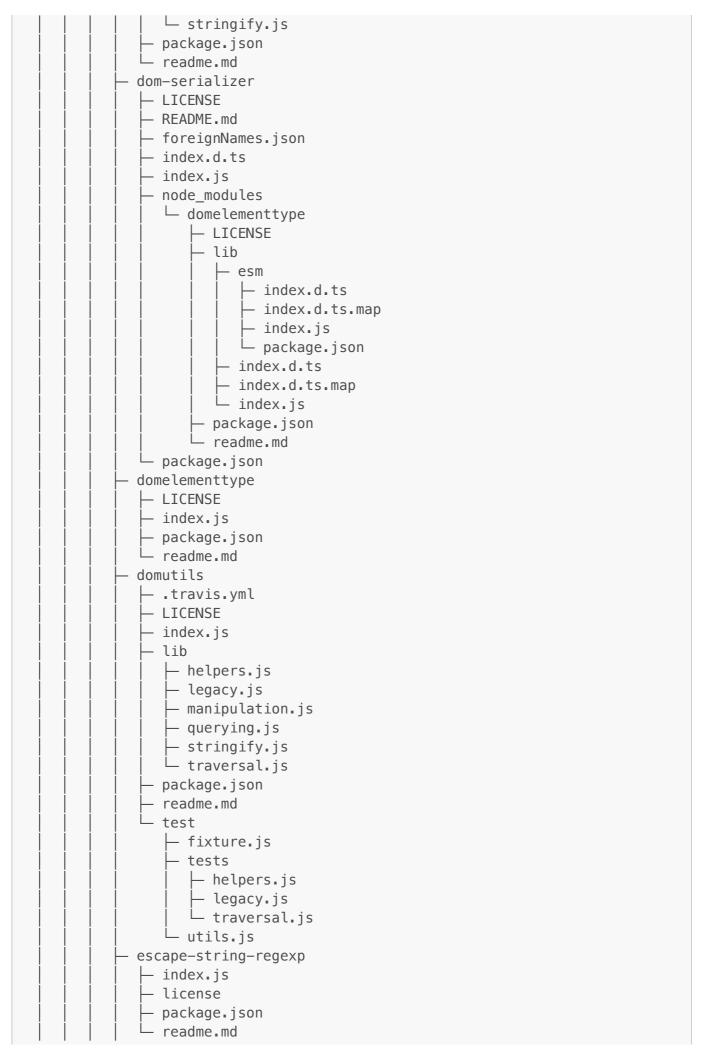

```
has-flag
     – index.js
      - license
      – package⊾json
    └ readme.md
   - mdn-data
     LICENSE
      - README.md
      - api

─ index.js

         inheritance.json
       └ inheritance.schema.json
      - CSS

— at-rules.json

         at-rules.schema.json
         – definitions.json
        — index.js
        – properties.json
        — properties.schema.json
         – readme.md
        — selectors.json
         selectors.schema.json
         – syntaxes.json
        syntaxes.schema.json
        — types.json
        — types.schema.json
         - units.json
        └ units.schema.json
      - index.js
      - l10n
        — css.json
       └ index.js
     └ package.json
   nth-check
     LICENSE
      README.md
     – compile.js
      - index.js
      – package.json
     ∟ parse.js
   - supports-color

    browser.js

     — index.js
      license
      - package.json
     └ readme.md
– package.json
plugins

— _collections.js

  – _path.js
   - _transforms.js
   addAttributesToSVGElement.js
  addClassesToSVGElement.js
   cleanupAttrs.js
```

```
cleanupEnableBackground.js
    cleanupIDs.js
    cleanupListOfValues.js
    cleanupNumericValues.js
    — collapseGroups.js
    — convertColors.js
    convertEllipseToCircle.js
    convertPathData.js
    convertShapeToPath.js
    — convertStyleToAttrs.js
    convertTransform.js
    inlineStyles.js
    — mergePaths.js
    — minifyStyles.js
    moveElemsAttrsToGroup.js
    moveGroupAttrsToElems.js
    — prefixIds.js
    removeAttributesBySelector.js
    — removeAttrs.js
    removeComments.js
    — removeDesc.js
    — removeDimensions.js
    removeDoctype.js
    removeEditorsNSData.js
     removeElementsByAttr.js
    removeEmptyAttrs.js
    removeEmptyContainers.js
    — removeEmptyText.js
    removeHiddenElems.js
    — removeMetadata.js
    — removeNonInheritableGroupAttrs.js
    — removeOffCanvasPaths.js
    — removeRasterImages.js
    removeScriptElement.js
    removeStyleElement.js

⊢ removeTitle.js

    removeUnknownsAndDefaults.js
    — removeUnusedNS.js
    removeUselessDefs.js
    removeUselessStrokeAndFill.js
    — removeViewBox₊js
    — removeXMLNS.js
    ⊢ removeXMLProcInst.js
    — reusePaths.js
     - sortAttrs.js
   └ sortDefsChildren.js
symbol-tree
 LICENSE
 README.md
  - lib
    ─ SymbolTree.js
     SymbolTreeNode.js
     - TreeIterator.js
     TreePosition.js
```

```
└ package.json
tailwindcss
 — CHANGELOG.md
 LICENSE
 README.md
 base css
 - colors.d.ts
 — colors.js
— components.css
— defaultConfig.d.ts
 defaultConfig.js
 — defaultTheme.d.ts
 defaultTheme₁js
 – lib
    — cli
      ─ build

⊢ deps.js

          index.js
          — plugin.js
          – utils.js
         └ watching.js
        - help
         └ index.js
       index.js
      └ init
         └ index.js
    – cli-peer-dependencies.js
    — cli.js
    – constants.js
    corePluginList.js
    — corePlugins.js
    - css
       LICENSE
      └ preflight.css
    featureFlags.js
    - index.js
     - lib

    ⊢ cacheInvalidation.js

       collapseAdjacentRules.js
       collapseDuplicateDeclarations.js
       — content.js
       defaultExtractor.js

    detectNesting.js

       evaluateTailwindFunctions.js
       expandApplyAtRules.js
       expandTailwindAtRules.js
       findAtConfigPath.js
       generateRules.js
       getModuleDependencies.js
       normalizeTailwindDirectives.js
        - offsets.js
        partitionApplyAtRules.js
        - regex.js
        remap-bitfield.js
```

```
resolveDefaultsAtRules.js
   setupContextUtils.js
  setupTrackingContext.js
   - sharedState.js
 └ substituteScreenAtRules.js
– oxide
  – cli
     — build
        ⊢ deps.js
        — index.js

→ plugin.js

         - utils.js
        └ watching.js
      help
       └ index.js
      - index.js
     └ init
       └ index.js
   - cli.js
 └ postcss-plugin.js
- plugin.js
 postcss-plugins

    nesting

     ─ README.md
      - index.js
     └ plugin.js
– processTailwindFeatures.js
public
  — colors.js
  — create-plugin.js

— default-config.js

  ─ default-theme.js

    resolve-config.js

- util

    bigSign.js

   buildMediaQuery.js
  — cloneDeep.js
  cloneNodes.js
  – color.js
   configurePlugins.js
  — createPlugin₁js
  createUtilityPlugin.js
  — dataTypes.js
  – defaults.js
  escapeClassName.js
   – escapeCommas₌js
  flattenColorPalette.js
   formatVariantSelector.js
   getAllConfigs.js
  hashConfig.js
   - isKeyframeRule.js
   isPlainObject.js
   isSyntacticallyValidPropertyValue.js
   - log.js
```

```
- nameClass.js
      negateValue.js
      normalizeConfig.js
      normalizeScreens.js
      parseAnimationValue.js
      parseBoxShadowValue.js
      parseDependency.js
      - parseGlob.js
      - parseObjectStyles.js
      - pluginUtils.js
      - prefixSelector.js
      removeAlphaVariables.js
      resolveConfig.js
      resolveConfigPath.js
      - responsive.js
      splitAtTopLevelOnly.js
      — tap.js
      – toColorValue.js
      – toPath.js
      transformThemeValue.js
      validateConfig.js

    validateFormalSyntax.js

     └ withAlphaVariable.js
nesting
  └ index.js
- node_modules
  — .bin
      detective
     ∟ resolve
   – glob-parent
      LICENSE
      README.md
      - index.js
     └ package.json
— package.json
- peers
  └ index.js
- plugin.d.ts
– plugin.js
prettier.config.js
resolveConfig.d.ts
resolveConfig.js
- screens.css
- scripts

    □ create-plugin-list.js

— generate-types.js

  — release-channel.js
   – release-notes.js
   - swap-engines.js
  └ type-utils.js
- src
   - cli
      - build
        ⊢ deps.js
```

```
- index.js
      - plugin.js
       utils.js
     └ watching.js
   - help
     └ index.js
   - index.js
  ∟ init
     └ index.js
cli-peer-dependencies.js
– cli.js
– constants.js
— corePluginList.js
corePlugins.js
- css

─ LICENSE

  └ preflight.css
featureFlags.js
- index.js
- lib

    ⊢ cacheInvalidation.js

  collapseAdjacentRules.js

─ collapseDuplicateDeclarations.js

   – content.js
   defaultExtractor.js
   detectNesting.js
  evaluateTailwindFunctions.js
  — expandApplyAtRules.js
   expandTailwindAtRules.js
  findAtConfigPath.js
   generateRules.js
   getModuleDependencies.js
   normalizeTailwindDirectives.js
   — offsets.js
   partitionApplyAtRules.js
   — regex.js
   - remap-bitfield.js
   resolveDefaultsAtRules.js
   setupContextUtils.js
  — setupTrackingContext.js
   - sharedState.js
  └ substituteScreenAtRules.js
oxide
  — cli
      build
        ⊢ deps.ts
         index.ts
         - plugin.ts
         - utils.ts
        └ watching.ts
       help
        └ index.ts
       - index.ts
      - init
```

```
└ index.ts
    cli.ts

    postcss-plugin.ts

– plugin.js
 postcss-plugins

    nesting

     README.md
      - index.js
     └ plugin.js
– processTailwindFeatures.js
public
  — colors.js
  — create-plugin.js
 — default-config.js
   - default-theme.js
 └ resolve-config.js
– util
  bigSign.js
  buildMediaQuery.js
  – cloneDeep.js
  — cloneNodes₌js
   - color.js
  configurePlugins.js
  createPlugin.js
   createUtilityPlugin.js
  – dataTypes.js
  — defaults.js
  escapeClassName.js
   – escapeCommas₌js
  flattenColorPalette.js
  formatVariantSelector.js
  getAllConfigs.js
   – hashConfig.js
  isKeyframeRule.js
   isPlainObject.js
   isSyntacticallyValidPropertyValue.js
   - log.js
   – nameClass.js
   – negateValue₊js
   normalizeConfig.js
  normalizeScreens.js
  parseAnimationValue.js
  – parseBoxShadowValue₊js
   parseDependency.js
   - parseGlob.js
   – parseObjectStyles.js
   – pluginUtils.js
   prefixSelector.js
   removeAlphaVariables.js
  resolveConfig.js
   resolveConfigPath.js
   - responsive.js
   splitAtTopLevelOnly.js
   – tap.js
```

```
– toColorValue.js
        – toPath.js
        transformThemeValue.js
        — validateConfig.js
        validateFormalSyntax.js
       └ withAlphaVariable.js
   - stubs
    ─ defaultConfig.stub.js
     defaultPostCssConfig.stub.js
    └ simpleConfig.stub.js
  tailwind.css
  types

─ config.d.ts

      generated
        _ .gitkeep
       — colors.d.ts
        corePluginList.d.ts
       └ default-theme.d.ts
    └ index.d.ts
   - utilities.css
 └ variants.css
tapable

    LICENSE

  README.md
  - lib

→ AsyncParallelBailHook.js

     AsyncParallelHook.js
     — AsyncSeriesBailHook.js
     AsyncSeriesHook.js
     AsyncSeriesLoopHook.js

    AsyncSeriesWaterfallHook.js

     — Hook.js
     — HookCodeFactory.js
     — HookMap₊js
     ─ MultiHook.js
     ─ SyncBailHook.js
     — SyncHook₊js
     SyncLoopHook.js
     SyncWaterfallHook.js
      - index.js
    └ util-browser.js
  package.json
 └ tapable.d.ts
- temp-dir
 index.d.ts
 — index.js

─ license

   – package.json
 └ readme.md
tempy

─ index.d.ts

   - index.js
  license
   - node_modules
```

```
└ type-fest

⊢ index.d.ts

         - license
        – package.json
         - readme.md
        source

— async-return-type.d.ts

           - basic.d.ts
           conditional-except.d.ts
           conditional-keys.d.ts
           conditional-pick.d.ts
           - except.d.ts
           — fixed-length-array.d.ts
           — literal-union.d.ts
           - merge-exclusive.d.ts
           - merge.d.ts
           — mutable.d.ts
           - opaque.d.ts
           — package-ison.d.ts
           - partial-deep.d.ts
           - promisable.d.ts
           - promise-value.d.ts
           - readonly-deep.d.ts
           — require-at-least-one.d.ts
           - require-exactly-one.d.ts
           - set-optional.d.ts
           - set-required.d.ts
           - stringified.d.ts
           - tsconfig-json.d.ts
           union-to-intersection.d.ts
          └ value-of.d.ts
 package.json
 └ readme.md
terminal-link
 index.d.ts
  – index.js
  – license
  - package.json
 └ readme.md
- terser
 — CHANGELOG.md
  LICENSE
  PATRONS.md
  README.md
  – bin

    package.json

    — terser
     - terser.mjs
    └ uglifyjs
  – dist
    — .gitkeep
     - bundle.min.js
    └ package.json
   - lib
```

```
– ast.js
     – cli.js
     - compress

    ⊢ common.js

       — compressor-flags.js
       — drop-side-effect-free.js
        – drop-unused.js
       — evaluate.js
        – index.js
       — inference.js
       — inline.js

    hative—objects.js


       — reduce−vars.js
       └ tighten-body.js
    — equivalent-to.js
    — minify.js
    — mozilla–ast.js
    ─ output.js
    — parse.js
    — propmangle.js
    — scope.js
    — size.js
    — sourcemap.js
    — transform.js
    └ utils
        - first_in_statement.js
       └ index.js
 — main.js
  - node_modules
   ∟ .bin
      ∟ acorn
  – package.json
  tools

    domprops.js

    — exit.cjs
    — props.html
    └ terser.d.ts
terser-webpack-plugin
 README.md
 – dist

─ index.js

    ├ minify.js
     – options.json
    └ utils.js
 node_modules
    - terser
       └ webpack
     schema-utils
       LICENSE
        - README.md
        declarations
          ─ ValidationError.d.ts
```

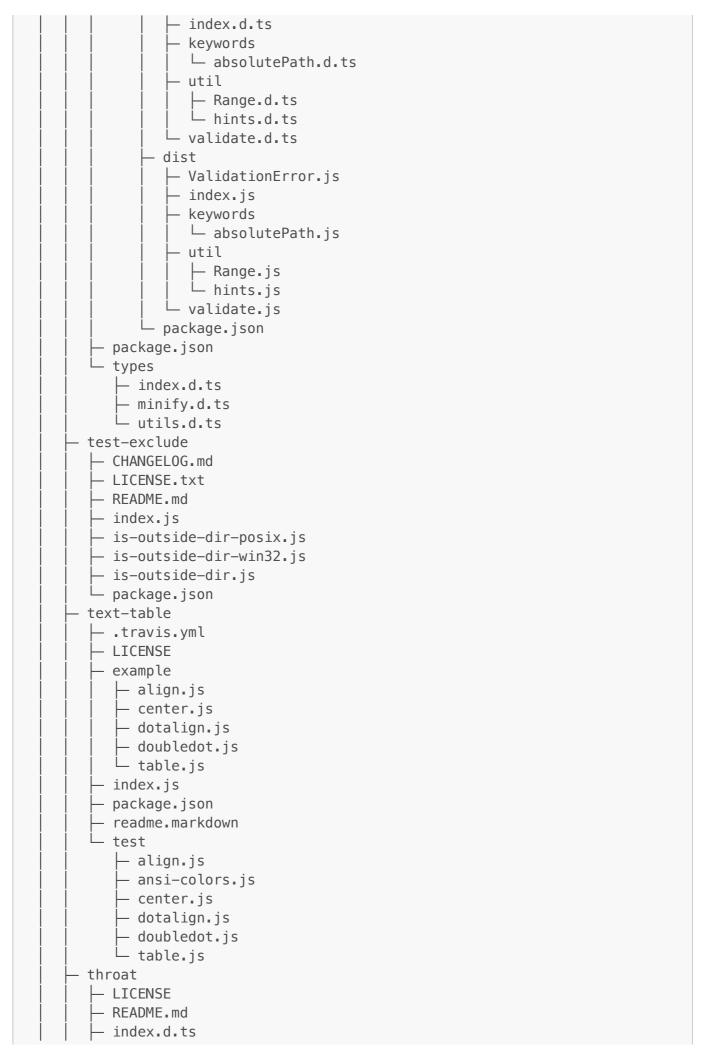

```
– index.js
  - index.js.flow
 └ package.json
- thunky

    ⊥travis.yml

  — LICENSE
  README.md
  — index.js
 — package.json
  — promise.js
 └ test.js
- tmpl
 ├ lib
    └ tmpl.js
  — license
  — package.json
 └ readme.md
to-fast-properties
 index.js
 — license
  — package.json
 └ readme.md
- to-regex-range

─ LICENSE

  — README.md
   - index.js
 └ package.json

    toidentifier

⊢ HISTORY.md

  — LICENSE
 ─ README.md
 index.js
 └ package.json
- tough-cookie

─ LICENSE

  README.md
  - lib
    ⊢ cookie.js
     — memstore.js
     — pathMatch.js
     — permuteDomain.js
     — pubsuffix-psl.js
     — store.js
     — utilHelper.js
      validators.js
    └ version.js
  - node_modules
    └ universalify

─ LICENSE

         README.md
         - index.js
        └ package.json
 └ package.json
- tr46
```

```
LICENSE.md
  - README.md
  index.js
  - lib

    mappingTable.json

     — regexes.js
    └ statusMapping.js
 └ package.json
- tryer
 jshintrc
  - .travis.yml
  AUTHORS
  CHANGES.md
  COPYING
  README.md
  — bower₌json
  — component.json
  – lib
    └ tryer.min.js
  — package.json
  - src
    ∟ tryer.js
  test
    ⊢ index.html
    └ unit.js
tsconfig-paths

    ⊢ CHANGELOG.md

  - LICENSE
  README.md
  — lib
       tests
        — config-loader.test.d.ts
        — config-loader.test.js
        config-loader.test.js.map
        data
          ─ match-path-data.d.ts
           - match−path−data.js
          └ match-path-data.js.map
        filesystem.test.d.ts
        – filesystem.test.js
        — filesystem.test.js.map
        mapping-entry.test.d.ts
        mapping-entry.test.js
        - mapping-entry.test.js.map
        - match-path-async.test.d.ts
        match-path-async.test.js
        match-path-async.test.js.map
        - match-path-sync.test.d.ts
        — match-path-sync.test.js
        match-path-sync.test.js.map
        - try-path.test.d.ts
        - try-path.test.js
        - try-path.test.js.map
```

```
tsconfig-loader.test.d.ts
      - tsconfig-loader.test.js
     └ tsconfig-loader.test.js.map
  — config-loader.d.ts
  — config-loader.js
  — config-loader.js.map
   – filesystem.d.ts
  filesystem.js
  filesystem.js.map
  - index.d.ts
   - index.js
   - index.js.map
  — mapping-entry.d.ts
   – mapping−entry.js
  — mapping-entry.js.map
  — match-path-async.d.ts
  — match-path-async₊js
  match-path-async.js.map
  — match-path-sync.d.ts
  match-path-sync.js
  match-path-sync.js.map
  — options.d.ts
  – options.js
  — options.js.map
  - register.d.ts
   – register.js
  — register.js.map
  — try-path.d.ts
   – try-path.js
  — try-path.js.map
  — tsconfig-loader.d.ts
   tsconfig-loader.js
  └ tsconfig-loader.js.map
node_modules
   - .bin
     └ json5
   - json5
      LICENSE.md
      - README.md
      - dist
       └ index.js
      - lib
        — cli.js
         – index.js
         – parse.js
        — register.js
        — require.js

    □ stringify.js

         - unicode.js
        └ util.js
      - package.json
- package.json
register.js
```

```
tests__
        - config-loader.test.ts
        – data
          └─ match-path-data.ts
        - filesystem.test.ts
        - mapping-entry.test.ts
        - match-path-async.test.ts
        — match-path-sync.test.ts
         - try-path.test.ts
        - tsconfig-loader.test.ts

    tsconfig—named.json

     config-loader.ts
     – filesystem.ts
      - index.ts
     - mapping-entry.ts
     — match-path-async.ts
     — match-path-sync.ts
     - options.ts
     — register.ts
     try-path.ts
    └ tsconfig-loader.ts
- tslib
 ─ CopyrightNotice.txt
  LICENSE.txt
  README.md
  SECURITY md
  modules
    index.js
    └ package.json
  — package.json
  - tslib.d.ts
 ├ tslib.es6.html
  tslib.es6.js
   - tslib.html
 └ tslib.js
- tsutils
  CHANGELOG.md
  LICENSE
  README.md
  — index.d.ts
  — index.js

─ index.js.map

  — node_modules
    └ tslib
        CopyrightNotice.txt
         - LICENSE.txt
        README.md
         - modules

─ index.js

          └ package.json
         - package.json
         test

    □ validateModuleExportsMatchCommonJS

             ⊢ index.js
```

```
└ package.json
      - tslib.d.ts
      - tslib.es6.html
     - tslib.es6.js
      - tslib.html
    └ tslib.js
– package⊾json

    typeguard

 — 2.8
     index.d.ts
      - index.js
     index.js.map
     - node.d.ts
      – node.js
      - node.js.map
     - type.d.ts
     – type.js
    └ type.js.map
   - 2.9
     index.d.ts
     — index.js
      - index.js.map
     - node.d.ts
     – node.js
      - node.js.map
     - type.d.ts
      - type.js
    └ type.js.map
   3.0
     index.d.ts
     - index.js

─ index.js.map

     - node.d.ts
     — node.js
     - node.js.map
     type.d.ts
      - type.js
    └ type.js.map
   - 3.2
     index.d.ts
     — index.js

─ index.js.map

     node.d.ts
     — node.js
     - node.js.map
      - type.d.ts
      - type.js
    └ type.js.map
    index.d.ts
   - index.js
   - index.js.map
   - next
     - index.d.ts
      - index.js
```

```
- index.js.map
         - node.d.ts
        – node.js
        - node.js.map
        - type.d.ts
         - type.js
       └ type.js.map
     - node.d.ts
     — node.js
     — node.js.map
     — type.d.ts
      - type.js
     - type.js.map
  - util
     — control-flow₁js
     ├ control-flow.js.map
     — convert-ast.d.ts
     — convert–ast.js
     — convert-ast.js.map
     — index.d.ts
     - index.js
     — index.js.map
     - type.d.ts
     – type.js
     - type.js.map
     — usage.d.ts
     — usage.js
     — usage.js.map
     — util.d.ts
     util.js
    └ util.js.map
type-check
  LICENSE
  README.md
  - lib
    ⊢ check.js
      - index.js
    └ parse-type.js
 └ package.json
type-detect
 LICENSE
  README.md

— index.js

  – package.json
 └ type-detect.js
type-fest
  base.d.ts
  - index.d.ts
  license
  package.json
  - readme.md
  - source

─ async-return-type.d.ts
```

```
- asyncify.d.ts
     - basic.d.ts
     — conditional-except.d.ts
    — conditional-keys.d.ts
    conditional-pick.d.ts
    — entries.d.ts
     — entry.d.ts
    — except.d.ts
    — fixed-length-array.d.ts
     — iterable-element.d.ts
     - literal-union.d.ts
     - merge-exclusive.d.ts
    — merge.d.ts
     mutable.d.ts
     - opaque.d.ts
     — package-json.d.ts
    — partial-deep.d.ts
     — promisable.d.ts
     — promise-value.d.ts
    — readonly-deep.d.ts
    — require-at-least-one.d.ts
    require-exactly-one.d.ts
    — set-optional.d.ts
     set-required.d.ts
     set-return-type.d.ts
     — stringified.d.ts
    — tsconfig-json.d.ts
    union-to-intersection.d.ts
     - utilities.d.ts
    └ value-of.d.ts
 └ ts41
    camel-case.d.ts
     delimiter-case.d.ts
     - index.d.ts
     - kebab-case.d.ts
     pascal-case.d.ts
    └ snake-case.d.ts
type-is

— HISTORY.md

  — LICENSE
  README.md
  index.js
 └ package.json
typed-array-length
 - eslintrc
  _ .github
   └ FUNDING.yml
  nycrc
  CHANGELOG.md
  LICENSE
  README.md
  - index.js
  – package.json
  - test
```

```
└ index.js
 typedarray-to-buffer
  - .travis.yml
   LICENSE
  README.md
   – index.js
  — package.json
  ∟ test
    └ basic.js
- unbox-primitive
  - .editorconfig
  eslintrc
   - .github
    └ FUNDING.yml
   - ₌nycrc
  — CHANGELOG.md
  LICENSE
  README.md
  — index.js
  — package.json
 └ test
    └ index.js
unicode-canonical-property-names-ecmascript

    LICENSE−MIT.txt

  README.md
   - index.js
 └ package.json

    unicode-match-property-ecmascript

    LICENSE−MIT.txt

  README.md
  — index.js

    package.json

unicode-match-property-value-ecmascript

    LICENSE−MIT.txt

  README.md
   – data
   ∟ mappings.js
   - index.js
  └ package.json

    unicode-property-aliases-ecmascript

    LICENSE−MIT.txt

  README.md
   - index.js

    package.json

unique-string

─ index.d.ts

  index.js
   license
  — package.json
  └ readme.md

    universalify

  LICENSE
   - README.md
```

```
- index.js
 └ package.json
- unpipe

— HISTORY.md

  — LICENSE
  README.md
   index.js
 └ package.json
unquote
 LICENSE
  — README.md
  index.js
 └ package.json
- upath

─ LICENSE

  - build
    ∟ code
       └ upath.js
 package.json
  — readme.md
 └ upath.d.ts


    update-browserslist-db

 ─ LICENSE
  README.md
  — check-npm-version.js
  ⊢ cli.js
  - index.d.ts
  index.js
  — node_modules
    └ .bin

    browserslist

  – package.json
 └ utils.js
– uri–js
 README.md
  — dist
    ⊢ es5
       ─ uri.all.d.ts
        — uri.all.js
       ─ uri.all.js.map
        — uri.all.min.d.ts
         - uri.all.min.js
       └ uri.all.min.js.map
      - esnext
       index.d.ts
        – index.js
        – index.js.map
        — regexps-iri.d.ts
        – regexps−iri.js
        - regexps-iri.js.map
        - regexps-uri.d.ts
        - regexps-uri.js
```



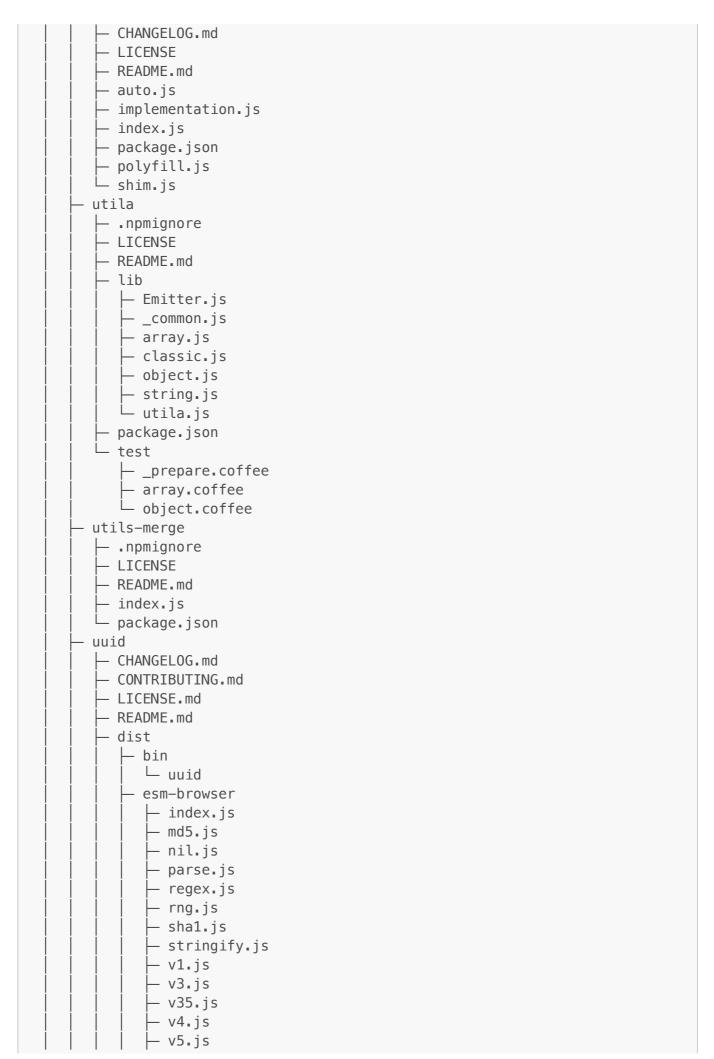

```
- validate.js
       └ version.js
      - esm-node
        — index.js
        — md5.js
        – nil.js
         – parse⊾js
         – regex.js
         - rng.js
        – sha1.js
         stringify.js
         – v1.js
        – v3.js
         - v35.js
         - v4.js
        – v5.js
        – validate.js
       └ version.js
      - index.js
     — md5-browser₊js
     — md5.js
     - nil.js
     – parse.js
     – regex.js
      - rng-browser.js
     – rng.js
     – sha1−browser.js
     – sha1.js
     — stringify.js
     — umd
       ⊢ uuid.min.js
        — uuidNIL.min.js
        — uuidParse.min.js
        ─ uuidStringify.min.js
        uuidValidate.min.js

─ uuidVersion.min.js

        — uuidv1.min.js
        — uuidv3.min.js
        — uuidv4.min.js
       └ uuidv5.min.js
     - uuid-bin.js
     – v1.js
     — v3.js
     – v35.js
     – v4.js
     – v5.js
     – validate.js
     – version.js
  – package.json
 └ wrapper.mjs
- v8-to-istanbul
  CHANGELOG.md
  LICENSE.txt
  - README.md
```

```
- index.d.ts
  index.js
  – lib

    branch.js

    ─ function.js
    — line.js
    — range₊js
     - source.js
    └ v8-to-istanbul.js
  - node_modules
    └ source-map
        LICENSE
        - README.md
        - dist
          └ source-map.js
        - lib
          — array−set.js
          ─ base64-vlq.js
           — base64.js
           — binary-search.js
          — mapping-list.js
           — mappings.wasm
          — read-wasm.js

    source-map-consumer.js

          — source-node.js
           - util.js
          └ wasm.js
        – package⊾json
        - source-map.d.ts
       └ source-map.js
 └ package.json
- vary

⊢ HISTORY.md

    LICENSE

 ─ README.md
  - index.js
 └ package.json
- w3c-hr-time

    ─ CHANGELOG.md

  LICENSE.md
 ─ README.md
 — index.js
 ├ lib

    ⊢ calculate-clock-offset.js

— global-monotonic-clock.js

     - performance.js
    └ utils.js
 └ package.json
- w3c-xmlserializer
  LICENSE.md
  README.md
  – lib
```

```
— attributes.js

     – constants.js
     └ serialize.js

    package.json

– walker
  LICENSE
  – lib
    └ walker.js
   – package.json
  └ readme.md
watchpack
  ─ LICENSE
   README.md
   - lib

    □ DirectoryWatcher.js

     ⊢ LinkResolver.js

— getWatcherManager.js

     ⊢ reducePlan.js
     watchEventSource.js
     └ watchpack.js
  └ package.json
- wbuf
  ─ README.md
   - index.js
   – package.json
  └ test
    └ wbuf-test.js
- web-vitals

─ LICENSE

  README.md
  — base.d.ts
  — base.js
  — dist
     ⊢ modules

— getCLS.d.ts

         - getCLS.js
         - getFCP.d.ts
         getFCP.js
         - getFID.d.ts
         – getFID.js
        — getLCP.d.ts
        — getLCP.js
         - getTTFB.d.ts
         getTTFB.js
         - index.d.ts
         – index.js
         - lib
           ─ bindReporter.d.ts
           — bindReporter.js

─ generateUniqueID.d.ts

            generateUniqueID.js
            getVisibilityWatcher.d.ts
            getVisibilityWatcher.js
```

```
- initMetric.d.ts
           - initMetric.js
           - observe.d.ts
           – observe⊾js
           onBFCacheRestore.d.ts
           onBFCacheRestore.js
           onHidden.d.ts
           - onHidden.js

    polyfills

─ firstInputPolyfill.d.ts

             ─ firstInputPolyfill.js
              getFirstHiddenTimePolyfill.d.ts
             getFirstHiddenTimePolyfill.js
        polyfill.d.ts
        polyfill.js
         - types.d.ts
       └ types.js
     - polyfill.js
     web-vitals.base.iife.js
     — web-vitals.base.js
     — web-vitals.base.umd.js
    ─ web-vitals.iife.js
     – web−vitals.js
    └ web-vitals.umd.js
   - package.json
  - src

— getCLS.ts

     — getFCP.ts
     — getFID.ts
     — getLCP.ts
     getTTFB.ts
     - index.ts
     - lib
       ─ bindReporter.ts
        generateUniqueID.ts
        getVisibilityWatcher.ts
        - initMetric.ts
        observe.ts
        onBFCacheRestore.ts
        onHidden.ts

    polyfills

           — firstInputPolyfill.ts
          polyfill.ts
    └ types.ts

    webidl-conversions

    LICENSE.md

  README.md
  - lib
    └ index.js
 └ package json

    webpack

  LICENSE
  README.md
```

```
SECURITY.md
- bin
 └ webpack.js
hot

    dev−server.js

  — emitter.js
   lazy-compilation-node.js

    lazy-compilation-web.js

   - log−apply−result.js
   - log.js
  – only-dev-server₁js
   - poll.js
  └ signal.js
- lib
  — APIPlugin.js
  — AbstractMethodError₊js

→ AsyncDependenciesBlock.js

    AsyncDependencyToInitialChunkError.js

    AutomaticPrefetchPlugin.js

  — BannerPlugin₊js
  — Cache.js
  CacheFacade.js

    CaseSensitiveModulesWarning.js

  — Chunk₊js
  — ChunkGraph.js
  — ChunkGroup₊js
  ─ ChunkRenderError.js
  ChunkTemplate.js
  — CleanPlugin.js
  — CodeGenerationError₊js
  CodeGenerationResults.js
  ─ CommentCompilationWarning.js
  CompatibilityPlugin.js
  Compilation.js
  ─ Compiler.js
  ─ ConcatenationScope.js
  — ConcurrentCompilationError₁js
  ─ ConditionalInitFragment.js
  — ConstPlugin.js
  ContextExclusionPlugin.js
  ContextModule.js
  ─ ContextModuleFactory.js
  ├ ContextReplacementPlugin.js
  ─ DefinePlugin.js
  — DelegatedModule.js
  ├ DelegatedModuleFactoryPlugin.js
  — DelegatedPlugin.js
  DependenciesBlock.js

→ Dependency.js

  DependencyTemplate.js
  DependencyTemplates.js
  DllEntryPlugin.js
  — DllModule.js
   DllModuleFactory.js
```

```
- DllPlugin.js
DllReferencePlugin.js
DynamicEntryPlugin.js
EntryOptionPlugin.js
EntryPlugin.js
— Entrypoint.js
— EnvironmentPlugin.js
— ErrorHelpers.js
EvalDevToolModulePlugin.js
EvalSourceMapDevToolPlugin.js
— ExportsInfo.js
ExportsInfoApiPlugin.js
— ExternalModule.js
— ExternalModuleFactoryPlugin₊js
— ExternalsPlugin.js
— FileSystemInfo.js
FlagAllModulesAsUsedPlugin.js
FlagDependencyExportsPlugin.js

    FlagDependencyUsagePlugin.js

— FlagEntryExportAsUsedPlugin.js
— Generator.js
GraphHelpers.js
— HarmonyLinkingError₊js
— HookWebpackError₊js
HotModuleReplacementPlugin.js
HotUpdateChunk.js
IgnoreErrorModuleFactory.js
IgnorePlugin.js
 - IgnoreWarningsPlugin.js
— InitFragment.js

    InvalidDependenciesModuleWarning.js

JavascriptMetaInfoPlugin.js
LibManifestPlugin.js
LibraryTemplatePlugin.js
─ LoaderOptionsPlugin.js
─ LoaderTargetPlugin.js
MainTemplate.js
— Module₊js
— ModuleBuildError₁js
— ModuleDependencyError.js

    ModuleDependencyWarning.js

— ModuleError⊾js
— ModuleFactory.js
ModuleFilenameHelpers.js
ModuleGraph.js
ModuleGraphConnection.js
— ModuleHashingError₊js

    ModuleInfoHeaderPlugin.js

ModuleNotFoundError.js
— ModuleParseError₊js
ModuleProfile.js
- ModuleRestoreError₊js
– ModuleStoreError₊js
 ModuleTemplate.js
```

```
- ModuleWarning.js
– MultiCompiler.js
MultiStats.js
— MultiWatching.js
NoEmitOnErrorsPlugin.js
— NoModeWarning.js
NodeStuffInWebError.js
NodeStuffPlugin.js
— NormalModule.js
NormalModuleFactory.js

    NormalModuleReplacementPlugin.js

NullFactory.js
OptimizationStages.js
— OptionsApply.js
— Parser.is
— PrefetchPlugin.js
— ProgressPlugin.js
ProvidePlugin.js
— RawModule₊įs
— RecordIdsPlugin.js
— RequestShortener.js
RequireJsStuffPlugin.js
— ResolverFactory.js
— RuntimeGlobals.js
RuntimeModule.js
— RuntimePlugin.js
— RuntimeTemplate.js
SelfModuleFactory.js
— SingleEntryPlugin.js
— SizeFormatHelpers.js

    SourceMapDevToolModuleOptionsPlugin.js

SourceMapDevToolPlugin.js
— Stats.js
— Template.js
 TemplatedPathPlugin.js
─ UnhandledSchemeError.js
— UnsupportedFeatureWarning.js
UseStrictPlugin.js

    WarnCaseSensitiveModulesPlugin.js

WarnDeprecatedOptionPlugin.js
WarnNoModeSetPlugin.js
— WatchIgnorePlugin₁js
Watching.js
— WebpackError₁js
WebpackIsIncludedPlugin.js
WebpackOptionsApply.js
WebpackOptionsDefaulter.js
asset
   — AssetGenerator.js
   AssetModulesPlugin.js
   AssetParser.js
   AssetSourceGenerator.js
    - AssetSourceParser.js
    - RawDataUrlModule.js
```

```
async-modules

    AwaitDependenciesInitFragment.js

  └ InferAsyncModulesPlugin.js
buildChunkGraph.js
cache

→ AddBuildDependenciesPlugin.js

    AddManagedPathsPlugin.js

  IdleFileCachePlugin.js
   MemoryCachePlugin.js
  MemoryWithGcCachePlugin.js
   PackFileCacheStrategy.js
  ResolverCachePlugin.js
  — getLazyHashedEtag₊js
  ∟ mergeEtags.js
- cli.js
config

    browserslistTargetHandler.js

  defaults.js
   - normalization.js
  └ target.js
container
  ─ ContainerEntryDependency.js
   ContainerEntryModule.js
  ContainerEntryModuleFactory.js

    ContainerExposedDependency.js

   ContainerPlugin₁js
  ─ ContainerReferencePlugin.js
  FallbackDependency.js
   FallbackItemDependency.js
  — FallbackModule₊js
   FallbackModuleFactory.js

    ModuleFederationPlugin.js

   – RemoteModule.js
   RemoteRuntimeModule.js

    RemoteToExternalDependency.js

  └ options.js
- CSS
  CssExportsGenerator.js
   – CssGenerator₊js
   CssLoadingRuntimeModule.js
  CssModulesPlugin.js
   - CssParser₊js
  └ walkCssTokens.js
– debug
  └─ ProfilingPlugin.js

    dependencies

→ AMDDefineDependency.js

    AMDDefineDependencyParserPlugin.js

   AMDPlugin.js
   AMDRequireArrayDependency.js

    AMDRequireContextDependency.js

    AMDRequireDependenciesBlock.js

    AMDRequireDependenciesBlockParserPlugin.js

    AMDRequireDependency.js
```

```
AMDRequireItemDependency.js
AMDRuntimeModules.js
CachedConstDependency.js
CommonJsDependencyHelpers.js

    CommonJsExportRequireDependency.js

CommonJsExportsDependency.js
CommonJsExportsParserPlugin.js

    CommonJsFullRequireDependency.js

- CommonJsImportsParserPlugin.js
CommonJsPlugin.js
CommonJsRequireContextDependency.js
CommonJsRequireDependency.js
CommonJsSelfReferenceDependency.js
ConstDependency.js
ContextDependency.js
ContextDependencyHelpers.js
ContextDependencyTemplateAsId.js

    ContextDependencyTemplateAsRequireCall.js

    ContextElementDependency.js

CreateScriptUrlDependency.js

    CriticalDependencyWarning.js

CssExportDependency.js
CssImportDependency.js

    CssLocalIdentifierDependency.js

    CssSelfLocalIdentifierDependency.js

CssUrlDependency.js

    DelegatedSourceDependency.js

DllEntryDependency.js
DynamicExports.js
EntryDependency.js
ExportsInfoDependency.js
HarmonyAcceptDependency.js
HarmonyAcceptImportDependency.js

    HarmonyCompatibilityDependency.js

    HarmonyDetectionParserPlugin.js

    HarmonyEvaluatedImportSpecifierDependency.js

    HarmonyExportDependencyParserPlugin.js

    HarmonyExportExpressionDependency.js

    HarmonyExportHeaderDependency.js

    HarmonyExportImportedSpecifierDependency.js

    HarmonyExportInitFragment.js

    HarmonyExportSpecifierDependency.js

— HarmonyExports.js
HarmonyImportDependency.js

    HarmonyImportDependencyParserPlugin.js

    HarmonyImportSideEffectDependency.js

    HarmonyImportSpecifierDependency.js

    HarmonyModulesPlugin.js

    HarmonyTopLevelThisParserPlugin.js

ImportContextDependency.js
ImportDependency.js

    ImportEagerDependency.js

    ImportMetaContextDependency.js

    ImportMetaContextDependencyParserPlugin.js
```

```
ImportMetaContextPlugin.js

    ImportMetaHotAcceptDependency.js

    ImportMetaHotDeclineDependency.js

 ImportMetaPlugin.js

    ImportParserPlugin.js

 - ImportPlugin.js
 ImportWeakDependency.js

    JsonExportsDependency.js

    LoaderDependency.js

 LoaderImportDependency.js
 LoaderPlugin.js
 – LocalModule₊js
 LocalModuleDependency.js
 - LocalModulesHelpers.js

    ModuleDecoratorDependency.js

 ModuleDependency.js
 ModuleDependencyTemplateAsId.js

    ModuleDependencyTemplateAsRequireId.js

    ModuleHotAcceptDependency.js

 ModuleHotDeclineDependency.js
 NullDependency.js
 PrefetchDependency.js
 ProvidedDependency.js

    PureExpressionDependency.js

 RequireContextDependency.js

    RequireContextDependencyParserPlugin.js

 RequireContextPlugin.js

    ReguireEnsureDependenciesBlock.js

    RequireEnsureDependenciesBlockParserPlugin.js

    RequireEnsureDependency.js

    RequireEnsureItemDependency.js

    RequireEnsurePlugin.js

    RequireHeaderDependency.js

    RequireIncludeDependency.js

    RequireIncludeDependencyParserPlugin.js

 RequireIncludePlugin.js

    RequireResolveContextDependency.js

    RequireResolveDependency.js

    RequireResolveHeaderDependency.js

    RuntimeRequirementsDependency.js

    StaticExportsDependency.js

 – SystemPlugin.js
 SystemRuntimeModule.js
 URLDependency.js
 URLPlugin.js
 UnsupportedDependency.js

    WebAssemblyExportImportedDependency.js

    WebAssemblyImportDependency.js

    WebpackIsIncludedDependency.js

 WorkerDependency.js
 – WorkerPlugin.js

    getFunctionExpression.js

    processExportInfo.js

electron
```

```
    □ ElectronTargetPlugin.js

 errors

    □ BuildCycleError.js

- esm

    ExportWebpackRequireRuntimeModule.js

  ModuleChunkFormatPlugin.js

    ModuleChunkLoadingPlugin.js

  formatLocation.js
– hmr
  ─ HotModuleReplacement.runtime.js

    HotModuleReplacementRuntimeModule.js

    JavascriptHotModuleReplacement.runtime.js

    LazyCompilationPlugin.js

  – ids

    □ ChunkModuleIdRangePlugin.js

    DeterministicChunkIdsPlugin.js

    DeterministicModuleIdsPlugin.js

   – HashedModuleIdsPlugin₊js
  IdHelpers.js

    NamedChunkIdsPlugin.js

   NamedModuleIdsPlugin.js
   NaturalChunkIdsPlugin.js
  — NaturalModuleIdsPlugin₊js
  OccurrenceChunkIdsPlugin.js

    OccurrenceModuleIdsPlugin.js

  └─ SyncModuleIdsPlugin.js
index.js
- javascript

    ArrayPushCallbackChunkFormatPlugin.js

    BasicEvaluatedExpression.js

   ChunkHelpers.js
  — CommonJsChunkFormatPlugin₊js

    EnableChunkLoadingPlugin.js

  JavascriptGenerator.js
   JavascriptModulesPlugin.js
   JavascriptParser.js
   JavascriptParserHelpers.js
  └ StartupHelpers.js
- ison
  — JsonData.js
  — JsonGenerator.js
   - JsonModulesPlugin.js
  └ JsonParser.js
- librarv

    AbstractLibraryPlugin.js

   AmdLibraryPlugin.js
   AssignLibraryPlugin.js
   EnableLibraryPlugin.js

    ExportPropertyLibraryPlugin.js

   JsonpLibraryPlugin.js
   ModuleLibraryPlugin.js
   SystemLibraryPlugin.js
```

```
    UmdLibraryPlugin.js

 logging
  — Logger⊾js
  createConsoleLogger.js
   - runtime.js
 └ truncateArgs.js
- node

    CommonJsChunkLoadingPlugin.js

    NodeEnvironmentPlugin.js

  NodeSourcePlugin.js
   NodeTargetPlugin.js
   NodeTemplatePlugin.js
  NodeWatchFileSystem.js

    ReadFileChunkLoadingRuntimeModule.js

    ReadFileCompileAsyncWasmPlugin.js

    ReadFileCompileWasmPlugin.js

  RequireChunkLoadingRuntimeModule.js
 └ nodeConsole.is
optimize
  — AggressiveMergingPlugin₁js

    AggressiveSplittingPlugin.js

  ConcatenatedModule.js
  EnsureChunkConditionsPlugin.js
  FlagIncludedChunksPlugin.js
   - InnerGraph.js
  InnerGraphPlugin.js
  — LimitChunkCountPlugin.js
  — MangleExportsPlugin.js
  MergeDuplicateChunksPlugin.js
  MinChunkSizePlugin.js
  MinMaxSizeWarning.js
  ModuleConcatenationPlugin.js
   RealContentHashPlugin.js
  RemoveEmptyChunksPlugin.js

    RemoveParentModulesPlugin.js

  ─ RuntimeChunkPlugin.js
   SideEffectsFlagPlugin.js
 └ SplitChunksPlugin.js

    performance

  AssetsOverSizeLimitWarning.js

    EntrypointsOverSizeLimitWarning.js

    NoAsyncChunksWarning.js

 └ SizeLimitsPlugin.js
- prefetch

    ChunkPrefetchFunctionRuntimeModule.js

    ChunkPrefetchPreloadPlugin.js

  — ChunkPrefetchStartupRuntimeModule.js

    ChunkPrefetchTriggerRuntimeModule.js

 └ ChunkPreloadTriggerRuntimeModule.js
rules
  BasicEffectRulePlugin.js

    BasicMatcherRulePlugin.js

   ObjectMatcherRulePlugin.js
   RuleSetCompiler.js
```

```
    UseEffectRulePlugin.js

 runtime

    AsyncModuleRuntimeModule.js

    AutoPublicPathRuntimeModule.js

    BaseUriRuntimeModule.js

  ChunkNameRuntimeModule.js
   CompatGetDefaultExportRuntimeModule.js
  CompatRuntimeModule.js

    CreateFakeNamespaceObjectRuntimeModule.js

  CreateScriptRuntimeModule.js
  CreateScriptUrlRuntimeModule.js
   DefinePropertyGettersRuntimeModule.js
  EnsureChunkRuntimeModule.js
  ─ GetChunkFilenameRuntimeModule.js

    GetFullHashRuntimeModule.js

    GetMainFilenameRuntimeModule.js

    GetTrustedTypesPolicyRuntimeModule.js

   GlobalRuntimeModule.js

    HasOwnPropertyRuntimeModule.js

  HelperRuntimeModule.js
  LoadScriptRuntimeModule.js

    MakeNamespaceObjectRuntimeModule.js

  NonceRuntimeModule.js
   OnChunksLoadedRuntimeModule.js
   PublicPathRuntimeModule.js
  — RelativeUrlRuntimeModule₊js
  ─ RuntimeIdRuntimeModule.js

    StartupChunkDependenciesPlugin.js

    StartupChunkDependenciesRuntimeModule.js

    StartupEntrypointRuntimeModule.js

    □ SystemContextRuntimeModule.js

schemes

→ DataUriPlugin.js

   - FileUriPlugin.js
 └ HttpUriPlugin.js
- serialization
  — ArraySerializer₊js
   BinaryMiddleware.js
  DateObjectSerializer.js
  — ErrorObjectSerializer.js
  FileMiddleware.js
  — MapObjectSerializer.js
  — NullPrototypeObjectSerializer.js
  ObjectMiddleware.js
  PlainObjectSerializer.js
   – RegExpObjectSerializer.js
  – Serializer.js
   SerializerMiddleware.js
   SetObjectSerializer.js
   – SingleItemMiddleware.js

    types.js

 sharing

    ConsumeSharedFallbackDependency.js

   ConsumeSharedModule.js
```

```
ConsumeSharedPlugin.js

    ConsumeSharedRuntimeModule.js

  ProvideForSharedDependency.js
  ProvideSharedDependency.js
  ProvideSharedModule.js
  ProvideSharedModuleFactory.js
   ProvideSharedPlugin.js
  SharePlugin.js
   ShareRuntimeModule.js
  resolveMatchedConfigs.js
 └ utils.js
stats
  — DefaultStatsFactoryPlugin₊js
   DefaultStatsPresetPlugin.js

    DefaultStatsPrinterPlugin.js

   - StatsFactory.js

    □ StatsPrinter.js

– util
  — ArrayHelpers.js
  – ArrayQueue₊js
  AsyncQueue₁js
   - Hash.js
  IterableHelpers.js
   LazyBucketSortedSet.js
   LazySet.js
   – MapHelpers.js
   - ParallelismFactorCalculator.js
  - Queue.js
   - Semaphore.js
  – SetHelpers.js
  SortableSet.js
  StackedCacheMap.js
   StackedMap.js
  — StringXor.js
   - TupleQueue₊js
   - TupleSet.js
  URLAbsoluteSpecifier.js
   WeakTupleMap.js
  binarySearchBounds.js
  – cleverMerge.js
  — comparators.js
  compileBooleanMatcher.js
  create-schema-validation.js
  – createHash.js
  deprecation.js
  deterministicGrouping.js
  extractUrlAndGlobal.js
   findGraphRoots.js
   – fs.js
   - hash
     BatchedHash.js
      - md4.js
      - wasm-hash.js
      – xxhash64.js
```

```
- identifier.js
      internalSerializables.js
      - makeSerializable.js
      - memoize.js
      nonNumericOnlyHash.js
      – numberHash.js
      objectToMap.js
      processAsyncTree.js
      propertyAccess.js
      - registerExternalSerializer.js
      – runtime.js
      – semver.js
      — serialization.js
      - smartGrouping.js
     └ source.js
   – validateSchema.js
   wasm
     └ EnableWasmLoadingPlugin.js
   wasm-async

    AsyncWasmLoadingRuntimeModule.js

    AsyncWebAssemblyGenerator.js

    AsyncWebAssemblyJavascriptGenerator.js

    AsyncWebAssemblyModulesPlugin.js

    □ AsyncWebAssemblyParser.js

   - wasm-sync

    UnsupportedWebAssemblyFeatureError.js

     ─ WasmChunkLoadingRuntimeModule.js

    WasmFinalizeExportsPlugin.js

      WebAssemblyGenerator.js

    WebAssemblyInInitialChunkError.js

      WebAssemblyJavascriptGenerator.js
      WebAssemblyModulesPlugin.js
      - WebAssemblyParser.js
     └ WebAssemblyUtils.js

    FetchCompileAsyncWasmPlugin.js

      FetchCompileWasmPlugin.js

    JsonpChunkLoadingPlugin.js

    JsonpChunkLoadingRuntimeModule.js

    □ JsonpTemplatePlugin.js

   webpack.is
  └ webworker

    □ ImportScriptsChunkLoadingPlugin.js

    ImportScriptsChunkLoadingRuntimeModule.js

     └─ WebWorkerTemplatePlugin.js
- module.d.ts
node modules
   - .bin
      - acorn

    browserslist

    @types
      - estree
         LICENSE
         README.md
```

```
- flow.d.ts
      - index.d.ts
     └ package.json
- schema-utils
  LICENSE
  - README.md

    declarations

     ValidationError.d.ts
      - index.d.ts
      keywords

    □ absolutePath.d.ts

      – util
       ⊢ Range.d.ts
         - hints.d.ts
    └ validate.d.ts
  - dist
     ─ ValidationError.js
     - index.js
     – keywords
       └ absolutePath.js
      - util
       ⊢ Range.js
       └ hints.js
    └ validate.js
   - package.json
 webpack-sources
  — LICENSE
  README.md
  - lib
     ─ CachedSource.js
     — CompatSource.js
      ConcatSource js
     — OriginalSource.js
     — PrefixSource.js
     — RawSource.js
     — ReplaceSource.js
     — SizeOnlySource.js
      Source.js
     SourceMapSource.js
     helpers
       — createMappingsSerializer.js

— getFromStreamChunks.js

        — getGeneratedSourceInfo.js
        — getName.js
        getSource.js

⊢ readMappings.js

— splitIntoLines.js

        splitIntoPotentialTokens.js
        streamAndGetSourceAndMap.js

— streamChunks.js

         streamChunksOfCombinedSourceMap.js
         streamChunksOfRawSource.js

    □ streamChunksOfSourceMap.js

      - index.js
```

```
    package.json

 package.json
schemas
  WebpackOptions.check.d.ts
  WebpackOptions.check.js
  WebpackOptions.json
   – _container.json
   sharing.json
  plugins
    BannerPlugin.check.d.ts
      BannerPlugin.check.js
     BannerPlugin₁json
     DllPlugin.check.d.ts
      - DllPlugin.check.js
      - DllPlugin.json

    DllReferencePlugin.check.d.ts

     DllReferencePlugin.check.js

    DllReferencePlugin.json

    HashedModuleIdsPlugin.check.d.ts

    HashedModuleIdsPlugin.check.js

    HashedModuleIdsPlugin.json

    IgnorePlugin.check.d.ts

     IgnorePlugin.check.js
      - IgnorePlugin.json
      JsonModulesPluginParser.check.d.ts
     JsonModulesPluginParser.check.js
      - JsonModulesPluginParser.json
     LoaderOptionsPlugin.check.d.ts

    LoaderOptionsPlugin.check.js

     LoaderOptionsPlugin.json
     ProgressPlugin.check.d.ts
     ProgressPlugin.check.js
      - ProgressPlugin.json
     SourceMapDevToolPlugin.check.d.ts

    SourceMapDevToolPlugin.check.js

    SourceMapDevToolPlugin.json

    WatchIgnorePlugin.check.d.ts

      WatchIgnorePlugin.check.js
     WatchIgnorePlugin.json
      asset
        AssetGeneratorOptions.check.d.ts
        AssetGeneratorOptions.check.js
        AssetGeneratorOptions.json
         AssetInlineGeneratorOptions.check.d.ts
        AssetInlineGeneratorOptions.check.js
         AssetInlineGeneratorOptions.json
        AssetParserOptions.check.d.ts
        AssetParserOptions.check.js
        AssetParserOptions.json
        AssetResourceGeneratorOptions.check.d.ts

    AssetResourceGeneratorOptions.check.js

    □ AssetResourceGeneratorOptions.json

       container
        ContainerPlugin.check.d.ts
```

```
ContainerPlugin.check.js
       — ContainerPlugin.json

    ContainerReferencePlugin.check.d.ts

      ContainerReferencePlugin.check.js
      ContainerReferencePlugin.json
      ExternalsType.check.d.ts
       ExternalsType.check.js
      — ExternalsType.json

    ModuleFederationPlugin.check.d.ts

       ModuleFederationPlugin.check.js
      - CSS
      — CssGeneratorOptions.check.d.ts
       CssGeneratorOptions.check.js
       CssGeneratorOptions.json
      CssParserOptions.check.d.ts
       CssParserOptions.check.js
      └ CssParserOptions.json
    debug
      ProfilingPlugin.check.d.ts
       ProfilingPlugin.check.js
      └─ ProfilingPlugin.json
    - ids
      DocurrenceChunkIdsPlugin.check.d.ts
       OccurrenceChunkIdsPlugin.check.js
       OccurrenceChunkIdsPlugin.json
       OccurrenceModuleIdsPlugin.check.d.ts

    OccurrenceModuleIdsPlugin.check.js

      └ OccurrenceModuleIdsPlugin.json
    - optimize

→ AggressiveSplittingPlugin.check.d.ts

    AggressiveSplittingPlugin.check.js

       AggressiveSplittingPlugin.json
      LimitChunkCountPlugin.check.d.ts
      LimitChunkCountPlugin.check.js
      — LimitChunkCountPlugin.json
       MinChunkSizePlugin.check.d.ts
       MinChunkSizePlugin.check.js
      - schemes
      HttpUriPlugin.check.d.ts
       HttpUriPlugin.check.js
      └ HttpUriPlugin.json
    sharing
      ConsumeSharedPlugin.check.d.ts

    ConsumeSharedPlugin.check.js

       ConsumeSharedPlugin.json

    ProvideSharedPlugin.check.d.ts

       ProvideSharedPlugin.check.js
       ProvideSharedPlugin.json
       SharePlugin.check.d.ts
       SharePlugin.check.js
      types.d.ts
```

```
webpack-dev-middleware
       LICENSE
          README.md
          – dist
                 ⊢ index.js
                  — middleware.js
                     – options.json
                 └ utils
                            ─ compatibleAPI.js
                               getFilenameFromUrl.js
                               - getPaths.js
                               – ready.js
                              — setupHooks.js
                                setupOutputFileSystem.js
                            └ setupWriteToDisk.js
          node modules
                 └ .bin
                           package.json

    types
    types

─ index.d.ts

                     middleware.d.ts
                 └ utils
                            — compatibleAPI.d.ts
                               - getFilenameFromUrl.d.ts
                               - getPaths.d.ts
                               - ready.d.ts
                              — setupHooks.d.ts
                                - setupOutputFileSystem.d.ts
                           – webpack-dev-server

    LICENSE

          README.md
        — bin
                 ⊢ cli-flags.js
                     – process–arguments₌js
                 └ webpack-dev-server.js
          - client
                 ⊢ clients

─ SockJSClient.js

    WebSocketClient.js

                  — index.js
                  — modules
                            ─ logger
                                   └ index.js
                            └ sockjs-client
                                     └ index.js
                  — overlay.js
                     - socket.js
                    utils
                            — createSocketURL.js
                                getCurrentScriptSource.js
                               — log.js
                               - parseURL.js
```

```
— reloadApp.js
        — sendMessage.js
       └ stripAnsi.js
  - lib
    ⊢ Server.is
     — getPort.js
     – options.json
    ∟ servers
       ─ BaseServer.js
        – SockJSServer₁js
       └─ WebsocketServer.js
  node modules
    ∟ .bin

— ansi−html

         - rimraf
       └ webpack
  — package.json
 └ types
    — bin

    ⊢ cli−flags.d.ts

        — process-arguments.d.ts
       └ lib
       — Server.d.ts
         - getPort.d.ts
       ∟ servers
          ─ BaseServer.d.ts
           - SockJSServer.d.ts
          webpack-manifest-plugin

─ LICENSE

  README.md
  – dist
    helpers.d.ts
     — helpers.js


    helpers.js.map

     - hooks.d.ts
     — hooks.js
     hooks.js.map
     — index.d.ts
     - index.js
    └ index.js.map
  — node_modules
    _ .bin
       └ webpack

    webpack-sources

    LICENSE

         - README.md
        – lib
          — CachedSource.js
          ├ CompatSource.js
           ConcatSource.js
           OriginalSource.js
           – PrefixSource.js
```

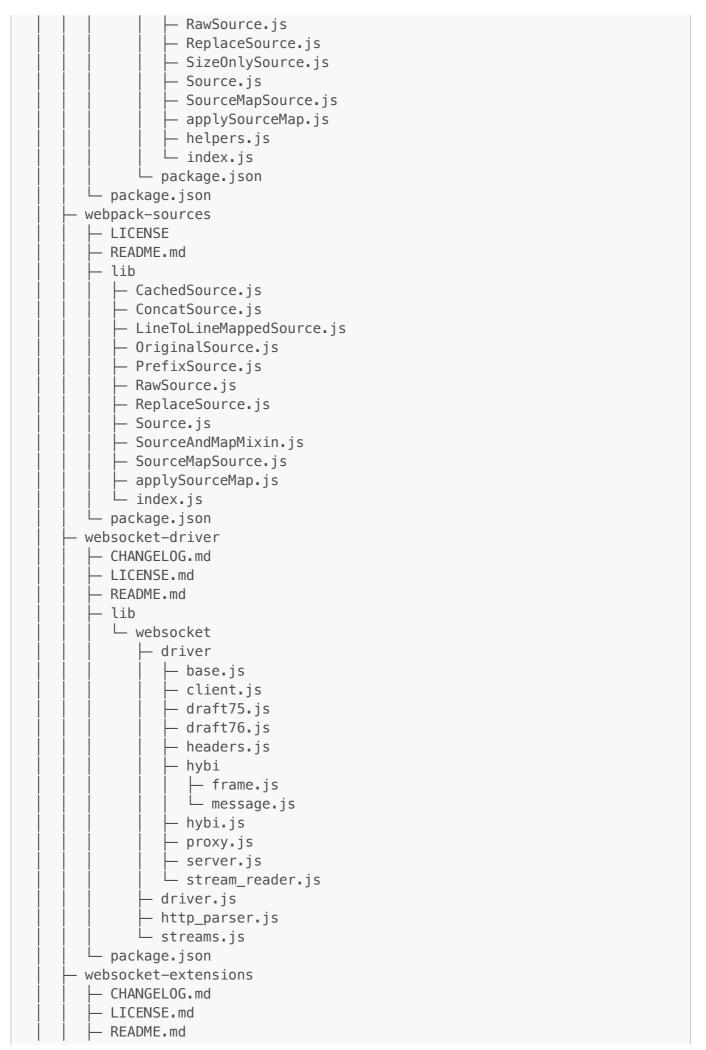

```
lib
     — parser.js
      - pipeline
        — README.md
        – cell.js
        — functor.js
         — index.js
         - pledge.js
        └ ring_buffer.js
      websocket_extensions.js
 └ package.json
whatwg-encoding

    LICENSE.txt

  README.md
   - lib

─ labels-to-names.json

     — supported-names.json
    └ whatwg-encoding.js
 └ package.json
whatwg-fetch

─ LICENSE

   - README.md
  — dist
    ├ fetch.umd.js
    └ fetch.umd.js.flow
  – fetch.js
   - fetch.js.flow
 └ package.json
whatwg-mimetype

    LICENSE.txt

  — README.md
  — lib

    mime-type.js

     — parser.js
     – serializer.js
    └ utils.js
 └ package.json
whatwg-url
  LICENSE.txt
  README.md
  – dist

⊢ Function.js

     ─ URL-impl.js
     ─ URL.js
     URLSearchParams-impl.js
     ─ URLSearchParams.js
     ─ VoidFunction.js
     — encoding.js
     — infra.js

→ percent-encoding.js

    url-state-machine.js

      - urlencoded.js
     └ utils.js
    index.js
```

```
- package.json

    webidl2js-wrapper.js

- which
 ─ CHANGELOG.md
  LICENSE
  README.md
  – bin
   └ node-which
  - package.json
 └ which.js
which-boxed-primitive
 ⊢ .editorconfig
  .eslintignore
  - .eslintrc
  - .github
   └ FUNDING.yml
  — .nycrc
  CHANGELOG.md
  LICENSE
  README.md
  — index.js
  – package.json
 └ test
    └ index.js
- which-collection
  - .eslintrc
  - .github
    FUNDING.yml
    └ workflows
       └ rebase.yml
  - .travis.yml
  — CHANGELOG.md
  LICENSE
  README.md
  index.js
  – package.json
  - test
    └ index.js
- which-typed-array
 .editorconfig
  - .eslintrc
  - .github
   └ FUNDING.yml
  - nycrc
  CHANGELOG.md
  LICENSE
  README.md
  – index.js
  – package.json
  test
    └ index.js
word-wrap
  LICENSE
  - README.md
```

```
- index.d.ts
   - index.js
 └ package.json

    workbox-background-sync

 ─ BackgroundSyncPlugin.d.ts

    BackgroundSyncPlugin.js

  BackgroundSyncPlugin.mjs
  — LICENSE
  Oueue.d.ts
  — Queue₊js
  — Queue.mjs
  OueueStore.d.ts
  — QueueStore.js
  — QueueStore.mjs
  README.md
  — StorableRequest.d.ts

─ StorableRequest.js

  StorableRequest.mjs
  version.d.ts
  – _version.js
  – _version.mjs
  build
    workbox-background-sync.dev.js
     workbox-background-sync.dev.js.map
     workbox-background-sync.prod.js

    workbox-background-sync.prod.js.map

  - index.d.ts
  — index.js
  — index.mjs
  — lib
    ─ QueueDb.d.ts
     — QueueDb₊js
     — QueueDb.mjs
     — QueueStore.d.ts
     — QueueStore.is
    — QueueStore.mjs
     — StorableRequest.d.ts
      - StorableRequest.js
    └ StorableRequest.mjs
   - node_modules
    └ idb

─ CHANGELOG.md

        LICENSE
         - README.md
        build

— async-iterators.cjs

            async-iterators.d.ts
           — async-iterators.js
            database-extras.d.ts
           – entry.d.ts
            index.cjs
            - index.d.ts
            index.js
            umd-with-async-ittr.js
```

```
– umd.js
            - util.d.ts
            - wrap-idb-value.cjs
            - wrap-idb-value.d.ts
           └ wrap-idb-value.js
         – package₌json
         - with—async—ittr⊾cjs
         - with-async-ittr.d.ts
        └ with-async-ittr.js
  — package₌json
   - src
     BackgroundSyncPlugin.ts
     — Queue.ts
     — QueueStore.ts
      StorableRequest.ts
     - _version.ts
     - index.ts
      - lib
        — QueueDb.ts
         QueueStore.ts
        └ StorableRequest.ts
   - tsconfig.json

    tsconfig.tsbuildinfo

    workbox-broadcast-update

  BroadcastCacheUpdate.d.ts
  BroadcastCacheUpdate.js
  BroadcastCacheUpdate.mjs
  — BroadcastUpdatePlugin.d.ts
  ─ BroadcastUpdatePlugin.js
  BroadcastUpdatePlugin.mjs
  — LICENSE
  README.md
  - _version.d.ts
  — _version.js
  - _version.mjs
  build
     workbox-broadcast-update.dev.js
     workbox-broadcast-update.dev.js.map
     workbox-broadcast-update.prod.js
     workbox-broadcast-update.prod.js.map
  — index.d.ts
  index.js
  — index.mjs
  – package.json
  responsesAreSame.d.ts
  responsesAreSame.js
  responsesAreSame.mjs
   - src
     BroadcastCacheUpdate.ts
     — BroadcastUpdatePlugin.ts
      – _version.ts
      - index.ts
      responsesAreSame.ts
      - utils
```

```
└ constants.ts
   tsconfig.json
  — tsconfig.tsbuildinfo
 └ utils
    ⊢ constants.d.ts
     – constants.įs
    └ constants.mis
- workbox-build
 _ ncurc.is
  LICENSE
  README.md
  build

    ⊢ cdn-details.json

     — generate-sw.d.ts
     — generate-sw₁js
     — get-manifest.d.ts
     — get–manifest.js
     — index.d.ts
     — index.js
     — inject-manifest.d.ts
     — inject–manifest.js
      - lib

→ additional-manifest-entries-transform.d.ts

        additional-manifest-entries-transform.js
        - bundle.d.ts
        bundle.js
        — cdn-utils.d.ts
        — cdn-utils.js
         copy-workbox-libraries.d.ts
        copy-workbox-libraries.js
        - errors.d.ts
        — errors.js
        escape-regexp.d.ts
        — escape−regexp.js
        get-composite-details.d.ts
         – get−composite−details.js
        - get-file-details.d.ts
         - get-file-details.js
        - get-file-hash.d.ts
         – get−file−hash.js
        — get-file-manifest-entries.d.ts
        get-file-manifest-entries.js
        — get-file-size.d.ts
         - get-file-size.js
        get-source-map-url.d.ts
        – get-source-map-url₊js
        get-string-details.d.ts
         – get−string−details.js
         get-string-hash.d.ts
        – get-string-hash.js
         maximum-size-transform.d.ts
         - maximum-size-transform.js
        - modify-url-prefix-transform.d.ts
         modify-url-prefix-transform.js
```

```
module-registry.d.ts
      - module-registry.js
      no-revision-for-urls-matching-transform.d.ts
     no-revision-for-urls-matching-transform.js
      populate-sw-template.d.ts
     populate-sw-template.js
      - rebase-path.d.ts
     - rebase-path.js
      replace-and-update-source-map.d.ts
     replace-and-update-source-map.js
     - runtime-caching-converter.d.ts
     runtime-caching-converter.js
     - stringify-without-comments.d.ts
      stringify-without-comments.js
      transform-manifest.d.ts
      - transform-manifest.js
     — translate-url-to-sourcemap-paths.d.ts
      translate-url-to-sourcemap-paths.js
     - validate-options.d.ts
     validate-options.js
     write-sw-using-default-template.d.ts

    write-sw-using-default-template.js

   schema
     ─ GenerateSWOptions.json
      GetManifestOptions.json
      InjectManifestOptions.json

    WebpackGenerateSWOptions.json

    WebpackInjectManifestOptions.json

    templates

     - sw-template.d.ts
    └ sw-template.js
   - types.d.ts
   – types.js
node modules
  - .bin
    └ rollup
   - @apideck
    └ better-ajv-errors
        LICENSE
         README.md
         – dist
           better-ajv-errors.cjs.development.js
           — better-ajv-errors.cjs.development.js.map
           better-ajv-errors.cjs.production.min.js
            better-ajv-errors.cjs.production.min.js.map
           better-ajv-errors.esm.js
            - better—ajv—errors.esm.js.map
            constants.d.ts
            - index.d.ts
            index.js
            - lib
              — filter.d.ts
               suggestions.d.ts
              └ utils.d.ts
```



```
names.d.ts
   - names.js
   - names.js.map
   - ref_error.d.ts
   - ref error.js
   - ref_error.js.map
   - resolve.d.ts
   - resolve.js
   resolve.js.map
   - rules.d.ts
   – rules.js
   - rules.js.map
   - util.d.ts
   – util.js
   - util.js.map
  └ validate
     applicability.d.ts
      applicability.js
      applicability.js.map
      boolSchema.d.ts
     — boolSchema.js
      boolSchema.js.map
     — dataType.d.ts
     — dataType.js
     — dataType.js.map
      - defaults.d.ts
      — defaults.js
      – defaults.js.map
      - index.d.ts
      index.js
      - index.js.map
      keyword.d.ts
      – keyword.js
     — keyword.js.map
      subschema.d.ts
      - subschema⊾js
     └ subschema.js.map
- core.d.ts
- core.js
- core₌js₌map
- jtd.d.ts
- jtd.js
– jtd.js.map
- refs
  — data.json
   ison-schema-2019-09
     index.d.ts
      index.js
      - index.js.map
      – meta
        — applicator.json
         — content.json
        — core₌json
         – format.json
```

│
│
├ json-schema-2020-12
index.d.ts
index.js
<pre> index.js.map </pre>
⊢ meta
│
— content.json
core.json
│
— meta-data.json
unevaluated.json
│
└─ schema.json
— json-schema-draft-06.json
json-schema-draft-07.json
— json-schema-secure.json
— jtd-schema.d.ts
— jtd-schema.js
└ jtd-schema.js.map
├─ runtime
— equal.d.ts
— equal.js
equal.js.map
<pre>parseJson.d.ts</pre>
├─ parseJson.js
├─ parseJson.js.map
— quote.d.ts
— quote.js
— quote.js.map
— re2.d.ts
re2.js
re2.js.map
— timestamp.d.ts
— timestamp.js
— timestamp.js.map
— ucs2length.d.ts
— ucs2length.js
ucs2length.js.map
uri.d.ts
⊢ uri.js
— uri.js.map
— validation_error.d.ts
— validation_error.js
└ validation_error.js.map
<pre></pre>
index.js
<pre>index.js.map instance.d.ts</pre>
instance.js
instance.js Linstance.js.map
In talled Johnap

```
types
  - index.d.ts
   - index.js
  - index.js.map
   - json-schema.d.ts
   - įson—schema.įs
   - json-schema.js.map
   - jtd-schema.d.ts
   - jtd-schema.js
 └ jtd-schema.js.map

    vocabularies

 ─ applicator
     additionalItems.d.ts
     – additionalItems.js
     additionalItems.js.map
     additionalProperties.d.ts
     additionalProperties.js
     — additionalProperties.js.map
     — allOf.d.ts

— allOf.is

     — allOf.js.map
     — anyOf.d.ts
     — anyOf.js

— anyOf.js.map

     contains.d.ts
     – contains.js
     — contains.js.map
     — dependencies.d.ts
     — dependencies.js
     dependencies.js.map
     dependentSchemas.d.ts
     — dependentSchemas.js
     dependentSchemas.js.map

─ if.d.ts

     - if.js
     - if.js.map
     - index.d.ts
     — index.js
      - index.js.map
     — items.d.ts
     — items.is

— items.js.map

     — items2020.d.ts
     items2020.js
     — items2020.js.map
     - not.d.ts
     — not.js
     — not.js.map
     - oneOf.d.ts
     — oneOf.js
      - oneOf.js.map
      patternProperties.d.ts
      - patternProperties.js
       patternProperties.js.map
```

	refixItems.d.ts refixItems.js refixItems.js.map roperties.d.ts roperties.js
	roperties.js.map ropertyNames.d.ts ropertyNames.js
p	ropertyNames.js.map henElse.d.ts
t	henElse.js henElse.js.map
	.d.ts
code	
	.js.map
core	. jo:ap
	d.d.ts
	d.js
	d.js.map
	ndex.d.ts
	ndex.js
	ndex.js.map
	ef.d.ts
	ef.js
	ef.js.map
	riminator
	ndex.d.ts ndex.js
	ndex.js
	ypes.d.ts
	ypes.js
	ypes.js.map
	t2020.d.ts
	t2020.js
	t2020.js.map
	t7.d.ts
	t7.js
	t7.js.map
	ynamicAnchor.d.ts
	ynamicAnchor.js
	ynamicAnchor.js.map ynamicRef.d.ts
	ynamicRef.js
	ynamicRef.js.map
	ndex.d.ts
	ndexides ndex.js
	ndex.js.map
	ecursiveAnchor.d.ts
	ecursiveAnchor.js
	ecursiveAnchor.js.map
	ecursiveRef.d.ts
	ecursiveRef.js
	ecursiveRef.js.map
	800 / 017

- errors.js - errors.js.map - format.js - format.js - format.js.map - index.d.ts - index.js.map - index.js.map - itd - discriminator.js.map - elements.js.map - elements.js.map - enum.js - error.js - error.js.map - index.js - index.js - index.js - index.js - index.js - metadata.js.map - nullable.d.ts - nullable.js.map - poptionalProperties.js - optionalProperties.js - optionalProperties.js - properties.js - properties.js.map - ref.d.ts - ref.js.map - ref.d.ts - ref.js.map - ref.d.ts - ref.js.map - ref.d.ts - ref.js.map - union.js.map - union.js - union.js - union.js.map - values.d.ts - walues.js - walues.js.map - metadata.js.map - metadata.js.map - redadata.js.map - walues.d.ts - walues.js - walues.js.map - metadata.js.map - metadata.js.map - metadata.js - metadata.js - metadata.js.map - metadata.js	
- errors.js.map - format.js - format.js - format.js.map - index.d.ts - index.js.map - jtd - discriminator.d.ts - discriminator.js.map - elements.d.ts - elements.js - elements.js.map - enum.js.map - enum.js - enum.js - enum.js - enum.js - error.js - erro	— errors.d.ts
- format - format.js - format.js.map - index.js - index.js - index.js.map - jtd - discriminator.js - discriminator.js - discriminator.js - elements.js.map - elements.js.map - elements.js.map - enum.js - enum.js - enum.js - enum.js - enum.js.map - error.js.map - error.js - metadata.js - motadata.js - properties.d.ts - properties.js - error.js - values.js - values.js - values.js - values.js - walues.js - metadata.js.map - metadata.js.map	⊢ errors.js
- format.js - format.js.map - index.d.ts - index.js - discriminator.d.ts - discriminator.js.map - elements.d.ts - elements.js - elements.js - elements.js - enum.js - enum.js - enum.js - enum.js - error.js.map - error.d.ts - error.js - error.js.map - index.d.ts - index.js - index.js - index.js - metadata.js.map - nullable.d.ts - nullable.js - nullable.js - nullable.js.map - optionalProperties.js - optionalProperties.js - optionalProperties.js - properties.js - properties.js - properties.js - properties.js - properties.js - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - metadata.d.ts - metadata.d.ts - metadata.d.ts - metadata.js - metadata.js.map - metadata.d.ts - metadata.js	— errors.js.map
- format.js.map - index.d.ts - index.js - index.js.map - jtd - discriminator.d.ts - discriminator.js - discriminator.js - discriminator.js.map - elements.js - elements.js - elements.js - elements.js.map - enum.d.ts - enum.js - enum.js - enum.js.map - error.d.ts - error.js - error.js - error.js.map - index.d.ts - index.js - index.js - metadata.d.ts - metadata.js - nullable.js - nullable.js - nullable.js - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts - properties.d.ts - properties.js -	— format
- format,js.map - index.js index.js.map - jtd - discriminator.js - discriminator.js.map - elements.d.ts - elements.js.map - enum.d.ts - enum.js.map - error.d.ts - error.js - error.js.map - index.d.ts - index.js - index.js - index.js - index.js - index.js - metadata.js.map - metadata.js.map - nullable.js - nullable.js - nullable.js - nullable.js - properties.d.ts - optionalProperties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - ref.d.ts - ref.js - ref.js.map - ref.d.ts - ref.js.map - ref.d.ts - ref.js - ref.js.map	
- format,js.map - index.js index.js.map - jtd - discriminator.js - discriminator.js.map - elements.d.ts - elements.js.map - enum.d.ts - enum.js.map - error.d.ts - error.js - error.js.map - index.d.ts - index.js - index.js - index.js - index.js - index.js - metadata.js.map - metadata.js.map - nullable.js - nullable.js - nullable.js - nullable.js - properties.d.ts - optionalProperties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - ref.d.ts - ref.js - ref.js.map - ref.d.ts - ref.js.map - ref.d.ts - ref.js - ref.js.map	— format.is
- index.js - index.js - index.js - index.js.map - jtd - discriminator.d.ts - discriminator.js - discriminator.js.map - elements.d.ts - elements.js - elements.js.map - enum.d.ts - enum.js - enum.js - enum.js - eror.d.ts - error.js - error.js.map - index.d.ts - index.js - index.js - metadata.js - metadata.js - metadata.js - nullable.js - nullable.js - nullable.js - nullable.js - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - ref.d.ts - ref.js.map - ref.d.ts - ref.js - ref.js.map - ref.d.ts - ref.js.map	!!!
- index.js.map - jtd - discriminator.js - discriminator.js - discriminator.js.map - elements.d.ts - elements.js - elements.js.map - enum.d.ts - enum.js - enum.js.map - error.js.map - error.js.map - index.js - index.js - index.js - metadata.js.map - nullable.js - nullable.js - nullable.js - nullable.js.map - optionalProperties.d.ts - optionalProperties.js.map - properties.js - properties.js - properties.js - ref.d.ts - ref.js - ref.js - ref.js - ref.js - ref.js - type.js.map - union.d.ts - union.js - union.js - union.js - unetadata.js - metadata.js	
	!!
- jtd - discriminator.d.ts - discriminator.js - discriminator.js.map - elements.d.ts - elements.js - elements.js - enum.d.ts - enum.js - enum.js.map - error.d.ts - error.js - error.js.map - index.d.ts - index.js.map - metadata.d.ts - metadata.js - metadata.js - metadata.js - nullable.js - nullable.js.map - optionalProperties.js - optionalProperties.js - optionalProperties.js - properties.d.ts - properties.d.ts - properties.d.ts - properties.js - properties.d.ts - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js.map - metadata.js.map	
discriminator.d.ts discriminator.js discriminator.js.map elements.d.ts elements.js elements.js.map enum.d.ts enum.js enum.js error.js error.js index.js index.js metadata.d.ts metadata.js metadata.js metadeta.js nullable.js nullable.js nullable.js nullable.js poptionalProperties.d.ts optionalProperties.js optionalProperties.js properties.d.ts properties.d.ts properties.d.ts properties.js properti	
- discriminator.js - discriminator.js.map - elements.d.ts - elements.js - elements.js.map - enum.d.ts - enum.js - enum.js - enum.js - error.js.map - error.js.map - index.d.ts - index.js - index.js - index.js - metadata.js.map - mullable.js - nullable.js - nullable.js - nullable.js - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js - properties.d.ts - properties.js - proper	
- discriminator.js.map - elements.d.ts - elements.js - elements.js.map - enum.js - enum.js - enum.js - enum.js - enum.js.map - error.d.ts - error.js - error.js.map - index.d.ts - index.js - index.js - index.js - metadata.js - metadata.js - metadata.js.map - nullable.js.map - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js - properties.js - ref.js -	ļ ļ
- elements.d.ts - elements.js - elements.js.map - enum.d.ts - enum.js.map - error.d.ts - error.js - error.js.map - index.d.ts - index.js - index.js.map - metadata.d.ts - metadata.js.map - nullable.js.map - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js - optionalProperties.js - properties.d.ts - properties.js - properties.js - properties.js - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.js - values.js - metadata.js.map	· ! !
elements.js elements.js.map enum.d.ts enum.js enum.js.map error.d.ts error.js error.js.map index.d.ts index.js index.js.map emtadata.js.map enullable.js.map enullable.js.map optionalProperties.js.map properties.d.ts eproperties.js.map erf.d.ts erf.js erf.js.map etype.d.ts etype.js etype.js.map eunion.d.ts eunion.js eunion.js.map evalues.d.ts evalues.js ewetadata.js.map emetadata.js.map emetadata.js.map emetadata.js.map emetadata.js.map	!!
- elements.js.map - enum.d.ts - enum.js - enum.js.map - error.d.ts - error.js - error.js - error.js.map - index.d.ts - index.js - index.js.map - metadata.d.ts - metadata.js.map - nullable.ds - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js - optionalProperties.js.map - properties.d.ts - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.js.map - union.js.map - values.d.ts - values.js - metadata.js - metadata.js - metadata.js - metadata.js - metadata.js - metadata.js.map	— elements.d.ts
- enum.d.ts - enum.js - enum.js.map - error.d.ts - error.js error.js.map - index.d.ts - index.js.map - metadata.d.ts - metadata.js.map - nullable.d.ts - nullable.js.map - optionalProperties.js - optionalProperties.js - optionalProperties.js - properties.d.ts - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js.map - union.d.ts - union.js.map - union.js.map - values.d.ts - values.js - wetadata.js.map - metadata.js.map - metadata.js - metadata.js - metadata.js - metadata.js.map	
- enum.d.ts - enum.js - enum.js.map - error.d.ts - error.js error.js.map - index.d.ts - index.js.map - metadata.d.ts - metadata.js.map - nullable.d.ts - nullable.js.map - optionalProperties.js - optionalProperties.js - optionalProperties.js - properties.d.ts - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js.map - union.d.ts - union.js.map - union.js.map - values.d.ts - values.js - wetadata.js.map - metadata.js.map - metadata.js - metadata.js - metadata.js - metadata.js.map	— elements.js.map
- enum.js - enum.js.map - error.d.ts - error.js - error.js.map - index.d.ts - index.js - index.js.map - metadata.d.ts - metadata.js - metadata.js.map - nullable.d.ts - nullable.js - nullable.js - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js - properties.d.ts - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js - ref.js - ref.js - values.js - values.d.ts - values.js - values.js - values.js - wateadata.js - metadata.d.ts - metadata.js - metadata.js - metadata.js.map	
- enum.js.map - error.d.ts - error.js - error.js.map - index.d.ts - index.js.map - metadata.d.ts - metadata.js.map - nullable.d.ts - nullable.js - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - properties.js - properties.js - properties.js - properties.js - properties.js - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js.map - union.d.ts - union.js.map - values.d.ts - values.js - values.js - metadata.d.ts - metadata.js - metadata.js - metadata.js - metadata.js - metadata.js - metadata.js.map	ļ ļ
- error.d.ts - error.js - error.js.map - index.d.ts - index.js.map - metadata.d.ts - metadata.js - metadata.js.map - nullable.d.ts - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js.map - values.d.ts - values.js - values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js - metadata.js.map	
- error.js - error.js.map - index.d.ts - index.js - index.js.map - metadata.d.ts - metadata.js.map - nullable.d.ts - nullable.js - nullable.js,map - optionalProperties.js - optionalProperties.js - optionalProperties.js - properties.d.ts - properties.js - ref.js - ref.js - ref.js - ref.js - ref.js - ref.js.map - type.d.ts - type.js - type.js - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - walues.js - metadata.js	
- error.js.map - index.d.ts - index.js - index.js.map - metadata.d.ts - metadata.js.map - nullable.d.ts - nullable.js - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - prionalProperties.js - properties.js - properties.js - properties.js - properties.js - properties.js - ref.js - ref.js - ref.js.map - type.d.ts - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js.map - metadata.js - metadata.js.map	
- index.d.ts - index.js - index.js.map - metadata.js.map - metadata.js.map - nullable.d.ts - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.d.ts - properties.js - properties.js - properties.js - properties.js - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js.map - values.d.ts - values.js - walues.js.map - metadata.js - metadata.js - metadata.js - metadata.js.map	
- index.js - index.js.map - metadata.d.ts - metadata.js.map - nullable.d.ts - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.js.map - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js - ref.js.map - type.d.ts - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js.map - metadata.js - metadata.js - metadata.js.map - metadata.js.map - metadata.js.map	
- index.js.map - metadata.d.ts - metadata.js - metadata.js.map - nullable.d.ts - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.d.ts - properties.js - properties.js - properties.js - properties.js - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - metadata.js - metadata.js.map - metadata.js.map - metadata.js.map	ļ ļ
- metadata.js - metadata.js - metadata.js.map - nullable.js - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.d.ts - properties.js - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js.map - union.d.ts - union.js - union.js.map - values.js - values.js - metadata.js - metadata.js.map - metadata.js.map - metadata.js.map - metadata.js.map	
- metadata.js - metadata.js.map - nullable.d.ts - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.d.ts - properties.js - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js.map - metadata.js - metadata.js - metadata.js - metadata.js.map	!!!
- metadata.js.map - nullable.d.ts - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.d.ts - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js - ref.js - ref.js - ref.js - rupe.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js.map - metadata.js - metadata.js - metadata.js - metadata.js.map	
- nullable.d.ts - nullable.js - nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.d.ts - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js.map - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js.map	│ ├─ metadata.js
- nullable.js map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.js - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - metadata.d.ts - metadata.js - metadata.js - metadata.js.map	— metadata.js.map
- nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js.map - values.js.map - metadata.d.ts - metadata.js - metadata.js.map	│
- nullable.js.map - optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js.map - values.js.map - metadata.d.ts - metadata.js - metadata.js.map	— nullable.js
- optionalProperties.d.ts - optionalProperties.js - optionalProperties.js.map - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js.map - metadata.d.ts - metadata.js - metadata.js.map	
- optionalProperties.js - optionalProperties.js.map - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js.map - metadata.js.map	· ! !
- optionalProperties.js.map - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js.map - metadata.js.map	
- properties.d.ts - properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js.map	
<pre>- properties.js - properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js - metadata.d.ts - metadata.js - metadata.js.map</pre>	
<pre>- properties.js.map - ref.d.ts - ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js.map</pre>	
- ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js.map	; ;
- ref.js - ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js - union.js.map - values.d.ts - values.js - values.js - metadata.d.ts - metadata.js - metadata.js.map	
- ref.js.map - type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js - metadata.d.ts - metadata.js - metadata.js.map	
<pre>- type.d.ts - type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js - metadata.d.ts - metadata.js - metadata.js.map</pre>	
<pre>- type.js - type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js - metadata.d.ts - metadata.js - metadata.js.map</pre>	
<pre>- type.js.map - union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js - metadata.d.ts - metadata.js - metadata.js.map</pre>	├─ type.d.ts
<pre>- union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js.map</pre>	
<pre>- union.d.ts - union.js - union.js.map - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js.map</pre>	├─ type.js.map
<pre>- union.js - union.js.map - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js.map</pre>	
<pre>- union.js.map - values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js.map</pre>	
<pre>- values.d.ts - values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js.map</pre>	!!!
<pre>- values.js - values.js.map - metadata.d.ts - metadata.js - metadata.js.map</pre>	
<pre></pre>	
<pre> metadata.d.ts metadata.js metadata.js.map</pre>	· ! · · · · · · · · · · · · · · · · · ·
<pre></pre>	:
metadata.js.map	!
	<pre>— next.d.ts</pre>


```
next.js
      next.js.map

    unevaluated

       - index.d.ts
       - index.js
       - index.js.map
       unevaluatedItems.d.ts
       unevaluatedItems.js
       unevaluatedItems.js.map
       unevaluatedProperties.d.ts
        unevaluatedProperties.js

    unevaluatedProperties.js.map

    validation
       const.d.ts
       - const.js
       — const.js.map
       dependentRequired.d.ts
       dependentRequired.js
       dependentRequired.js.map
       enum.d.ts
       — enum.js
       – enum.js.map
       - index.d.ts
       – index.js
        - index.js.map
        limitContains.d.ts
        - limitContains.js
        - limitContains.js.map
        - limitItems.d.ts
       - limitItems.js
       — limitItems.js.map
       limitLength.d.ts
       - limitLength.js
       — limitLength.js.map
       limitNumber.d.ts
        - limitNumber.js
       limitNumber.js.map
       limitProperties.d.ts
        limitProperties.js
        limitProperties.js.map
       - multipleOf.d.ts
       — multipleOf.js
       multipleOf.js.map
       - pattern.d.ts
       – pattern.js
       pattern.js.map
        required.d.ts
        required.js
        - required.js.map
       uniqueItems.d.ts
        - uniqueItems.js
       - uniqueItems.js.map
lib
— 2019.ts
```

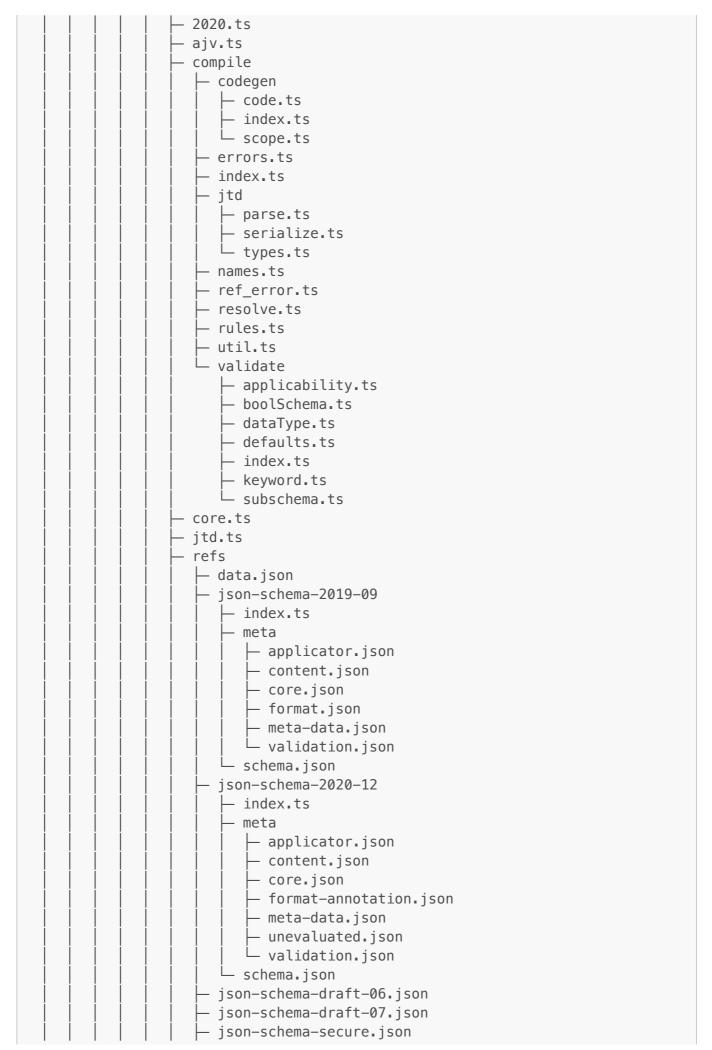





```
└ index.spec.js
    source-map
    ─ CHANGELOG.md
     LICENSE
      - README.md
     - lib
       — array-set.js
        — base64-vlq.js
        – base64.js
        — binary−search.js
        — mapping−list.js
        — mappings.wasm
        — read-wasm-browser₊js
        — read-wasm₊js
        – source-map-consumer⊾js
        — source-map-generator₊js
        — source-node.js
        — url-browser₊js
        — url.js
        util.js
       └ wasm.js
     — package.json
      - source-map.d.ts
    └ source-map.js
   - tr46
     LICENSE.md
     README.md
     - index.js
      - lib

    mappingTable.json

       └ regexes.js
    └ package.json

    webidl-conversions

    LICENSE.md
     README.md
     – lib
       └ index.js
    └ package.json
   whatwg-url
    LICENSE.txt
     - README.md
     – lib
       ─ URL-impl.js
        — URL.js
        URLSearchParams-impl.js
        URLSearchParams.js
        — infra.js
        — public-api.js
        — url-state-machine.js
        — urlencoded.js
       └ utils.js
      - package.json
- package.json
```

```
_types.js
      - cdn-details.json
      generate-sw.ts
     – get-manifest.ts
      - index.ts
     - inject-manifest.ts
      - lib

    additional-manifest-entries-transform.ts

         bundle.ts
         - cdn-utils.ts
         copy-workbox-libraries.ts
         - errors.ts
        - escape-regexp.ts
        get-composite-details.ts
         get-file-details.ts
         - get-file-hash.ts
        — get-file-manifest-entries.ts
         - get-file-size.ts
         get-source-map-url.ts
         get-string-details.ts
        — get-string-hash.ts
         - maximum-size-transform.ts
        modify-url-prefix-transform.ts
        - module-registry.ts
        no-revision-for-urls-matching-transform.ts
         populate-sw-template.ts
         rebase-path.ts
        — replace-and-update-source-map.ts
         runtime-caching-converter.ts
        stringify-without-comments.ts
        – transform-manifest.ts
        translate-url-to-sourcemap-paths.ts
         validate-options.ts
       └─ write-sw-using-default-template.ts
     rollup-plugin-off-main-thread.d.ts
     schema
        GenerateSWOptions.json
         GetManifestOptions.json
        InjectManifestOptions.json
         WebpackGenerateSWOptions.json
       └─ WebpackInjectManifestOptions.json
     - strip-comments.d.ts
     - templates
       └ sw-template.ts

    types.ts

   - tsconfig.json

    tsconfig.tsbuildinfo

    workbox-cacheable-response

 ─ CacheableResponse.d.ts
  — CacheableResponse₊js
 ─ CacheableResponse.mjs

    CacheableResponsePlugin.d.ts

    CacheableResponsePlugin.js

    CacheableResponsePlugin.mjs
```

```
    LICENSE

  - README.md
   version.d.ts
  – _version.js
  - version.mjs
  — build
    workbox-cacheable-response.dev.js
    workbox-cacheable-response.dev.js.map
     workbox-cacheable-response.prod.js
    - index.d.ts
  index.js
  — index.mjs
 — package.json
  - src

    ─ CacheableResponse.ts

    CacheableResponsePlugin.ts
     - version.ts
    └ index.ts
  – tsconfig.json

    tsconfig.tsbuildinfo

    workbox-core

 LICENSE
  - README.md
   _private
    Deferred.d.ts
    — Deferred.js
    ─ Deferred.mis
     — WorkboxError.d.ts
    — WorkboxError⊾js
    — WorkboxError₌mjs
     assert.d.ts
     — assert.js
    — assert.mjs
    cacheMatchIgnoreParams.d.ts
    ├ cacheMatchIgnoreParams.js
    cacheMatchIgnoreParams.mjs
    cacheNames.d.ts
    cacheNames.js
    — cacheNames.mjs
    — canConstructReadableStream.d.ts
    — canConstructReadableStream.js
    ─ canConstructReadableStream.mjs
    canConstructResponseFromBodyStream.d.ts
    canConstructResponseFromBodyStream.js
    canConstructResponseFromBodyStream.mjs
     dontWaitFor.d.ts
     — dontWaitFor₊js
     — dontWaitFor mjs
    executeQuotaErrorCallbacks.d.ts
     executeQuotaErrorCallbacks.js
     executeQuotaErrorCallbacks.mjs
     getFriendlyURL.d.ts
     getFriendlyURL.js
```

```
getFriendlyURL.mjs
    - logger.d.ts
    - logger.js
   — logger.mjs
   resultingClientExists.d.ts
   — resultingClientExists.js
   resultingClientExists.mjs
   — timeout.d.ts
   – timeout.js
   – timeout.mjs
   — waitUntil.d.ts
   – waitUntil.js
  └ waitUntil.mjs
 - _private.d.ts
 - _private.js
  _private.mjs
 _version.d.ts
 - _version.js
- version.mjs
build
  workbox-core.dev.js
   workbox-core.dev.js.map
   workbox-core.prod.js
  — cacheNames.d.ts
– cacheNames₊js
 – cacheNames₌mjs
clientsClaim.d.ts
 – clientsClaim.js
— clientsClaim.mjs
— copyResponse.d.ts
— copyResponse.js
— copyResponse.mjs
— index.d.ts
— index.js

— index.mjs

models
  messages
      messageGenerator.d.ts
      – messageGenerator.js
      messageGenerator.mjs
      messages.d.ts
      — messages⊾js
     └ messages.mjs
    - pluginEvents.d.ts
   – pluginEvents.js
    pluginEvents.mjs
   - quotaErrorCallbacks.d.ts
    - quotaErrorCallbacks.js
   quotaErrorCallbacks.mjs
 – package.json
 registerQuotaErrorCallback.d.ts
 - registerQuotaErrorCallback.js
  registerQuotaErrorCallback.mjs
```

```
setCacheNameDetails.d.ts
 setCacheNameDetails.js
 setCacheNameDetails.mjs
 — skipWaiting.d.ts
 — skipWaiting.js
 — skipWaiting.mjs
 - src
      private
       — Deferred.ts
       WorkboxError.ts
       assert.ts
       cacheMatchIgnoreParams.ts
       cacheNames.ts
       canConstructReadableStream.ts
       canConstructResponseFromBodyStream.ts
       — dontWaitFor.ts
       executeQuotaErrorCallbacks.ts
       - getFriendlyURL.ts
       — logger.ts
       resultingClientExists.ts
       - timeout.ts
      └ waitUntil.ts
     - _private.ts
    - _version.ts
    cacheNames.ts
    clientsClaim.ts
    copyResponse.ts
    - index.ts
    models
       — messages
          — messageGenerator.ts
         └ messages.ts
        pluginEvents.ts
      └ quotaErrorCallbacks.ts
    registerQuotaErrorCallback.ts
    setCacheNameDetails.ts
    skipWaiting.ts
    - types.ts
   └ utils

→ pluginUtils.ts

      └ welcome.ts
 — tsconfig.json
 tsconfig.tsbuildinfo
 – types.d.ts
 – types.js
 – types.mjs
└ utils

→ pluginUtils.d.ts

    — pluginUtils.js
    — pluginUtils.mjs
    welcome.d.ts
    - welcome.js
   ∟ welcome.mjs
workbox-expiration
```

```
CacheExpiration.d.ts
CacheExpiration.js
CacheExpiration.mjs
— ExpirationPlugin.d.ts
ExpirationPlugin.js
ExpirationPlugin.mjs

    LICENSE

README.md
- _version.d.ts
 - _version.js
– _version.mjs
build
  workbox-expiration.dev.js
   workbox-expiration.dev.js.map
   workbox-expiration.prod.js

    workbox−expiration.prod.js.map

index.d.ts
index.js
— index.mjs
— models
  CacheTimestampsModel.d.ts

    CacheTimestampsModel.js

  └ CacheTimestampsModel.mjs
node modules
  ∟ idb
       CHANGELOG.md

    LICENSE

       - README.md
       - build

— async-iterators.cjs

         async-iterators.d.ts
         — async−iterators.js
         database-extras.d.ts
         — entry.d.ts
         index.cis
         — index.d.ts
         – index.js
         — umd-with-async-ittr.js
         – umd.js
         — util.d.ts
         — wrap-idb-value.cjs
          - wrap-idb-value.d.ts
        └ wrap-idb-value.js
       - package.json
       with-async-ittr.cjs
       - with-async-ittr.d.ts
     └ with-async-ittr.js
— package₁json
- src
   ─ CacheExpiration.ts
   ExpirationPlugin.ts
    - _version.ts
    - index.ts
    - models
```

```
└─ CacheTimestampsModel.ts
   tsconfig.json

    tsconfig.tsbuildinfo

workbox-google-analytics
 LICENSE
  README.md
  _version.d.ts
  – version.js
  – _version.mjs
  build
    ─ workbox-offline-ga.dev.js
    workbox-offline-ga.dev.js.map
     — workbox-offline-ga.prod.js
    └ workbox-offline-ga.prod.js.map
   - index.d.ts
  – index.js
  — index.mjs
  └ initialize.d.ts
  initialize.js
  — initialize.mjs
  — package.json
  - src
    — _version.ts
     — index.ts
      initialize.ts
      - utils
       └ constants.ts

    ⊤ tsconfig.json

    tsconfig.tsbuildinfo

 └ utils
    — constants.d.ts
     constants.js
    └ constants.mjs
- workbox-navigation-preload

    LICENSE

  README.md
  _version.d.ts
   -_version.js
  - _version.mjs
  build
    ─ workbox-navigation-preload.dev.js
    workbox-navigation-preload.dev.js.map
     workbox-navigation-preload.prod.js
    ─ workbox-navigation-preload.prod.js.map
  — disable.d.ts
  — disable.js
  — disable.mis
  enable.d.ts
  — enable.js
  — enable.mjs
  — index.d.ts
   - index.js
   index.mjs
   isSupported.d.ts
```

```
isSupported.js
  isSupported.mjs
  – package⊾json
  - src
    — _version.ts
     — disable.ts
     — enable.ts
      - index.ts
    └ isSupported.ts
  - tsconfig.json

    tsconfig.tsbuildinfo

workbox-precaching

    LICENSE

  PrecacheController.d.ts
  PrecacheController.js

⊢ PrecacheController.mjs

  PrecacheFallbackPlugin.d.ts
  PrecacheFallbackPlugin.js
  PrecacheFallbackPlugin.mjs
  PrecacheRoute.d.ts
  PrecacheRoute.js
  PrecacheRoute.mjs
  PrecacheStrategy.d.ts
  PrecacheStrategy.js
  PrecacheStrategy.mjs
  README.md
  - _types.d.ts
  – _types.js
   -_types.mjs
  - _version.d.ts
  – version₊js
  - version.mjs
  addPlugins.d.ts
  — addPlugins.js
  addPlugins.mjs
  — addRoute.d.ts
  – addRoute.js
  — addRoute.mjs
  build
    workbox-precaching.dev.js
    workbox-precaching.dev.js.map
     workbox-precaching.prod.js

    workbox-precaching.prod.js.map

  cleanupOutdatedCaches.d.ts
  cleanupOutdatedCaches.is
  cleanupOutdatedCaches.mis
  — createHandlerBoundToURL.d.ts
  createHandlerBoundToURL.js
  createHandlerBoundToURL.mjs
  getCacheKeyForURL.d.ts
  getCacheKeyForURL.js
  getCacheKeyForURL mjs
  - index.d.ts
   - index.js
```

```
– index.mjs
- matchPrecache.d.ts
- matchPrecache.js
matchPrecache.mjs
— package.json
precache.d.ts
 – precache₊js
– precache mjs
 precacheAndRoute.d.ts
precacheAndRoute.js
precacheAndRoute.mjs
 - src
   PrecacheController.ts
   PrecacheFallbackPlugin.ts
   PrecacheRoute.ts
   PrecacheStrategy.ts
   - _types.ts
   — _version.ts
   — addPlugins.ts
   addRoute.ts
   cleanupOutdatedCaches.ts
   createHandlerBoundToURL.ts
   getCacheKeyForURL.ts
   - index.ts
   matchPrecache.ts
   - precache.ts
    precacheAndRoute.ts
    - utils
     PrecacheCacheKeyPlugin.ts
      PrecacheInstallReportPlugin.ts
      — createCacheKey.ts
      deleteOutdatedCaches.ts
      generateURLVariations.ts
      getCacheKeyForURL.ts
      getOrCreatePrecacheController.ts
      printCleanupDetails.ts
       printInstallDetails.ts
     └ removeIgnoredSearchParams.ts
tsconfig.json
 tsconfig.tsbuildinfo
└ utils
  PrecacheCacheKeyPlugin.d.ts
   PrecacheCacheKeyPlugin.js
   PrecacheCacheKeyPlugin.mjs
   PrecacheInstallReportPlugin.d.ts
   PrecacheInstallReportPlugin.js
   — PrecacheInstallReportPlugin.mjs
   — createCacheKey.d.ts
   — createCacheKey₊js
   ─ createCacheKey.mjs
   deleteOutdatedCaches.d.ts
   deleteOutdatedCaches.js
   deleteOutdatedCaches.mjs
    generateURLVariations.d.ts
```

```
generateURLVariations.js
     generateURLVariations.mjs
     getCacheKeyForURL.d.ts
     getCacheKeyForURL.js
     getCacheKeyForURL.mjs
     — get0rCreatePrecacheController.d.ts
     get0rCreatePrecacheController.js
     get0rCreatePrecacheController.mjs
     printCleanupDetails.d.ts
     — printCleanupDetails.js
     printCleanupDetails.mjs
     printInstallDetails.d.ts
     printInstallDetails.js
     – printInstallDetails.mjs
     - removeIgnoredSearchParams.d.ts
     removeIgnoredSearchParams.js
    └ removeIgnoredSearchParams.mjs
workbox-range-requests
 README.md
  RangeRequestsPlugin.d.ts
  RangeRequestsPlugin.js
  RangeRequestsPlugin.mjs
  - _version.d.ts
   -_version.js
  - _version.mjs
  - build
    ─ workbox-range-requests.dev.js
    workbox-range-requests.dev.js.map
     - workbox-range-requests.prod.js
    createPartialResponse.d.ts
  createPartialResponse.js
  — createPartialResponse.mjs
  index.d.ts
  — index.is
  – index.mjs
  — package₁json
  - src
    RangeRequestsPlugin.ts
     - version.ts
     createPartialResponse.ts
    — index.ts
    ∟ utils

    calculateEffectiveBoundaries.ts

    □ parseRangeHeader.ts

 — tsconfig.json

    tsconfig.tsbuildinfo

 └ utils

─ calculateEffectiveBoundaries.d.ts

    calculateEffectiveBoundaries.js

     calculateEffectiveBoundaries.mjs
     - parseRangeHeader.d.ts
     parseRangeHeader.js
```

```
    parseRangeHeader.mjs

workbox-recipes

─ LICENSE

  — README.md
  version.d.ts
   - _version.js
  - _version.mjs
  — build
    workbox-recipes.dev.js
    workbox-recipes.dev.js.map
     workbox-recipes.prod.js
    └─ workbox-recipes.prod.js.map
  googleFontsCache.d.ts
  - googleFontsCache₊js
  googleFontsCache.mjs
  - imageCache.d.ts
  — imageCache₊js
  imageCache.mjs
  — index.d.ts
  — index.js
  — index.mjs
 - offlineFallback.d.ts
  offlineFallback.js
  offlineFallback.mjs
  – package.json
  pageCache.d.ts
  – pageCache₊js
  pageCache.mjs
  - src
    — _version.ts

— googleFontsCache.ts

     — imageCache.ts
     index.ts
     offlineFallback.ts
     – pageCache.ts
      staticResourceCache.ts

    warmStrategyCache.ts

  staticResourceCache.d.ts
  staticResourceCache.js
  staticResourceCache.mjs
  — tsconfig.json
 tsconfig.tsbuildinfo
 warmStrategyCache.d.ts
  warmStrategyCache.js
 └ warmStrategyCache.mjs
workbox-routing

─ LICENSE

  NavigationRoute.d.ts
  — NavigationRoute₌js
  — NavigationRoute.mjs
  README.md
  RegExpRoute.d.ts
  RegExpRoute.js
  RegExpRoute.mjs
```

```
Route.d.ts
− Route.js
— Route.mjs
— Router.d.ts
Router.js
— Router.mjs
- _types.d.ts
 – _types.js
– _types.mjs
 -_version.d.ts
_version.js
 - _version.mjs
– build
  ─ workbox-routing.dev.js
   workbox-routing.dev.js.map
   — workbox-routing.prod.js
  - index.d.ts
— index.js

    index.mjs

— package.json
registerRoute.d.ts

⊢ registerRoute.js

registerRoute.mjs
 setCatchHandler.d.ts
setCatchHandler.js
⊢ setCatchHandler₊mjs
setDefaultHandler.d.ts
 setDefaultHandler.js
— setDefaultHandler.mjs
- src

    ─ NavigationRoute.ts

   RegExpRoute.ts
   — Route.ts
   - Router<sub>•</sub>ts
   - _types.ts
   - _version.ts
    - index.ts
   registerRoute.ts
   — setCatchHandler.ts
   setDefaultHandler.ts
  └ utils

    ─ constants.ts

       getOrCreateDefaultRouter.ts
     └ normalizeHandler.ts

─ tsconfig.json

tsconfig.tsbuildinfo
utils
  — constants.d.ts
   — constants.js
   — constants.mjs
   getOrCreateDefaultRouter.d.ts
   — getOrCreateDefaultRouter.js
   getOrCreateDefaultRouter.mjs
```

```
normalizeHandler.d.ts
     normalizeHandler.js
    └ normalizeHandler.mjs
workbox-strategies
 ─ CacheFirst.d.ts
  — CacheFirst₊įs
  CacheFirst.mjs
  CacheOnly.d.ts
  — CacheOnly.js
  — CacheOnly.mjs
  LICENSE
  NetworkFirst.d.ts
  NetworkFirst.js

— NetworkFirst.mjs

  NetworkOnly.d.ts

    NetworkOnly.js

 ─ NetworkOnly.mjs
  README.md
  StaleWhileRevalidate.d.ts

— StaleWhileRevalidate.js

 — StaleWhileRevalidate.mjs
  Strategy.d.ts
 — Strategy.js

— Strategy.mjs

 StrategyHandler.d.ts
  StrategyHandler.js
  StrategyHandler.mjs
  version.d.ts
   -_version.js
  – _version.mjs
  build
    ─ workbox-strategies.dev.js
    workbox-strategies.dev.js.map
     workbox-strategies.prod.js
    index.d.ts
  – index.js
  index.mjs
  – package₁json
  plugins
    cache0kAndOpaquePlugin.d.ts
     cacheOkAndOpaquePlugin.js
    └ cacheOkAndOpaquePlugin.mjs
  - src
    ─ CacheFirst.ts
     CacheOnly.ts
     NetworkFirst.ts
     NetworkOnly.ts
     StaleWhileRevalidate.ts
     Strategy.ts
     StrategyHandler.ts
     - _version.ts
      - index.ts
     - plugins
```

```
    □ cacheOkAndOpaquePlugin.ts

       utils

    messages.ts

─ tsconfig.json

    ⊢ tsconfig.tsbuildinfo

 └ utils
    messages.js
    └ messages.mjs
workbox-streams
 README.md
  - _types.d.ts
  – _types.js
  - _types.mjs
   - _version.d.ts
  – _version.js
  - version.mjs
  build
    ─ workbox-streams.dev.js
    workbox-streams.dev.js.map
     workbox-streams.prod.js
    └─ workbox-streams.prod.js.map
  — concatenate.d.ts
  — concatenate.js
  — concatenate.mjs
  — concatenateToResponse.d.ts
  concatenateToResponse.js
  concatenateToResponse.mjs
  — index.d.ts
 index.js

— index.mjs

 isSupported.d.ts

— isSupported.js

  — isSupported.mjs
  — package.json
  - src
    _ _types.ts
     - _version.ts
     — concatenate.ts
     concatenateToResponse.ts
     — index.ts
    isSupported.ts
     - strategy.ts
    └ utils
       └ createHeaders.ts
  — strategy.d.ts
  – strategy.js
  – strategy.mjs
  — tsconfig.json

    tsconfig.tsbuildinfo

  - utils
    ─ createHeaders.d.ts
    createHeaders.js
```

```
└ createHeaders.mjs
- workbox-sw

    LICENSE

  README.md
  – _types.mjs
  — version.mjs
  build
    ─ workbox-sw.js
    └ workbox-sw.js.map
 controllers
    └ WorkboxSW.mjs
  index.mjs
 └ package.json
- workbox-webpack-plugin

⊢ LICENSE

  README.md
  — build

─ generate-sw.d.ts

    — generate-sw.js
    — index.d.ts
    — index.js
     — inject-manifest.d.ts
     inject-manifest.js
    └ lib
        get-asset-hash.d.ts
        - get-asset-hash.js
        get-manifest-entries-from-compilation.d.ts
        — get-manifest-entries-from-compilation.js
        - get-script-files-for-chunks.d.ts
        get-script-files-for-chunks.js
        get-sourcemap-asset-name.d.ts
        get-sourcemap-asset-name.js
        relative-to-output-path.d.ts

⊢ relative-to-output-path.js

        resolve-webpack-url.d.ts
       resolve-webpack-url.js
  node_modules
    └ .bin
       └ webpack
  – package.json
  - src

— generate-sw₁ts

     — index.ts
     inject-manifest.ts
    └ lib

    get−asset−hash.ts

        get-manifest-entries-from-compilation.ts
        get-script-files-for-chunks.ts
        get-sourcemap-asset-name.ts
        relative-to-output-path.ts
       └ resolve-webpack-url.ts

    tsconfig.json

    tsconfig.tsbuildinfo

workbox-window
```

```
    LICENSE

   - README.md
  Workbox.d.ts
  – Workbox⊾js
  Workbox mjs
  version.d.ts
  - _version.js
  - version.mjs
   - build
    workbox-window.dev.es5.mjs
     — workbox-window.dev.es5.mjs.map
     workbox-window.dev.mjs
     — workbox-window.dev.mjs.map
     — workbox-window.dev.umd.js
     — workbox-window.dev.umd.js.map
     — workbox-window.prod.es5.mjs
     — workbox-window.prod.es5.mjs.map
     — workbox-window.prod.mjs
     workbox-window.prod.mjs.map
     workbox-window.prod.umd.js
    ─ workbox-window.prod.umd.js.map
   - index.d.ts
  — index.js
  — index.mjs
  — messageSW.d.ts
  – messageSW.js
  – messageSW.mjs
  – package.json
   - src
    ─ Workbox.ts
     — version.ts
     — index.ts
      messageSW.ts
    └ utils
       ─ WorkboxEvent.ts
         WorkboxEventTarget.ts
       └ urlsMatch.ts
   - tsconfig.json

    tsconfig.tsbuildinfo

  utils
    ─ WorkboxEvent.d.ts
     — WorkboxEvent.js
     — WorkboxEvent.mjs
     — WorkboxEventTarget.d.ts
     WorkboxEventTarget.js
     WorkboxEventTarget.mjs
     urlsMatch.d.ts
      - urlsMatch.js
    └ urlsMatch.mjs
– wrap—ansi
  — index.js
   - license
   – package.json
   - readme.md
```

```
wrappy

⊢ LICENSE

  - README.md
  — package.json
 ∟ wrappy.js
- write-file-atomic
  ─ CHANGELOG.md
  — LICENSE
  README.md
  — index.js
 └ package.json
- WS

    LICENSE

   - README.md
  — browser.js
  index.js
  — lib
     ─ buffer-util.js
     — constants.js
     — event–target.js
     — extension.js
      – limiter.js
     — permessage-deflate.js
     — receiver.js
     — sender.js
     — stream₊js
     ─ subprotocol.js
     — validation.js
     — websocket-server.js
     └ websocket.js
  – package.json
  ∟ wrapper.mjs
- xml-name-validator

─ LICENSE.txt

  README.md
  – lib

— generated-parser.js

      — grammar⊾pegjs
    └ xml-name-validator.js
  └ package.json
xmlchars

─ LICENSE

  ─ README.md

— package.json

  — xml
     - 1.0
        ─ ed4.d.ts
         – ed4.js
         – ed4.js.map
         – ed5.d.ts
         – ed5.js
        └ ed5.js.map
      - 1.1
        — ed2.d.ts
```

```
– ed2.js
                                 └ ed2.js.map
            - xmlchars.d.ts
          — xmlchars.js
            - xmlchars.js.map
        ∟ xmlns

└ 1.0
                                 — ed3.d.ts
                                    – ed3.js
                                └ ed3.js.map
xtend

    ishintre
    ishintre

           LICENSE
          README.md
            - immutable.js

— mutable.js

         — package.json
       └ test.js
- y18n
        ─ CHANGELOG.md
          — LICENSE
            README.md
          build

    index.cjs

                     └ lib
                                 ⊢ cjs.js
                                      - index.js
                                      platform-shims
                                            └ node.js
            – index.mjs
       └ package.json
- yallist

─ LICENSE

         — README.md

— iterator.js

            – package.json
       └ yallist.js
 - yaml
        LICENSE
           README.md
           browser
                    ⊢ dist

→ PlainValue-b8036b75.js

                                     Schema-e94716c8.js
                                    — index.js
                                      - legacy-exports.js
                                    — package.json
                                     – parse−cst.js
                                      - resolveSeq-492ab440.js
                                    – types.js
                                      - util.js
                                 └ warnings-df54cb69.js
                              index.js
                               map.js
```

```
– pair⊾js
      - parse-cst.js
      - scalar.js
     — schema.js
     – seq.js
     types
        — binary.js
        — omap.js
        — pairs.js
        — set.js
       └ timestamp.js
      - types.js
    └ util.js
   - dist
    ─ Document-9b4560a1.js
     — PlainValue−ec8e588e.js
     — Schema−88e323a7.js
     — index.js
     — legacy-exports.js
     — parse–cst.js
     resolveSeq-d03cb037.js
     — test-events.js
    — types.js
     — util.js
    └ warnings-1000a372.js
   - index.d.ts
  index.js
  — map.js
  — package.json
  — pair.js
 parse-cst.d.ts
  — parse−cst.js
  – scalar.js
  — schema.js
 — seq.js
  types
    ─ binary.js
    — omap.js
    ├ pairs.js
      - set.js
    └ timestamp.js
  types.d.ts
  — types.js
  — types₌mjs
  util.d.ts
 ⊢ util.js
 └ util.mjs
- yargs
 ─ CHANGELOG.md
  LICENSE
  - README.md
   browser mjs
   build

─ index.cjs
```

```
└ lib

— argsert.js

      — command.js
      completion-templates.js
      — completion.js
      — middleware.js
       - parse-command.js
       typings

    common−types.js

        └ yargs-parser-types.js
       – usage.js
      - utils

— apply−extends.js

         — is-promise.js
         levenshtein.js
         — obj-filter.js
         — process-argv.js
          set-blocking.js
        └ which-module.js
       – validation.js
       - yargs-factory.js
       - yerror.js
— helpers

    helpers.mjs

    - index.js
  └ package.json
– index.cjs
index.mjs
 - lib
  └ platform-shims
      - browser.mjs
     ∟ esm.mjs
locales
  — be.json
  — de.json
   — en.json
   – es.json
   – fi.json
    - fr⊾json
   — hi.json
   — hu₌json
   — id.json
   — it.json
   — ja.json
   – ko.json
   — nb.json
   — nl.json
   – nn.json
   – pirate.json
   — pl.json
    - pt.json
    - pt_BR.json
   - ru₌json
   - th.json
```

```
— tr.json
        - zh_CN.json
       └ zh_TW.json
     – package.json
    ∟ yargs
  yargs-parser
     — CHANGELOG.md
     - LICENSE.txt
     README.md
    — browser⊾js
     build

⊢ index.cjs

       └ lib

─ index.js

          – string-utils.js
          — tokenize-arg-string.js
           – yargs-parser-types.js
          └ yargs-parser.js
    └ package.json
 index.d.ts
     - index.js
    — license
     — package.json
    └ readme.md
– package.json
public
 ⊢ favicon.ico
  index.html
  logo192.png
 ─ logo512.png
 ─ manifest.json
 └ robots.txt
- src
 ⊢ App.js
  App.test.js
  assets
   └ crown.svg
  components
    — category—item
        — category-item.component.jsx
       └ category—item.styles.scss
    └ directory
       directory.component.jsx
       index.js
  - index.scss
  - logo.svg
  – reportWebVitals.js
  routes

⊢ home

       └ home.component.jsx
     - navigation
       havigation.component.jsx
```