

SPECIFICATION

CUSTOMER : 凌陽科技
ITEM : JB12RH35608
CUSTOMER P/N. :
SUNG CHI P/N. : JS050114001
ISSUED NO. : A/0
ISSUED DATE : 2004/12/14

PURCHASER CONFIRMED

APPROVED	CHECKED	DESIGNED

SUNG CHI TECHNOLOGY CO., LTD.

6F, NO.88, Cingshan, 3rd Street., Yangmei
Township, Taoyuan, 32657, Taiwan, R.O.C.
TEL: 886-3-4641692 FAX: 886-3-4643934

松 頌 科 技 有 限 公 司

地 址 : 桃園縣楊梅鎮青山三街88號6樓
電 話 : (03) 4641690
傳 真 : (03) 4643932



SPECIFICATION

ITEM	JB12RH35608
SUNG CHI P/N.	JS050114001
ELECTRICAL REQUIREMENTS	IMPEDANCE: Z1=25ΩAT100MHZ MIN Z2=45ΩAT100MHZ MIN

TEST METHOD:

TEST EQUIPMENT	HP4286A IMPEDANCE ANALYZER
TEST FREQUENCY	25Ω/25MHZ,45Ω/100MHZ

DIMENSION : (UNIT:mm)

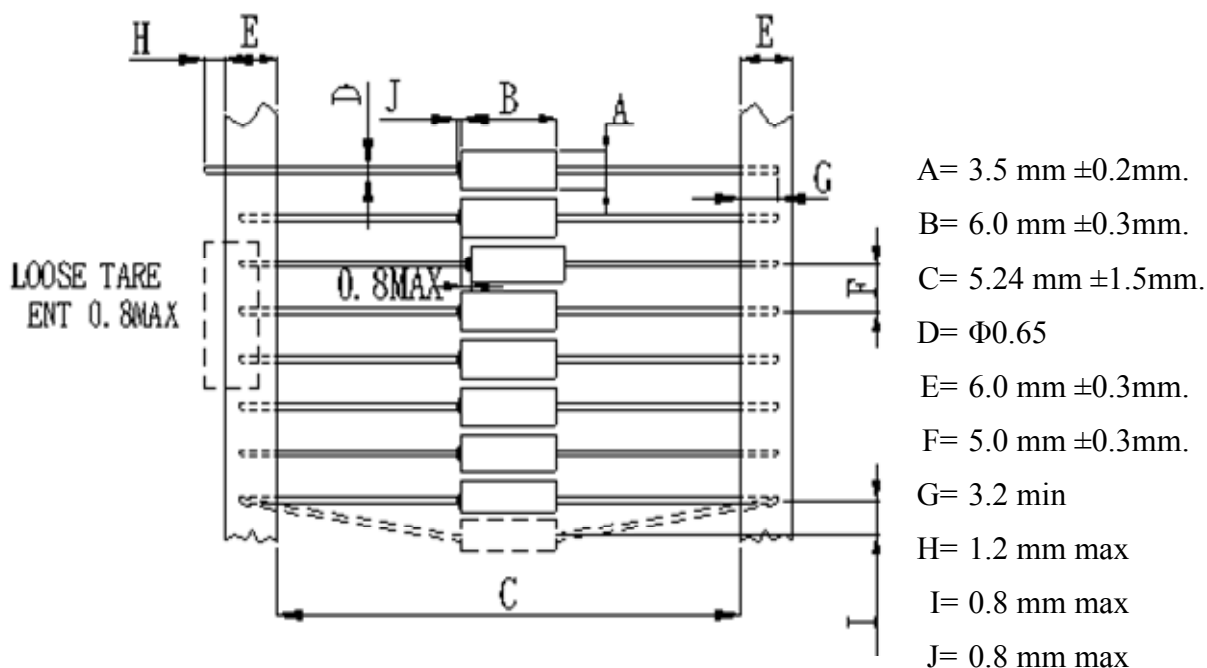

CORE: JF12-RH3.5*6.0*0.9

WIRE: TCW-Φ0.64

EPOXY: 6012

TCW-Φ0.65mm*0.5TS

APPROVED	CHECKED	DESIGNED

SUNG CHI TECHNOLOGY CO., LTD

FILE NO.

DATE










2005/1/14

REV.

PAGE


1




TEST DATA

CUSTOMER	凌陽科技			QUANTITY	50 PCS										
ITEM	JB12RH35608			COIL SPEC.											
SUNG CHI P/N.	JS050114001			TEST FREQUENCY	25Ω/25MHZ,45Ω/100MHZ										
HUMIDITY	65%			TEST EQUIPMENT	HP4286A IMPEDANCE ANALYZER										
TEMPERATURE	25°C														
	TEST RESOLUTION			DIMENSION (UNIT:mm)											
	Z1 Ω	Z2 Ω	0 0	A	B	C									
SPEC.	25Ω / 25 MHZ MIN	45Ω / 100 MHZ MIN	0 0	0 0	0 0	0 0									
1	41.00	67.000	0.00	0.00	0.00	0.00									
2	42.00	69.000	0.00	0.00	0.00	0.00									
3	41.00	68.000	0.00	0.00	0.00	0.00									
4	42.00	70.000	0.00	0.00	0.00	0.00									
5	40.00	67.000	0.00	0.00	0.00	0.00									
6	0.00	0.000	0.00	0.00	0.00	0.00									
7	0.00	0.000	0.00	0.00	0.00	0.00									
8	0.00	0.000	0.00	0.00	0.00	0.00									
9	0.00	0.000	0.00	0.00	0.00	0.00									
10	0.00	0.000	0.00	0.00	0.00	0.00									
MEAN	41.20	68.200	0.00	0.00	0.00	0.00									
R	2.00	3.000	0.00	0.00	0.00	0.00									
				<table border="1"> <tr> <td>APPROVED</td> <td>CHECKED</td> <td>TEST</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table>						APPROVED	CHECKED	TEST			
APPROVED	CHECKED	TEST													
															
SUNG CHI TECHNOLOGY CO., LTD				FILE NO.	DATE 2005/1/14	REV.	PAGE 2								

曲線

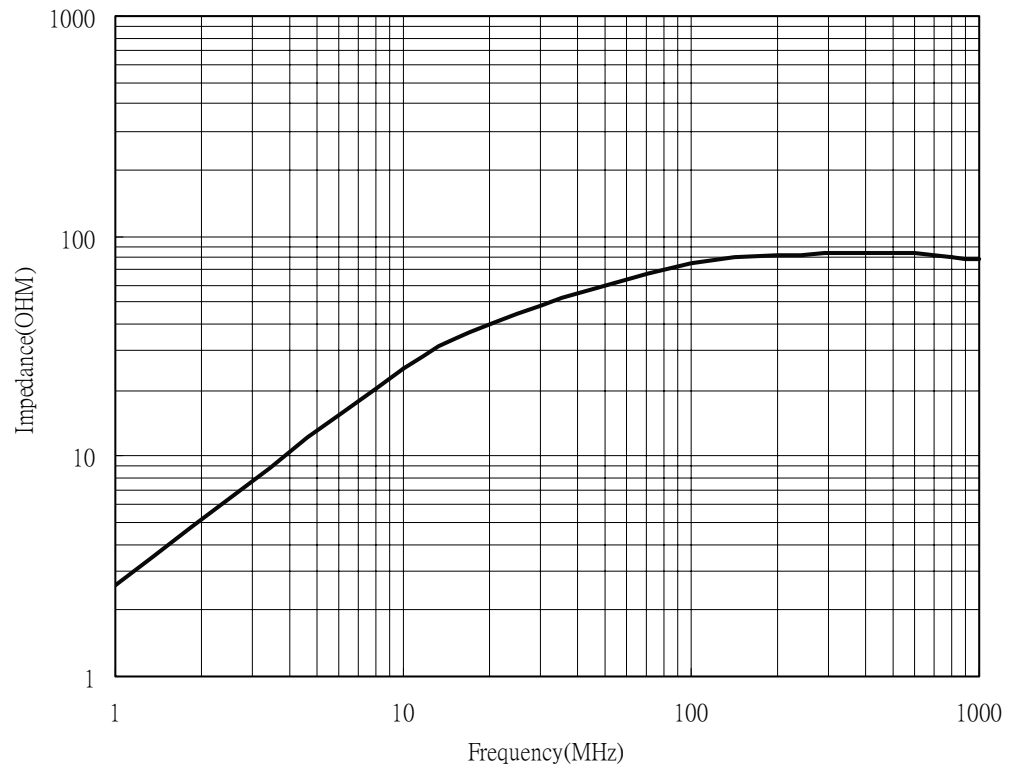RH03506AT-F18



APPROVED	CHECKED	DESIGNED
		

SUNG CHI TECHNOLOGY CO., LTD


FILE NO.

DATE
2005/1/14

REV.


PAGE
3

包裝規格


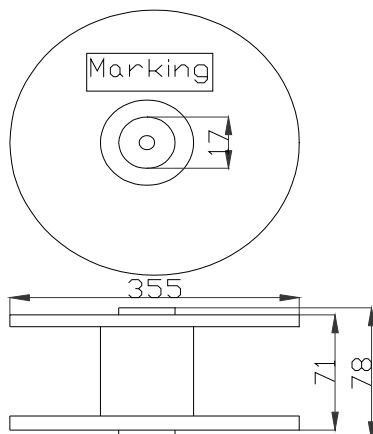


如圖:

每個REEL裝入5000PCS產品,
產品層與層之間用紙帶隔開

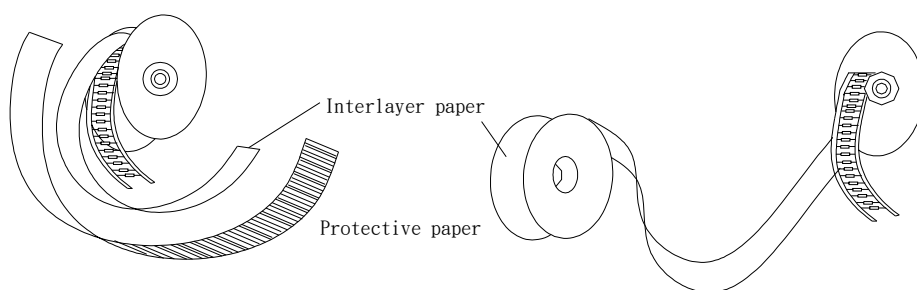

每個REEL裝入一個內盒,5個內盒一個
外箱, 共 $5000 \times 5 = 25000$ PCS

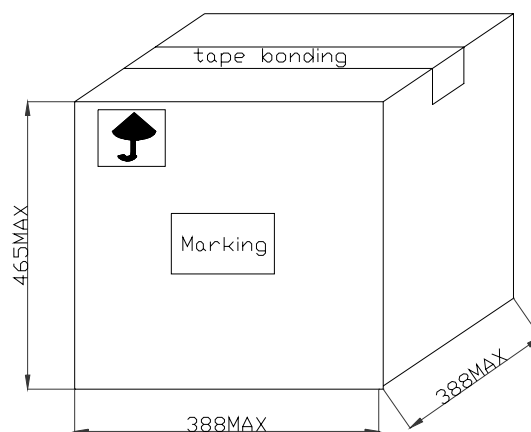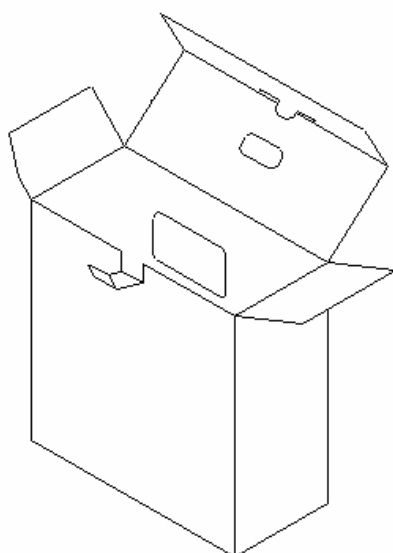

APPROVED	CHECKED	DESIGNED
