



# High Level Architecture

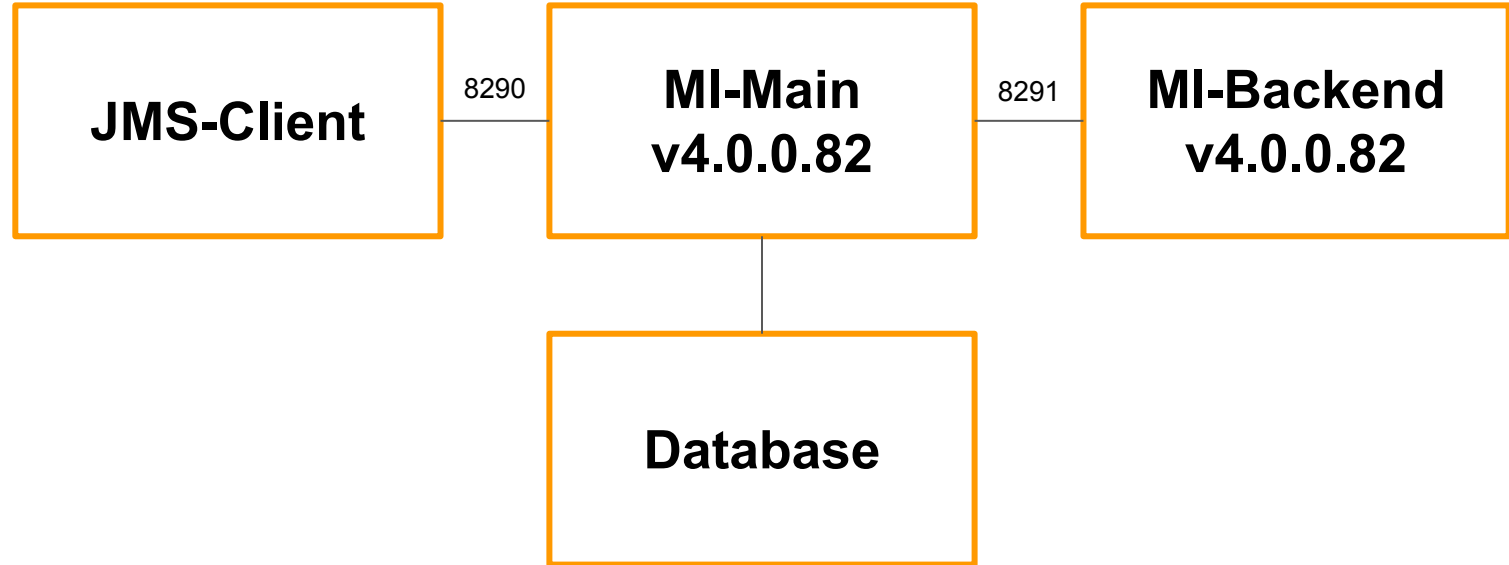

# MI-Main

## Detailed View

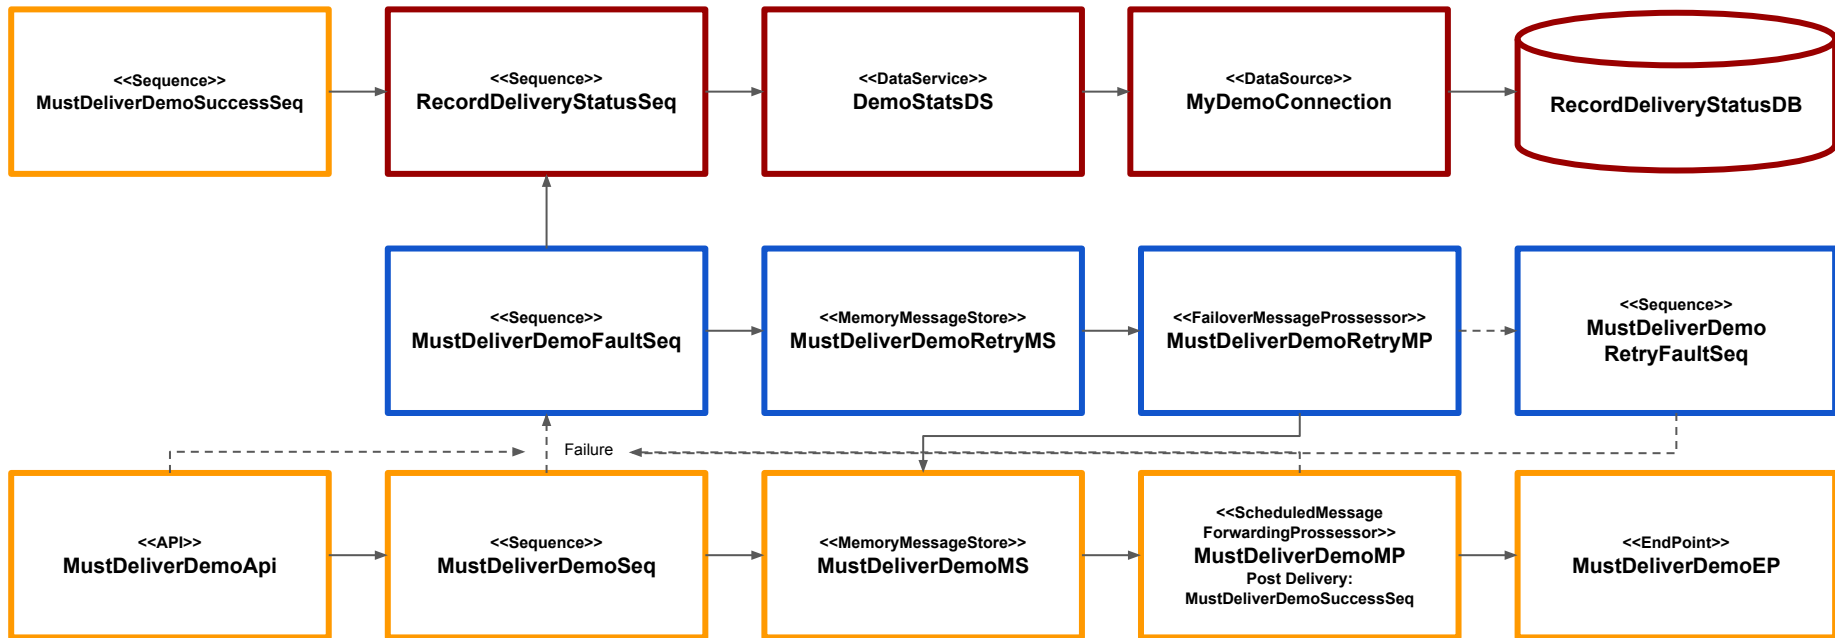

### Notes:

MemoryMessageStores are used for ease of creating this demo since the focus is on the retry count. Normally you'd want to use a JDBC or JMS for your Message Stores in a production environment.

This Demo is based on the [Guaranteed Delivery Integration Pattern](#). Please review the MI 4.0.0 [Tutorial](#) as well.

# MI-Backend

## Detailed View

