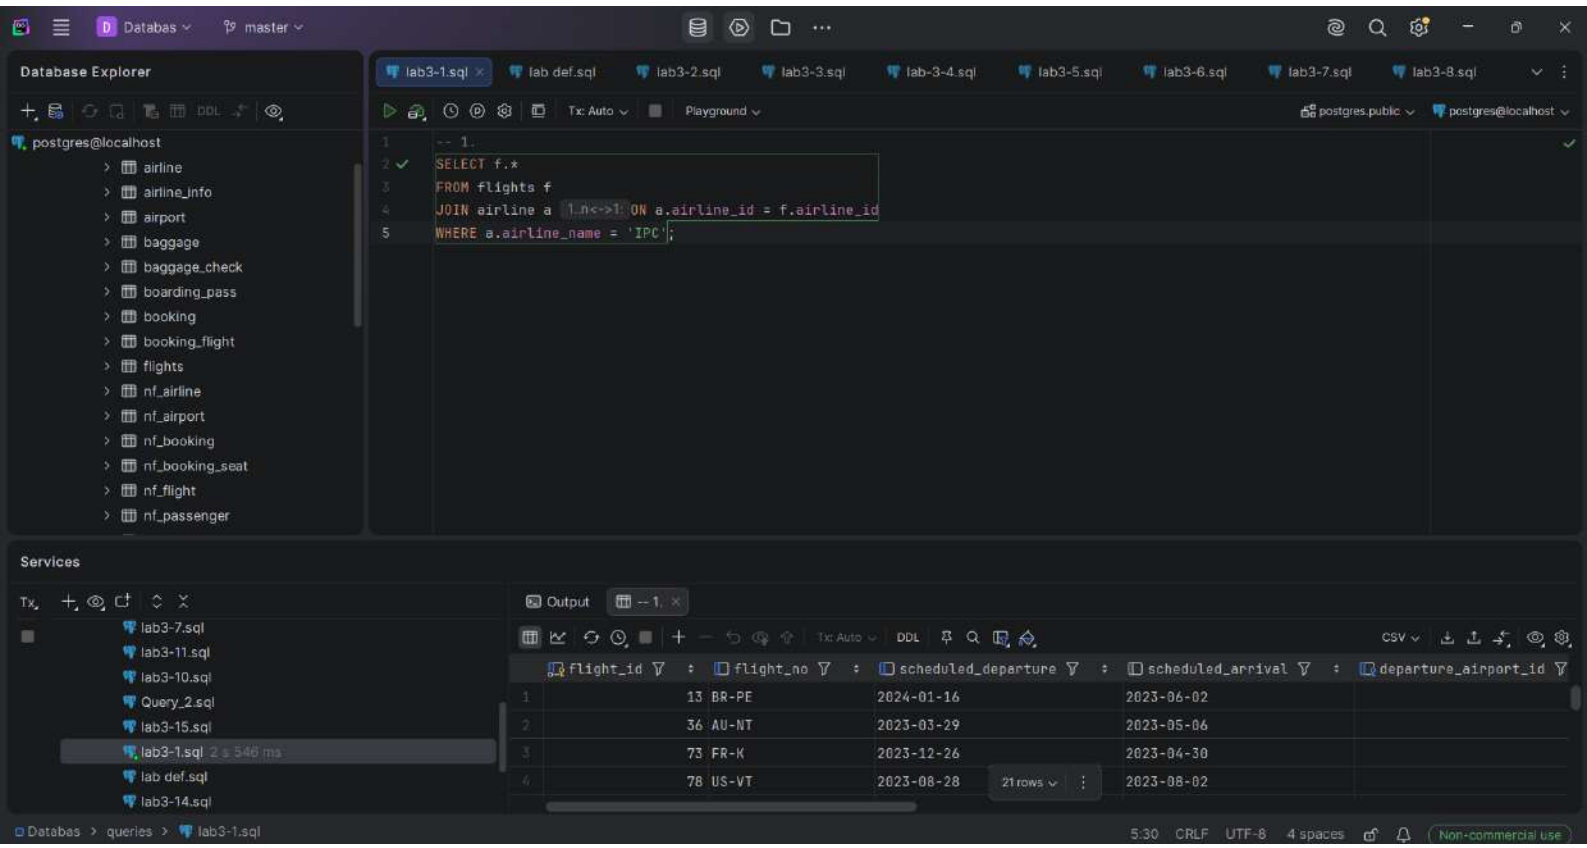
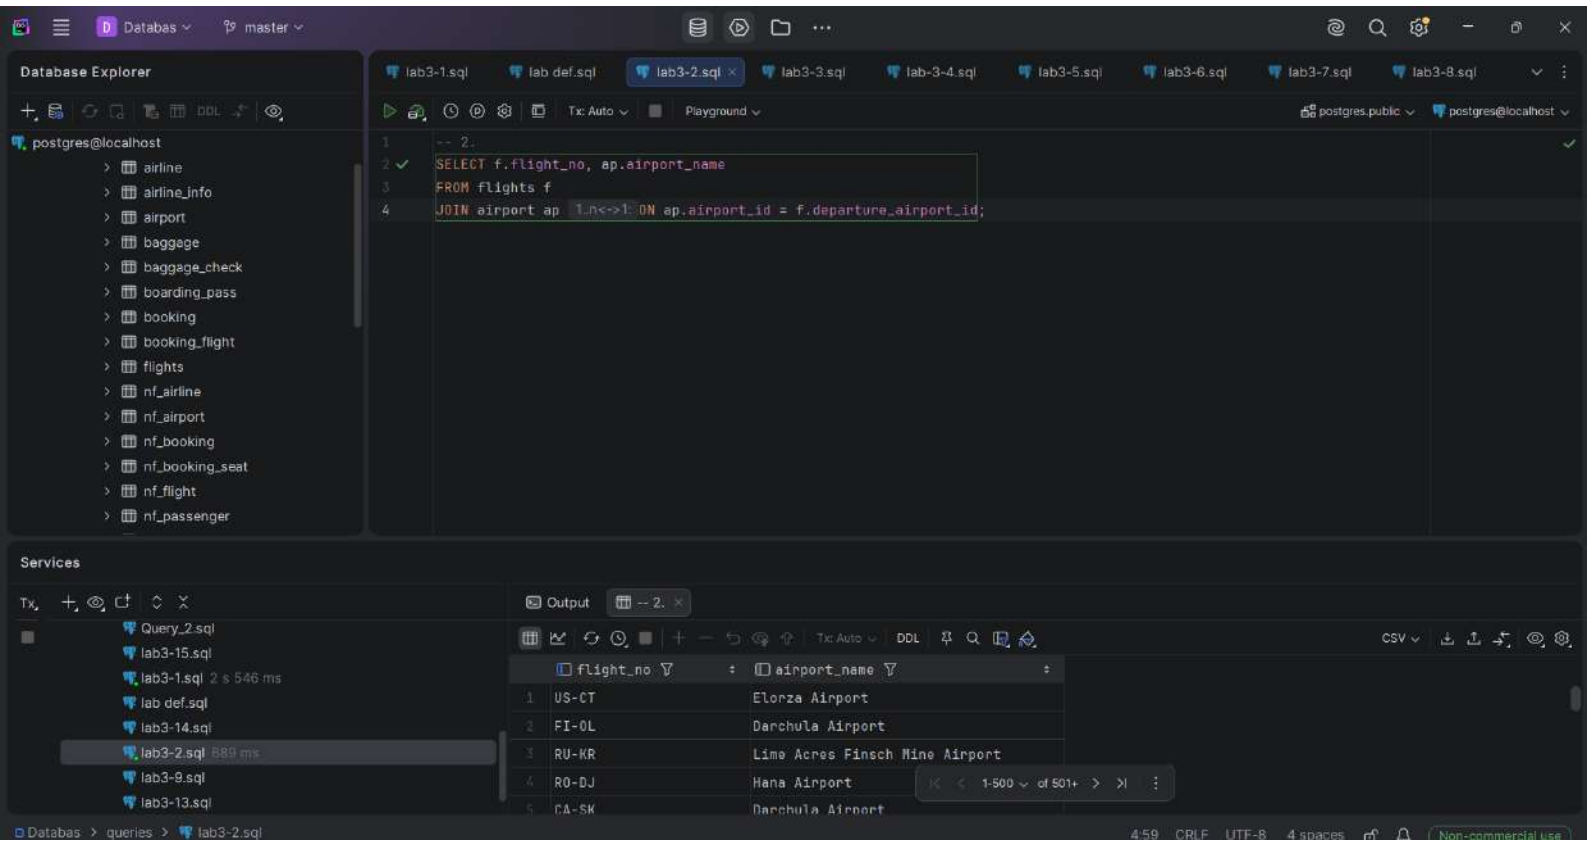
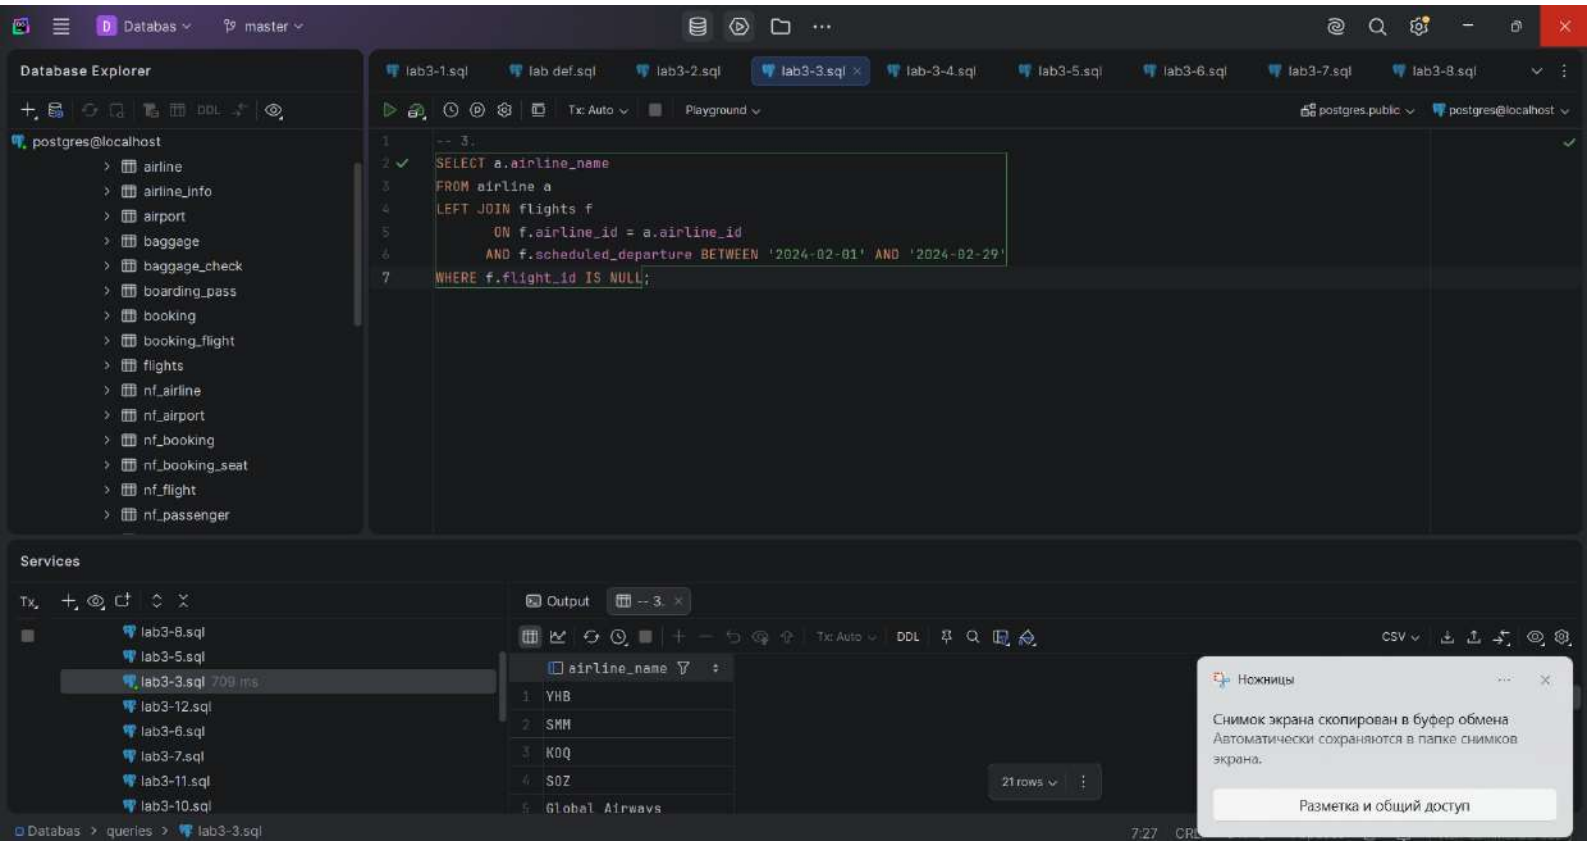
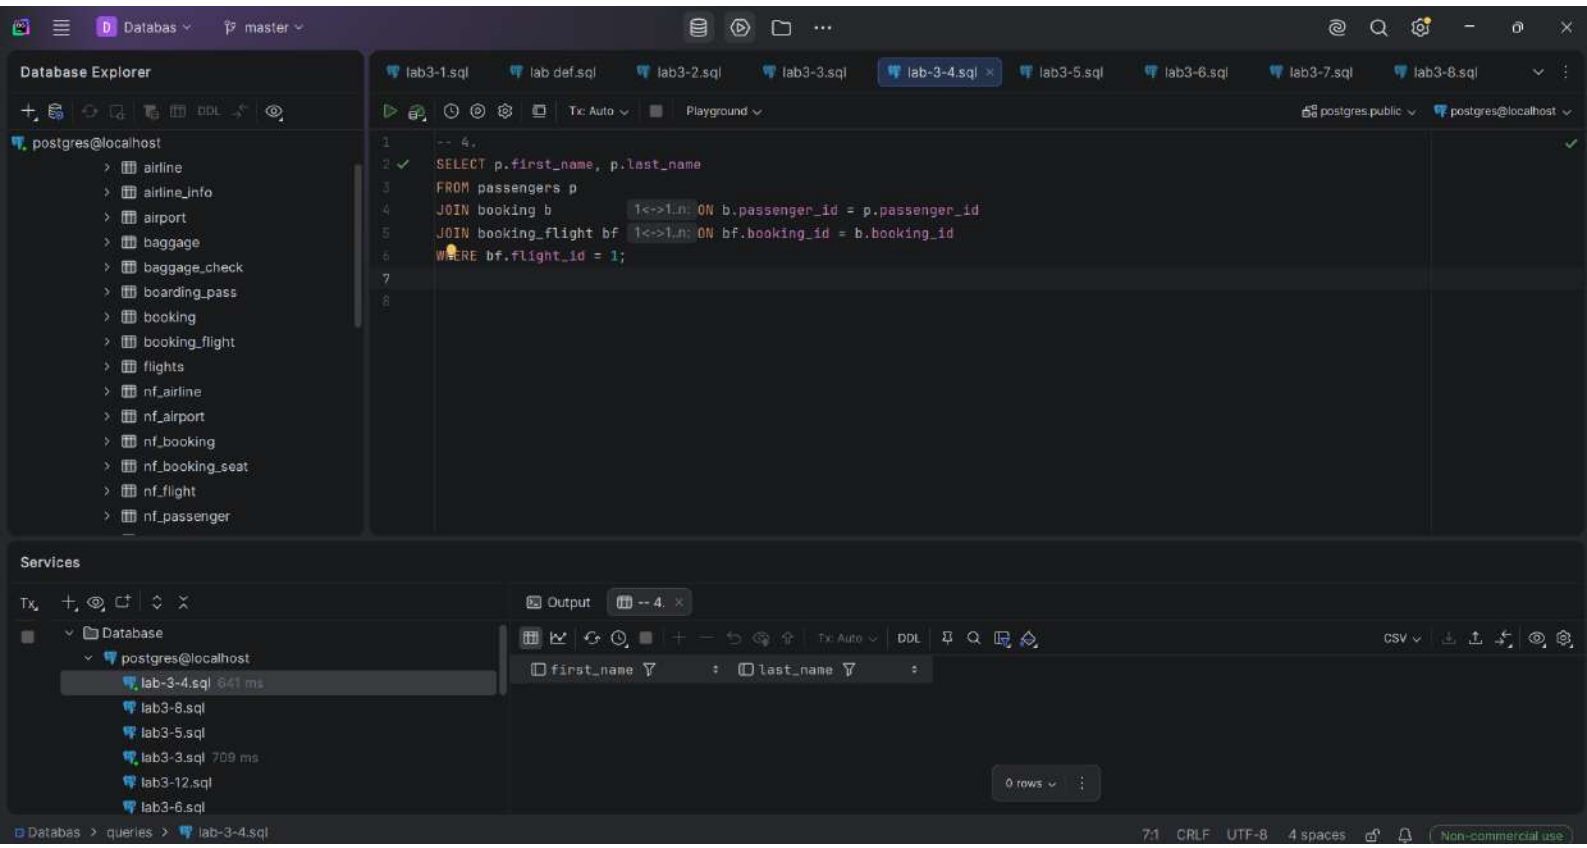
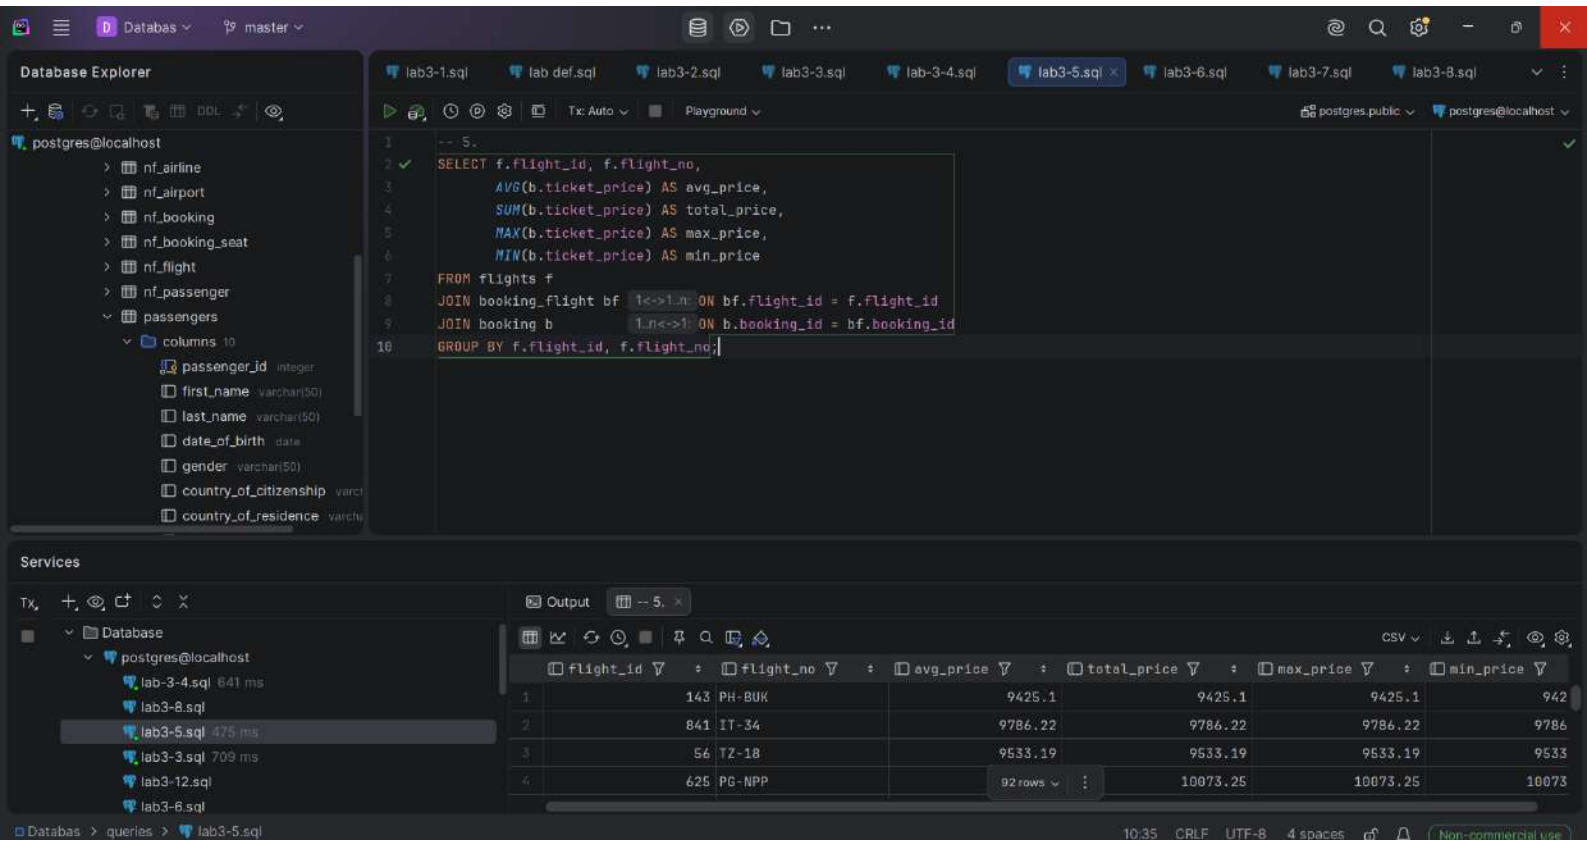
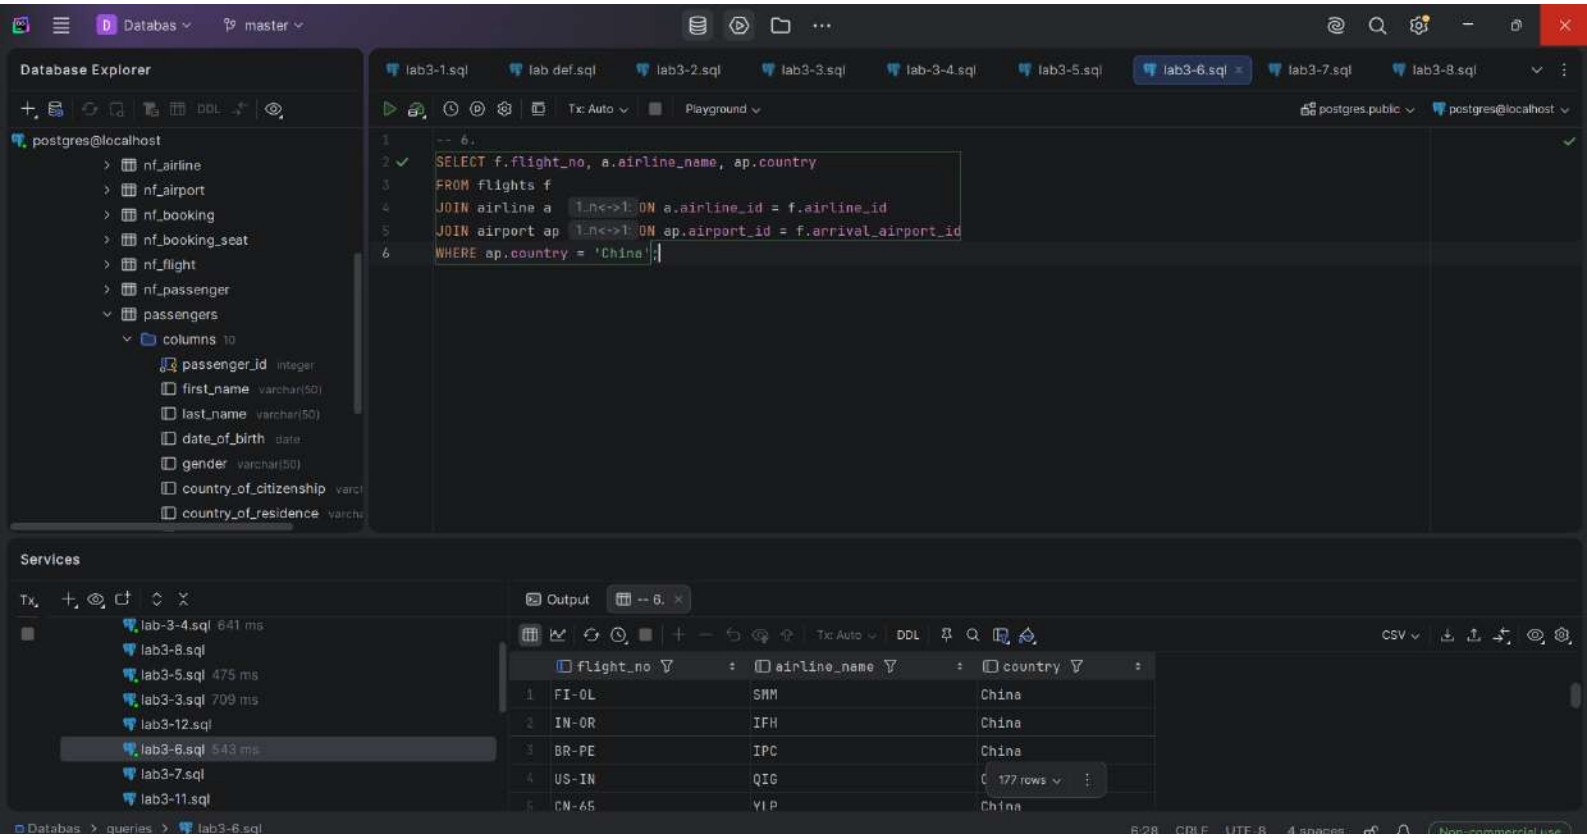

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
-- 1.
SELECT f.*
FROM flights f
JOIN airline a 1..n<->1: ON a.airline_id = f.airline_id
WHERE a.airline_name = 'IPC';
Services
Output
-- 1.
Tx: Auto
DDL
CSV
flight_id
flight_no
scheduled_departure
scheduled_arrival
departure_airport_id
1 13 BR-PE 2024-01-16 2023-06-02
2 36 AU-NT 2023-03-29 2023-05-06
3 73 FR-K 2023-12-26 2023-04-30
4 78 US-VT 2023-08-28 2023-08-02
21 rows
lab3-7.sql
lab3-11.sql
lab3-10.sql
Query_2.sql
lab3-15.sql
lab3-1.sql 2 s 546 ms
lab def.sql
lab3-14.sql
Databas > queries > lab3-1.sql
5:30 CRLF UTF-8 4 spaces
Non-commercial use

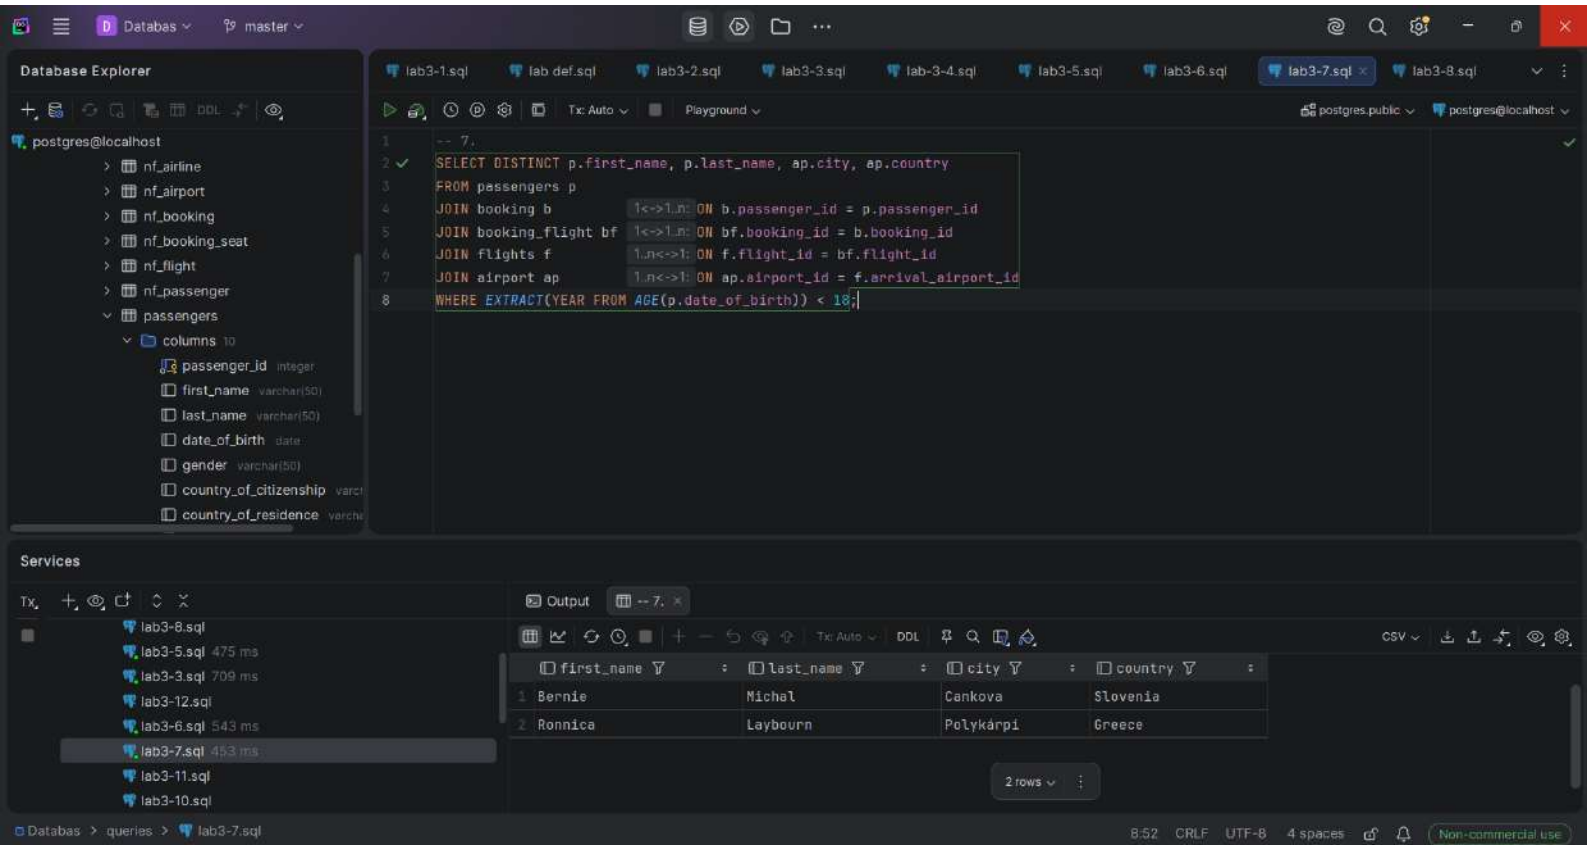

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
-- 2.
SELECT f.flight_no, ap.airport_name
FROM flights f
JOIN airport ap ON ap.airport_id = f.departure_airport_id;
Services
Output
-- 2.
Query_2.sql
lab3-15.sql
lab3-1.sql 2 s 546 ms
lab def.sql
lab3-14.sql
lab3-2.sql 689 ms
lab3-9.sql
lab3-13.sql
flight_no
airport_name
US-CT
Elonza Airport
FI-OL
Darchula Airport
RU-KR
Lime Acres Finsch Mine Airport
RO-DJ
Hana Airport
CA-SK
Darchula Airport
1-500 of 501+
CSV
Databas > queries > lab3-2.sql
4:59
CRLF
UTF-8
4 spaces
Non-commercial use

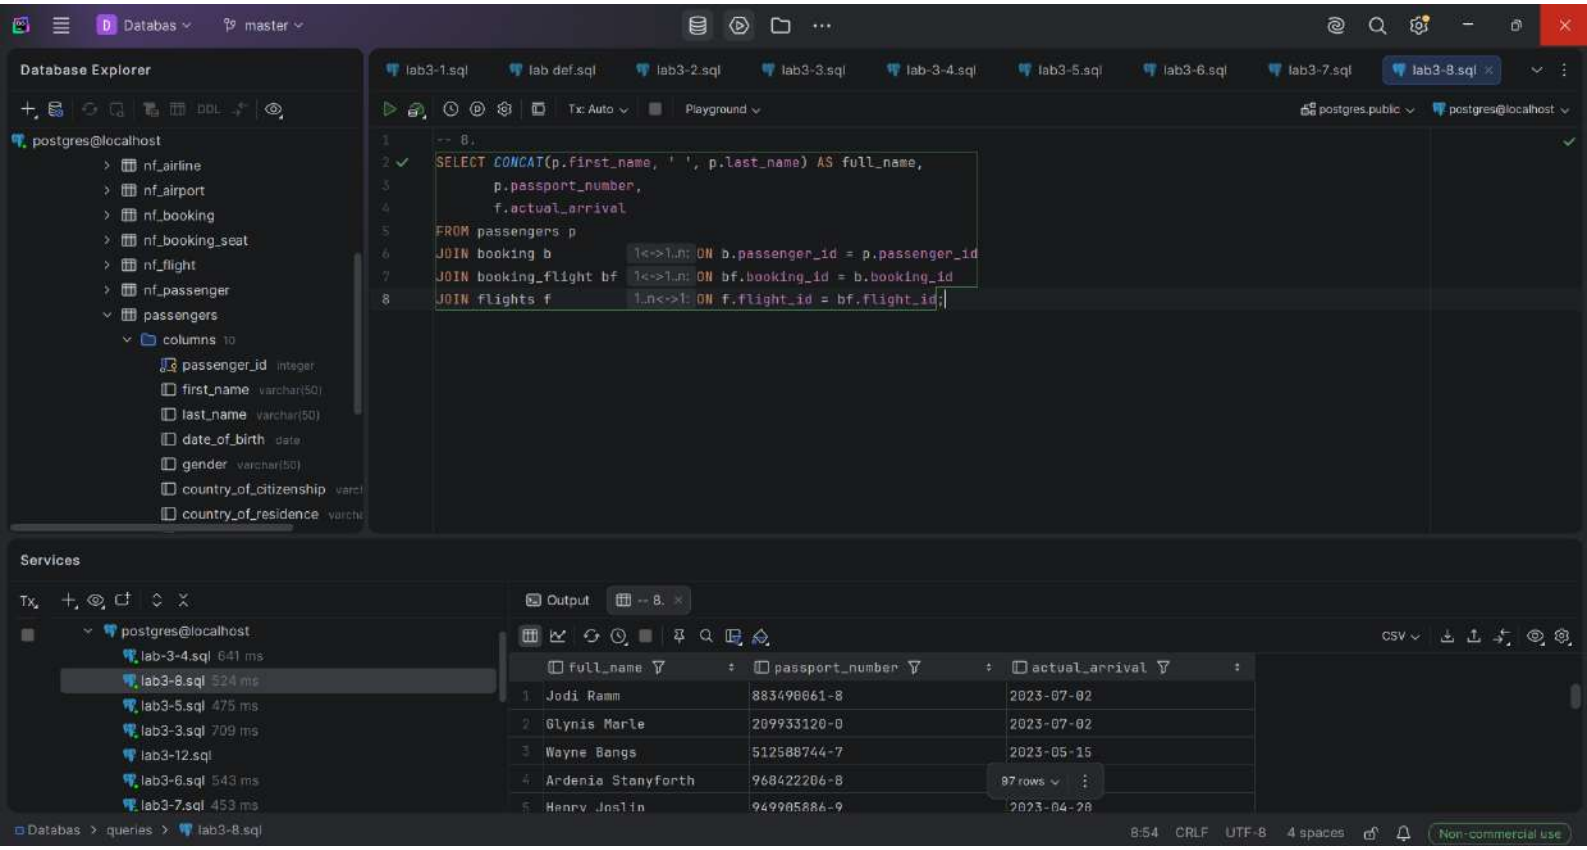

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
-- 3.
SELECT a.airline_name
FROM airline a
LEFT JOIN flights f
ON f.airline_id = a.airline_id
AND f.scheduled_departure BETWEEN '2024-02-01' AND '2024-02-29'
WHERE f.flight_id IS NULL;
Services
Output
-- 3.
lab3-8.sql
lab3-5.sql
lab3-3.sql 709 ms
lab3-12.sql
lab3-6.sql
lab3-7.sql
lab3-11.sql
lab3-10.sql
airline_name
YHB
SMM
KOQ
SOZ
Global Airways
21 rows
CSV
Ножницы
Снимок экрана скопирован в буфер обмена
Автоматически сохраняются в папке снимков экрана.
Разметка и общий доступ
Databas > queries > lab3-3.sql
7:27

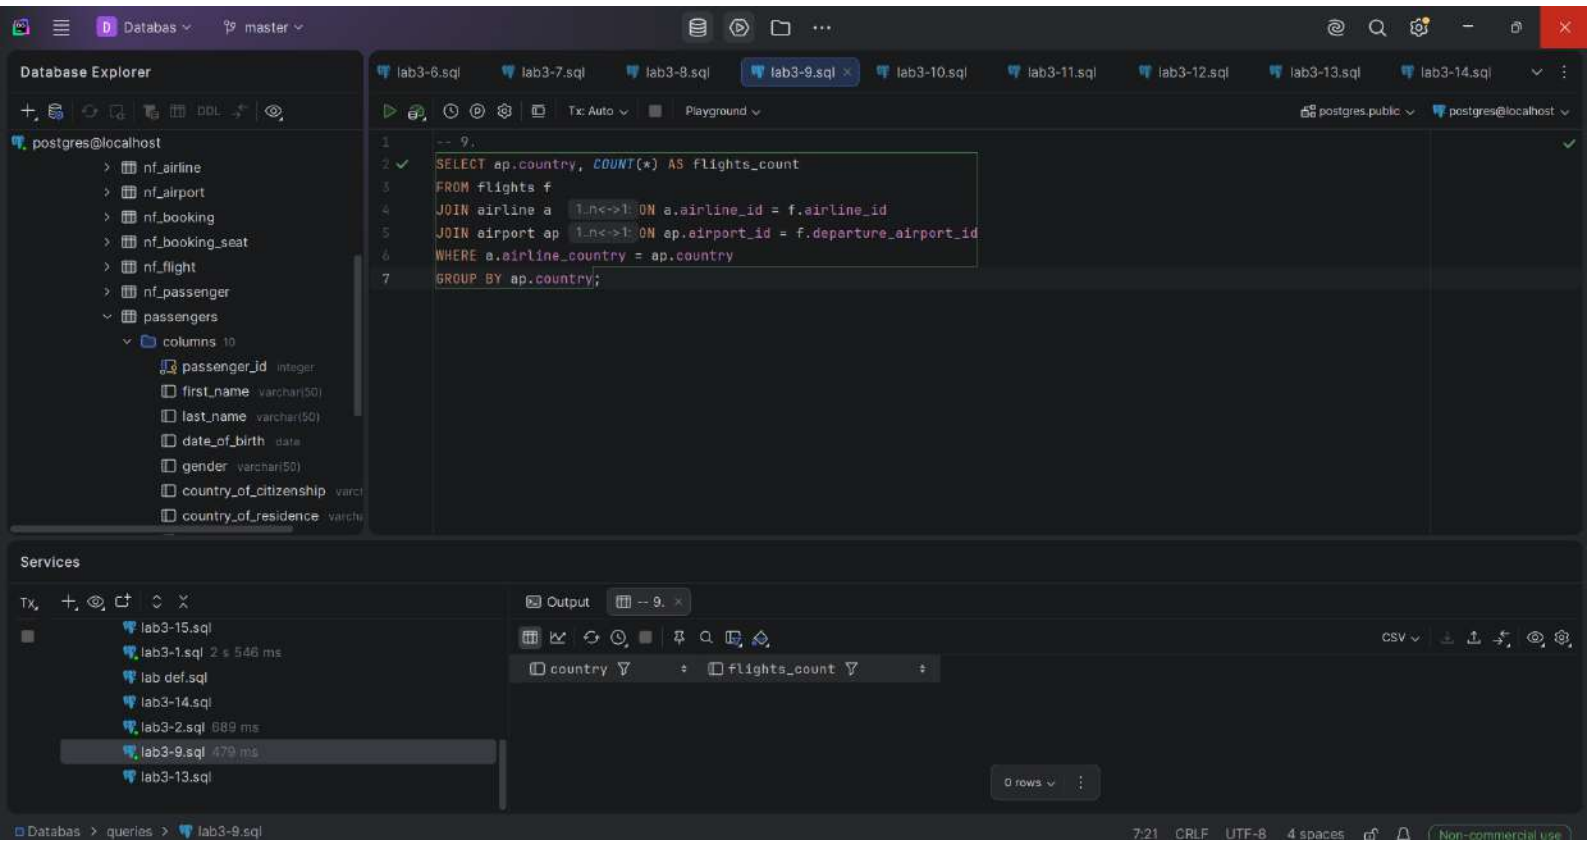

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
booking_flight
flights
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
-- 4.
SELECT p.first_name, p.last_name
FROM passengers p
JOIN booking b 1<->1..n: ON b.passenger_id = p.passenger_id
JOIN booking_flight bf 1<->1..n: ON bf.booking_id = b.booking_id
WHERE bf.flight_id = 1;
Services
Output
-- 4.
Database
postgres@localhost
lab-3-4.sql 641 ms
lab3-8.sql
lab3-5.sql
lab3-3.sql 709 ms
lab3-12.sql
lab3-6.sql
Tx: Auto
DDL
CSV
first_name
last_name
0 rows
Databas > queries > lab-3-4.sql
7:1
CRLF
UTF-8
4 spaces
Non-commercial use

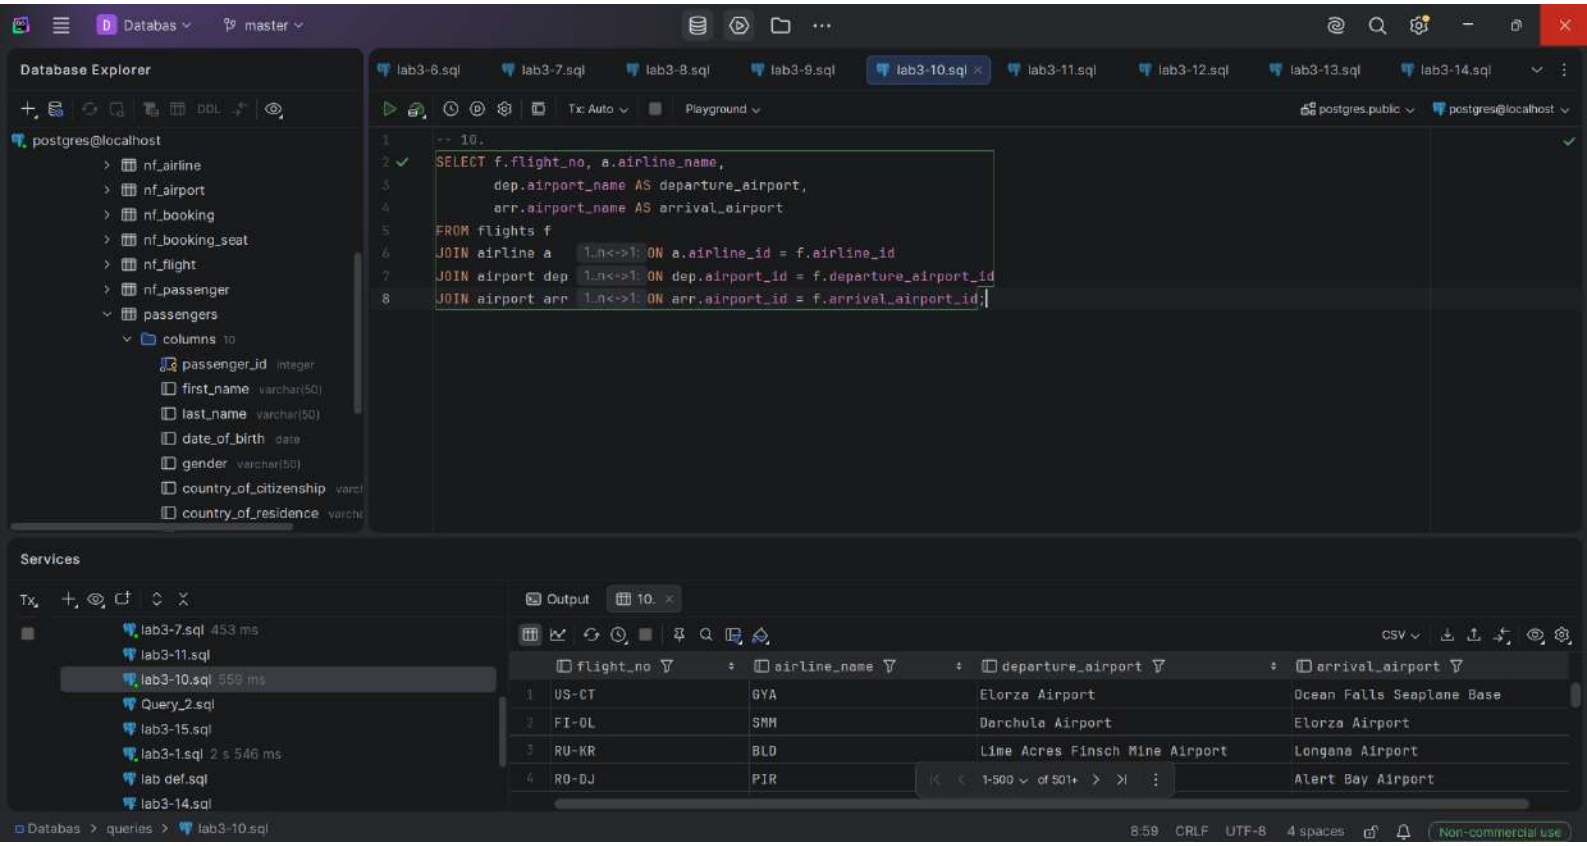

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 5.
SELECT f.flight_id, f.flight_no,
AVG(b.ticket_price) AS avg_price,
SUM(b.ticket_price) AS total_price,
MAX(b.ticket_price) AS max_price,
MIN(b.ticket_price) AS min_price
FROM flights f
JOIN booking_flight bf 1<->1..n: ON bf.flight_id = f.flight_id
JOIN booking b 1..n<->1: ON b.booking_id = bf.booking_id
GROUP BY f.flight_id, f.flight_no;
Services
Database
postgres@localhost
lab-3-4.sql 641 ms
lab3-8.sql
lab3-5.sql 475 ms
lab3-3.sql 709 ms
lab3-12.sql
lab3-6.sql
Output
-- 5.
CSV
flight_id flight_no avg_price total_price max_price min_price
1 143 PH-BUK 9425.1 9425.1 9425.1 942
2 841 IT-34 9786.22 9786.22 9786.22 9786
3 56 TZ-18 9533.19 9533.19 9533.19 9533
4 625 PG-NPP 10073.25 10073.25 10073
92 rows
Databas > queries > lab3-5.sql
10:35 CRLF UTF-8 4 spaces
Non-commercial use

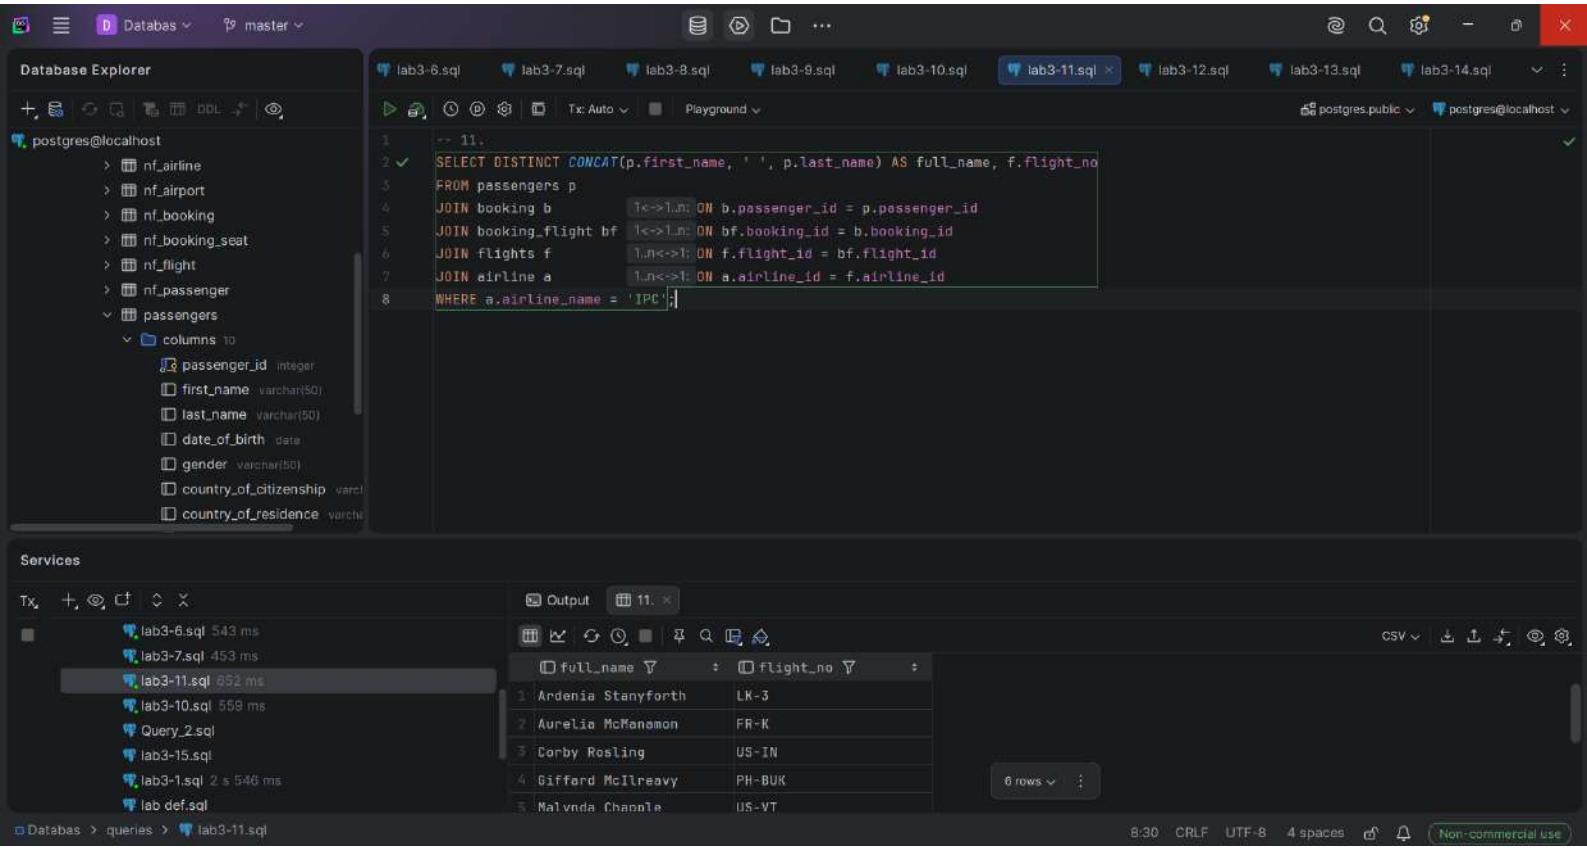

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 6.
SELECT f.flight_no, a.airline_name, ap.country
FROM flights f
JOIN airline a 1..n<->1 ON a.airline_id = f.airline_id
JOIN airport ap 1..n<->1 ON ap.airport_id = f.arrival_airport_id
WHERE ap.country = 'China';
Services
Output
-- 6.
Tx: Auto
DDL
CSV
flight_no
airline_name
country
1 FI-OL SMM China
2 IN-OR IFH China
3 BR-PE IPC China
4 US-IN QIG
5 CN-65 YLP China
177 rows
lab-3-4.sql 641 ms
lab3-8.sql
lab3-5.sql 475 ms
lab3-3.sql 709 ms
lab3-12.sql
lab3-6.sql 543 ms
lab3-7.sql
lab3-11.sql
Databas > queries > lab3-6.sql
6:28
CRLF
UTF-8
4 spaces
Non-commercial use

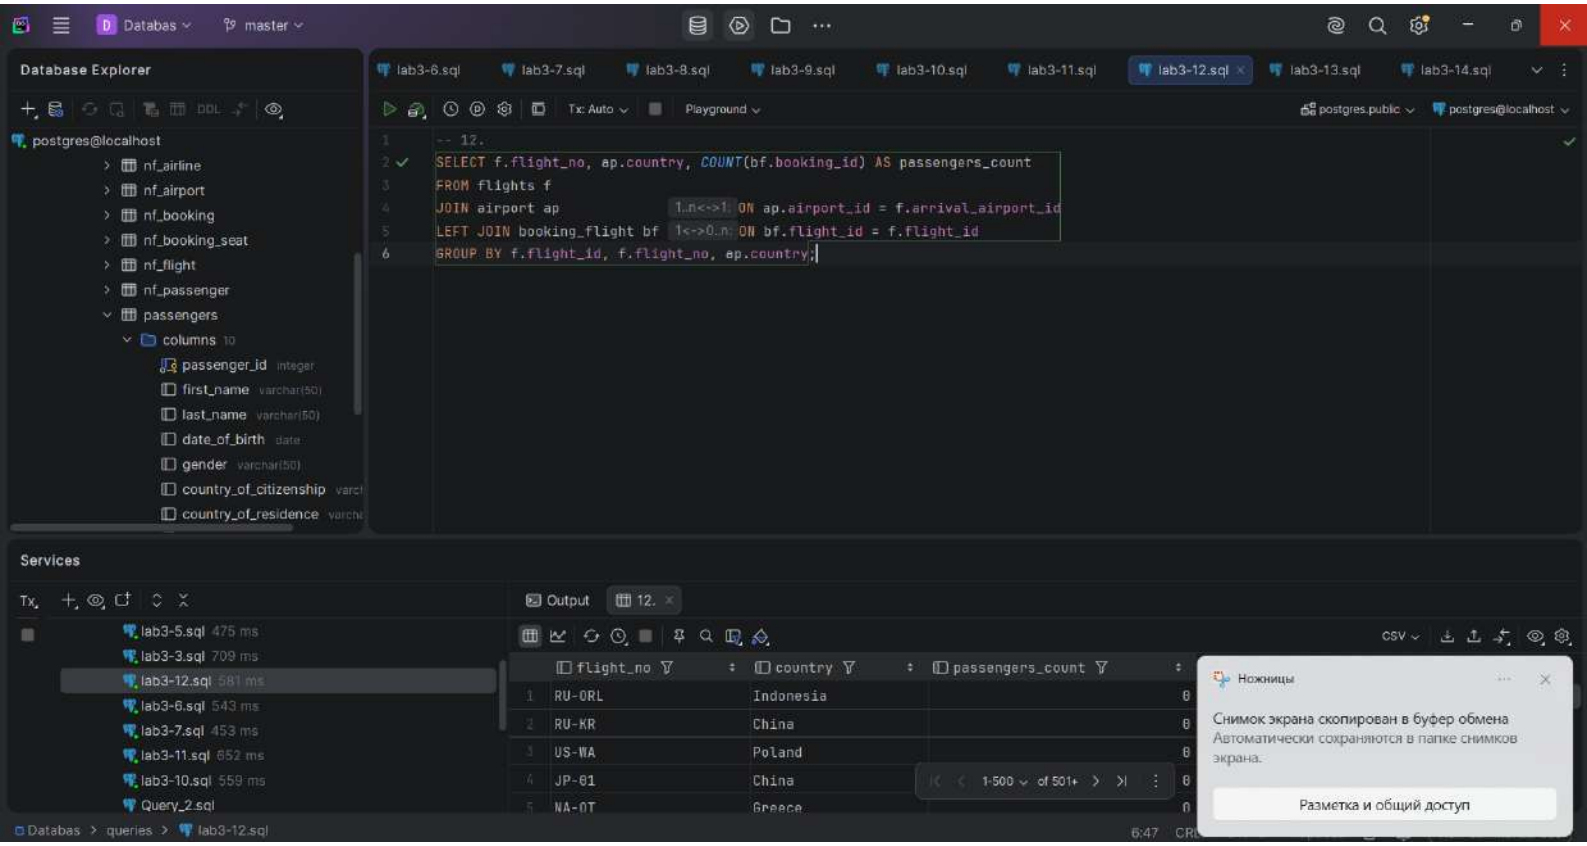

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 7.
SELECT DISTINCT p.first_name, p.last_name, ap.city, ap.country
FROM passengers p
JOIN booking b 1<->1..n: ON b.passenger_id = p.passenger_id
JOIN booking_flight bf 1<->1..n: ON bf.booking_id = b.booking_id
JOIN flights f 1..n<->1: ON f.flight_id = bf.flight_id
JOIN airport ap 1..n<->1: ON ap.airport_id = f.arrival_airport_id
WHERE EXTRACT(YEAR FROM AGE(p.date_of_birth)) < 18;
Services
Output
-- 7.
Tx: Auto
DDL
CSV
lab3-8.sql
lab3-5.sql 475 ms
lab3-3.sql 709 ms
lab3-12.sql
lab3-6.sql 543 ms
lab3-7.sql 453 ms
lab3-11.sql
lab3-10.sql
first_name
last_name
city
country
1 Bernie Michal Cankova Slovenia
2 Ronnica Laybourn Polykárpi Greece
2 rows
Databas > queries > lab3-7.sql
8:52 CRLF UTF-8 4 spaces
Non-commercial use

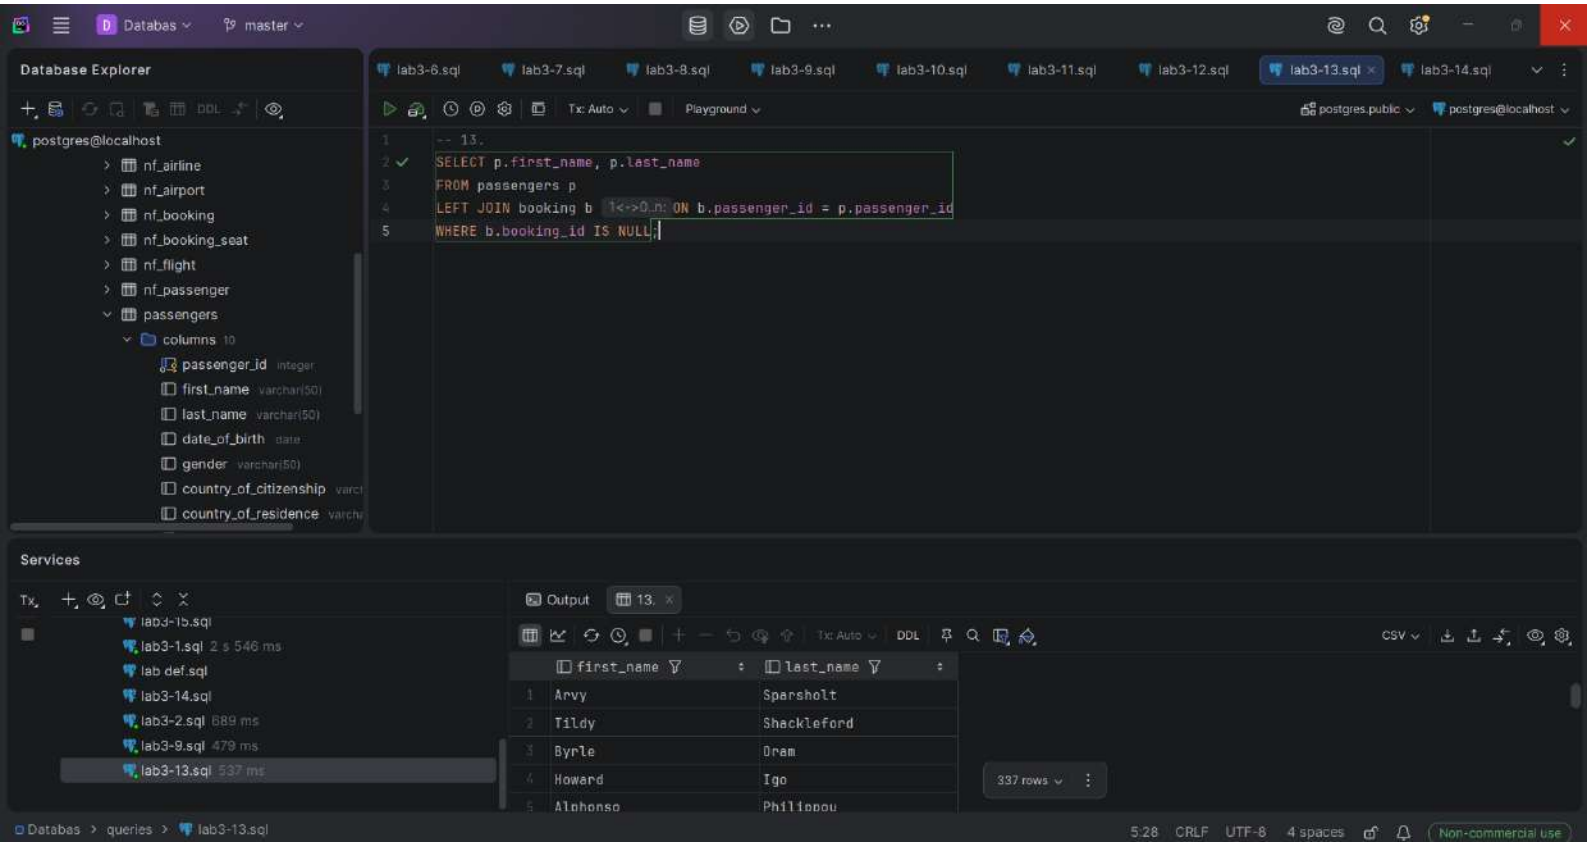

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 8.
SELECT CONCAT(p.first_name, ' ', p.last_name) AS full_name,
p.passport_number,
f.actual_arrival
FROM passengers p
JOIN booking b 1<->1..n: ON b.passenger_id = p.passenger_id
JOIN booking_flight bf 1<->1..n: ON bf.booking_id = b.booking_id
JOIN flights f 1..n<->1: ON f.flight_id = bf.flight_id;
Services
Output
-- 8.
CSV
postgres@localhost
lab-3-4.sql 641 ms
lab3-8.sql 524 ms
lab3-5.sql 475 ms
lab3-3.sql 709 ms
lab3-12.sql
lab3-6.sql 543 ms
lab3-7.sql 453 ms
full_name
passport_number
actual_arrival
1 Jodi Ramm 883498061-8 2023-07-02
2 Glynis Marle 209933120-0 2023-07-02
3 Wayne Bangs 512588744-7 2023-05-15
4 Ardenia Stanyforth 968422206-8 2023-04-28
97 rows
Databas > queries > lab3-8.sql
8:54 CRLF UTF-8 4 spaces
Non-commercial use

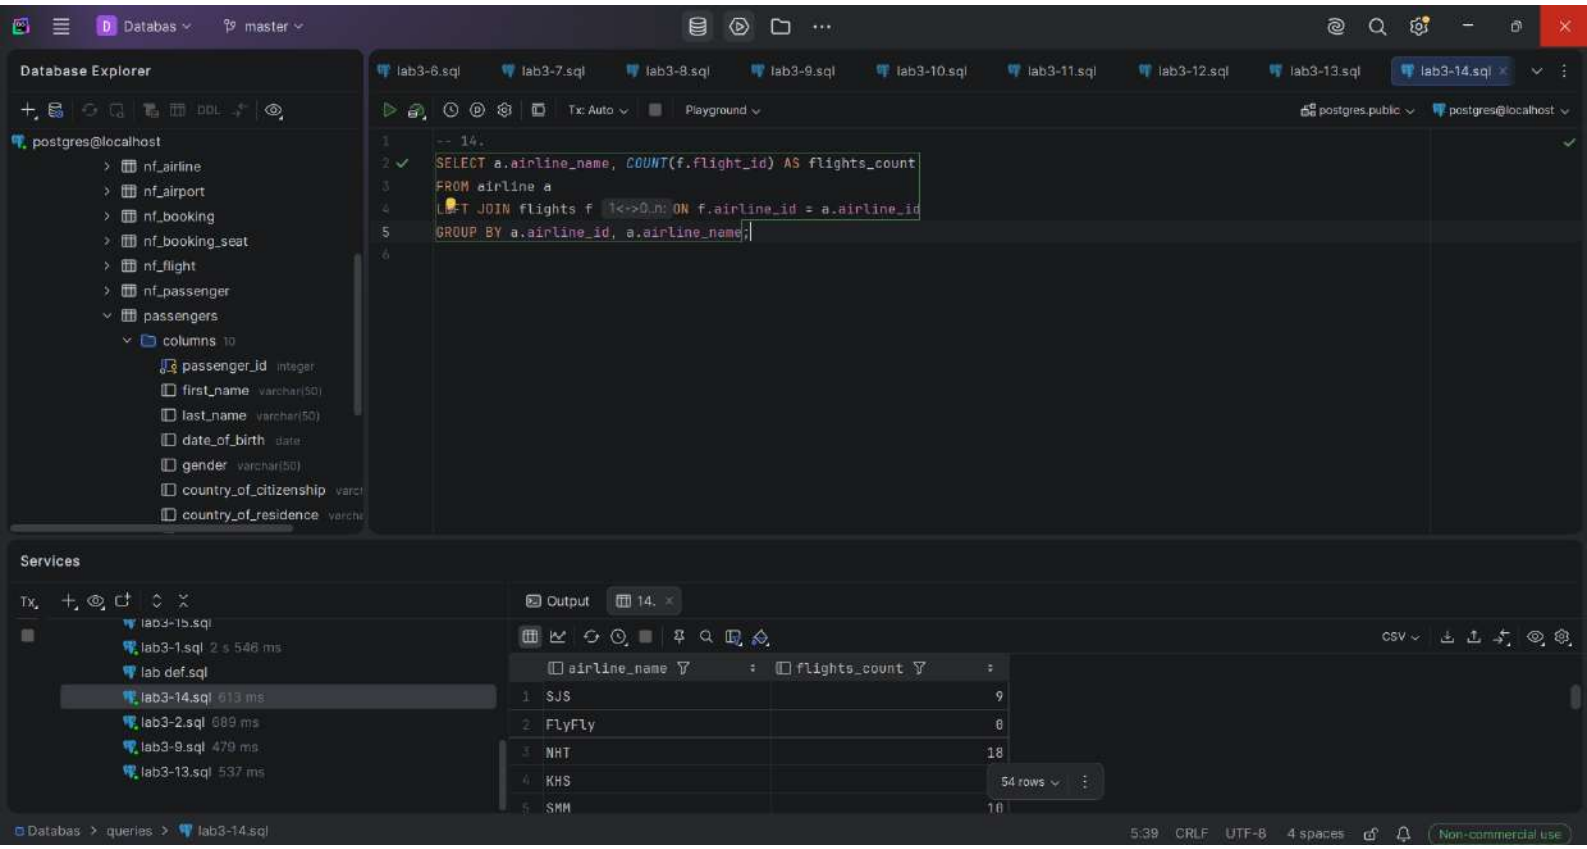

Databas
master
Database Explorer
lab3-6.sql
lab3-7.sql
lab3-8.sql
lab3-9.sql
lab3-10.sql
lab3-11.sql
lab3-12.sql
lab3-13.sql
lab3-14.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 9.
SELECT ap.country, COUNT(*) AS flights_count
FROM flights f
JOIN airline a 1..n<->1 ON a.airline_id = f.airline_id
JOIN airport ap 1..n<->1 ON ap.airport_id = f.departure_airport_id
WHERE a.airline_country = ap.country
GROUP BY ap.country;
Services
lab3-15.sql
lab3-1.sql 2 s 546 ms
lab def.sql
lab3-14.sql
lab3-2.sql 689 ms
lab3-9.sql 479 ms
lab3-13.sql
Output
-- 9.
CSV
country
flights_count
0 rows
Databas > queries > lab3-9.sql
7:21
CRLF
UTF-8
4 spaces
Non-commercial use

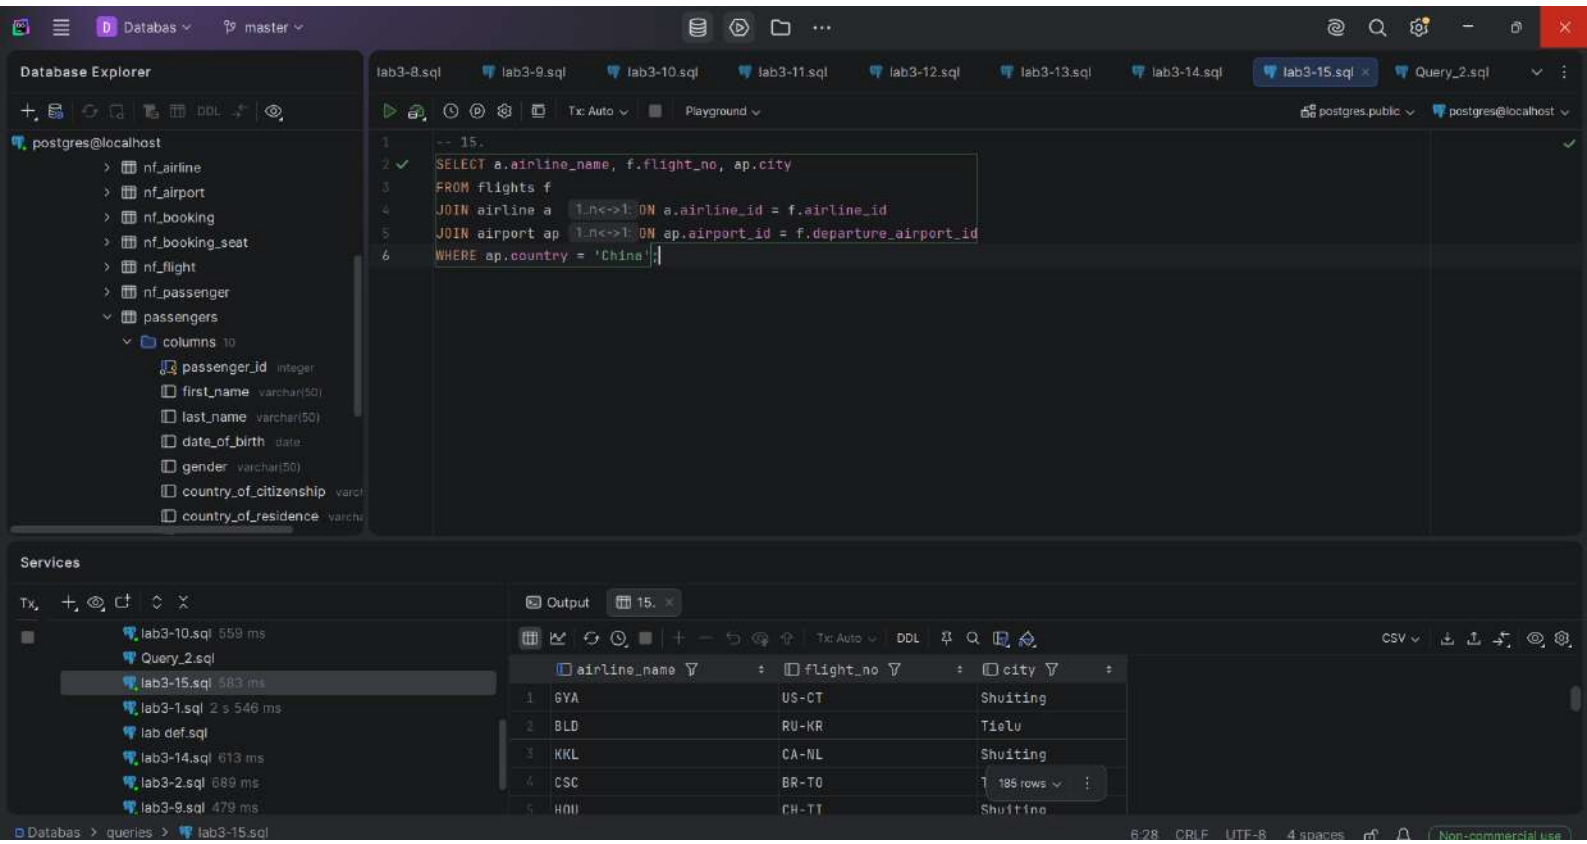

Databas
master
Database Explorer
lab3-6.sql
lab3-7.sql
lab3-8.sql
lab3-9.sql
lab3-10.sql
lab3-11.sql
lab3-12.sql
lab3-13.sql
lab3-14.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 10.
SELECT f.flight_no, a.airline_name,
dep.airport_name AS departure_airport,
arr.airport_name AS arrival_airport
FROM flights f
JOIN airline a 1..n<->1: ON a.airline_id = f.airline_id
JOIN airport dep 1..n<->1: ON dep.airport_id = f.departure_airport_id
JOIN airport arr 1..n<->1: ON arr.airport_id = f.arrival_airport_id;
Services
lab3-7.sql 453 ms
lab3-11.sql
lab3-10.sql 559 ms
Query_2.sql
lab3-15.sql
lab3-1.sql 2 s 546 ms
lab def.sql
lab3-14.sql
Output
10.
CSV
flight_no
airline_name
departure_airport
arrival_airport
1 US-CT GYA Elorza Airport Ocean Falls Seaplane Base
2 FI-OL SMM Darchula Airport Elorza Airport
3 RU-KR BLD Lime Acres Finsch Mine Airport Longana Airport
4 RO-DJ PIR Alert Bay Airport
1-500 of 501+
Databas > queries > lab3-10.sql
8:59 CRLF UTF-8 4 spaces
Non-commercial use


Databas
master
Database Explorer
lab3-6.sql
lab3-7.sql
lab3-8.sql
lab3-9.sql
lab3-10.sql
lab3-11.sql
lab3-12.sql
lab3-13.sql
lab3-14.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 11.
SELECT DISTINCT CONCAT(p.first_name, ' ', p.last_name) AS full_name, f.flight_no
FROM passengers p
JOIN booking b 1<->1..n: ON b.passenger_id = p.passenger_id
JOIN booking_flight bf 1<->1..n: ON bf.booking_id = b.booking_id
JOIN flights f 1..n<->1: ON f.flight_id = bf.flight_id
JOIN airline a 1..n<->1: ON a.airline_id = f.airline_id
WHERE a.airline_name = 'IPC';
Services
Output
11.
lab3-6.sql 543 ms
lab3-7.sql 453 ms
lab3-11.sql 652 ms
lab3-10.sql 559 ms
Query_2.sql
lab3-15.sql
lab3-1.sql 2 s 546 ms
lab def.sql
csv
full_name
flight_no
1 Ardenia Stanyforth LK-3
2 Aurelia McMenamon FR-K
3 Corby Rosling US-IN
4 Gifford McIlreavy PH-BUK
5 Malynda Chapple US-VT
6 rows
Databas > queries > lab3-11.sql
8:30 CRLF UTF-8 4 spaces
Non-commercial use


Databas
master
Database Explorer
lab3-6.sql
lab3-7.sql
lab3-8.sql
lab3-9.sql
lab3-10.sql
lab3-11.sql
lab3-12.sql
lab3-13.sql
lab3-14.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 12.
SELECT f.flight_no, ap.country, COUNT(bf.booking_id) AS passengers_count
FROM flights f
JOIN airport ap 1..n<->1 ON ap.airport_id = f.arrival_airport_id
LEFT JOIN booking_flight bf 1<->0..n ON bf.flight_id = f.flight_id
GROUP BY f.flight_id, f.flight_no, ap.country;
Services
Output
12.
lab3-5.sql 475 ms
lab3-3.sql 709 ms
lab3-12.sql 581 ms
lab3-6.sql 543 ms
lab3-7.sql 453 ms
lab3-11.sql 652 ms
lab3-10.sql 559 ms
Query_2.sql
CSV
flight_no
country
passengers_count
1 RU-ORL Indonesia 0
2 RU-KR China 0
3 US-WA Poland 0
4 JP-01 China 0
5 NA-0T Greece 0
1-500 of 501+
Ножницы
Снимок экрана скопирован в буфер обмена
Автоматически сохраняются в папке снимков экрана.
Разметка и общий доступ
Databas > queries > lab3-12.sql
6:47


Databas
master
Database Explorer
lab3-6.sql
lab3-7.sql
lab3-8.sql
lab3-9.sql
lab3-10.sql
lab3-11.sql
lab3-12.sql
lab3-13.sql
lab3-14.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 13.
SELECT p.first_name, p.last_name
FROM passengers p
LEFT JOIN booking b 1<->0..n: ON b.passenger_id = p.passenger_id
WHERE b.booking_id IS NULL;
Services
lab3-1.sql 2 s 546 ms
lab def.sql
lab3-14.sql
lab3-2.sql 689 ms
lab3-9.sql 479 ms
lab3-13.sql 537 ms
Output
13.
Tx: Auto
DDL
CSV
first_name
last_name
1 Arvy Sparsholt
2 Tildy Shackleford
3 Byrle Dram
4 Howard Igo
5 Alphonso Philippou
337 rows
Databas > queries > lab3-13.sql
5:28 CRLF UTF-8 4 spaces
Non-commercial use


Databas
master
Database Explorer
lab3-6.sql
lab3-7.sql
lab3-8.sql
lab3-9.sql
lab3-10.sql
lab3-11.sql
lab3-12.sql
lab3-13.sql
lab3-14.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 14.
SELECT a.airline_name, COUNT(f.flight_id) AS flights_count
FROM airline a
LEFT JOIN flights f 1<->0..n: ON f.airline_id = a.airline_id
GROUP BY a.airline_id, a.airline_name;
Services
Tx
lab3-1.sql 2 s 546 ms
lab def.sql
lab3-14.sql 613 ms
lab3-2.sql 689 ms
lab3-9.sql 479 ms
lab3-13.sql 537 ms
Output
14.
CSV
airline_name
flights_count
1 SJS 9
2 FlyFly 0
3 NHT 18
4 KHS
5 SMM
54 rows
Databas > queries > lab3-14.sql
5:39 CRLF UTF-8 4 spaces
Non-commercial use


Database Explorer
lab3-8.sql
lab3-9.sql
lab3-10.sql
lab3-11.sql
lab3-12.sql
lab3-13.sql
lab3-14.sql
lab3-15.sql
Query_2.sql
postgres@localhost
nf_airline
nf_airport
nf_booking
nf_booking_seat
nf_flight
nf_passenger
passengers
columns 10
passenger_id integer
first_name varchar(50)
last_name varchar(50)
date_of_birth date
gender varchar(50)
country_of_citizenship
country_of_residence
-- 15.
SELECT a.airline_name, f.flight_no, ap.city
FROM flights f
JOIN airline a ON a.airline_id = f.airline_id
JOIN airport ap ON ap.airport_id = f.departure_airport_id
WHERE ap.country = 'China';
Services
Output
15.
airline_name
flight_no
city
1 GYA US-CT Shuiting
2 BLD RU-KR Tielu
3 KKL CA-NL Shuiting
4 CSC BR-TO
5 HOU CH-TT Shuiting
lab3-10.sql 559 ms
Query_2.sql
lab3-15.sql 583 ms
lab3-1.sql 2 s 546 ms
lab def.sql
lab3-14.sql 613 ms
lab3-2.sql 689 ms
lab3-9.sql 479 ms
Databas > queries > lab3-15.sql