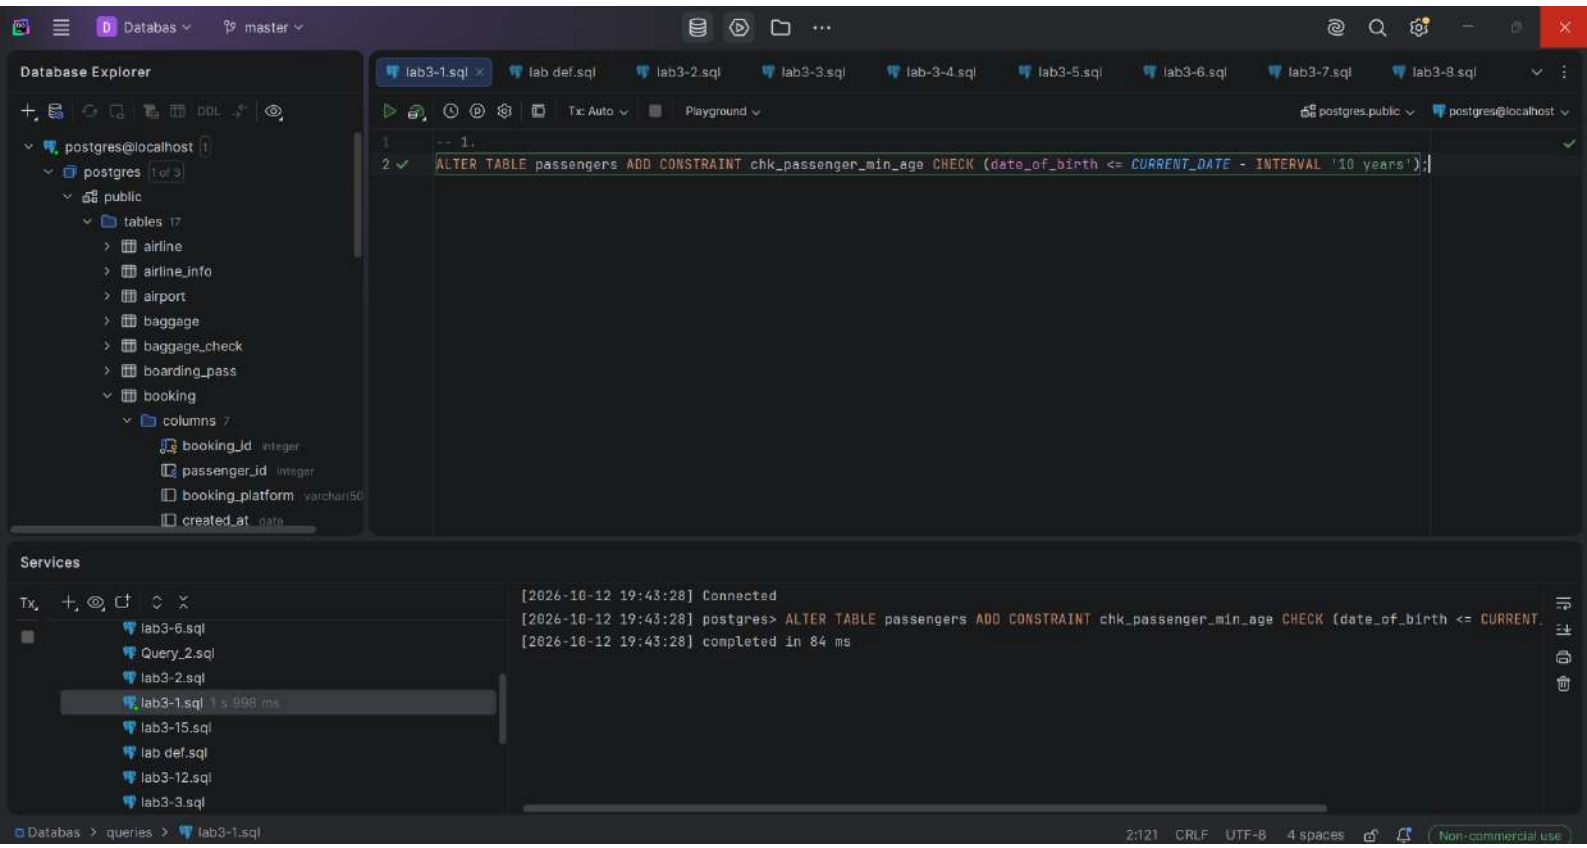
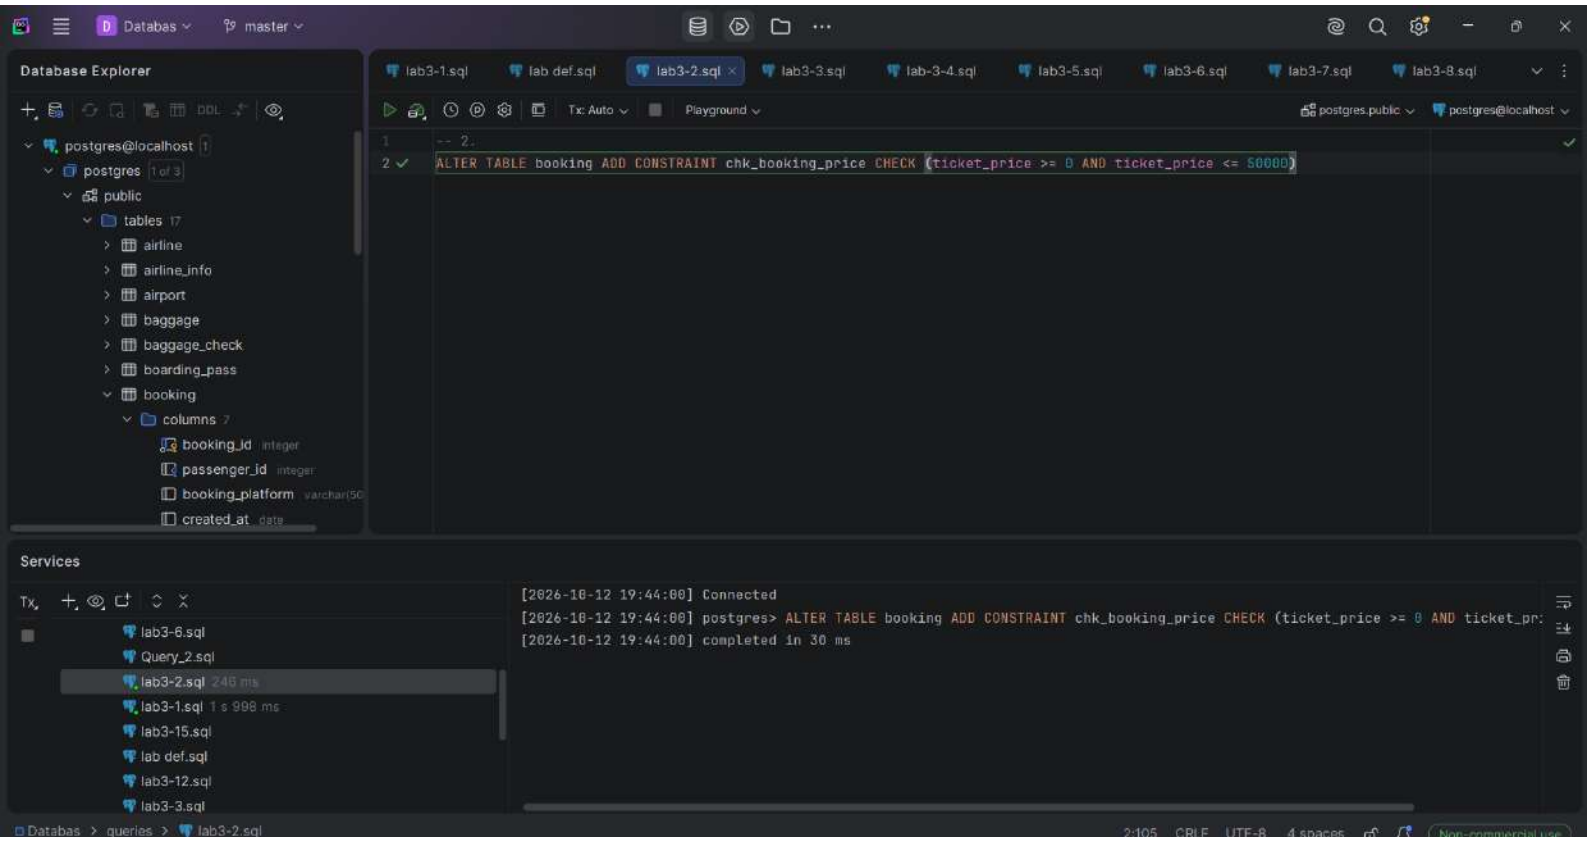
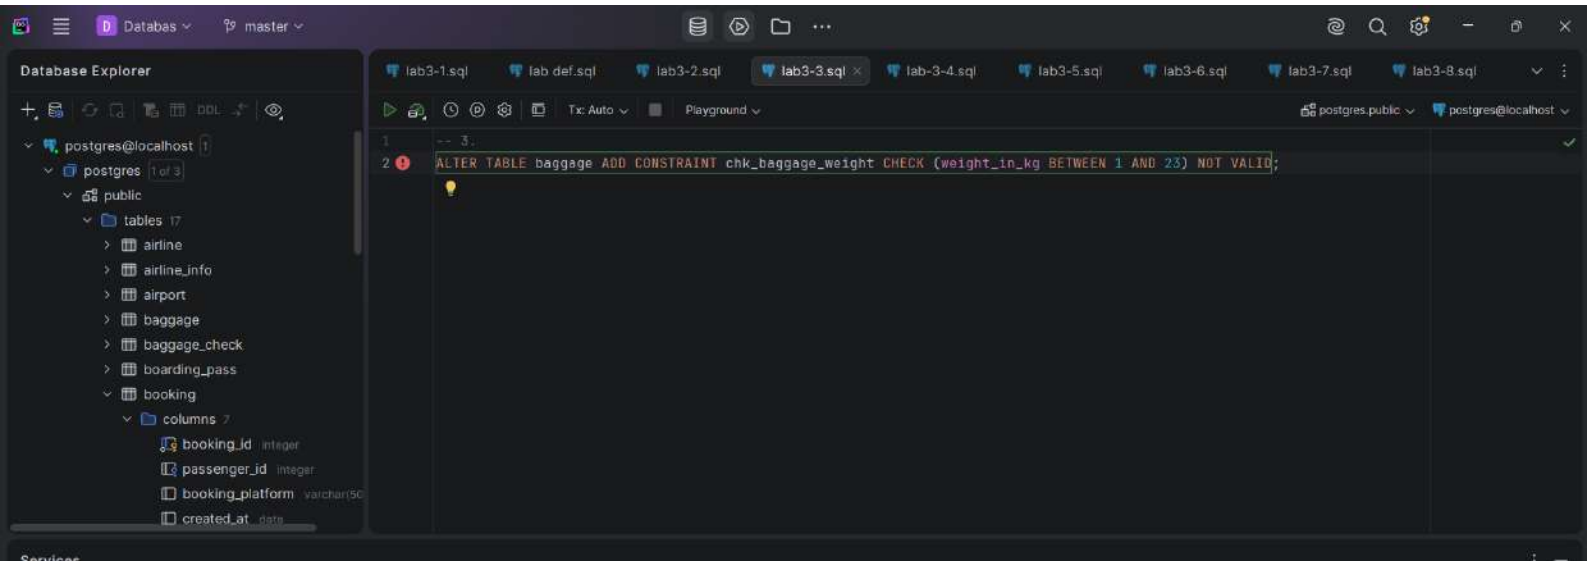
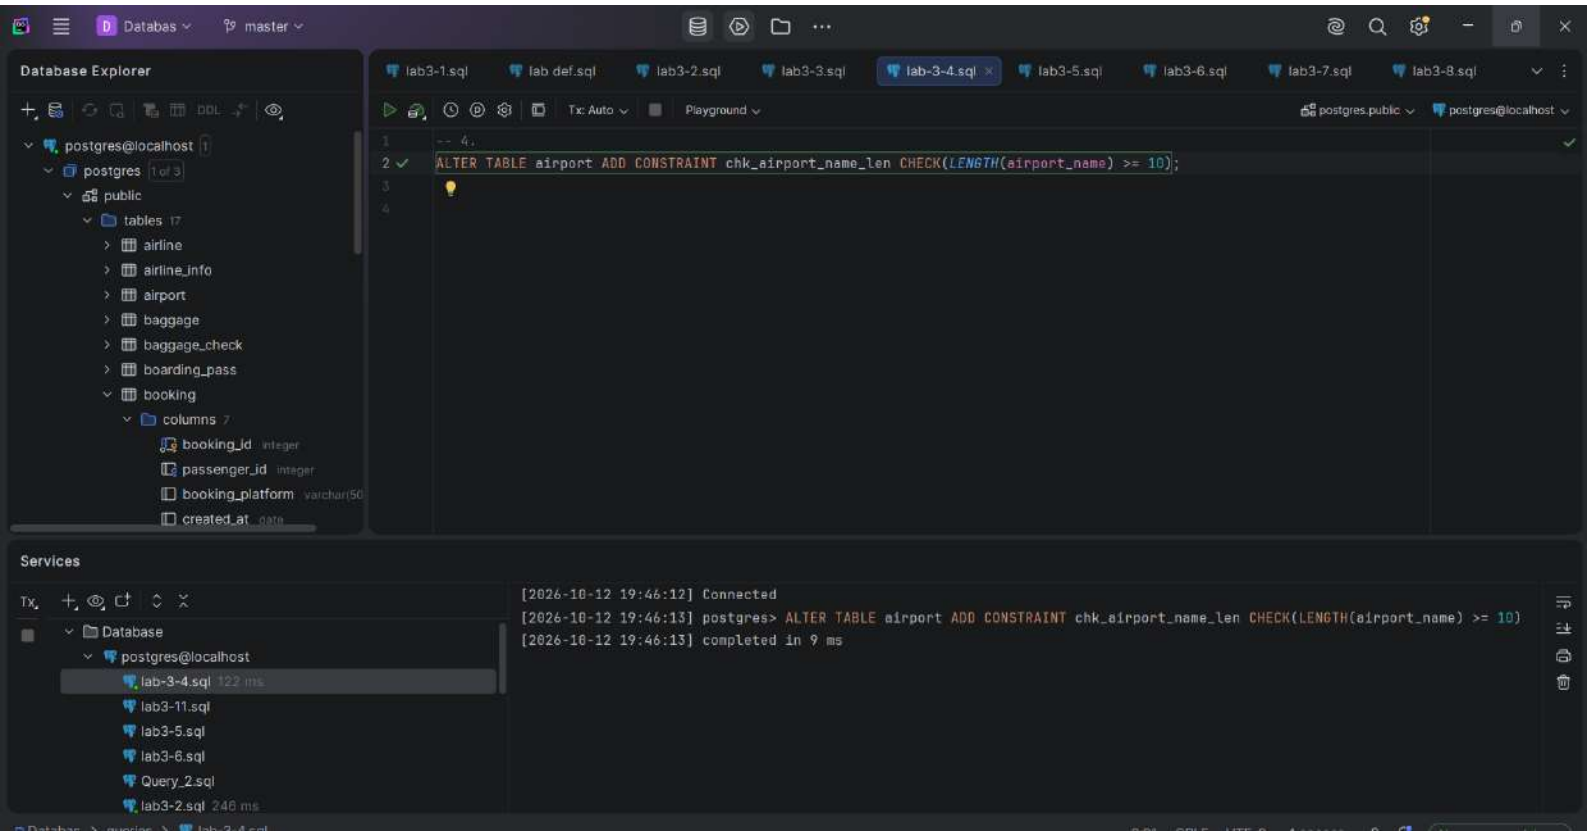
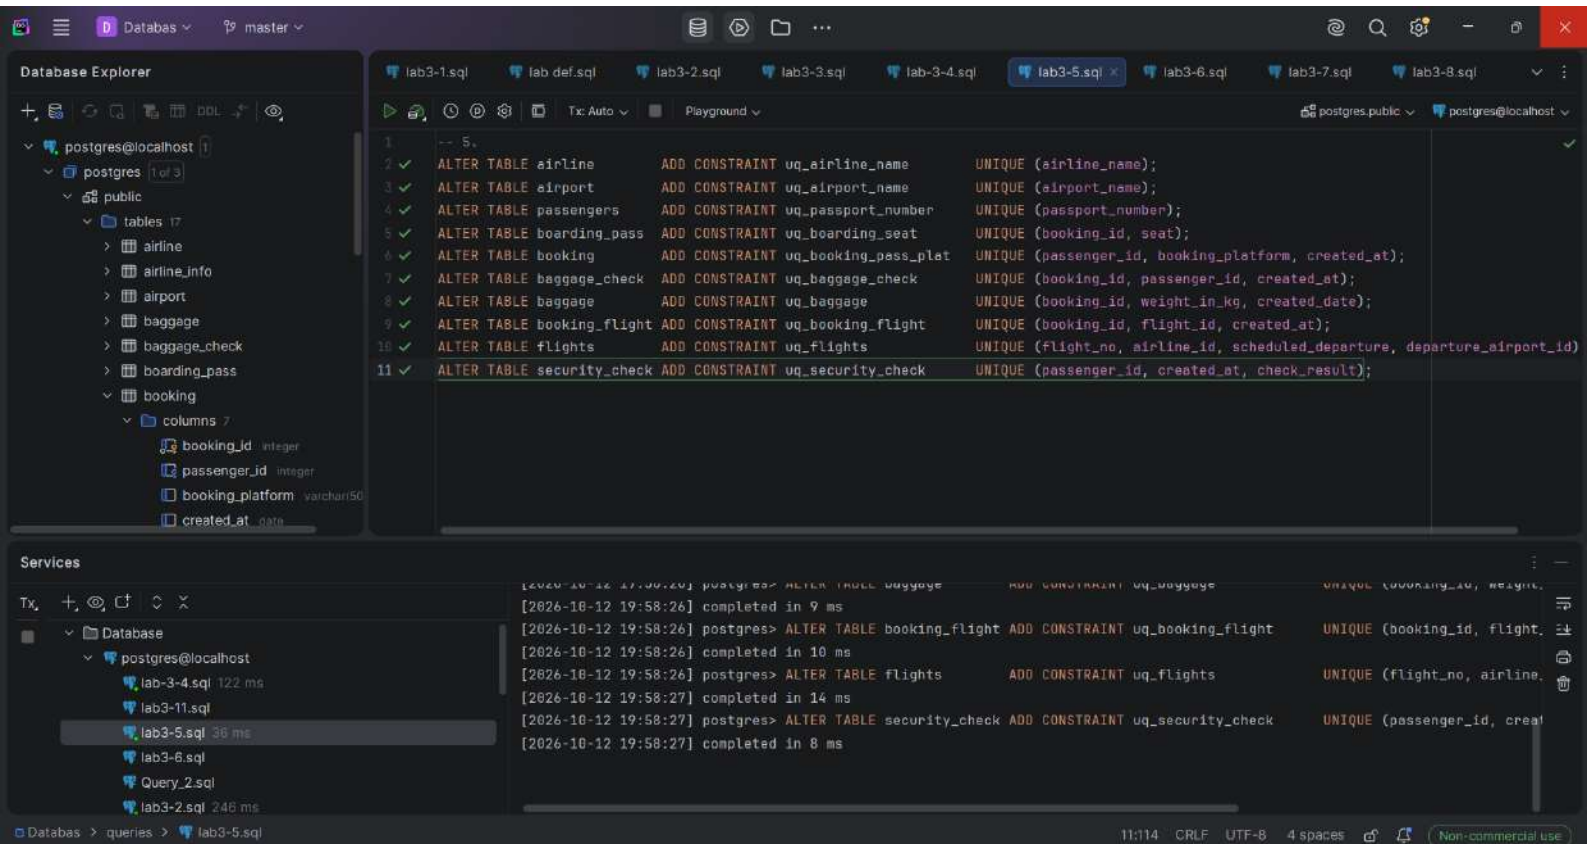
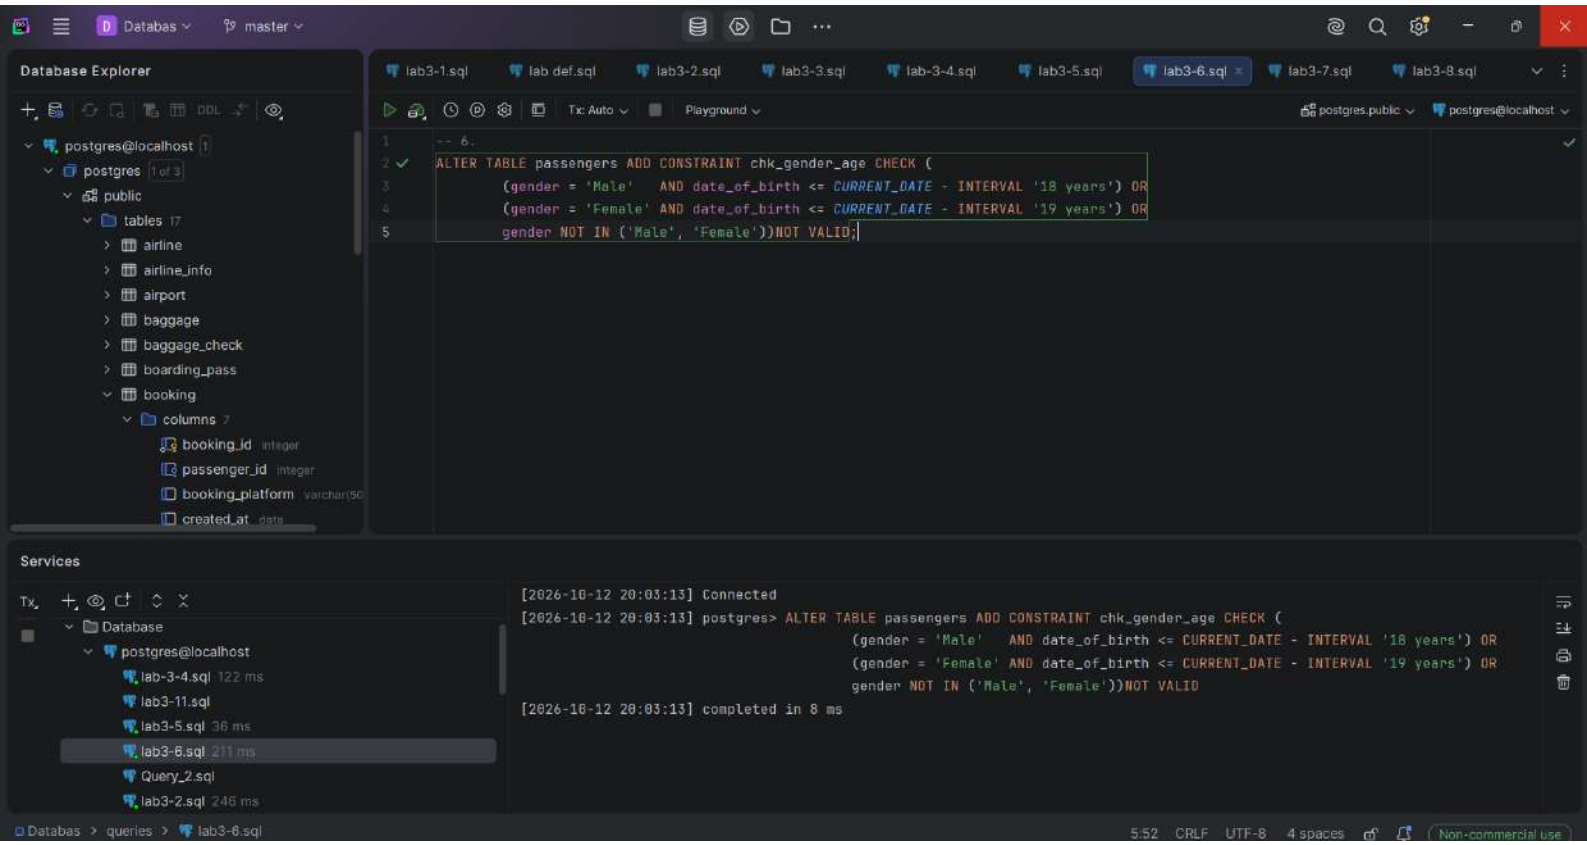

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
-- 1.
ALTER TABLE passengers ADD CONSTRAINT chk_passenger_min_age CHECK (date_of_birth <= CURRENT_DATE - INTERVAL '10 years');
postgres@localhost
postgres
public
tables
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
columns
booking_id
passenger_id
booking_platform
created_at
Services
lab3-6.sql
Query_2.sql
lab3-2.sql
lab3-1.sql
lab3-15.sql
lab def.sql
lab3-12.sql
lab3-3.sql
[2026-10-12 19:43:28] Connected
[2026-10-12 19:43:28] postgres> ALTER TABLE passengers ADD CONSTRAINT chk_passenger_min_age CHECK (date_of_birth <= CURRENT.
[2026-10-12 19:43:28] completed in 84 ms
Databas > queries > lab3-1.sql
2:121
CRLF
UTF-8
4 spaces
Non-commercial use

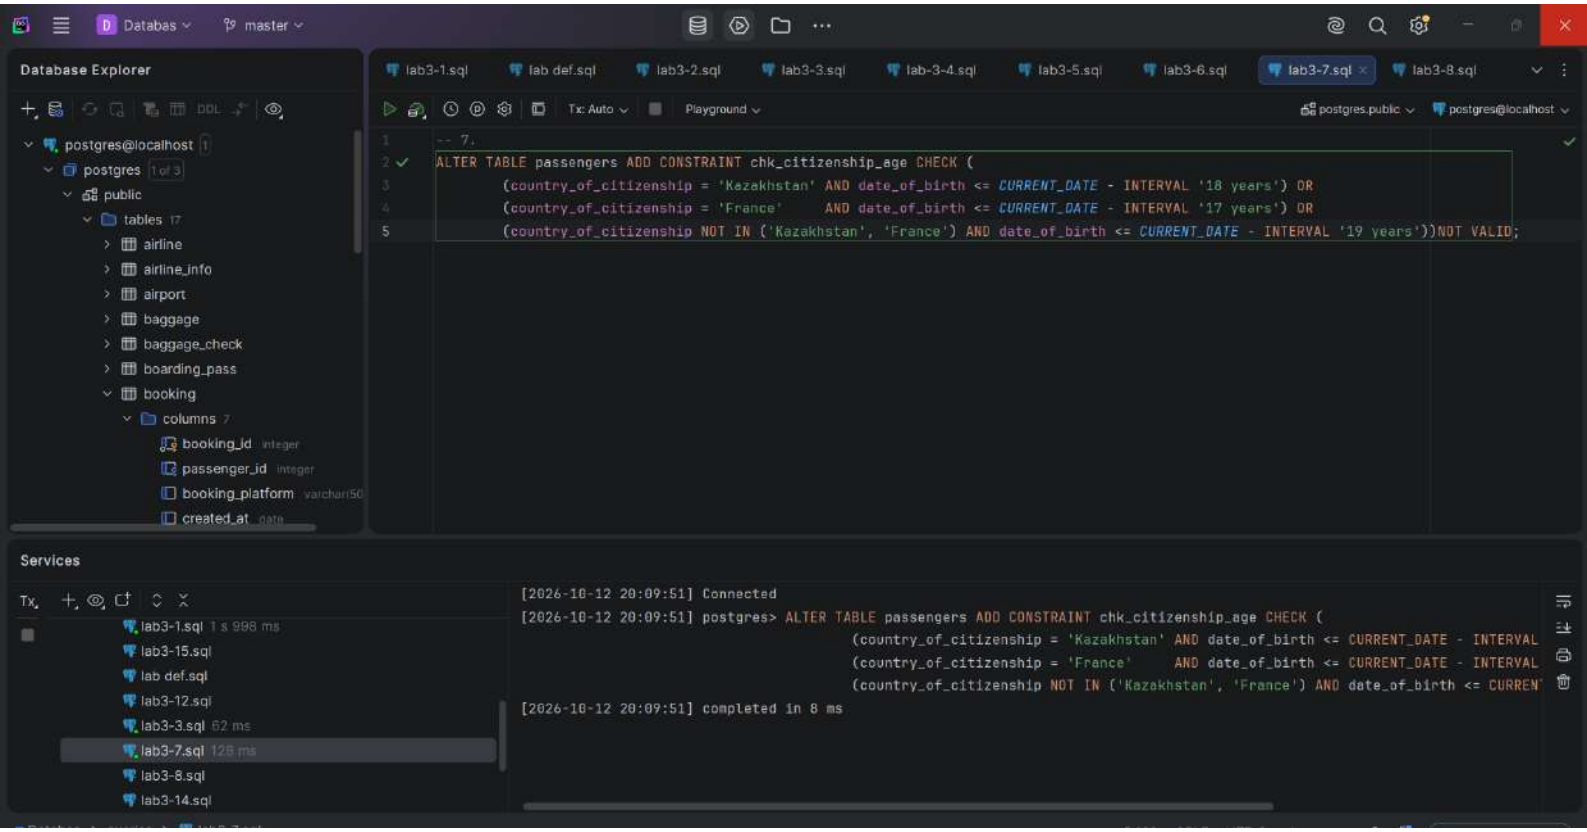

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
postgres
public
tables
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
columns
booking_id
passenger_id
booking_platform
created_at
-- 2.
ALTER TABLE booking ADD CONSTRAINT chk_booking_price CHECK (ticket_price >= 0 AND ticket_price <= 50000)
Services
lab3-6.sql
Query_2.sql
lab3-2.sql 246 ms
lab3-1.sql 1 s 998 ms
lab3-15.sql
lab def.sql
lab3-12.sql
lab3-3.sql
[2026-10-12 19:44:00] Connected
[2026-10-12 19:44:00] postgres> ALTER TABLE booking ADD CONSTRAINT chk_booking_price CHECK (ticket_price >= 0 AND ticket_pri
[2026-10-12 19:44:00] completed in 30 ms
Databas > queries > lab3-2.sql
2:105
CRLF
UTF-8
4 spaces

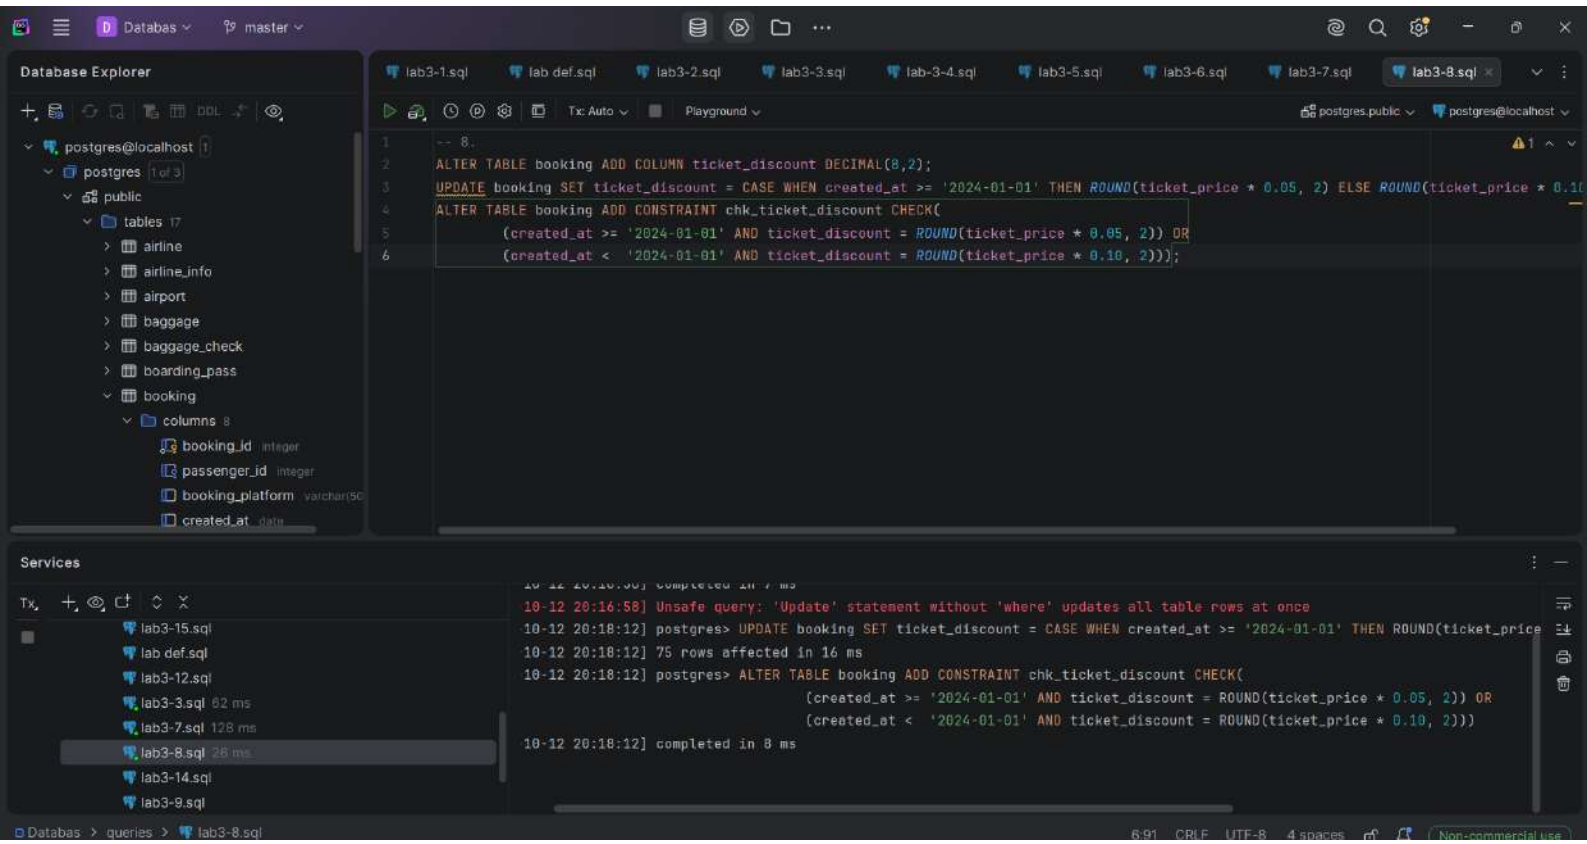

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
postgres
public
tables
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
columns
booking_id
passenger_id
booking_platform
created_at
-- 3.
ALTER TABLE baggage ADD CONSTRAINT chk_baggage_weight CHECK (weight_in_kg BETWEEN 1 AND 23) NOT VALID;

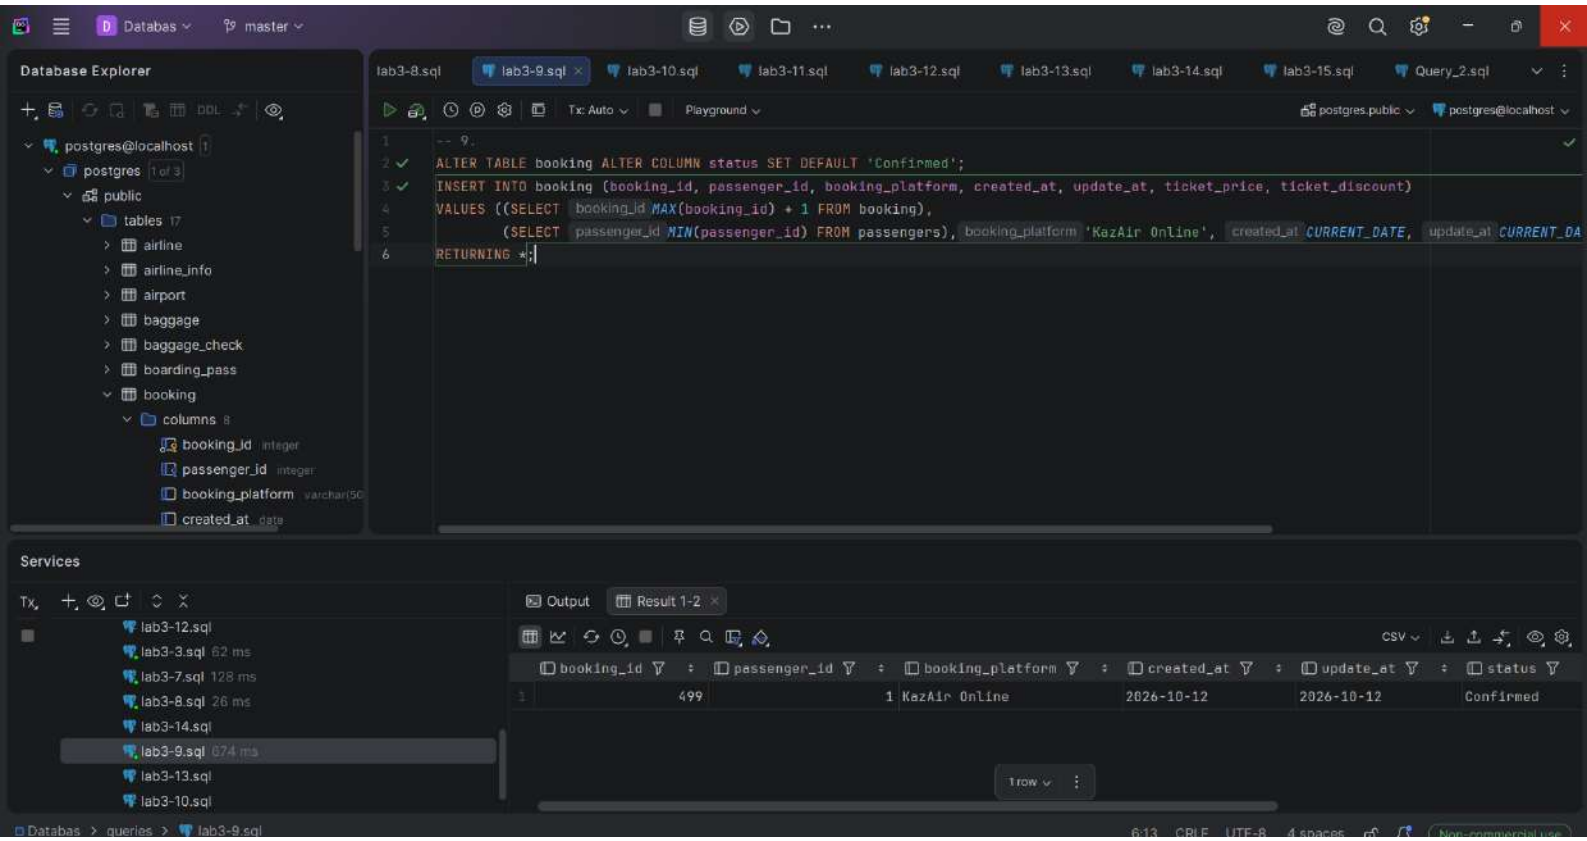

Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
postgres
public
tables
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
columns
booking_id
passenger_id
booking_platform
created_at
-- 4.
ALTER TABLE airport ADD CONSTRAINT chk_airport_name_len CHECK(LENGTH(airport_name) >= 10);
Services
Database
postgres@localhost
lab-3-4.sql
lab3-11.sql
lab3-5.sql
lab3-6.sql
Query_2.sql
lab3-2.sql
[2026-10-12 19:46:12] Connected
[2026-10-12 19:46:13] postgres> ALTER TABLE airport ADD CONSTRAINT chk_airport_name_len CHECK(LENGTH(airport_name) >= 10)
[2026-10-12 19:46:13] completed in 9 ms

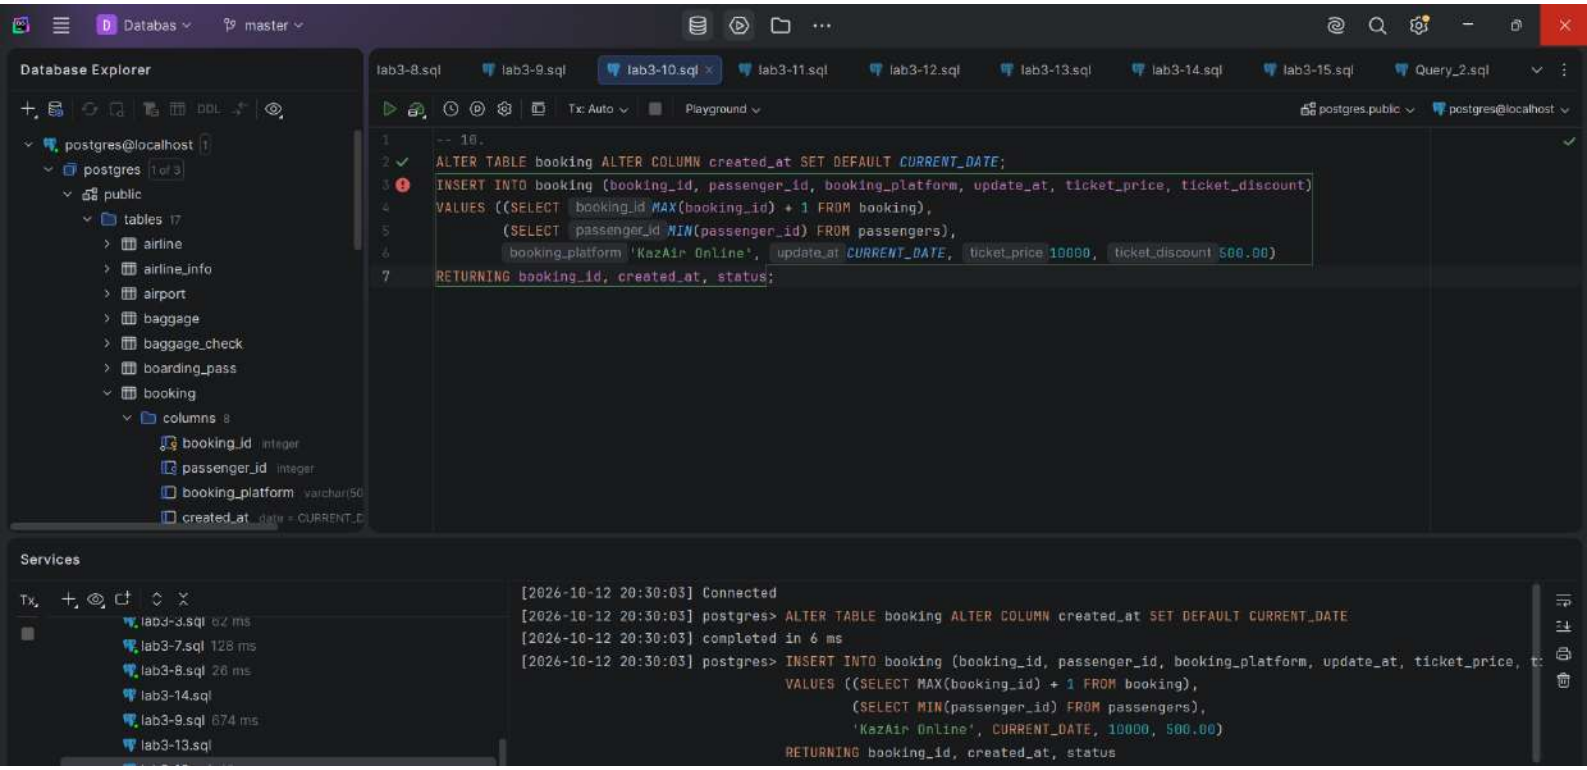

Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
-- 5.
ALTER TABLE airline ADD CONSTRAINT uq_airline_name UNIQUE (airline_name);
ALTER TABLE airport ADD CONSTRAINT uq_airport_name UNIQUE (airport_name);
ALTER TABLE passengers ADD CONSTRAINT uq_passport_number UNIQUE (passport_number);
ALTER TABLE boarding_pass ADD CONSTRAINT uq_boarding_seat UNIQUE (booking_id, seat);
ALTER TABLE booking ADD CONSTRAINT uq_booking_pass_plat UNIQUE (passenger_id, booking_platform, created_at);
ALTER TABLE baggage_check ADD CONSTRAINT uq_baggage_check UNIQUE (booking_id, passenger_id, created_at);
ALTER TABLE baggage ADD CONSTRAINT uq_baggage UNIQUE (booking_id, weight_in_kg, created_date);
ALTER TABLE booking_flight ADD CONSTRAINT uq_booking_flight UNIQUE (booking_id, flight_id, created_at);
ALTER TABLE flights ADD CONSTRAINT uq_flights UNIQUE (flight_no, airline_id, scheduled_departure, departure_airport_id)
ALTER TABLE security_check ADD CONSTRAINT uq_security_check UNIQUE (passenger_id, created_at, check_result);
Services
[2026-10-12 19:58:26] completed in 9 ms
[2026-10-12 19:58:26] postgres> ALTER TABLE booking_flight ADD CONSTRAINT uq_booking_flight UNIQUE (booking_id, flight_
[2026-10-12 19:58:26] completed in 10 ms
[2026-10-12 19:58:26] postgres> ALTER TABLE flights ADD CONSTRAINT uq_flights UNIQUE (flight_no, airline_
[2026-10-12 19:58:27] completed in 14 ms
[2026-10-12 19:58:27] postgres> ALTER TABLE security_check ADD CONSTRAINT uq_security_check UNIQUE (passenger_id, creat
[2026-10-12 19:58:27] completed in 8 ms


Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
postgres
public
tables
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
columns
booking_id integer
passenger_id integer
booking_platform
created_at
-- 6.
ALTER TABLE passengers ADD CONSTRAINT chk_gender_age CHECK (
(gender = 'Male' AND date_of_birth <= CURRENT_DATE - INTERVAL '18 years') OR
(gender = 'Female' AND date_of_birth <= CURRENT_DATE - INTERVAL '19 years') OR
gender NOT IN ('Male', 'Female'))NOT VALID;
Services
Database
postgres@localhost
lab-3-4.sql 122 ms
lab3-11.sql
lab3-5.sql 36 ms
lab3-6.sql 211 ms
Query_2.sql
lab3-2.sql 246 ms
[2026-10-12 20:03:13] Connected
[2026-10-12 20:03:13] postgres> ALTER TABLE passengers ADD CONSTRAINT chk_gender_age CHECK (
(gender = 'Male' AND date_of_birth <= CURRENT_DATE - INTERVAL '18 years') OR
(gender = 'Female' AND date_of_birth <= CURRENT_DATE - INTERVAL '19 years') OR
gender NOT IN ('Male', 'Female'))NOT VALID
[2026-10-12 20:03:13] completed in 8 ms
Databas > queries > lab3-6.sql
5:52 CRLF UTF-8 4 spaces
Non-commercial use


Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
-- 7.
ALTER TABLE passengers ADD CONSTRAINT chk_citizenship_age CHECK (
(country_of_citizenship = 'Kazakhstan' AND date_of_birth <= CURRENT_DATE - INTERVAL '18 years') OR
(country_of_citizenship = 'France' AND date_of_birth <= CURRENT_DATE - INTERVAL '17 years') OR
(country_of_citizenship NOT IN ('Kazakhstan', 'France') AND date_of_birth <= CURRENT_DATE - INTERVAL '19 years'))NOT VALID;
Services
[2026-10-12 20:09:51] Connected
[2026-10-12 20:09:51] completed in 8 ms


Databas
master
Database Explorer
lab3-1.sql
lab def.sql
lab3-2.sql
lab3-3.sql
lab-3-4.sql
lab3-5.sql
lab3-6.sql
lab3-7.sql
lab3-8.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost
postgres
public
tables 17
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
columns 8
booking_id integer
passenger_id integer
booking_platform varchar(5
created_at date
-- 8.
ALTER TABLE booking ADD COLUMN ticket_discount DECIMAL(8,2);
UPDATE booking SET ticket_discount = CASE WHEN created_at >= '2024-01-01' THEN ROUND(ticket_price * 0.05, 2) ELSE ROUND(ticket_price * 0.1
ALTER TABLE booking ADD CONSTRAINT chk_ticket_discount CHECK(
(created_at >= '2024-01-01' AND ticket_discount = ROUND(ticket_price * 0.05, 2)) OR
(created_at < '2024-01-01' AND ticket_discount = ROUND(ticket_price * 0.10, 2)));
Services
lab3-15.sql
lab def.sql
lab3-12.sql
lab3-3.sql 62 ms
lab3-7.sql 128 ms
lab3-8.sql 26 ms
lab3-14.sql
lab3-9.sql
10-12 20:16:58] Unsafe query: 'Update' statement without 'where' updates all table rows at once
10-12 20:18:12] postgres> UPDATE booking SET ticket_discount = CASE WHEN created_at >= '2024-01-01' THEN ROUND(ticket_price
10-12 20:18:12] 75 rows affected in 16 ms
10-12 20:18:12] postgres> ALTER TABLE booking ADD CONSTRAINT chk_ticket_discount CHECK(
(created_at >= '2024-01-01' AND ticket_discount = ROUND(ticket_price * 0.05, 2)) OR
(created_at < '2024-01-01' AND ticket_discount = ROUND(ticket_price * 0.10, 2)))
10-12 20:18:12] completed in 8 ms
Databas > queries > lab3-8.sql
6:91
CRLF
UTF-8
4 spaces
Non-commercial use


Databas
master
Database Explorer
lab3-8.sql
lab3-9.sql
lab3-10.sql
lab3-11.sql
lab3-12.sql
lab3-13.sql
lab3-14.sql
lab3-15.sql
Query_2.sql
Tx: Auto
Playground
postgres.public
postgres@localhost
postgres@localhost 1
postgres 1 of 3
public
tables 17
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
columns 8
booking_id integer
passenger_id integer
booking_platform varchar(50
created_at date
-- 9.
ALTER TABLE booking ALTER COLUMN status SET DEFAULT 'Confirmed';
INSERT INTO booking (booking_id, passenger_id, booking_platform, created_at, update_at, ticket_price, ticket_discount)
VALUES ((SELECT booking_id MAX(booking_id) + 1 FROM booking),
(SELECT passenger_id MIN(passenger_id) FROM passengers), booking_platform 'KazAir Online', created_at CURRENT_DATE, update_at CURRENT_DA
RETURNING *;
Services
Output
Result 1-2
CSV
lab3-12.sql
lab3-3.sql 62 ms
lab3-7.sql 128 ms
lab3-8.sql 26 ms
lab3-14.sql
lab3-9.sql 674 ms
lab3-13.sql
lab3-10.sql
booking_id
passenger_id
booking_platform
created_at
update_at
status
1
499
1
KazAir Online
2026-10-12
2026-10-12
Confirmed
1 row
Databas > queries > lab3-9.sql
6:13
CRLF
UTF-8
4 spaces
Non-commercial use


Database Explorer
lab3-8.sql
lab3-9.sql
lab3-10.sql
lab3-11.sql
lab3-12.sql
lab3-13.sql
lab3-14.sql
lab3-15.sql
Query_2.sql
postgres@localhost
postgres
public
tables 17
airline
airline_info
airport
baggage
baggage_check
boarding_pass
booking
columns 8
booking_id integer
passenger_id integer
booking_platform varchar(50
created_at date = CURRENT_D
-- 10.
ALTER TABLE booking ALTER COLUMN created_at SET DEFAULT CURRENT_DATE;
INSERT INTO booking (booking_id, passenger_id, booking_platform, update_at, ticket_price, ticket_discount)
VALUES ((SELECT MAX(booking_id) + 1 FROM booking),
(SELECT MIN(passenger_id) FROM passengers),
'KazAir Online', CURRENT_DATE, 10000, 500.00)
RETURNING booking_id, created_at, status;
Services
lab3-7.sql 128 ms
lab3-8.sql 26 ms
lab3-14.sql
lab3-9.sql 674 ms
lab3-13.sql
[2026-10-12 20:30:03] Connected
[2026-10-12 20:30:03] postgres> ALTER TABLE booking ALTER COLUMN created_at SET DEFAULT CURRENT_DATE
[2026-10-12 20:30:03] completed in 6 ms
[2026-10-12 20:30:03] postgres> INSERT INTO booking (booking_id, passenger_id, booking_platform, update_at, ticket_price,
VALUES ((SELECT MAX(booking_id) + 1 FROM booking),
(SELECT MIN(passenger_id) FROM passengers),
'KazAir Online', CURRENT_DATE, 10000, 500.00)
RETURNING booking_id, created_at, status