```sql
--1
ALTER TABLE Passengers
ADD CONSTRAINT chk_passengers_min_age
CHECK (date_of_birth <= CURRENT_DATE - INTERVAL '10 years');

SELECT conname AS constraint_name,
       contype AS type,
       pg_get_constraintdef(oid) AS definition
FROM pg_constraint
WHERE conrelid = 'passengers'::regclass
  AND conname = 'chk_passengers_min_age';
```

Data Output | Messages | Notifications

Showing rows: 1 to 1 | Page No: 1

	constraint_name name	type "char"	definition text
1	chk_passengers_min_a...	c	CHECK ((date_of_birth <= (CURRENT_DATE - '10 years'::interv...

```sql
--2
ALTER TABLE Booking
ADD CONSTRAINT chk_booking_ticket_price
CHECK (ticket_price >= 0 AND ticket_price <= 50000);

SELECT conname AS constraint_name,
       contype AS type,
       pg_get_constraintdef(oid) AS definition
FROM pg_constraint
WHERE conrelid = 'booking'::regclass
  AND conname = 'chk_booking_ticket_price';
```

Data Output | Messages | Notifications

Showing rows: 1 to 1 | Page No: 1

	constraint_name name	type "char"	definition text
1	chk_booking_ticket_pri...	c	CHECK (((ticket_price >= (0)::numeric) AND (ticket_price <= (50000)::numer...

```sql
--3
ALTER TABLE Baggage
ADD CONSTRAINT chk_baggage_weight
CHECK (weight_in_kg>=1 AND weight_in_kg<=23) NOT VALID;

SELECT conname AS constraint_name,
       contype AS type,
       pg_get_constraintdef(oid) AS definition
FROM pg_constraint
WHERE conrelid = 'baggage'::regclass
  AND conname = 'chk_baggage_weight';
```

Data Output | Messages | Notifications

Showing rows: 1 to 1 | Page No: 1 of 1

	constraint_name name	type "char"	definition text
1	chk_baggage_weig...	c	CHECK (((weight_in_kg >= (1)::numeric) AND (weight_in_kg <= (23)::numeric))) NOT V...

```sql
--4
ALTER TABLE Airport
ADD CONSTRAINT chk_airport_name_length
CHECK (LENGTH(airport_name)>=10);

SELECT conname AS constraint_name,
       contype AS type,
       pg_get_constraintdef(oid) AS definition
FROM pg_constraint
WHERE conrelid = 'airport'::regclass
  AND conname = 'chk_airport_name_length';
```

Data Output | Messages | Notifications

Showing rows: 1 to 1 | Page No: 1 of

	constraint_name name	type "char"	definition text
1	chk_airport_name_len...	c	CHECK ((length((airport_name)::text) >= 1...

Query | Query History | Scratch Pad

```
293  --5
294  ALTER TABLE airline
295  ADD CONSTRAINT uq_aieline_code UNIQUE (airline_code);
296
297  ALTER TABLE Airport
298  ADD CONSTRAINT uq_airport_name UNIQUE (airport_name);
299
300  ALTER TABLE Passengers
301  ADD CONSTRAINT uq_passengers_passport UNIQUE (passport_number);
302
303  ALTER TABLE Flights
304  ADD CONSTRAINT uq_flights_airline_airport_time
305  UNIQUE (airline_id, departing_airport_id, sch_departure_time);
306
307  ALTER TABLE Booking
308  ADD CONSTRAINT uq_booking_id_flight UNIQUE (booking_id, flight_id);
309
310  ALTER TABLE Booking_flight
311  ADD CONSTRAINT uq_booking_flight UNIQUE (booking_id, flight_id);
```

Data Output | Messages | Notifications

Showing rows: 1 to 58 | Page No: 1 of 1

	table_name regclass	constraint_name name	definition text
1	airline	uq_aieline_code	UNIQUE (airline_code)
2	airport	uq_airport_name	UNIQUE (airport_name)
3	baggage	uq_baggage_id_booking	UNIQUE (baggage_id, booking_id)
4	baggage_check	uq_baggage_check_booking	UNIQUE (booking_id)
5	boarding_pass	uq_boarding_pass_booking	UNIQUE (booking_id)
6	booking	uq_booking_id_flight	UNIQUE (booking_id, flight_id)
7	booking_flight	uq_booking_flight	UNIQUE (booking_id, flight_id)
8	flights	uq_flights_airline_airport_time	UNIQUE (airline_id, departing_airport_id, sch_departure_time)

```sql
--6
ALTER TABLE Passengers
ADD CONSTRAINT chk_passengers_gender_age
CHECK (
    (gender='Male' AND date_of_birth<= CURRENT_DATE - INTERVAL '18 years')
 OR (gender = 'Female' AND date_of_birth <= CURRENT_DATE - INTERVAL '19 years')
 OR (gender NOT IN ('Male', 'Female'))
);
SELECT conname AS constraint_name,
       contype AS type,
       pg_get_constraintdef(oid) AS definition
FROM pg_constraint
WHERE conrelid = 'passengers'::regclass
  AND conname = 'chk_passengers_gender_age';
```

Data Output | Messages | Notifications

Showing rows: 1 to 1 | Page No: 1 of 1

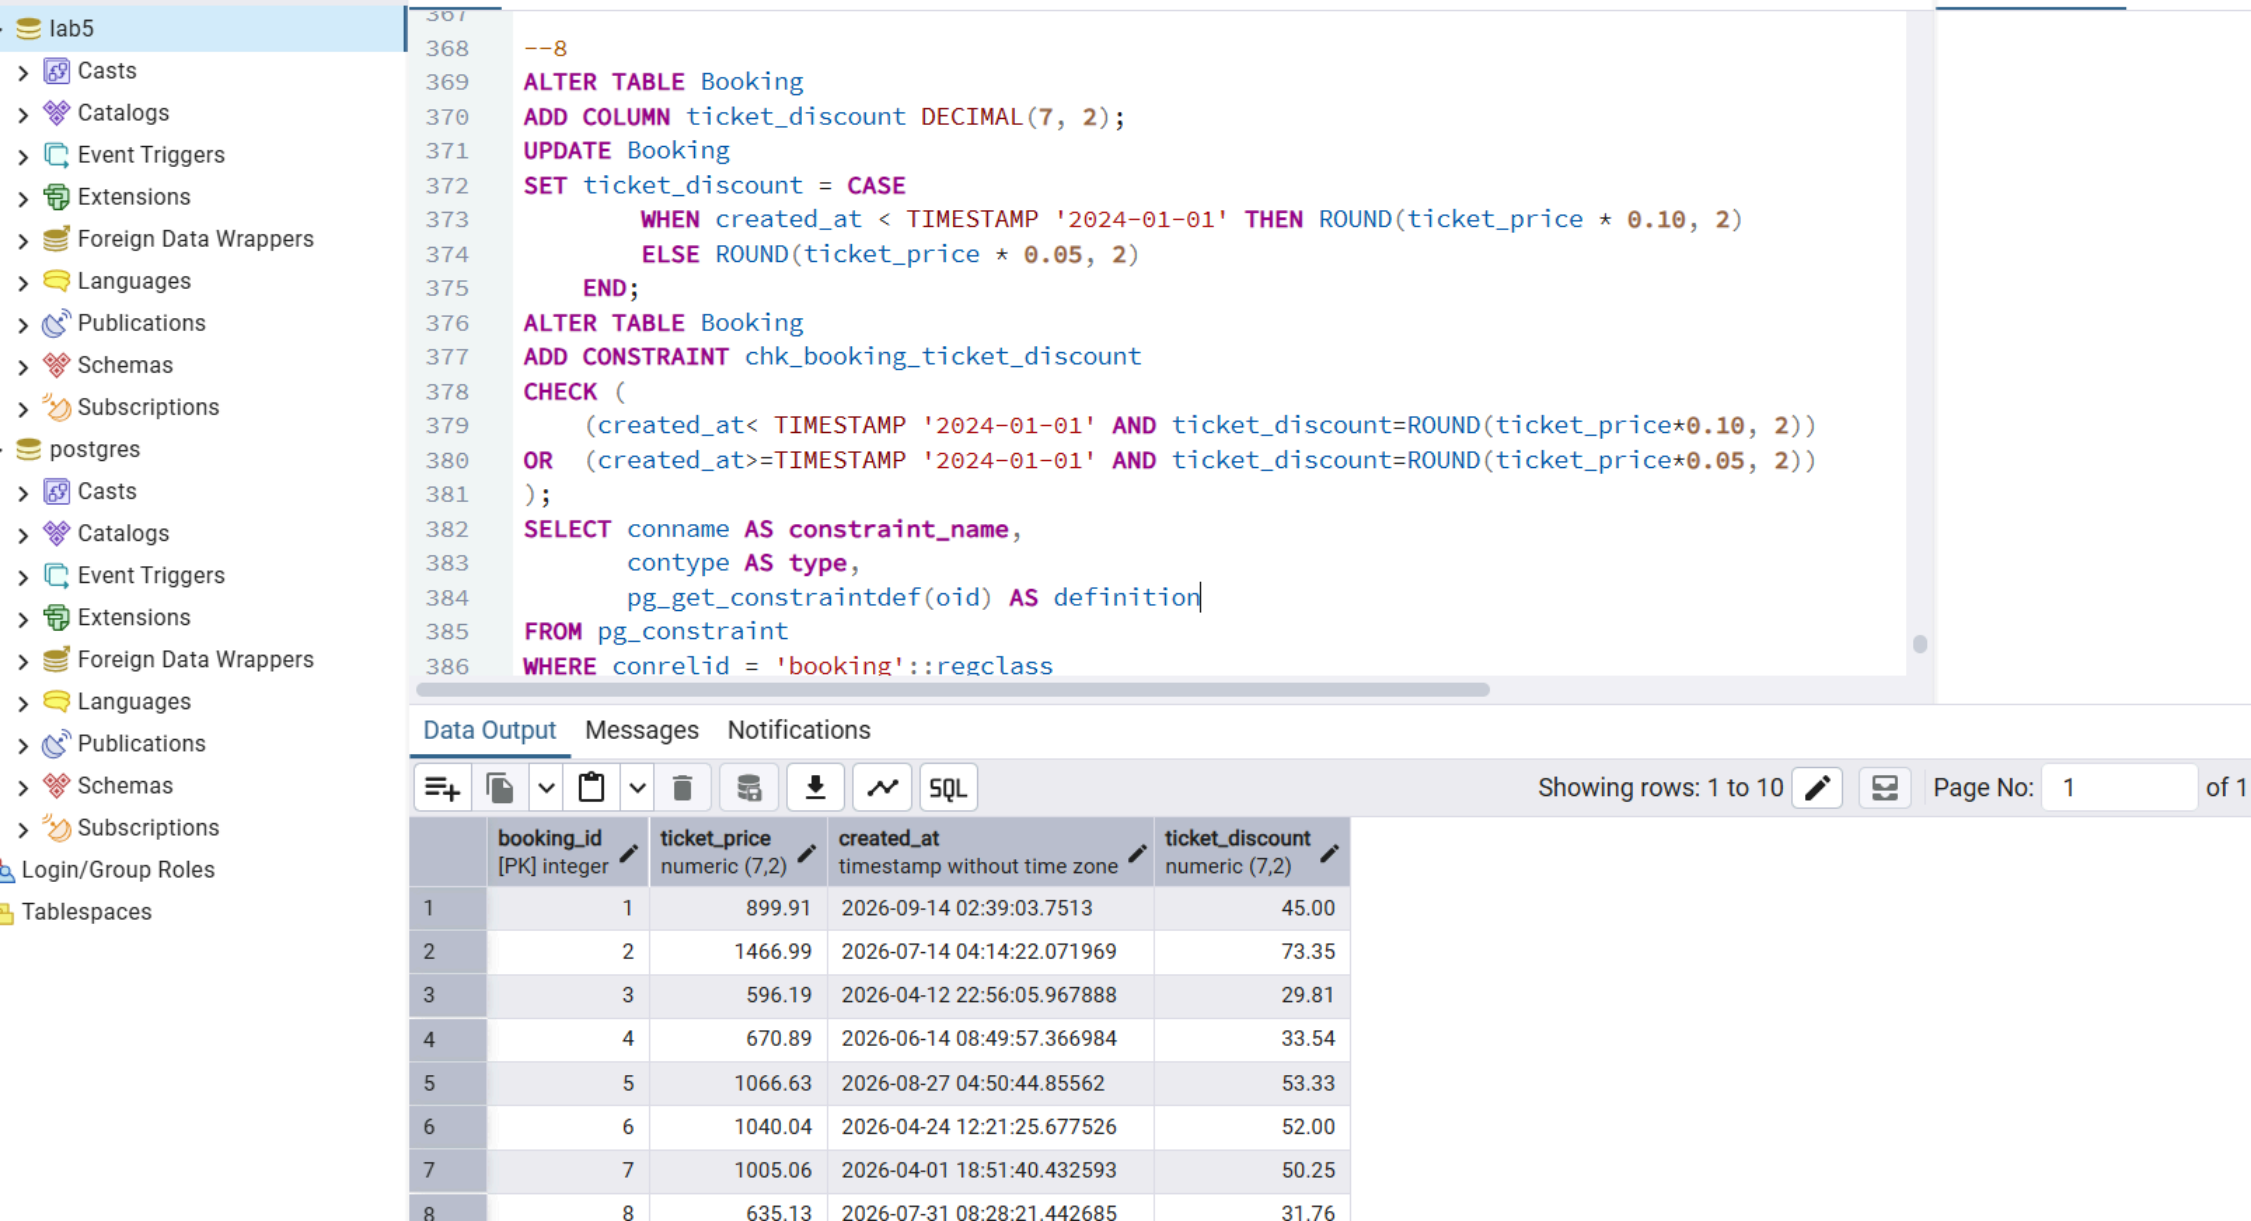
	constraint_name name	type "char"	definition text
1	chk_passengers_gender_a...	c	CHECK (((((gender)::text = 'Male'::text) AND (date_of_birth <= (CURRENT_DATE - '18 years'::interval))) OR (((gender)::text = 'Female'::text) AND (date_of_birth <= (CURRE

```
349
350  --7
351  ALTER TABLE Passengers
352  ADD CONSTRAINT chk_passengers_citizenship_age
353  CHECK (
354      (country_of_citizenship = 'Kazakhstan' AND date_of_birth <= CURRENT_DATE - INTERVAL '18 ye
355   OR (country_of_citizenship = 'France'     AND date_of_birth <= CURRENT_DATE - INTERVAL '17 ye
356   OR (country_of_citizenship NOT IN ('Kazakhstan', 'France')
357                                             AND date_of_birth <= CURRENT_DATE - INTERVAL '19 ye
358  );
359
360  SELECT conname AS constraint_name,
361         contype AS type,
362         pg_get_constraintdef(oid) AS definition
363  FROM pg_constraint
364  WHERE conrelid = 'passengers'::regclass
365    AND conname = 'chk_passengers_citizenship_age';
```

Data Output | Messages | Notifications

Showing rows: 1 to 1 | Page No: 1 of 1

	constraint_name name	type "char"	definition text
1	chk_passengers_citizenship_a...	c	CHECK (((((country_of_citizenship)::text = 'Kazakhstan'::text) AND (date_of_birth <= (CURRENT_DATE - '18 years'::interval))) OR (((country_of_citizenship)::text = 'Fra


lab5
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas
Subscriptions
postgres
Casts
Catalogs
Event Triggers
Extensions
Foreign Data Wrappers
Languages
Publications
Schemas
Subscriptions
Login/Group Roles
Tablespaces
--8
ALTER TABLE Booking
ADD COLUMN ticket_discount DECIMAL(7, 2);
UPDATE Booking
SET ticket_discount = CASE
WHEN created_at < TIMESTAMP '2024-01-01' THEN ROUND(ticket_price * 0.10, 2)
ELSE ROUND(ticket_price * 0.05, 2)
END;
ALTER TABLE Booking
ADD CONSTRAINT chk_booking_ticket_discount
CHECK (
(created_at< TIMESTAMP '2024-01-01' AND ticket_discount=ROUND(ticket_price*0.10, 2))
OR (created_at>=TIMESTAMP '2024-01-01' AND ticket_discount=ROUND(ticket_price*0.05, 2))
);
SELECT conname AS constraint_name,
contype AS type,
pg_get_constraintdef(oid) AS definition
FROM pg_constraint
WHERE conrelid = 'booking'::regclass
Data Output
Messages
Notifications
SQL
Showing rows: 1 to 10
Page No: 1
of 1
booking_id [PK] integer
ticket_price numeric (7,2)
created_at timestamp without time zone
ticket_discount numeric (7,2)
1 1 899.91 2026-09-14 02:39:03.7513 45.00
2 2 1466.99 2026-07-14 04:14:22.071969 73.35
3 3 596.19 2026-04-12 22:56:05.967888 29.81
4 4 670.89 2026-06-14 08:49:57.366984 33.54
5 5 1066.63 2026-08-27 04:50:44.85562 53.33
6 6 1040.04 2026-04-24 12:21:25.677526 52.00
7 7 1005.06 2026-04-01 18:51:40.432593 50.25
8 635.13 2026-07-31 08:28:21.442685 31.76

```sql
--9
ALTER TABLE Booking
ALTER COLUMN status SET DEFAULT 'Confirmed';

INSERT INTO Booking (booking_id, flight_id, passenger_id, booking_platform,
                     created_at, updated_at, ticket_price, ticket_discount)
VALUES (2000, 1, 1, 'Website', now(), now(), 1000, 50.00);

SELECT booking_id, status, ticket_price, ticket_discount, created_at
FROM Booking
WHERE booking_id = 2000;
```

Data Output | Messages | Notifications

Showing rows: 1 to 1 | Page No: 1 of 1

	booking_id [PK] integer	status character varying (50)	ticket_price numeric (7,2)	ticket_discount numeric (7,2)	created_at timestamp without time zone
1	2000	Confirmed	1000.00	50.00	2026-10-11 13:06:31.339991

```sql
--10
ALTER TABLE Booking
ALTER COLUMN created_at SET DEFAULT CURRENT_TIMESTAMP;

ALTER TABLE Booking
ALTER COLUMN updated_at SET DEFAULT CURRENT_TIMESTAMP;

SELECT column_name, column_default
FROM information_schema.columns
WHERE table_name = 'booking'
  AND column_name IN ('created_at', 'updated_at');
```

Data Output | Messages | Notifications

Showing rows: 1 to 2 | Page No: 1

	column_name name	column_default character varying
1	created_at	CURRENT_TIMESTA...
2	updated_at	CURRENT_TIMESTA...