

The Path to DotA 2 Master

An intelligent model to predict and visualize match result in DotA 2

Yuehua Xu¹, Huanli Wang¹, Jingfan Sun², Hong Cao¹, Xueyang Xu²

Abstract—People are eager to know the result even before a game begins. So the results prediction is much attractive. DotA 2, the online video game, is widely accepted as a kind of electronic sport program. Our team figures out the correlation between hero selection and winning rates. We then build a web and data-driven system to visualize these results online. Through this system, we apply machine learning methods to train a prediction model by using data from an official, public source and finally draw an conclusion.

NOMENCLATURE

Terminology

DotA 2	Defense of The Ancients 2
hero	The essential element of DotA
mode	A set of restrictions within which the game can be played
skill	The level of a certain match
MidLane	The middle of the three lanes in the map
SafeLane	The easier and less risky lane for each faction
OffLane	The more risky lane for each faction
Jungle	A neutral area between each lane in the map

Indices and Sets

S	Set of attributes
-----	-------------------

Attribute

a_{bl}	The base performance of each hero
a_{ml}	The ability of a hero to rival with enemies on MidLane
a_{sl}	The ability of a hero to rival with enemies on SafeLane
a_{ol}	The ability of a hero to rival with enemies on OffLane
a_{jl}	The performance of a hero in Jungle
a_{dps}	Initialism for damage per second, a measure of the damage dealt by a hero or unit over one second
a_p	The ability of a hero to destroy enemy's tower
a_n	The ability of a hero to deal a large amount of damage in a very short span of time
a_{dur}	The ability to take a lot of damage and abuse before dying
a_i	The ability to take advantage in the early stage of a battle
a_{dis}	The ability to impede other heroes' abilities to act

a_h	The ability to heal teammates
a_{aai}^{ij}	Initialism for anti-advantage-index, a higher value means the hero i has a higher advantage over hero j
a_{cai}^{ij}	Initialism for combo-advantage-index, a higher value means hero i can help hero j better when they are teammates
a_c	A measure to evaluate the coordination among allies and advantage among enemies of a specific hero in a team
id	The unique index assigned to a past match

I. INTRODUCTION

The market of E-sports is growing extremely fast. DotA is the most popular one in this area. Essentially an online game, DotA generates a tremendous amount of data from every match played on its servers. Based on these data, we create a mathematical model to predict the winning possibility of each match using the machine learning methods. A web and data-driven system is then built to visualize these results and recommend the optimal combination of heroes to win the game.

Hero selection is an essential part of DotA 2. It is nearly impossible to win without a well coordinated team base. Hero selection is based not only on heroes' attributes but also on their synergy with allied heroes and their performance against enemy heroes. In DotA 2, there are hundreds of heroes and each of them has its own set of strengths and weaknesses, which means mastering selecting heroes is quite challenging. Many teams rely on the experience of players and their impromptu inspiration for matches (selecting heroes). However, most ordinary players do not have such talent and this limits their performance. With the help of our proposed system, a rookie is able to test different team bases online and finally gain experience from doing comparisons.

This paper is structured as follows: Section II summaries previous work in this area, Section III briefly describes the game mechanism of DotA 2, and Section IV introduces data collected and pre-processing of data. In Section V, the structure of proposed system is presented. Details about the match prediction model can be found in section VI. Thereafter, we are able to predict the winning probability of any combination of heroes. The model is trained and tested under various situations. Results and Summary of Innovations are shown in section VII and section VIII, respectively. Finally, conclusions are drawn in Section IX.

¹College of Computing, Georgia Institute of Technology, Atlanta, GA 30332 USA

²School of Electrical and Computer Engineering, Georgia Institute of Technology, Atlanta, GA 30332 USA

II. SURVEY

In recent years, there has been a number of publications to predict game results in different domains, including traditional sports and E-sports.

Various ideas have been come up with to predict traditional sport games results. Cao[1] used an SVM, naive Bayes, and a multilayer perceptron neural network to predict basketball game results. Kahn[2] proposed a multilayer perceptron neural network to predict football results. Trawinski[3] considered the prediction problem as a binary classification. He designed a fuzzy model to predict ACB league results by using a three-phase modeling process. Buursma[4] selected a set of features and used a number of classification algorithms including simple and logistic regression, Bayesian network, naive Bayes, and decision tree to predict soccer match results.

In the DotA 2 domain, Song et al[5] used Logistic regression to predict winning side based on hero lineups, but the result was not satisfying given the inadequacy of factors which was taken into account. Kinkade[6] proposed two win predictors for DotA 2 analysis. One of them used full post-match data and the other used only hero selection data. Neidhardt et al.[7] explored the impacts of different types of team factors on performance (like Team Ecosystem Factors, Team Process and Duration and etc), which are compositional, relational and ecosystem factors. Conley et al.[8] presented a hero recommendation engine, detailed with method of data collection and features selection. An augmentation algorithm was presented by Kalyanaraman[9] to predict the outcome of DotA 2 matches and recommend the hero lineups.

Some researches focus on spatio-temporal behaviors across four skill tiers and two measures: zone changes and intra-team distance[10] in order to analyze team behaviors. Eggert et al.[11] used the logistic regression to classify players' behavior based on attributes they constructed from replay files. Pobiedina et al.[12][13] investigated that to which extent different factors of the team in the game, such as role distribution, experience, number of friends and national diversity, have influences on the team's success.

If game-state data can be collected real-timely from the game APIs, it is possible to perform a machine learning algorithm to predict the result of an ongoing DotA 2 game as it is progressing. DotA 2 provides a powerful replay system which preserves almost all necessary information. That is, replays of the DotA 2 can be used as the training dataset. Features and patterns extracted from replays will help to create the model of result prediction. Johansson and Wikström[14] performed several algorithms to different models and the Random Forest came out as the most accurate one.

III. DEFENCE OF THE ANCIENTS 2

Defense of the Ancients 2 (DotA 2)[19] is a Free-to-Play (F2P) game that originated from the DotA mod of Warcraft 3: Reign of Chaos which was released in 2003. The mod became popular and supported a substantial e-sports scene.[18] By 2009, Valve began developing DotA 2 as a standalone game.

It went into beta testing in 2011. DotA 2 is today the most played game on the online distribution platform Steam, in itself one of the most heavily trafficked digital game platforms in the world. DotA 2 also hosts the biggest prize pools in e-sports. Furthermore, the game has a reported number of 7.86 million of monthly active players and achieved a revenue of 80 million USD in 2013 via micro-transactions which are limited to selling cosmetic items.[17]

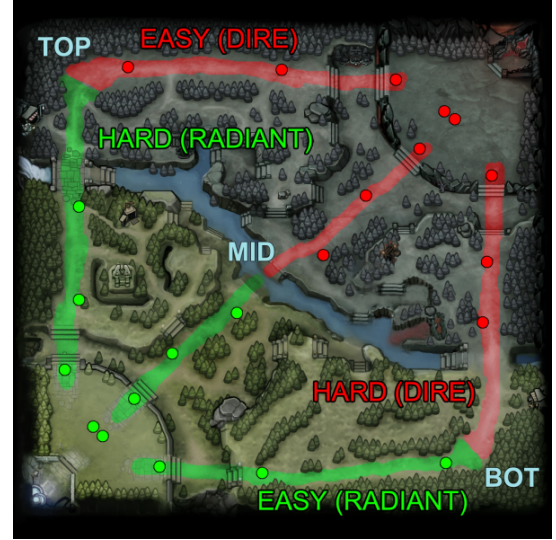


Fig. 1. The DotA 2 map. The Radiant base is at the bottom left, the Dire base at the top right.

A. Game Process

DotA 2 is played by two teams of 5 players, each of them controlling one avatar-character being selected from a roster of 112 predefined heroes. Each hero has different abilities and is suited for different roles in the game, e.g. for dealing damage at a distance. Each hero can gain levels similar to an archetypical character in a Role-Playing Game. Additionally, a hero can be equipped with a variety of objects that improve the characters base statistics or increase, alter or add new abilities. Items are bought with gold being earned during the game, e.g. from killing other players characters, creeps or towers (see below). Experience to level up characters and thereby unlock better versions of the heroes abilities or new abilities, is earned in a similar way. Tactics and strategy are key components in the game, and communication between team members is very important. Players can communicate via text chat, voice chat, alert messages in the arena itself (pings) or by writing on the minimap. The game is viewed from an isometric perspective. Games have no time limit, but the matches used in the current work average about 40 minutes in length. The two teams compete in a geographically balanced, square virtual arena, and the same arena is used in every match. The arena is split in two parts, with each half owned by one team at the beginning of a match (Figure 2). The arena contains a variety of game-related features, most importantly a base for each team with a central building, the

ancient, which the opposing team must destroy to win. The ancients are guarded by a series of defensive structures called towers which provide defensive capabilities. Additionally, the two bases regularly spawn computer-controlled units called creeps which rush the opposing teams towers and players. The presence of towers and creeps results in an unstable balance that oscillates slowly [5]. There are three main pathways through the map, referred to as lanes (Figure 1). These are differentiated top, middle, and bottom. The lanes form vital strategic points of attack on the opposing teams defences. However, there are a variety of sub-environments in the DotA 2 environment, which sees different tactical and strategic uses. For example, the jungle area in between the lanes form a means for levelling up a hero via killing regularly re-spawning computer-controlled neutral units, as well as for launching surprise attacks on enemy players or creeps.

IV. DATA AND PRE-PROCESSING

The quality of dataset is essentially important for training of prediction model. The dataset we used can be divided into three parts:

- 1) Hero attributes
- 2) Advantage indices
- 3) Historical match data

Among these three, both *Hero attributes* and *Historical match data* are both raw data and are available online. A Python script is written to acquire these data from *DotA 2 API* [?]. *Advantage indices* is a secondary dataset which is processed and calculated based on *Hero attributes*. Detailed description can be found below.

A. Hero attributes

There are 112 heroes included in our analysis. Each hero has two set of attributes (The meaning of these attributes can be found in NOMENCLATURE).

- Lane Attributes: $\{a_{bl}, a_{ml}, a_{sl}, a_{ol}, a_{jl}\}$
- Battle Attributes: $\{a_{dps}, a_p, a_n, a_{dur}, a_i, a_{dis}, a_h\}$

The range of both *Lane Attributes* and *Battle Attributes* are from 0 to 10. The higher the value, the higher the performance of that hero on this certain attribute.

B. Advantage indices

Based on *Hero attributes*, we introduce two indices *anti-advantage-index* and *combo-advantage-index* for each hero pair $\{\text{Hero } i, \text{Hero } j\}$.

$$a_{aai}^{ij} = \frac{\text{Average winning rate when } i \text{ and } j \text{ are enemy}}{\text{Average winning rate of } i}$$

$$a_{cai}^{ij} = \frac{\text{Average winning rate when } i \text{ and } j \text{ are teammates}}{\text{Average winning rate of } i}$$

In this way, we create two 112×112 matrices, *anti-advantage-index-matrix* and *combo-advantage-index-matrix*. The entry on i th row and j th column of each matrix is the *anti-advantage-index* a_{aai}^{ij} and *combo-advantage-index* a_{cai}^{ij} of this hero pair $\{\text{Hero } i, \text{Hero } j\}$ respectively.

C. Historical match data

There are over 2.7 billion historical matches data available online. We collected 100 thousand matches for model training. Each *Historical match data* has 12 entries $\{id, result, \{\text{five heroes of first team}\}, \{\text{five heroes of second team}\}\}$. id is the unique index assigned to a past match. $result$ is either 0 or 1, which indicates "win" or "lose".

V. STRUCTURE OF PROPOSED SYSTEM

Figure. 2 is the general structure of the proposed web and data-based system. The whole system are divided into two major subsystems, Training Subsystem and Web-Analysis Subsystem.

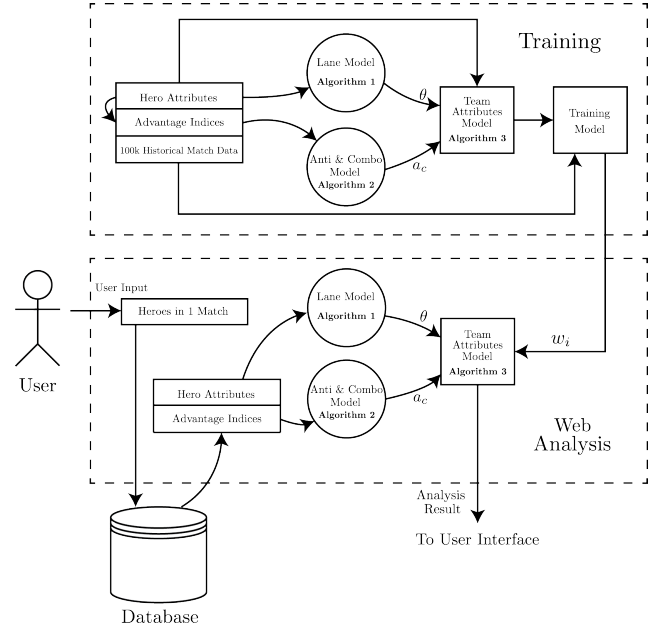


Fig. 2. Detailed structure of proposed web and data-based system

A. Training Subsystem

Based on the data collecting and pre-processing method from Section IV, we generate *Hero attributes*, *Advantage indices*, and collected *Historical match data* from 100k matches in total. These datasets (at top-left side in Figure. 2) form the foundation for match prediction algorithms proposed in Section VI.

In Training subsystem, dataset *Hero attributes* and *Advantage indices* are sent to **Lane Model (Algorithm 1)** and **Anti & Combo Model (Algorithm 2)**, respectively. The output of these two models are Resource-Adjustment-Index θ and Advantage-Adjustment-Index a_c . These two parameters, along with dataset *Hero attributes* itself, are sent to **Team Attributes Model (Algorithm 3)**.

The subsystem is then trained based on the output of **Algorithm 3** and 100k *Historical match data*. Finally, we obtain weighted parameters w_i for each model attributes. These weighted parameters are used to calculate analysis results (winning rate, etc.) in Web-Analysis subsystem.

B. Web-Analysis Subsystem

The Web-Analysis subsystem is an interface between website users and our proposed prediction model. A screen shot of the website ¹ is presented in Figure. 3.

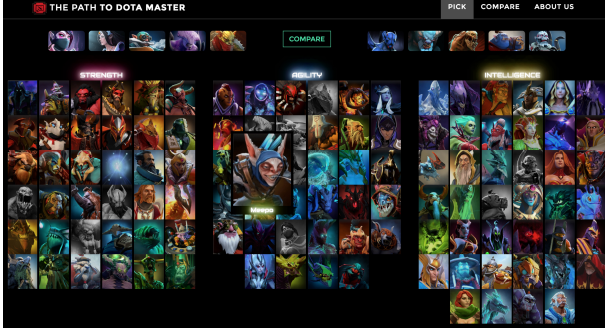


Fig. 3. A screen shot of user interface on the website for web analysis subsystem. url: <http://believerw.github.io/ThePathToDotAMaster/index.html>

Datasets *Hero attributes* and *Advantage indices* are stored in a database (bottom-left corner of Figure. 2). Whenever a website user enters the 10 hero names of both teams, subsystem searches in the database and selects all the attributes related to these 10 heroes. These attributes are sent to **Lane Model (Algorithm 1)** and **Anti & Combo Model (Algorithm 2)** which are fast enough to be implemented in the web analysis. Combined with the pre-trained weighted parameters w_i , we are able to calculate all the results needed from **Team Attributes Model (Algorithm 3)**. Later, Web-Analysis subsystem performs a data visualization on the user interface and users can read it directly from the website.

VI. MATCH PREDICTION MODEL

Basically, strength of each team base is modeled as a Gaussian distribution.

$$f_1(x|\mu_1, \sigma_1^2) = \frac{1}{\sqrt{2\sigma_1^2\pi}} e^{-\frac{(x-\mu_1)^2}{2\sigma_1^2}}$$

$$f_2(x|\mu_2, \sigma_2^2) = \frac{1}{\sqrt{2\sigma_2^2\pi}} e^{-\frac{(x-\mu_2)^2}{2\sigma_2^2}}$$

where μ_1 and μ_2 represent the average strength of each team while σ_1 and σ_2 models the stability of performance. After obtaining these parameters from training algorithm, we are able to calculate the difference of these two distributions. The result we get is also a Gaussian distribution which we denote as $f_3(x|\mu_3, \sigma_3^2)$.

$$f_3(x|\mu_3, \sigma_3^2) = \frac{1}{\sqrt{2(\sigma_1^2 + \sigma_2^2)\pi}} e^{-\frac{(x-(\mu_1 - \mu_2))^2}{2(\sigma_1^2 + \sigma_2^2)}}$$

Then, we calculate the cdf of f_3 and name it g_3 . The value at $x = 0$ is the winning rate (possibility of winning) of second team. For example, in Figure. 4, we provide a set of typical values for f_1 and f_2 .

$$f_1 : \mu_1 = 7.34, \sigma_1 = 47.74$$

$$f_2 : \mu_2 = -4.42, \sigma_2 = 42.58$$

$$f_3 : \mu_3 = 11.76, \sigma_3 = 64.49$$

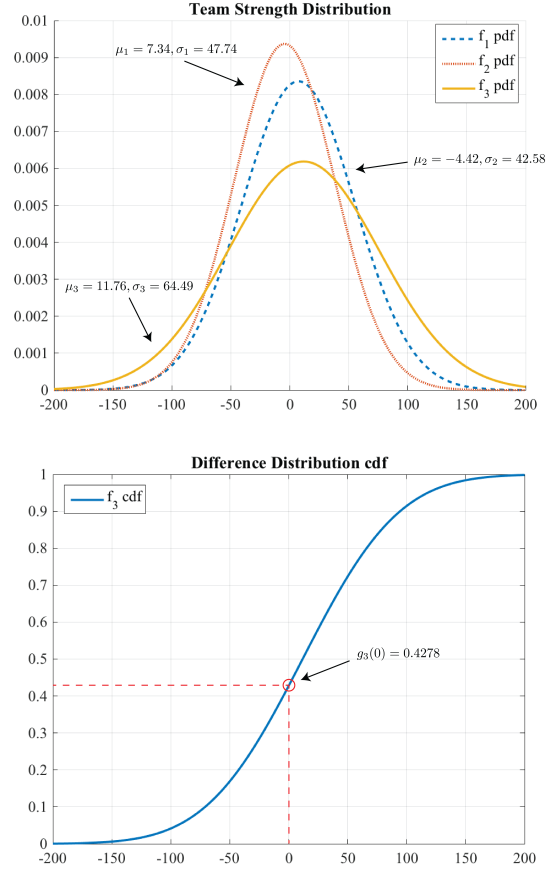


Fig. 4. Team strength distribution

Based on Figure. 4, we find $g_3(0) = 0.4278$. It means the winning rate of second team is 42.78%, the winning rate of first team is $100\% - 42.78\% = 57.22\%$.

Now, we describe the training algorithms in detail. There are mainly three algorithms used in match prediction model, Lane Model (Algorithm 1), Anti & Combo Model (Algorithm 2) and Team Attributes Model (Algorithm 3).

A. Lane Model

In DotA 2, the performance of a hero is greatly impacted by resource. However, the dataset *Hero attributes* only has the data of heroes in normal resource situation. To improve the accuracy of prediction model, we introduce the Lane Model with which we can show the level of resource by a Resource-Adjustment-Index θ .

As is shown in **Algorithm 1**, we get the base performance data for heroes in both teams first. After training the weight α , we perform an optimization and calculate the θ we need. θ is in a range of $[0, 2]$. The higher the θ , we higher the adjustment for team 1. For example, a $\theta = 1.2$ means that

¹<http://believerw.github.io/ThePathToDotAMaster/index.html>

Algorithm 1 Lane Model

```
function LANE CMP(radiant, dire)  
  for side in radiant, dire do  
    if side has at least one hero perfer MidLane then  
      Find the hero with max ability in MidLane with preference of MidLane: M  
    else  
      Find the hero with max ability in MidLane and time decay rate 0.85: M  
    end if  
    if there are hero in jungle then  
      Find the hero with max ability in jungle: J  
      Find the hero with max ability in OffLane and time decay rate 0.7: O  
      Set the other two heroes in SafeLane and get the sum of abilities in SafeLane: S  
      Get the general ability with hero in jungle of side:  $L_1 = (M + J + O + S)/5$   
    else  
      find the max sum ability of two heroes in SafeLane and two heroes in OffLane: S  
      Get the general ability with hero in jungle of side:  $L_2 = (M + S)/5$   
    end if  
     $L[side] = \max(L_1, L_2)$   
  end for  
   $\theta = 2/(1 + \exp((L[dire] - L[radiant])/\alpha))$   
end function
```

the performance of team 1 will be strengthened by a factor of 1.2 because they have better resource. On the contrary, the performance of team 2 is weakened by $2 - 1.2 = 0.8$ because the lack of resource limits their abilities.

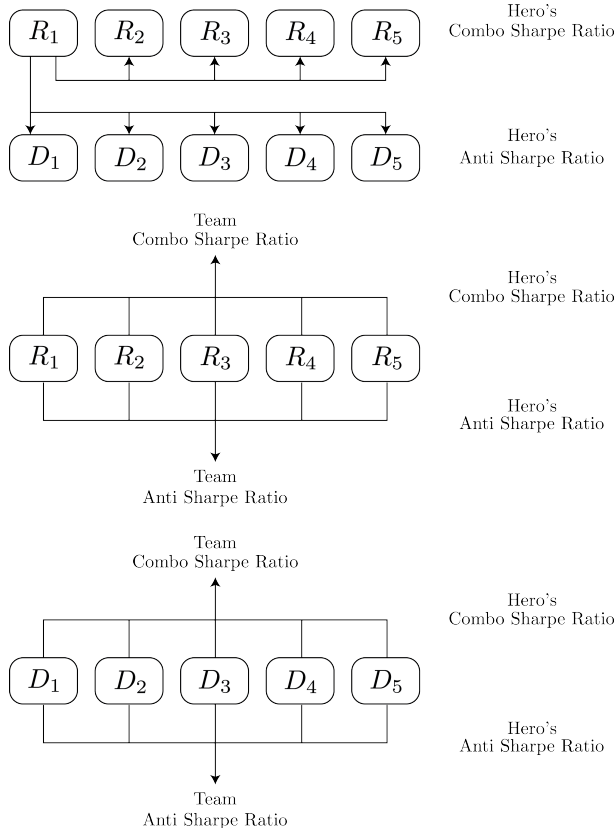


Fig. 5. Sharpe ratio calculation Demonstration

B. Anti & Combo Model

The data from dataset *Hero attribute* measures the performance of a hero in a standalone mode. However, in a real DotA game, heroes are grouped into two teams and therefore, apparently, their performance is significantly influenced by their teammates and enemies. Anti & Combo Model (Algorithm 2) is presented here to take this influence into consideration.

The idea comes from "Sharpe Ratio" which is a terminology widely used in finance analysis. It is a way to examine the performance of an investment by adjusting for its risk. In our model, we use the same idea to calculate the "Sharpe Ratio" for *anti-advantage-index* and *combo-advantage-index*.

In the second part of our dataset, we have *Advantage indices*. This is two 112×112 matrices where element $[i][j]$ represents the *anti-advantage-index* a_{ai}^{ij} and *combo-advantage-index* a_{cai}^{ij} of a hero pair {Hero *i*, Hero *j*} respectively. We use *R* and *D* to denote the two teams. Thus, the heroes in both teams are R_1, R_2, R_3, R_4, R_5 and D_1, D_2, D_3, D_4, D_5 , respectively.

Figure. 5 is an illustration showing how to calculate "Sharpe Ratio" in our case. We use R_1 as an example. R_1 has 4 teammates, its *Combo Sharpe Ratio* is

$$R_1's \text{ Combo Sharpe Ratio} = \frac{E\{R_2, R_3, R_4, R_5\}}{\sigma\{R_2, R_3, R_4, R_5\}}$$

where $E\{R_2, R_3, R_4, R_5\}$ is the expectation and $\sigma\{R_2, R_3, R_4, R_5\}$ is the standard deviation.

Similarly, R_1 has 5 enemies, its *Anti Sharpe Ratio* is

$$R_1's \text{ Anti Sharpe Ratio} = \frac{E\{D_1, D_2, D_3, D_4, D_5\}}{\sigma\{D_1, D_2, D_3, D_4, D_5\}}$$

After repeating this method for all 10 heroes in two teams, we have both *Hero's Combo Sharpe Ratio* and *Hero's Anti Sharpe Ratio* for every hero. It is totally 20 sharpe ratios. Then we go ahead to compute *Team Combo Sharpe Ratio* and *Team Anti Sharpe Ratio*. Let's take *Team Combo Sharpe Ratio* of Team R as an example.

Team R Combo Sharpe Ratio

$$= \frac{E\{CSR_{R_1}, CSR_{R_2}, CSR_{R_3}, CSR_{R_4}, CSR_{R_5}\}}{\sigma\{CSR_{R_1}, CSR_{R_2}, CSR_{R_3}, CSR_{R_4}, CSR_{R_5}\}}$$

where $CSR_{R_1}, CSR_{R_2}, CSR_{R_3}, CSR_{R_4}, CSR_{R_5}$ are *Combo Sharpe Ratio* for hero R_1, R_2, R_3, R_4, R_5 , respectively.

Finally, we have *Team Combo Sharpe Ratio* and *Team Anti Sharpe Ratio* for each team. The advantage-adjustment-index a_c is then computed with the algorithm shown in Algorithm 2.

Algorithm 2 Anti&Combo Model

```

function ANTI_COMBO(radiant, dire)
  for side in radiant, dire do
    for hero in side do
      get the sharpe ratio of the anti-advantage index
        of hero with 5 enemy heroes:  $A[side][hero]$ 
      get the sharpe ratio of the combo-advantage
        index of hero with 4 ally heroes:
         $C[side][hero]$ 
    end for
    get the sharpe ratio of  $A[side]$ 
    get the sharpe ratio of  $C[side]$ 
     $sr[side] = A[side] + C[side]$ 
  end for
   $a_c = sr[radiant] - sr[dire]$ 
end function

```

C. Team Attributes Model

In a normal DotA match, among the 5 heroes in a team, different hero plays different roles. Some of them are good at dealing damage, while some of them are specialized in healing their teammates.

Form this perspective, to optimize the performance of a team, we can just take a weighted average of the 5 members to calculate the team attributes. For example, among the 5 heroes R_1, R_2, R_3, R_4, R_5 , R_1 and R_2 are good at attacking. Therefore, their weights on attribute a_{dps} will be higher then their teammates. As is shown in Figure. 6, with this average method, we obtain the 11 attributes for each team.

$$\{a_{bl}, a_{ml}, a_{sl}, a_{ol}, a_{jl}, a_{dps}, a_p, a_n, a_{dur}, a_i, a_{dis}, a_h\}$$

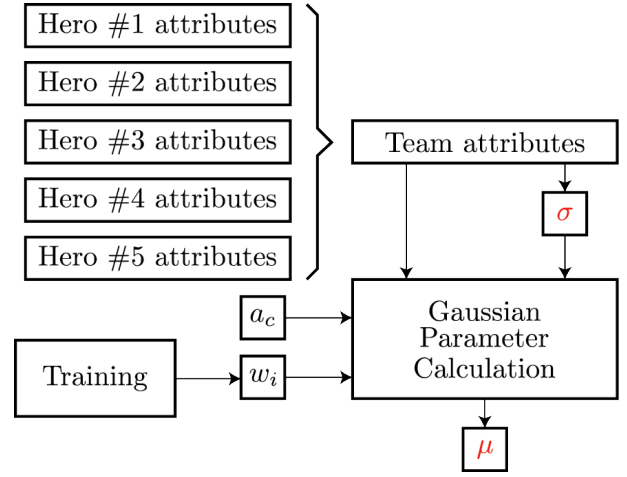


Fig. 6. Detailed process of Team Attributes Model

The next step is to calculate μ and σ for the Gaussian model mentioned at the beginning of this section.

$$\sigma = std\{a_{bl}, a_{ml}, a_{sl}, a_{ol}, a_{jl}, a_{dps}, a_p, a_n, a_{dur}, a_i, a_{dis}, a_h\}$$

As for μ , we add two parameters σ and a_c into our 11 attributes set. Thus, we have 13 attributes in total. After training w_i (details presented in next subsection), we can calculate μ as followed.

$$\mu = \frac{1}{13} \sum_{i=0}^{13} w_i A_i$$

where w_i is the weight and A_i is the i th attribute in set

$$\{a_{bl}, a_{ml}, a_{sl}, a_{ol}, a_{jl}, a_{dps}, a_p, a_n, a_{dur}, a_i, a_{dis}, a_h, a_c, \sigma\}$$

Therefore, in *Team Attributes Model*, we are able to obtain μ and σ for Gaussian Distribution of each team. The winning rate of any combination of heroes can be computed then. Algorithm 3 shows the details regarding how to calculate these team attributes.

Algorithm 3 Team Attributes Model

```

function TEAM_ATTRIBUTES(radiant, dire)
  for side in radiant, dire do
    for attribute in attributes do
      if attribute is disable then
        weight:  $w = [1, 1, 1]$ 
      else if attribute is initial or healing then
        weight:  $w = [0.7, 0.3]$ 
      else
        weight:  $w = [1.5, 1.5, 1.1, 0.2, 0.2]$ 
      end if
      sort the attribute of hero in side by
        descending and get list:  $A[side][attribute]$ 
      get the team attributes:  $T[side][attribute] =$ 
         $\frac{1}{\sum(w)} \sum_{i=0}^{len(w)-1} w[i] * A[side][attribute][i]$ 
    end for
  end for
end function

```

D. Model Training

Let's check what we have now. We know the μ and σ from *Team Attributes Model*, advantage adjustment parameters a_c from *Anti&Combo Model*, and resource adjustment index θ from *Lane Model*. We also have 100k historical match data.

Here is the process to train the weight w_i needed in *Team Attributes Model*.

- Step 1: Set the initial value $w_i = 1$.
- Step 2: For every historical match, we calculate the predicted winning rate of each team based on Gaussian method mentioned at the beginning of this section. Parameters μ, σ can be calculated from *Team Attributes Model*.
- Step 3: Pick the higher one (denoted as wr_j) among the two winning rates
- Step 4: Multiply wr_j for 100k matches and take \log
- Step 5: Use gradient descent to find the optimal w_i for the following optimization problem

$$\max L = \sum_{j=1}^{100k} \log(wr_j)$$

The training of w_i is basically a maximum likelihood estimation. Pandas[16] toolkit is used here to train the weights. These weights are then sent to Web Analysis subsystem for online computing.

VII. RESULT & EVALUATION

Here is a primary result of the prediction model. In Figure. 7, the red buckets are actual winning rate (from 0% to 100%). Purple buckets are predicted winning rate. It is clear that our prediction matches the data well.

UNDER CONSTRUCTION

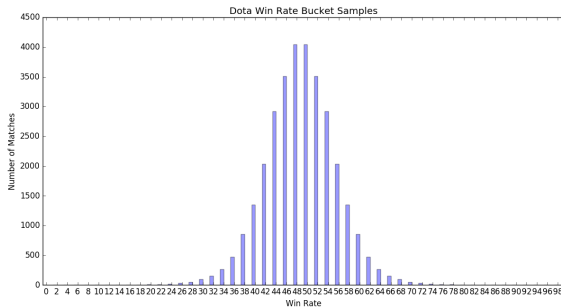


Fig. 7. Match winning rate bucket sample

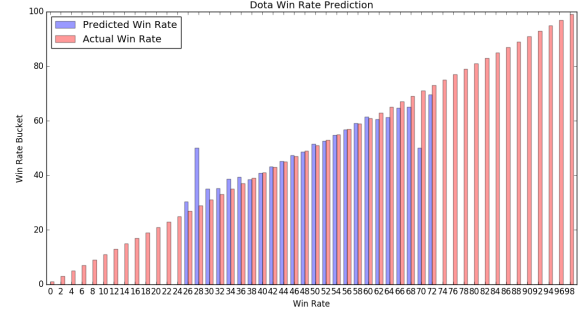


Fig. 8. Primary result for winning rate prediction

UNDER CONSTRUCTION

VIII. SUMMARY OF INNOVATIONS

- 1) Applied normal distribution as an evaluation of the difference of skill between two groups.
- 2) Built a Lane Model to simplify the whole process of game into two most critical stages to reduce the complexity of analysis.
- 3) Proposed Anti & Combo model to calculate team advantage index, which can reflect the effect of different characteristics of heroes on the result of game.

IX. CONCLUSIONS

UNDER CONSTRUCTION

APPENDIX

Tasks	Y. Xu	Wang	Cao	Sun	X. Xu	Status
Brainstorm	✓	✓	✓	✓	✓	Completed
Proposal	✓	✓	✓	✓	✓	Completed
Data Collection	✓			✓		Not Started
Data Clean/Integration		✓	✓		✓	Not Started
Algorithm Developing	✓			✓		Not Started
Data Visualization		✓	✓		✓	Not Started
Testing	✓	✓	✓	✓	✓	Not Started

TABLE I
PREVIOUS TASKS ASSIGNMENT

Timing Frame (Revised on Project Final Presentation section)

- Project Proposal (Sept.10 - Oct.17)
 - Brainstorming
 - Read related papers
 - Build Product Backlog and Sprint Backlog
 - Write a proposal.
- Progress Report (Oct.17 - Nov.10)
 - Data Collection
 - Data Cleaning

Tasks	Y. Xu	Wang	Cao	Sun	X. Xu	Status
Brainstorm	✓	✓	✓	✓	✓	Completed
Proposal	✓	✓	✓	✓	✓	Completed
Data Collection	✓	✓		✓	✓	Completed
Data Clean/Integration	✓			✓		Completed
Algorithm Developing	✓			✓		Completed
Data Visualization		✓	✓			Ongoing
Documents	✓	✓		✓		Ongoing
Testing	✓	✓	✓	✓	✓	Not Started

TABLE II
CURRENT TASKS ASSIGNMENT

Data Integration

Build, train models

Start visualization scratching

- Project Final Presentation (Nov.11 - Dec.06)
- Modify algorithms and improve model performance
- Modify data visualization section
- Prepare presentation and posters

ACKNOWLEDGMENT

UNDER CONSTRUCTION

REFERENCES

- [1] Cao C. Sports data mining technology used in basketball outcome prediction[J]. 2012.
- [2] Kahn J. Neural network prediction of NFL football games[J]. World Wide Web electronic publication, 2003: 9-15.
- [3] Trawinski K. A fuzzy classification system for prediction of the results of the basketball games[C], Fuzzy Systems (FUZZ), 2010 IEEE International Conference on. IEEE, 2010: 1-7.
- [4] Buursma D. Predicting sports events from past results Towards effective betting on football matches[C], Conference Paper, presented at 14th Twente Student Conference on IT, Twente, Holland. 2011, 21.
- [5] K. Song, T. Zhang, and C. Ma. Predicting the winning side of DotA2. tech. rep., Stanford University, 2015.
- [6] N. Kinkade, L. Jolla, and K. Lim. DOTA 2 Win Prediction. tech. rep., University of California San Diego, 2015.
- [7] J. Neidhardt, Y. Huang, and N. Contractor. Team vs. Team: Success Factors in a Multiplayer Online Battle Arena Game. In Academy of Management Annual Meeting Proceedings 2015(1):18725-18725, January, 2015.
- [8] K. Conley and D. Perry. How Does He Saw Me? A Recommendation Engine for Picking Heroes in DOTA 2. CS229 Previous Projects, 2013.
- [9] K. Kalyanaraman. To win or not to win? A Prediction Model to Determine the Outcome of a DotA2 Match. tech. rep., University of California San Diego, 2014.
- [10] A. Drachen, M. Yancey, J. Maguire, D. Chu, I. Y. Wang, T. Mahlmann, M. Schubert, and D. Klabajan. Skill-based Differences in Spatio-temporal Team Behaviour in Defence of the Ancients 2 (DotA 2). Games Media Entertainment (GEM), 2014 IEEE, vol. 2, no. dOTa 2, PP. 1-8, 2014.
- [11] C. Eggert, M. Herrlich, J. Smeddinck, and R. Malaka. Classification of Player Roles in the Team-Based Multi-player Game Dota 2. In Entertainment Computing ICEC 2015, vol. 9353 of Lecture Notes in Computer Science, (Cham), pp. 112-125, Springer International Publishing, 2015.
- [12] N. Pobiedina, J. Neidhardt, M. del Carmen Calatrava Moreno, and H. Werthner. Ranking Factors of Team Success. In WWW (Companion Volume), pages 11851194, 2013.

- [13] N. Pobiedina, J. Neidhardt, M. D. C. C. Moreno, L. Grad-Gyenge and H. Werthner. On Successful Team Formation: Statistical Analysis of a Multiplayer Online Game. 2013 IEEE 15th Conference, In Business Informatics (CBI), (2013), pp. 55-62.
- [14] Johansson, F. and Wikstrm, J., Result Prediction by Mining Replays in Dota 2, 2015.
- [15] Dota2api (2016). Dota 2 API Documentation. [online] Available at: <https://dota2api.readthedocs.io/en/latest/> [Accessed 13 Nov. 2016].
- [16] Pandas.pydata.org. (2016). Python Data Analysis Library pandas: Python Data Analysis Library. [online] Available at: <http://pandas.pydata.org> [Accessed 16 Nov. 2016].
- [17] Drachen A, Yancey M, Maguire J, et al. Skill-based differences in spatio-temporal team behaviour in defence of the Ancients 2 (Dota 2)[C]//Games media entertainment (GEM), 2014 IEEE. IEEE, 2014: 1-8.
- [18] Valve Corporation. (2012) The international dota2 championships official website. [Online]. Available: <http://www.dota2.com/international/overview/>
- [19] Defense of the Ancients. Wikipedia. Wikimedia Foundation, n.d. Web. 15 Nov. 2016. [Online].