



USER

2025-08-02 02:14:12

Order a pizza on Uber Eats

ASSISTANT

2025-08-02 02:14:14

(2.34 sec.) I'll help you order a pizza on Uber Eats. Let me start by taking a screenshot to see the current desktop, then open a web browser to access Uber Eats.

ASSISTANT

2025-08-02 02:14:14

Tool Use: computer

Input:

```
{'action': 'screenshot'}
```

TOOL

2025-08-02 02:14:15



ASSISTANT

2025-08-02 02:14:18

(3.43 sec.) I can see the desktop with the taskbar at the bottom. I need to open Firefox to access Uber Eats. I'll click on the Firefox icon in the taskbar.

ASSISTANT

2025-08-02 02:14:18


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [804, 738]}
```

TOOL

2025-08-02 02:14:21

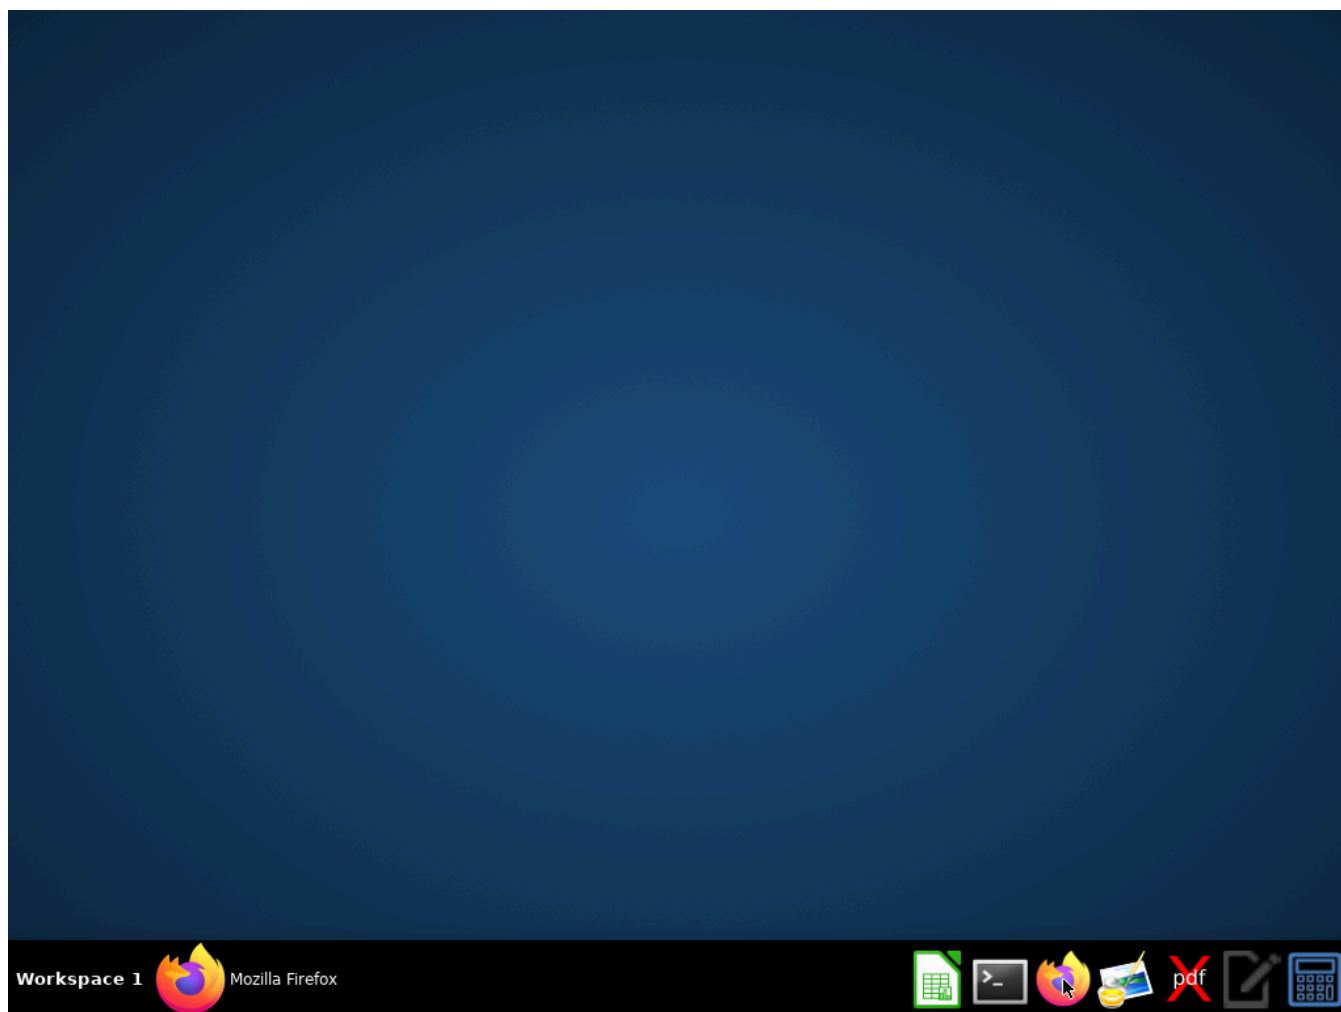

ASSISTANT

2025-08-02 02:14:26

(4.08 sec.) I can see Firefox is starting to load (the Firefox icon is now visible in the taskbar).
Let me wait a moment for it to fully open and take another screenshot.

Wasted 4s API call + 3s wait because Firefox hadn't fully loaded.

Can we use a lightweight model to detect when the app has loaded?

Max wait of at least 3 seconds because API call takes at least this long?

(Rationale: API call is expensive; only use it when absolutely necessary. If it's not even taking as long as an API call, then it's probably not necessary yet)

ASSISTANT

2025-08-02 02:14:26


Tool Use: computer

Input:

```
{'action': 'wait', 'duration': 3}
```

TOOL

2025-08-02 02:14:29

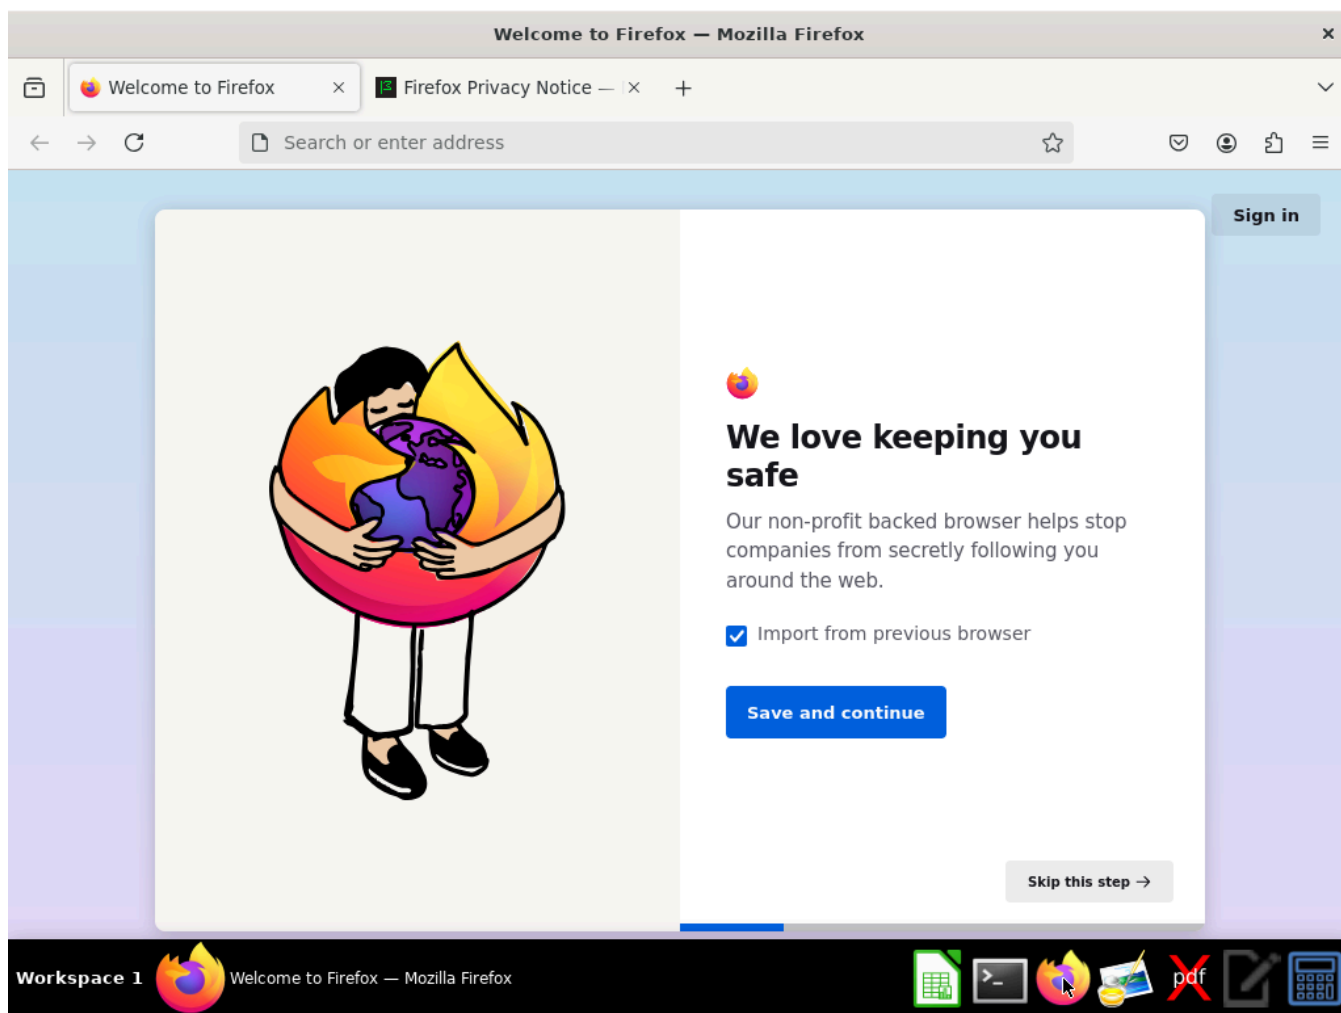

ASSISTANT

2025-08-02 02:14:33

(3.84 sec.) Perfect! Firefox has opened and I can see the welcome screen. As instructed, I'll ignore the startup wizard and go directly to the address bar to navigate to Uber Eats. I'll click on the address bar where it says "Search or enter address".

ASSISTANT

2025-08-02 02:14:33


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [294, 100]}
```

TOOL

2025-08-02 02:14:33

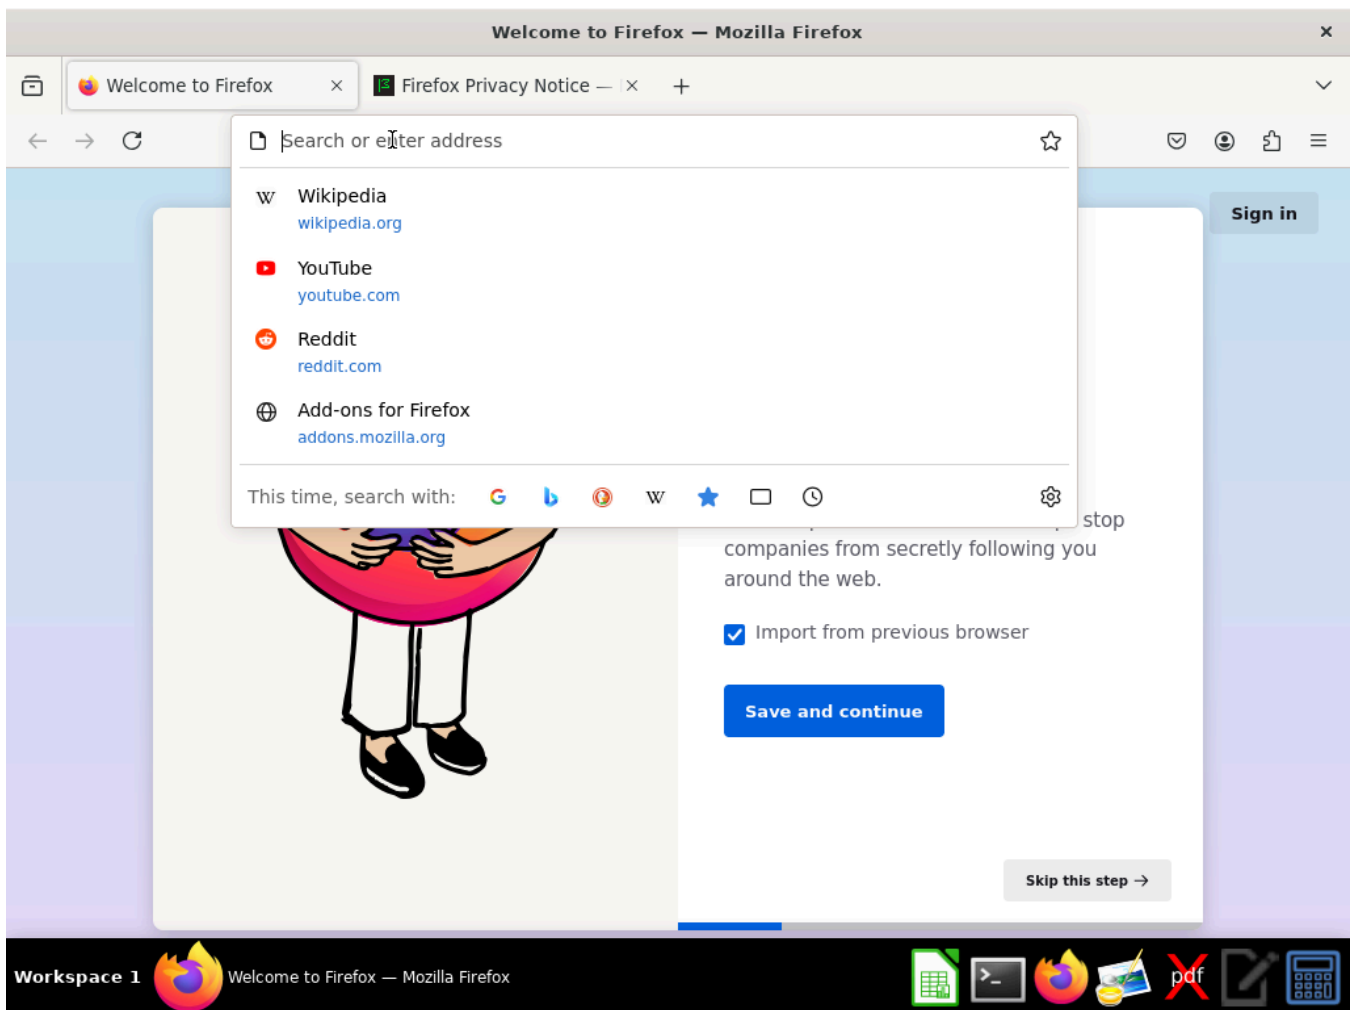

ASSISTANT

2025-08-02 02:14:37

(4.22 sec.) Great! The address bar is now active and showing a dropdown with suggested sites. I need to type "ubereats.com" to navigate to Uber Eats.

*Wasted 4s API call just to make sure
the address bar is active before typing ubereats
Is there another way to make sure the bar is active?*

ASSISTANT

2025-08-02 02:14:37


Tool Use: computer

Input:

```
{'action': 'type', 'text': 'ubereats.com'}
```

TOOL

2025-08-02 02:14:38

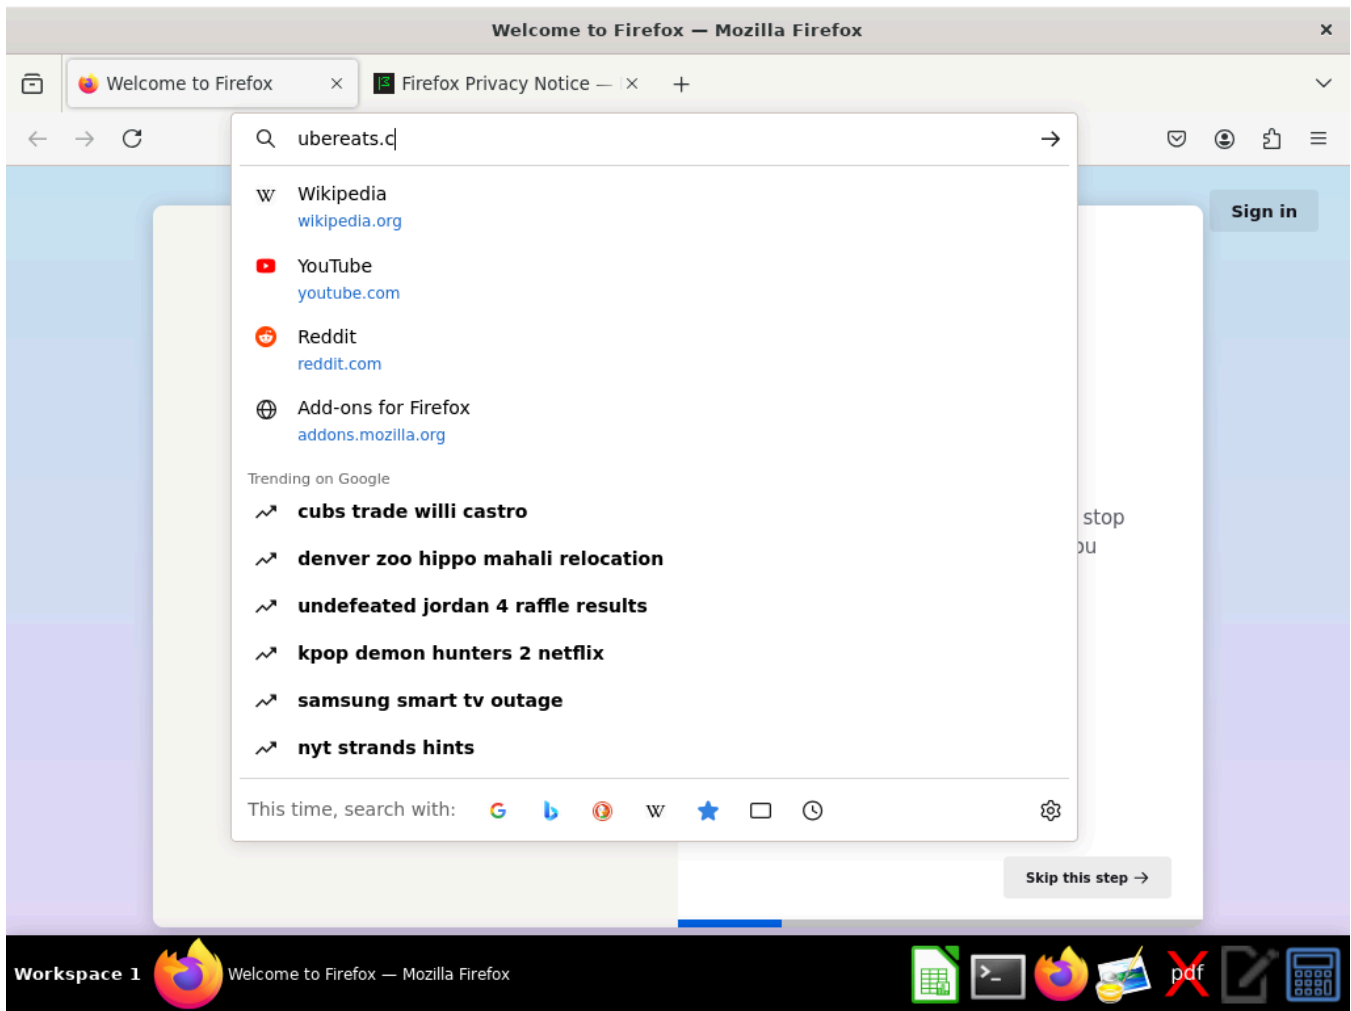

ASSISTANT

2025-08-02 02:14:41

(3.25 sec.) I can see I've typed "ubereats.c" in the address bar. Now I need to press Enter to navigate to the Uber Eats website.

*Another 3s to make sure it successfully typed.
Is this necessary?*

*If so, there has to be an easier way to detect this.
E.g. OCR the area around the click (smaller image = faster)*

ASSISTANT

2025-08-02 02:14:41


Tool Use: computer

Input:

```
{'action': 'key', 'text': 'Return'}
```

TOOL

2025-08-02 02:14:43

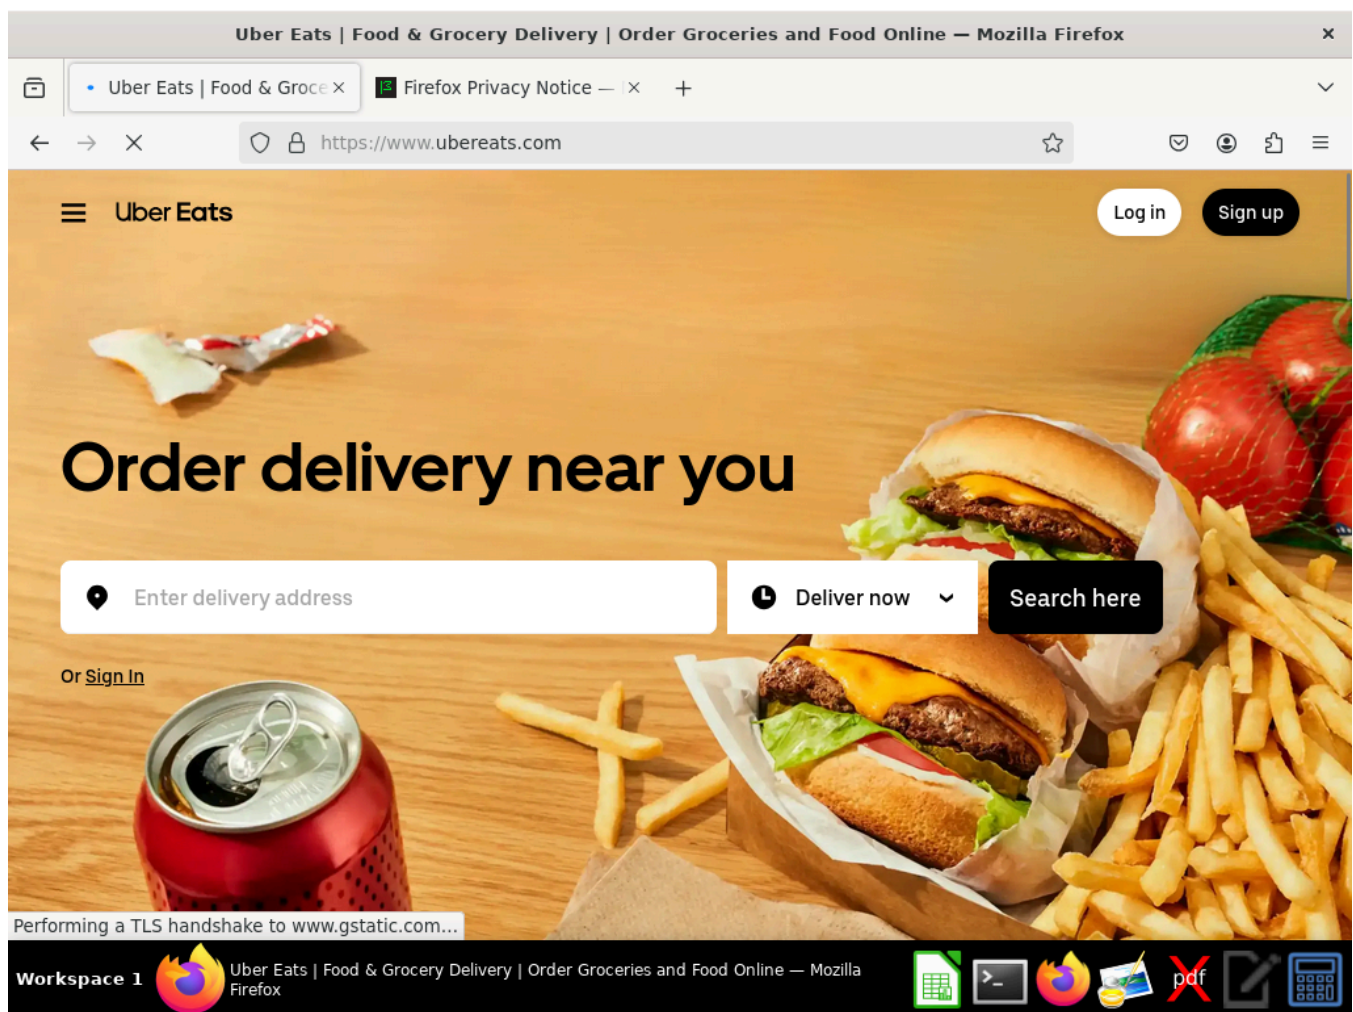

ASSISTANT

2025-08-02 02:14:48

(4.62 sec.) Perfect! I've successfully navigated to the Uber Eats website. I can see the homepage with "Order delivery near you" and there's a delivery address input field. To order pizza, I need to first enter a delivery address. I can see there's a text field that says "Enter delivery address" which I need to click on and fill out.

ASSISTANT

2025-08-02 02:14:48


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [289, 447]}
```

TOOL

2025-08-02 02:14:49

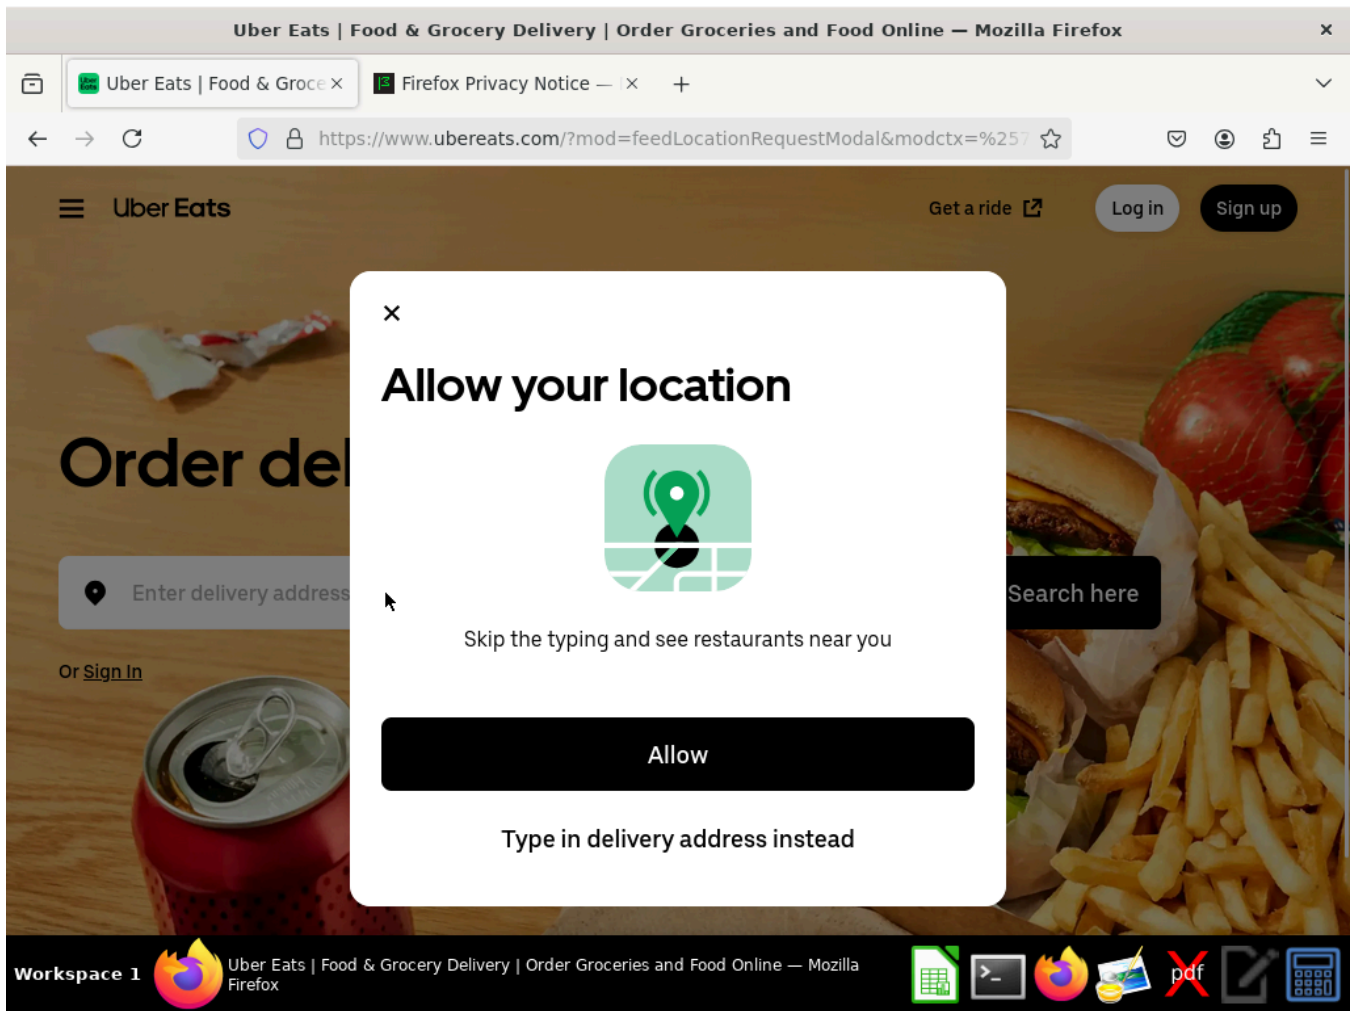

ASSISTANT

2025-08-02 02:14:54

(4.26 sec.) I see a location permission dialog has appeared asking to "Allow your location" with options to "Allow" or "Type in delivery address instead". Since I don't want to allow location access, I'll click on "Type in delivery address instead" to manually enter an address.

*I thought this was going to be another case of unnecessary API call.
(e.g. only checking that the text field is focused)*

Turns out this was actually useful because a popup came up.

*So it ***is*** necessary to check that an action is successful,
but it is still useful to know when the outcome is as expected and we can
proceed to the next action without calling computer use.*

ASSISTANT

2025-08-02 02:14:54


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [511, 634]}
```

TOOL

2025-08-02 02:14:56

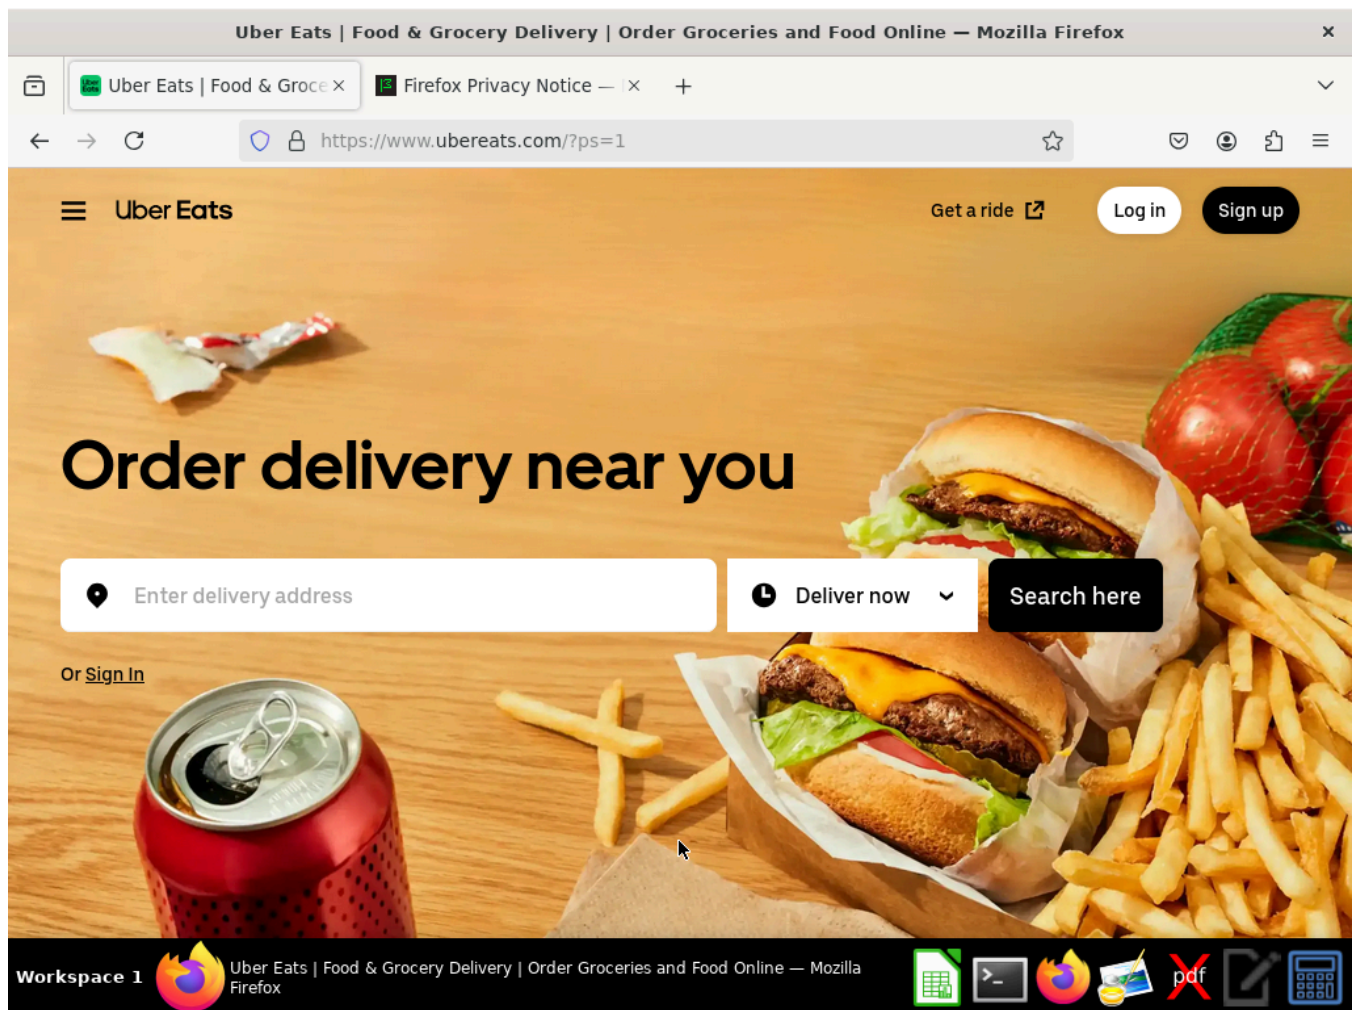

ASSISTANT

2025-08-02 02:15:01

(4.31 sec.) Good! The dialog has closed and I'm back to the main page. Now I can see the address input field is ready for me to enter a delivery address. I'll click on the "Enter delivery address" field to start typing an address.

ASSISTANT

2025-08-02 02:15:01


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [289, 447]}
```

TOOL

2025-08-02 02:15:02

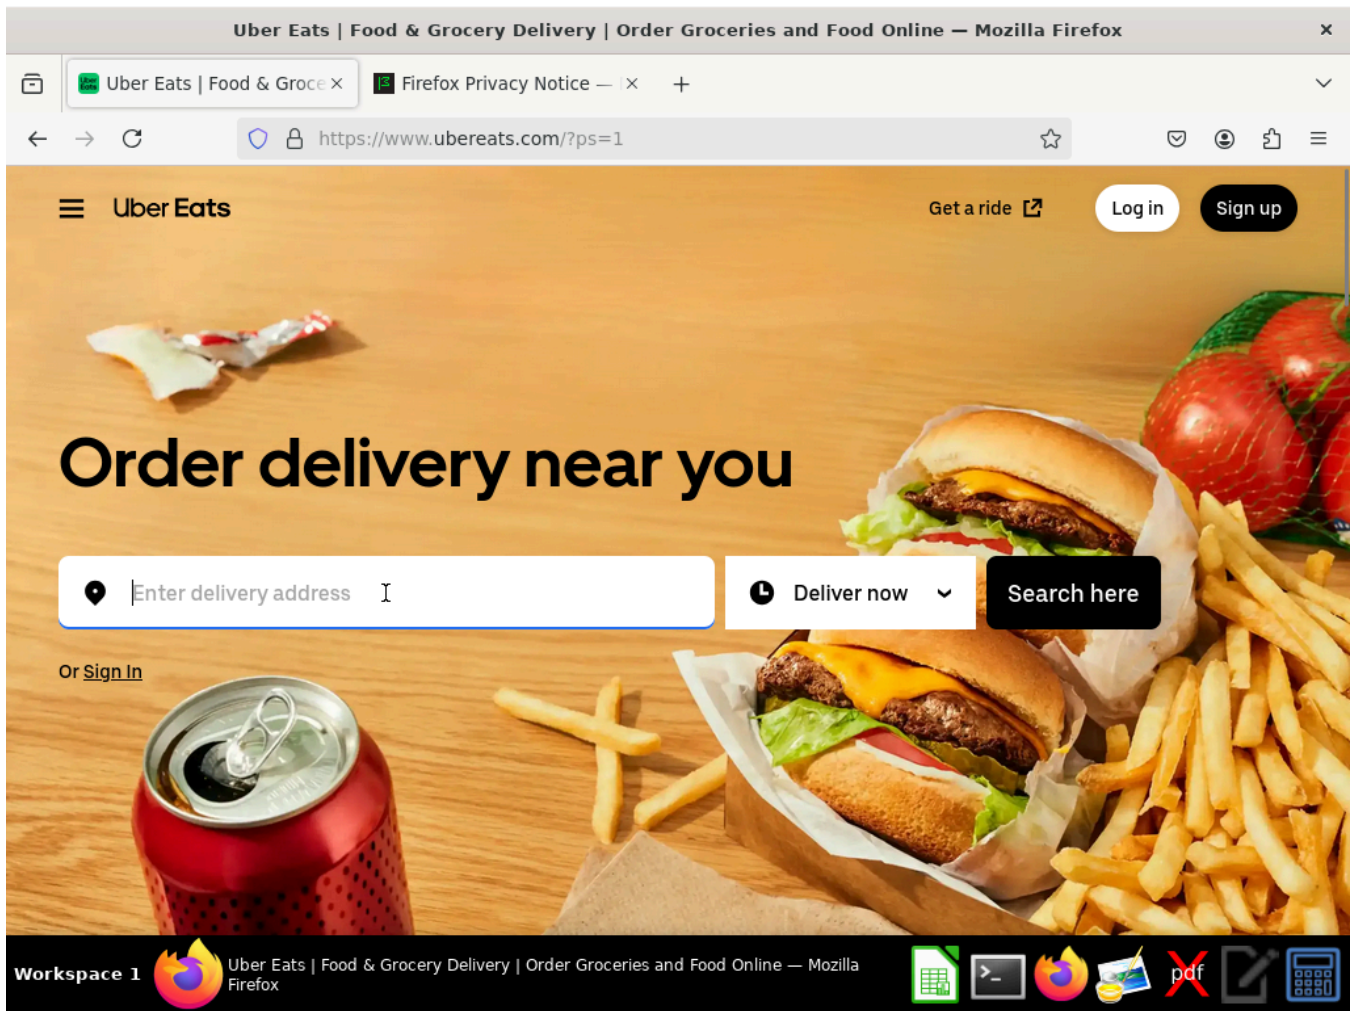

ASSISTANT

2025-08-02 02:15:08

(5.10 sec.) Perfect! I can see the cursor is now active in the address field (there's a blinking cursor). Now I'll type a sample delivery address to proceed with the pizza ordering process.

*Now we get the expected unnecessary 5s API call just to make sure the address field is active before typing.
Is there another way to make sure the bar is active?*

ASSISTANT

2025-08-02 02:15:08


Tool Use: computer

Input:

```
{'action': 'type', 'text': '123 Main Street, New York, NY 10001'}
```

TOOL

2025-08-02 02:15:08

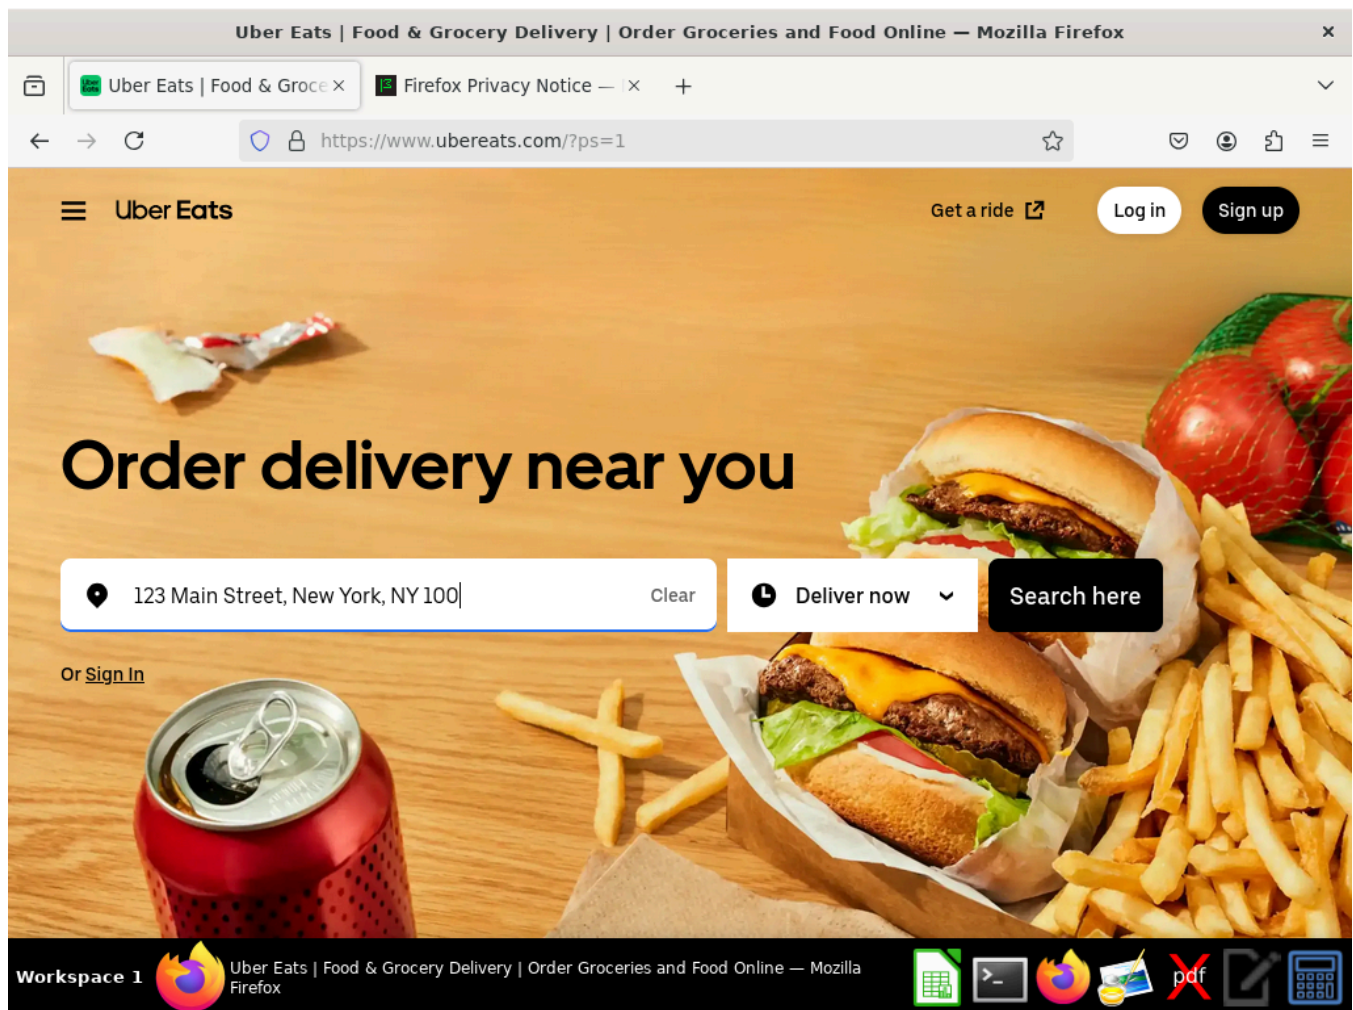

ASSISTANT

2025-08-02 02:15:12

(4.09 sec.) Great! I can see the address has been entered and there's now a "Clear" button visible next to it. Now I need to click the "Search here" button to search for restaurants in this area.

*Another 4s to make sure it successfully typed.
The "Search here" button was already there before.*

This call seems unnecessary.

*Ideally we plan to type and click "search here" in the same API call
and use a lightweight model in between to make sure the typing worked.*

ASSISTANT

2025-08-02 02:15:12


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [813, 447]}
```

TOOL

2025-08-02 02:15:15

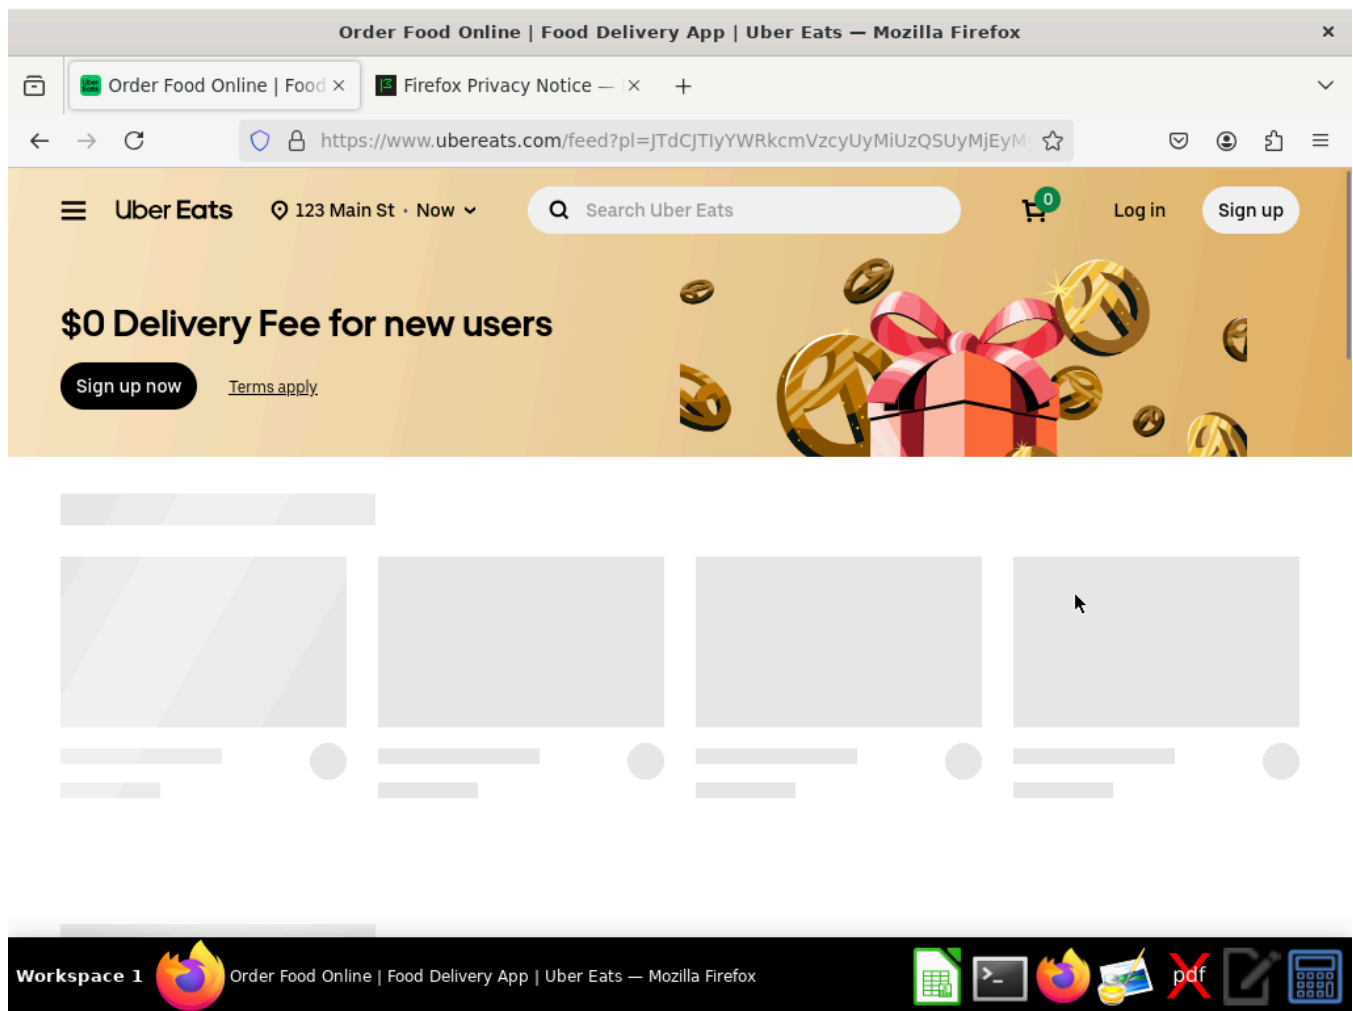

ASSISTANT

2025-08-02 02:15:22

(6.60 sec.) Perfect! I can see that Uber Eats has loaded with the delivery address set to "123 Main St" and is showing "Now" for delivery time. I can see the page is loading restaurant options (there are placeholder gray boxes where restaurant listings will appear). I also notice there's a search bar at the top where it says "Search Uber Eats". Let me use this to search specifically for pizza restaurants.

This 6s API call is actually a waste because the page hadn't fully loaded. You'll see in the next API call that the result of this call was inconsequential because it opted to click on the pizza category instead of typing in the search bar. It's really important to be able to detect "loading". By layout? By animation? Really depends on the exact loading screen.

ASSISTANT

2025-08-02 02:15:22


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [565, 153]}
```

TOOL

2025-08-02 02:15:23

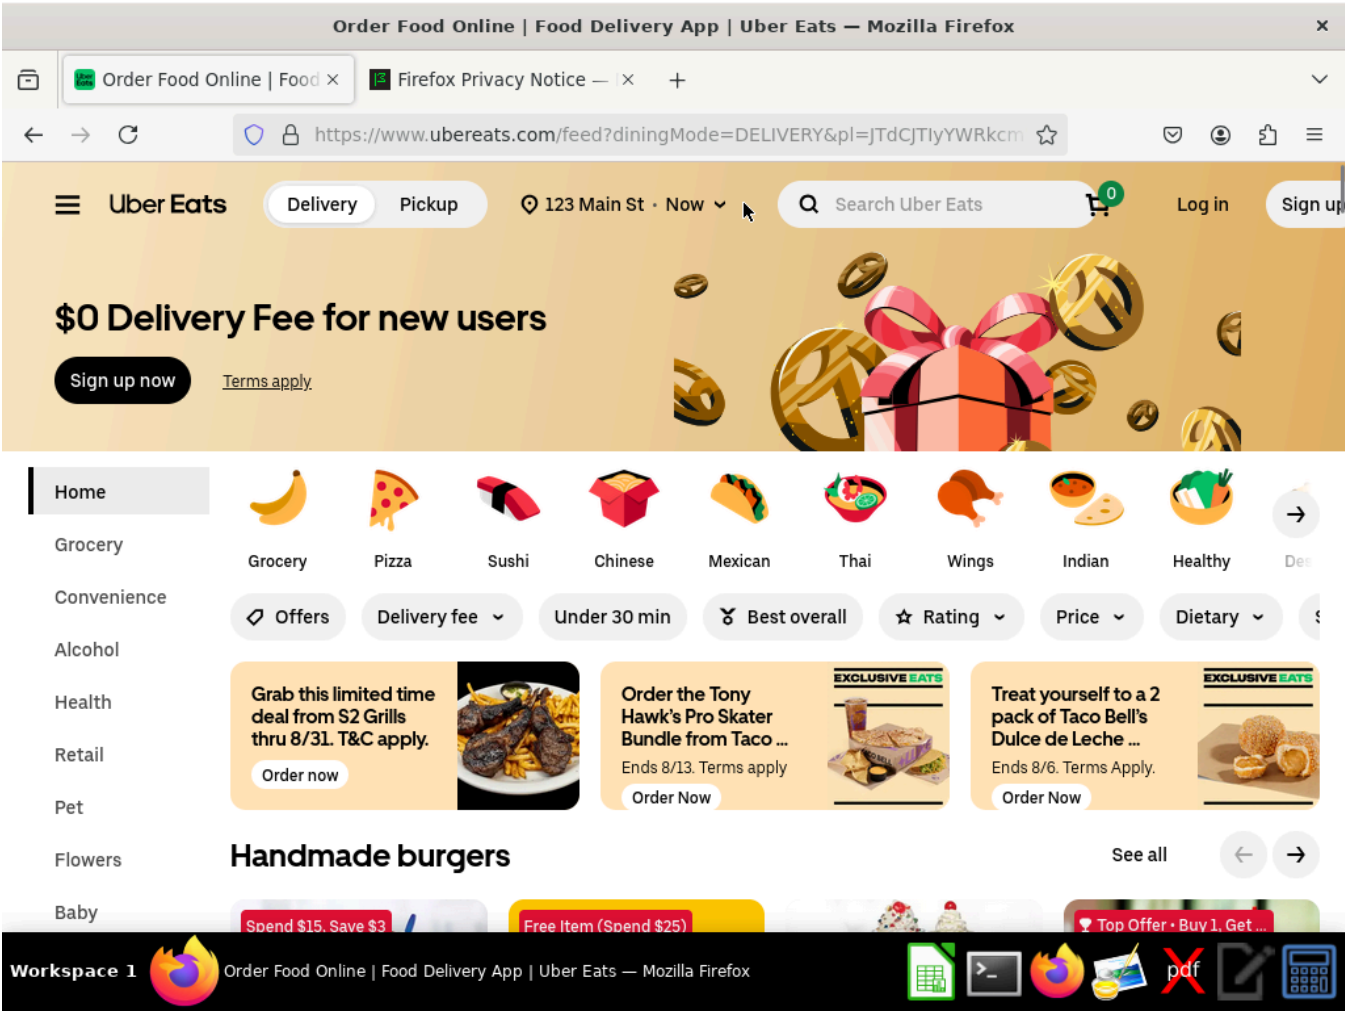

ASSISTANT

2025-08-02 02:15:27

(4.15 sec.) Excellent! I can see that the search box is now active (there's a cursor visible) and I can see food categories including a "Pizza" option with a pizza slice icon. I can click directly on the Pizza category to find pizza restaurants, or I can type "pizza" in the search box. Let me click on the Pizza category icon to filter for pizza restaurants.

Like the model said, there are two paths: click the "pizza" category or type in the search bar.

Pursuing the former renders the previous API call unnecessary.

Pursuing the latter means this 4s call's sole purpose is to check that the search bar is active.

At this point we notice two recurring events that are crucial to detect efficiently:

1) detecting when something has finished loaded

2) detecting when a text field is active

ASSISTANT

2025-08-02 02:15:27


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [297, 395]}
```

TOOL

2025-08-02 02:15:28

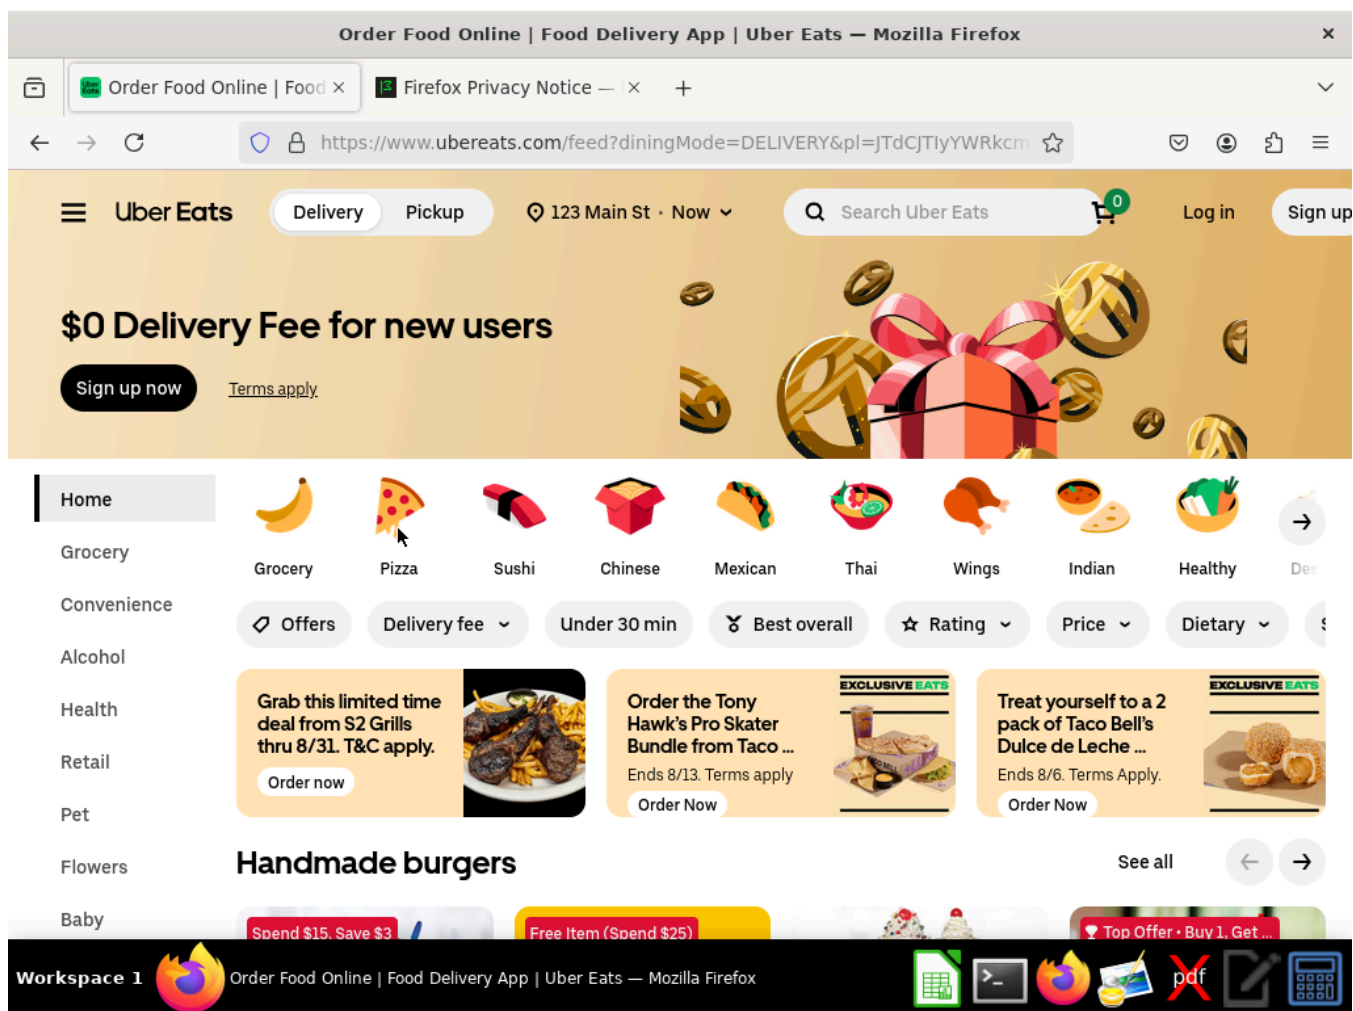

ASSISTANT

2025-08-02 02:15:31

(3.05 sec.) I can see the cursor is hovering over the Pizza category. Let me click on it to filter for pizza restaurants.

ASSISTANT

2025-08-02 02:15:31


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [297, 395]}
```

TOOL

2025-08-02 02:15:48

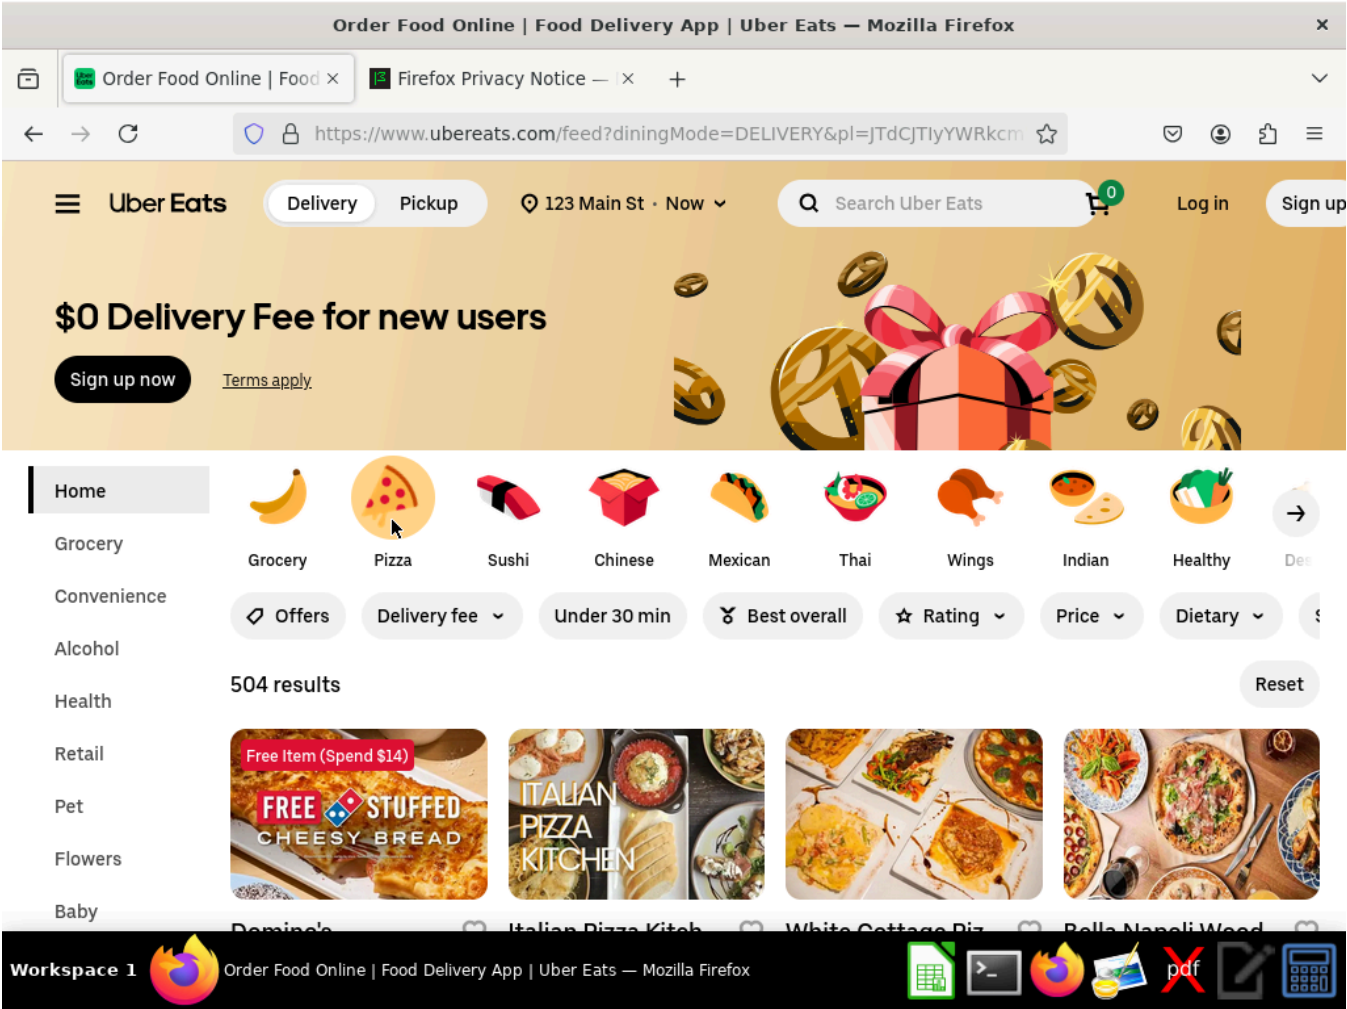

ASSISTANT

2025-08-02 02:15:55

(6.77 sec.) Perfect! Now I can see the Pizza category is selected (the pizza icon has a different background color) and it shows "504 results" for pizza restaurants. I can see several pizza options appearing at the bottom:

1. Domino's (with a "Free Item (Spend \$14)" promotion)
2. Italian Pizza Kitchen
3. White Cottage Pizza
4. Bella Napoli Wood Fired Pizza

Let me scroll down to see more pizza restaurant options and their details.

ASSISTANT

2025-08-02 02:15:55


Tool Use: computer

Input:

```
{'action': 'scroll', 'coordinate': [512, 600], 'scroll_direction': 'down', 'scroll_amount': 100}
```

TOOL

2025-08-02 02:15:56

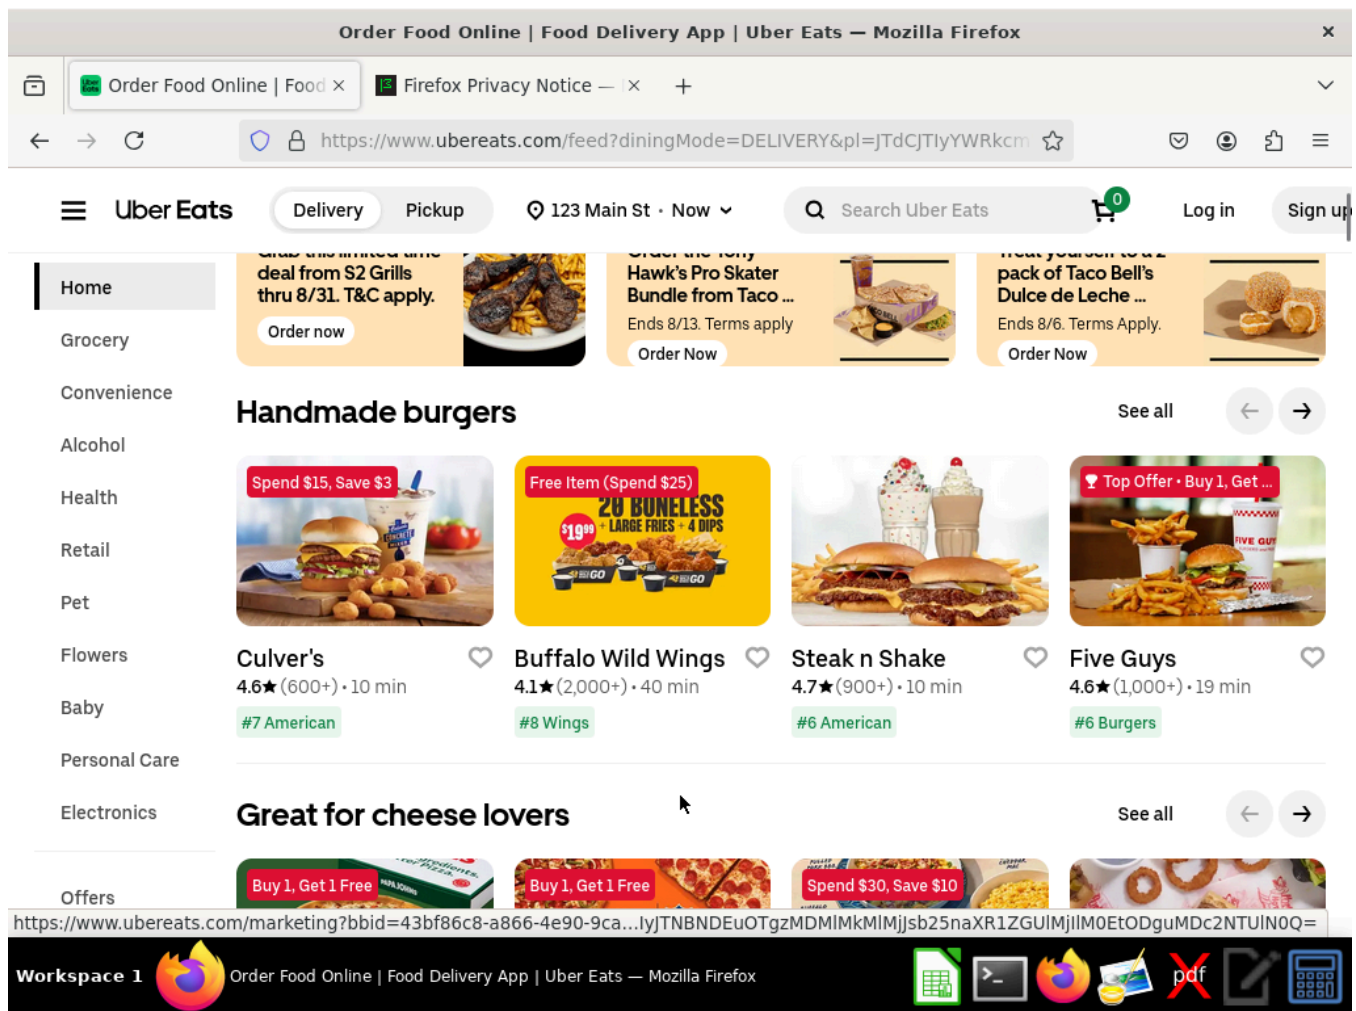

ASSISTANT

2025-08-02 02:16:01

(4.51 sec.) I can see more restaurant options now, but these appear to be mostly burger and wing places. Let me continue scrolling to find pizza-specific restaurants that would be more appropriate for ordering pizza.

We waste 4.5s just to process the scrolled screenshot, then another 5.8s to process another scrolled screenshot.

Ideally, we wait until the page loads, scroll multiple times – taking a screenshot each time – and then send everything at once.

ASSISTANT

2025-08-02 02:16:01


Tool Use: computer

Input:

```
{'action': 'scroll', 'coordinate': [512, 600], 'scroll_direction': 'down', 'scroll_amount': 100}
```

TOOL

2025-08-02 02:16:18

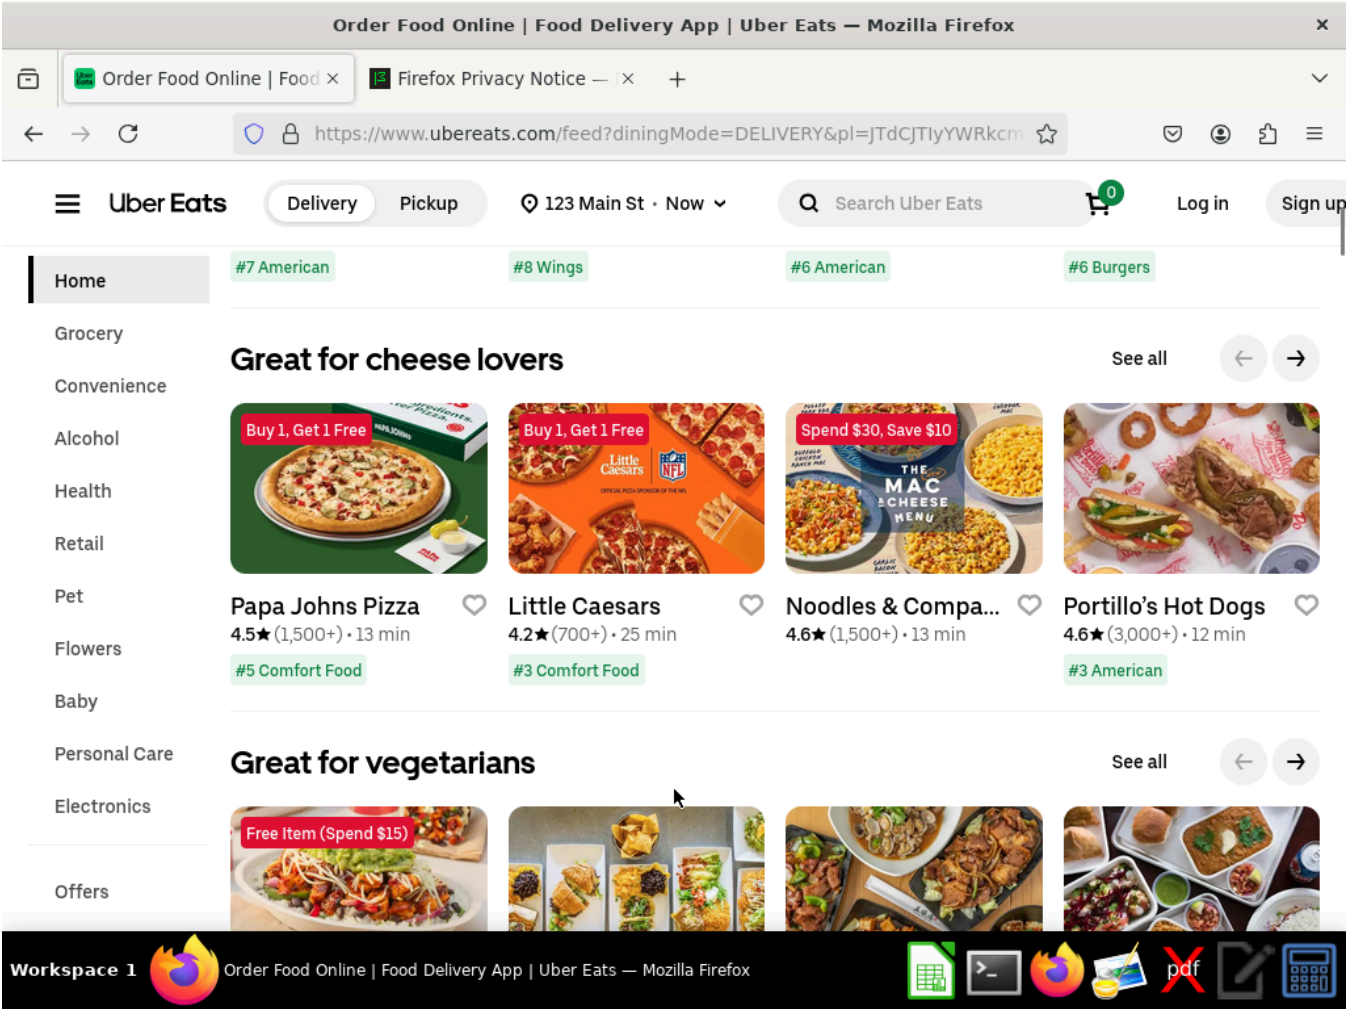

ASSISTANT

2025-08-02 02:16:24

(5.85 sec.) Great! Now I can see some pizza options in the "Great for cheese lovers" section. I can see:

1. **Papa John's Pizza** - 4.5★ (1,500+) • 13 min delivery with a "Buy 1, Get 1 Free" promotion
2. **Little Caesars** - 4.2★ (700+) • 25 min delivery with a "Buy 1, Get 1 Free" promotion

Papa John's looks like a good option with better ratings and faster delivery time. Let me click on Papa John's to see their menu and place an order.

ASSISTANT

2025-08-02 02:16:24


Tool Use: computer

Input:

```
{'action': 'left_click', 'coordinate': [271, 460]}
```

TOOL

2025-08-02 02:16:25

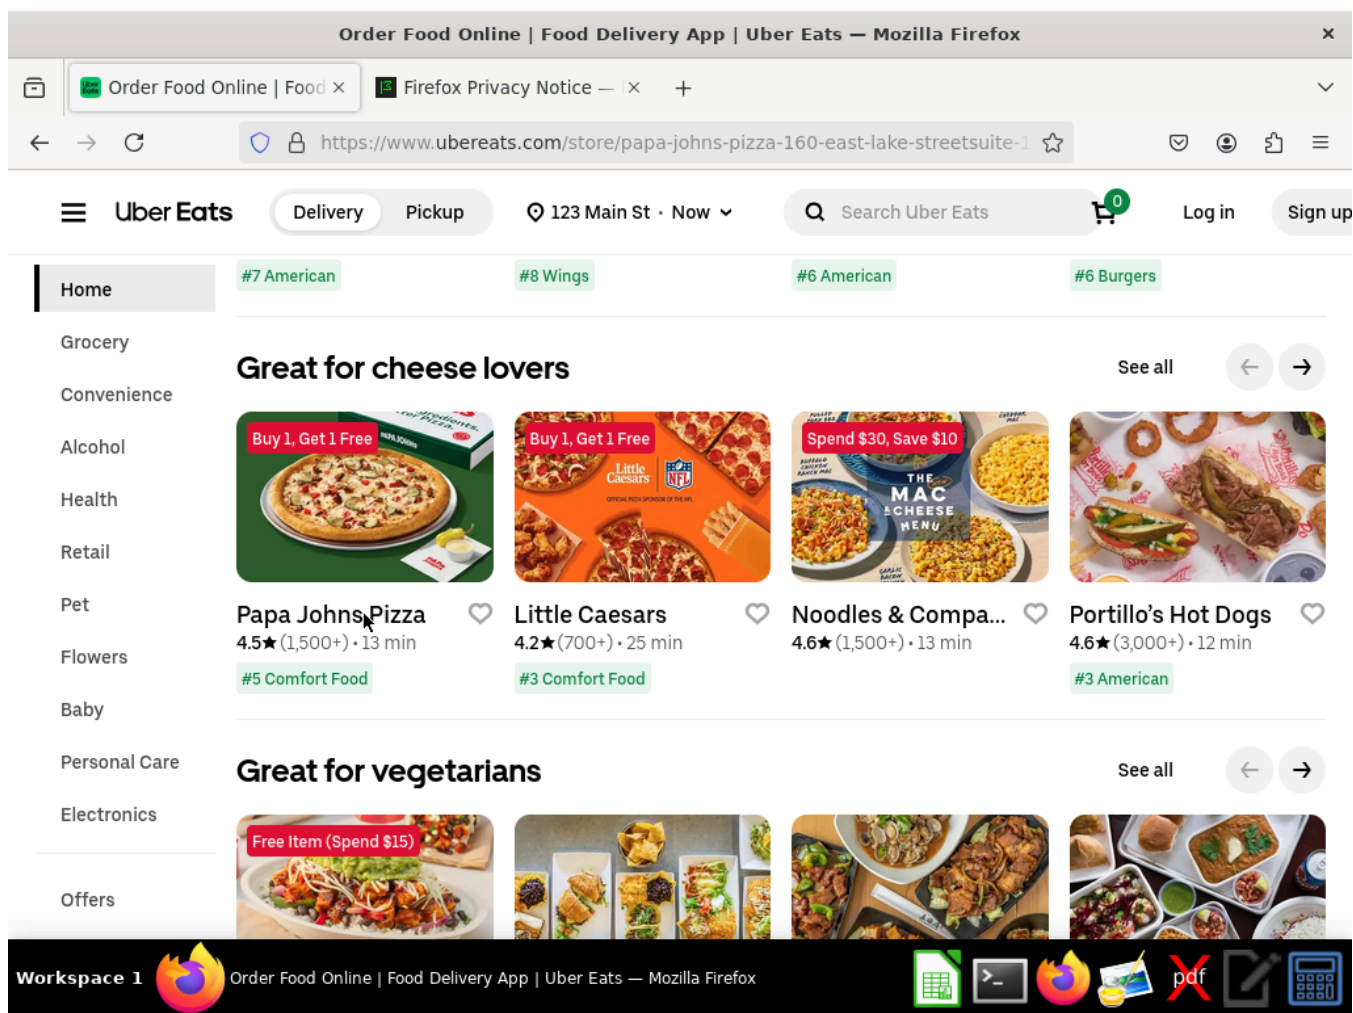

ASSISTANT

2025-08-02 02:16:30

(4.77 sec.) I can see that the URL has changed to show Papa John's store page, but the page content hasn't loaded yet. Let me wait a moment for the page to load completely.

We waste 4.7s because it hasn't loaded.

ASSISTANT

2025-08-02 02:16:30

Tool Use: computer

Input:

```
{'action': 'wait', 'duration': 3}
```

TOOL

2025-08-02 02:16:34

Order Papa Johns Pizza (160 East Lake Streetsuite #156B) - Menu & Prices - Bloomingdale Delivery | Uber Eats — Mozilla Firefox

Order Papa Johns Pizza (1 x)

Firefox Privacy Notice — × +

← → ↺ https://www.ubereats.com/store/papa-johns-pizza-160-east-lake-streetsuite/ Bloomingdale Delivery | Uber Eats — Mozilla Firefox

Uber Eats

123 Main St · Now

Search Uber Eats

0

Log in

Sign up



Papa Johns Pizza (160 East Lake Streetsuite #156B)

4.5 ★ (1,500+) · American · Chicken · Comfort Food · Desserts · Family Friendly · Fast Food · Italian · Pizza · Sandwich · Wings · \$ · Info

156 E Lake St, Bloomingdale, IL 60108

Delivery

Pickup

Group order

Rating and reviews

4.5

"My large size sausage & black olive pizza was sooo good. Especially with all the cheese! For dessert we ordered the OREO"

\$0 delivery fee

Other fees

13 min

Earliest arrival

Workspace 1

Order Papa Johns Pizza (160 East Lake Streetsuite #156B) - Menu & Prices - Bloomingdale Delivery | Uber Eats — Mozilla Firefox

