


Hands-on Lab: Using the CQL Shell (cqlsh)



Objectives

After completing this lab you will be able to:

- Access the Cassandra server with cqlsh, the command-line interface for using the Cassandra Query Language (CQL)
- Run commands to learn more about the server and session, such as server version and host details
- Determine the available keyspaces, which are objects similar to databases, on the server

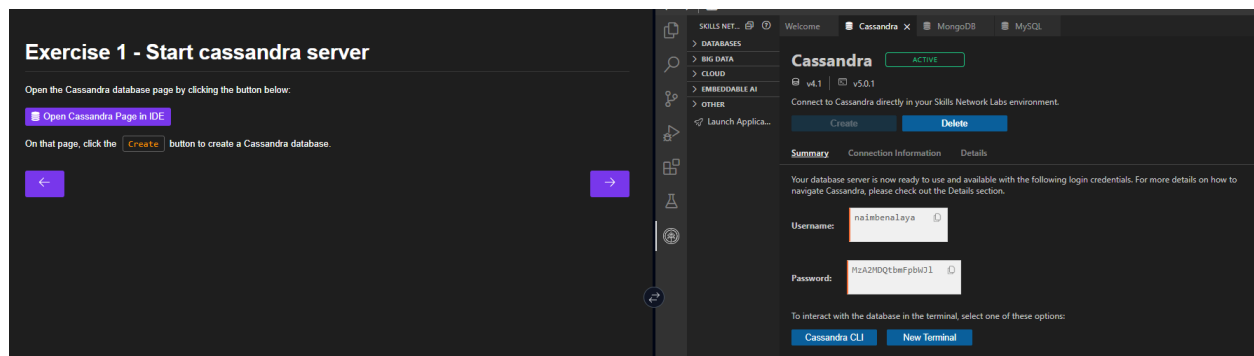

Exercise 2 - Connect to cassandra server

After creation has finished, click the **Cassandra CLI** button (below the **Create** button from the previous step) to connect to the database using the cqlsh CLI.

← →

SKILLS NET...
Welcome
Cassandra x MongoDB MySQL
DATABASES
BIG DATA
CLOUD
IMMEDIATE AI
OTHER
Launch Applica...

Cassandra ACTIVE

v4.1 v5.0.1

Connect to Cassandra directly in your Skills Network Labs environment.

Create Delete

Summary Connection Information Details

Your database server is now ready to use and available with the following login credentials. For more details on how to navigate Cassandra, please check out the Details section.

Username: naimbenalaya

Password: HZA2HDQktmfptWJ1

To interact with the database in the terminal, select one of these options:

Cassandra CLI New Terminal

theia@theiadocker-naimbenalaya:/home/project
Connected to Test Cluster at 172.21.121.98:9042
[cqlsh 6.0.0 | Cassandra 5.0-beta1 | CQL spec 3.4.7 | Native protocol v5]
Use HELP for help.
root@cqlsh>
root@cqlsh> |

Exercise 3 - Find host details

On the cqlsh run the below command.

```
1 show host
```

This will show the details of the server you have connected to.

Exercise 4 - Find the version of the server

On the cqlsh run the below command.

```
1 show version
```

This will show the version of the cassandra server.

Exercise 5 - List keyspaces

On the cqlsh run the below command.

```
1 describe keyspaces
```

This will print a list of the keyspaces present on the server.

```

theia@theiadocker-naimbenalaya:/home/project$ cqlsh 172.21.121.98 9042 --username ro
ot --password gPTIySecuWBXKfF3jFg0qcTS
WARNING: cqlsh was built against 4.0.17, but this server is 5.0. All features may n
ot work!
Connected to Test Cluster at 172.21.121.98:9042
[cqlsh 6.0.0 | Cassandra 5.0-beta1 | CQL spec 3.4.7 | Native protocol v5]
Use HELP for help.
root@cqlsh>
theia@theiadocker-naimbenalaya:/home/project$ cqlsh 172.21.121.98 9042 --username ro
ot --password gPTIySecuWBXKfF3jFg0qcTS
WARNING: cqlsh was built against 4.0.17, but this server is 5.0. All features may n
ot work!
Connected to Test Cluster at 172.21.121.98:9042
[cqlsh 6.0.0 | Cassandra 5.0-beta1 | CQL spec 3.4.7 | Native protocol v5]
Use HELP for help.
root@cqlsh>
root@cqlsh> show host
Connected to Test Cluster at 172.21.121.98:9042
root@cqlsh> show version
[cqlsh 6.0.0 | Cassandra 5.0-beta1 | CQL spec 3.4.7 | Native protocol v5]
root@cqlsh> describe keyspaces

system            system_distributed  system_traces      system_virtual_schema
system_auth        system_schema       system_views
root@cqlsh>

```

Exercise 6 - Clear the screen

On the cqlsh run the below command.

```
1  cls
```

This will clear the cqlsh screen.

Exercise 7 - Disconnect from cassandra server

On the cqlsh run the below command.

```
1  exit
```

Practice exercises

▼ Click here for Solution

Use the below command with the user name and password generated on your terminal window, when you started the cassandra server using start_cassandra command.

```
1  cqlsh --username cassandra --password MTg3MzMtcnNhbm5h
```

Your database server is now ready to use and available with the following login credentials. For more details on how to navigate Cassandra, please check out the Details section.

Username: naimbenalaya 

Password: MzA2MDQtbmFpbWJ1 