

Furnish Hope - Database ERD

A page per theme, in the order shown below.

Reading the diagrams


- **Orange header** = data table (tbl_*). **Green header** = lookup table (lkp_*).
- **PK** badge marks the primary key; **FK** badge marks a foreign key.
- A small italic → tbl_other under an FK column means that reference points OUT of this theme’s page.
- Arrows are drawn only for relationships within the same theme; cross-theme links are listed inline.

Contents

1.	Contacts & Addresses Shared people + place rows that almost every other theme joins to. tbl_contact is the polymorphic identity row used by clients, donors, facility_staff, agency contacts, vendors, etc.
2.	Clients & Households The client lifecycle — referral, intake, packing list (provisioning request) with its per-child rows + room/item template, visit, waiver, and delivery. Container pickup tables live here too.
3.	Donors, Donations & QuickBooks Donor records, individual gifts, designations, pledges, and the QBO sync trail. Donation pickups (warehouse intake) also live here.
4.	Inventory & Storage Items currently in the warehouse, where they're stored, and how they get reserved against open client requests.
5.	Facilities & Vehicles Corporate org and physical sites (warehouses, showrooms), plus the company vehicle fleet and its maintenance log.
6.	Staff, Volunteers & Shifts Facility staff + volunteer rosters, the public volunteer-signup queue, shift templates, generated shifts, and individual signups + hours.
7.	Fundraising: Campaigns, Events, Grants Multi-gift campaigns, fundraising events with attendees and sponsors, and grant tracking.
8.	Vendors Outside service providers Furnish Hope works with (plumbers, landscapers, suppliers) and the log of their service calls.
9.	Partner Agencies Outside agencies that refer households to Furnish Hope. Includes the self-serve application queue (pending → approved → agency), the populations-served join, and the one-time caseworker invitations that seed agency user accounts.
10.	Communications, Files & Notes Email accounts, cached IMAP messages, templates, the outbound/inbound messaging layer (SMS + email with templates and triggers), the generic per-entity attachment table, and free-form notes.
11.	System: Auth, Audit, Issues, Settings App-wide infrastructure: user accounts, audit log, app settings, the in-app issue tracker + developer broadcasts, org branding, and the user-manual screenshot store.


Contacts & Addresses

Shared people + place rows that almost every other theme joins to. tbl_contact is the polymorphic identity row used by clients, donors, facility_staff, agency contacts, vendors, etc.

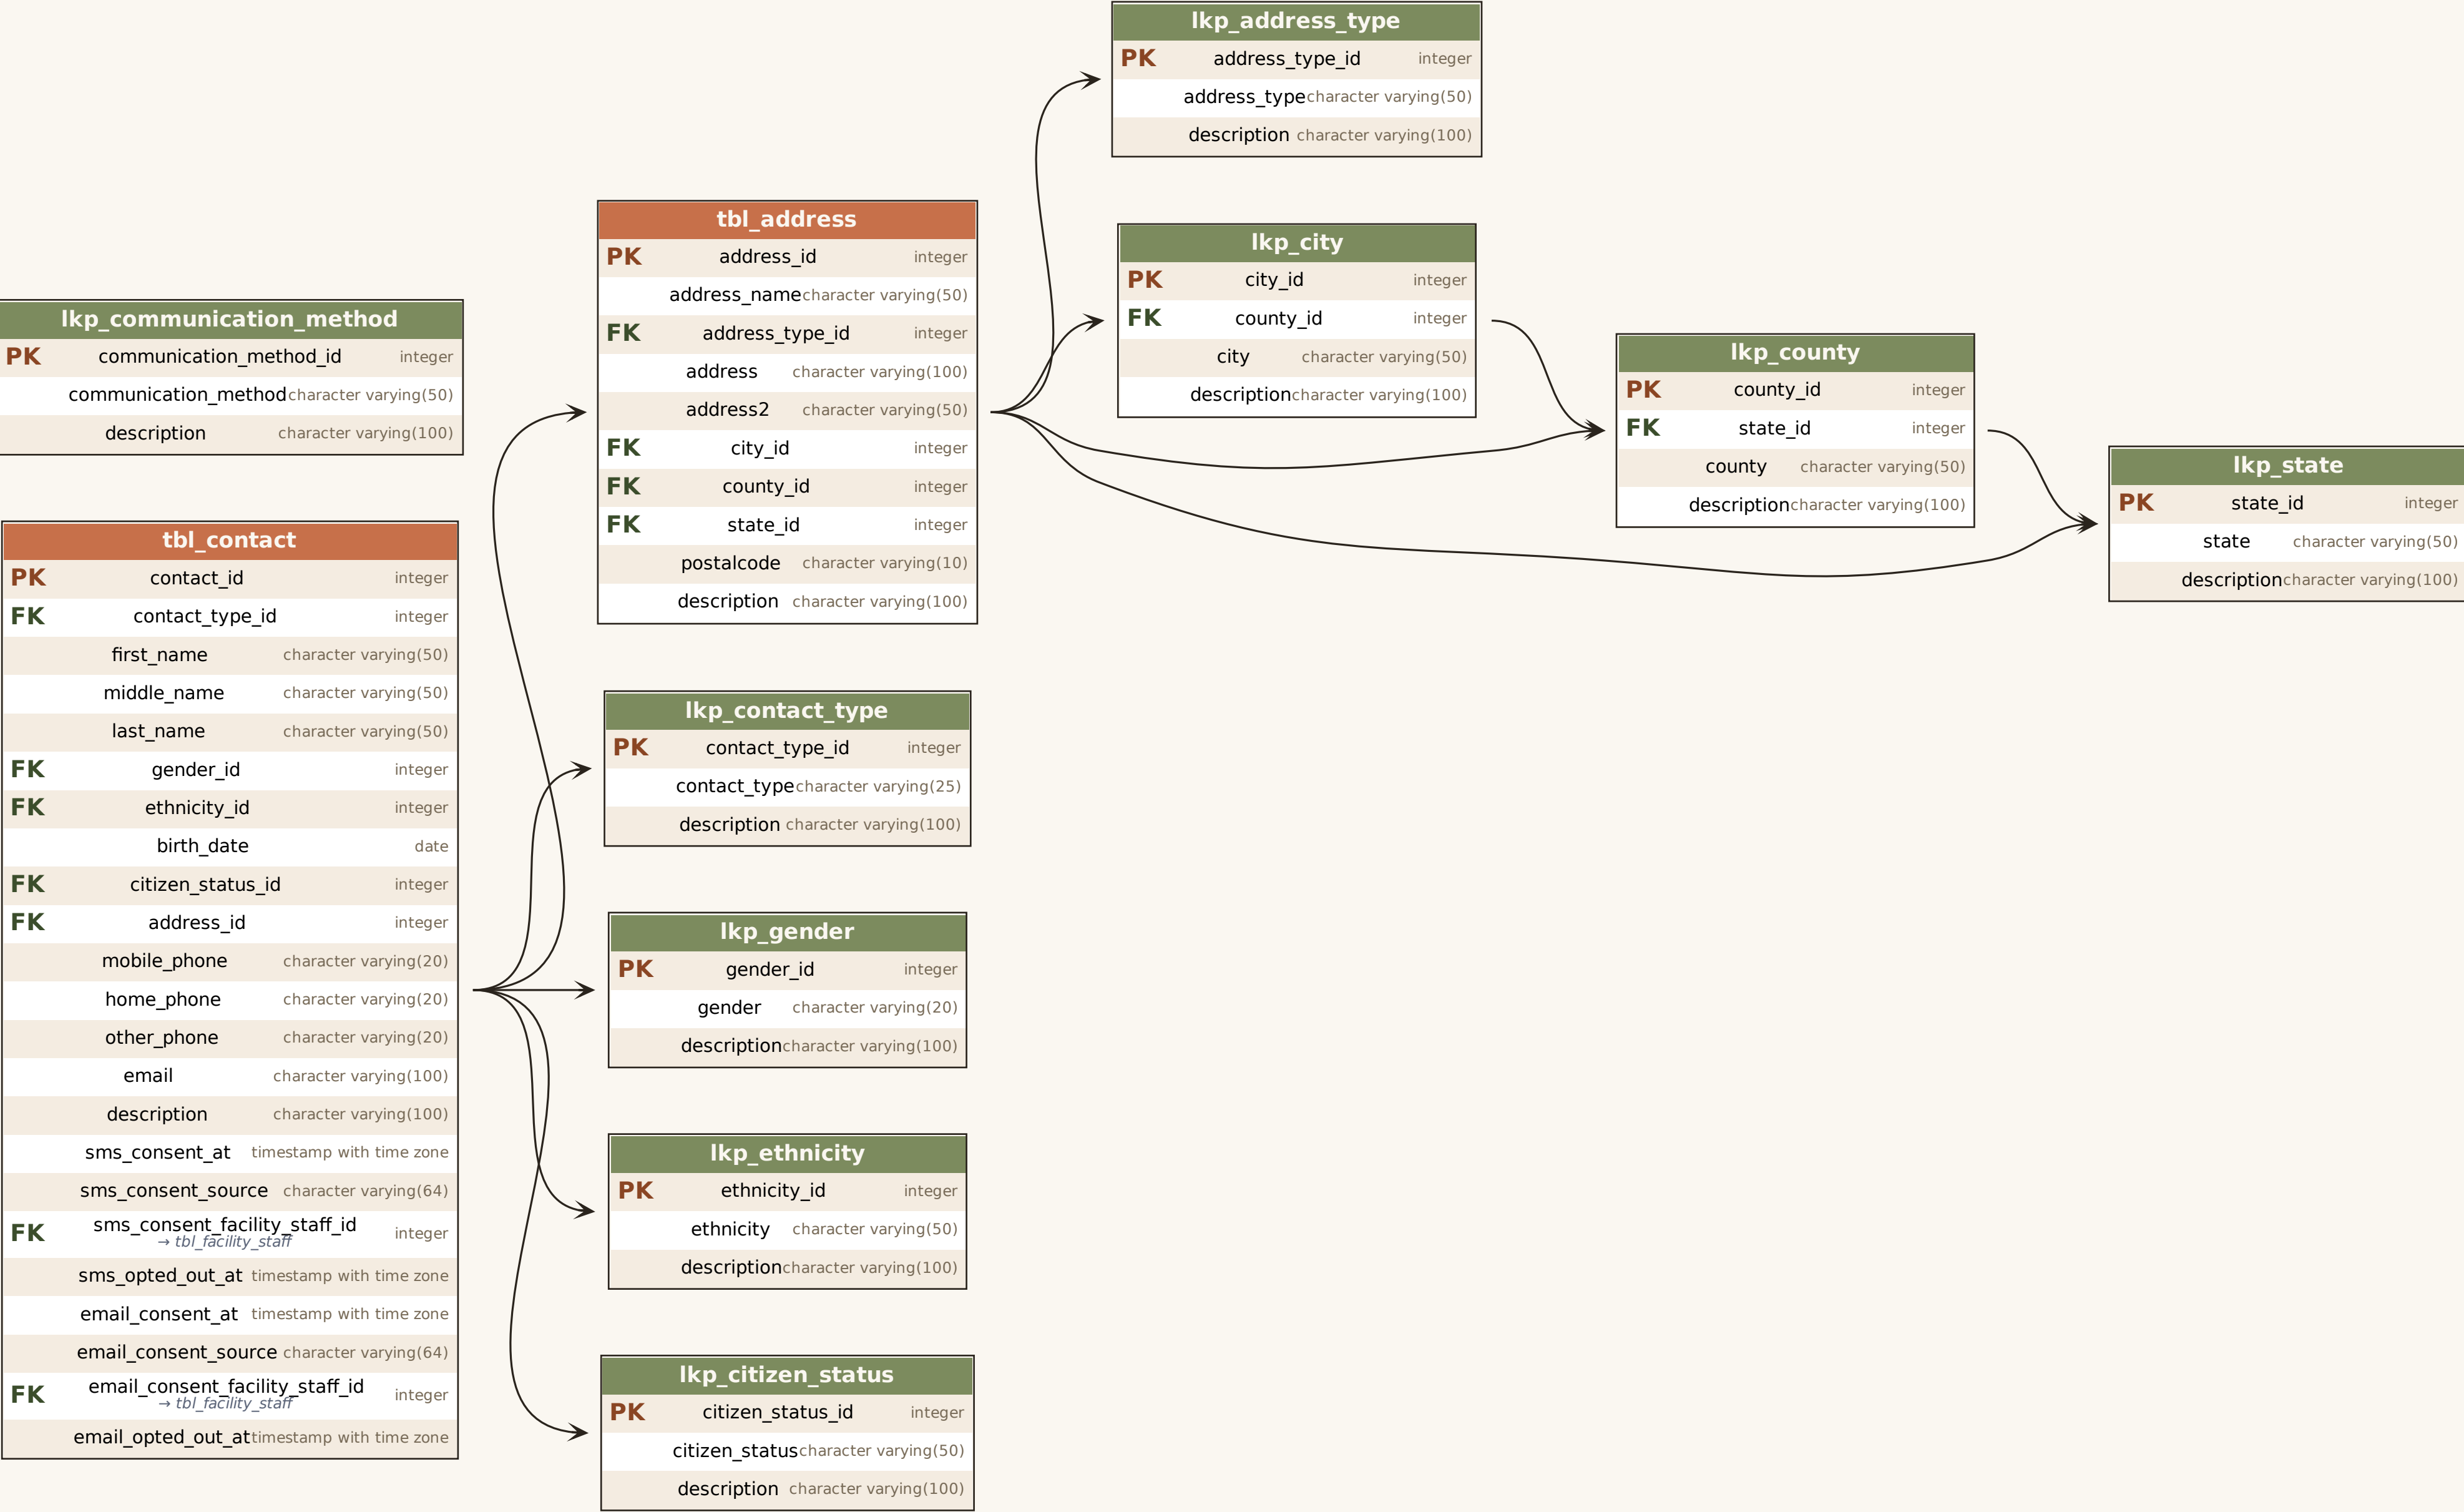


Clients & Households

The client lifecycle — referral, intake, packing list (provisioning request) with its per-child rows + room/item template, visit, waiver, and delivery. Container pickup tables live here too.

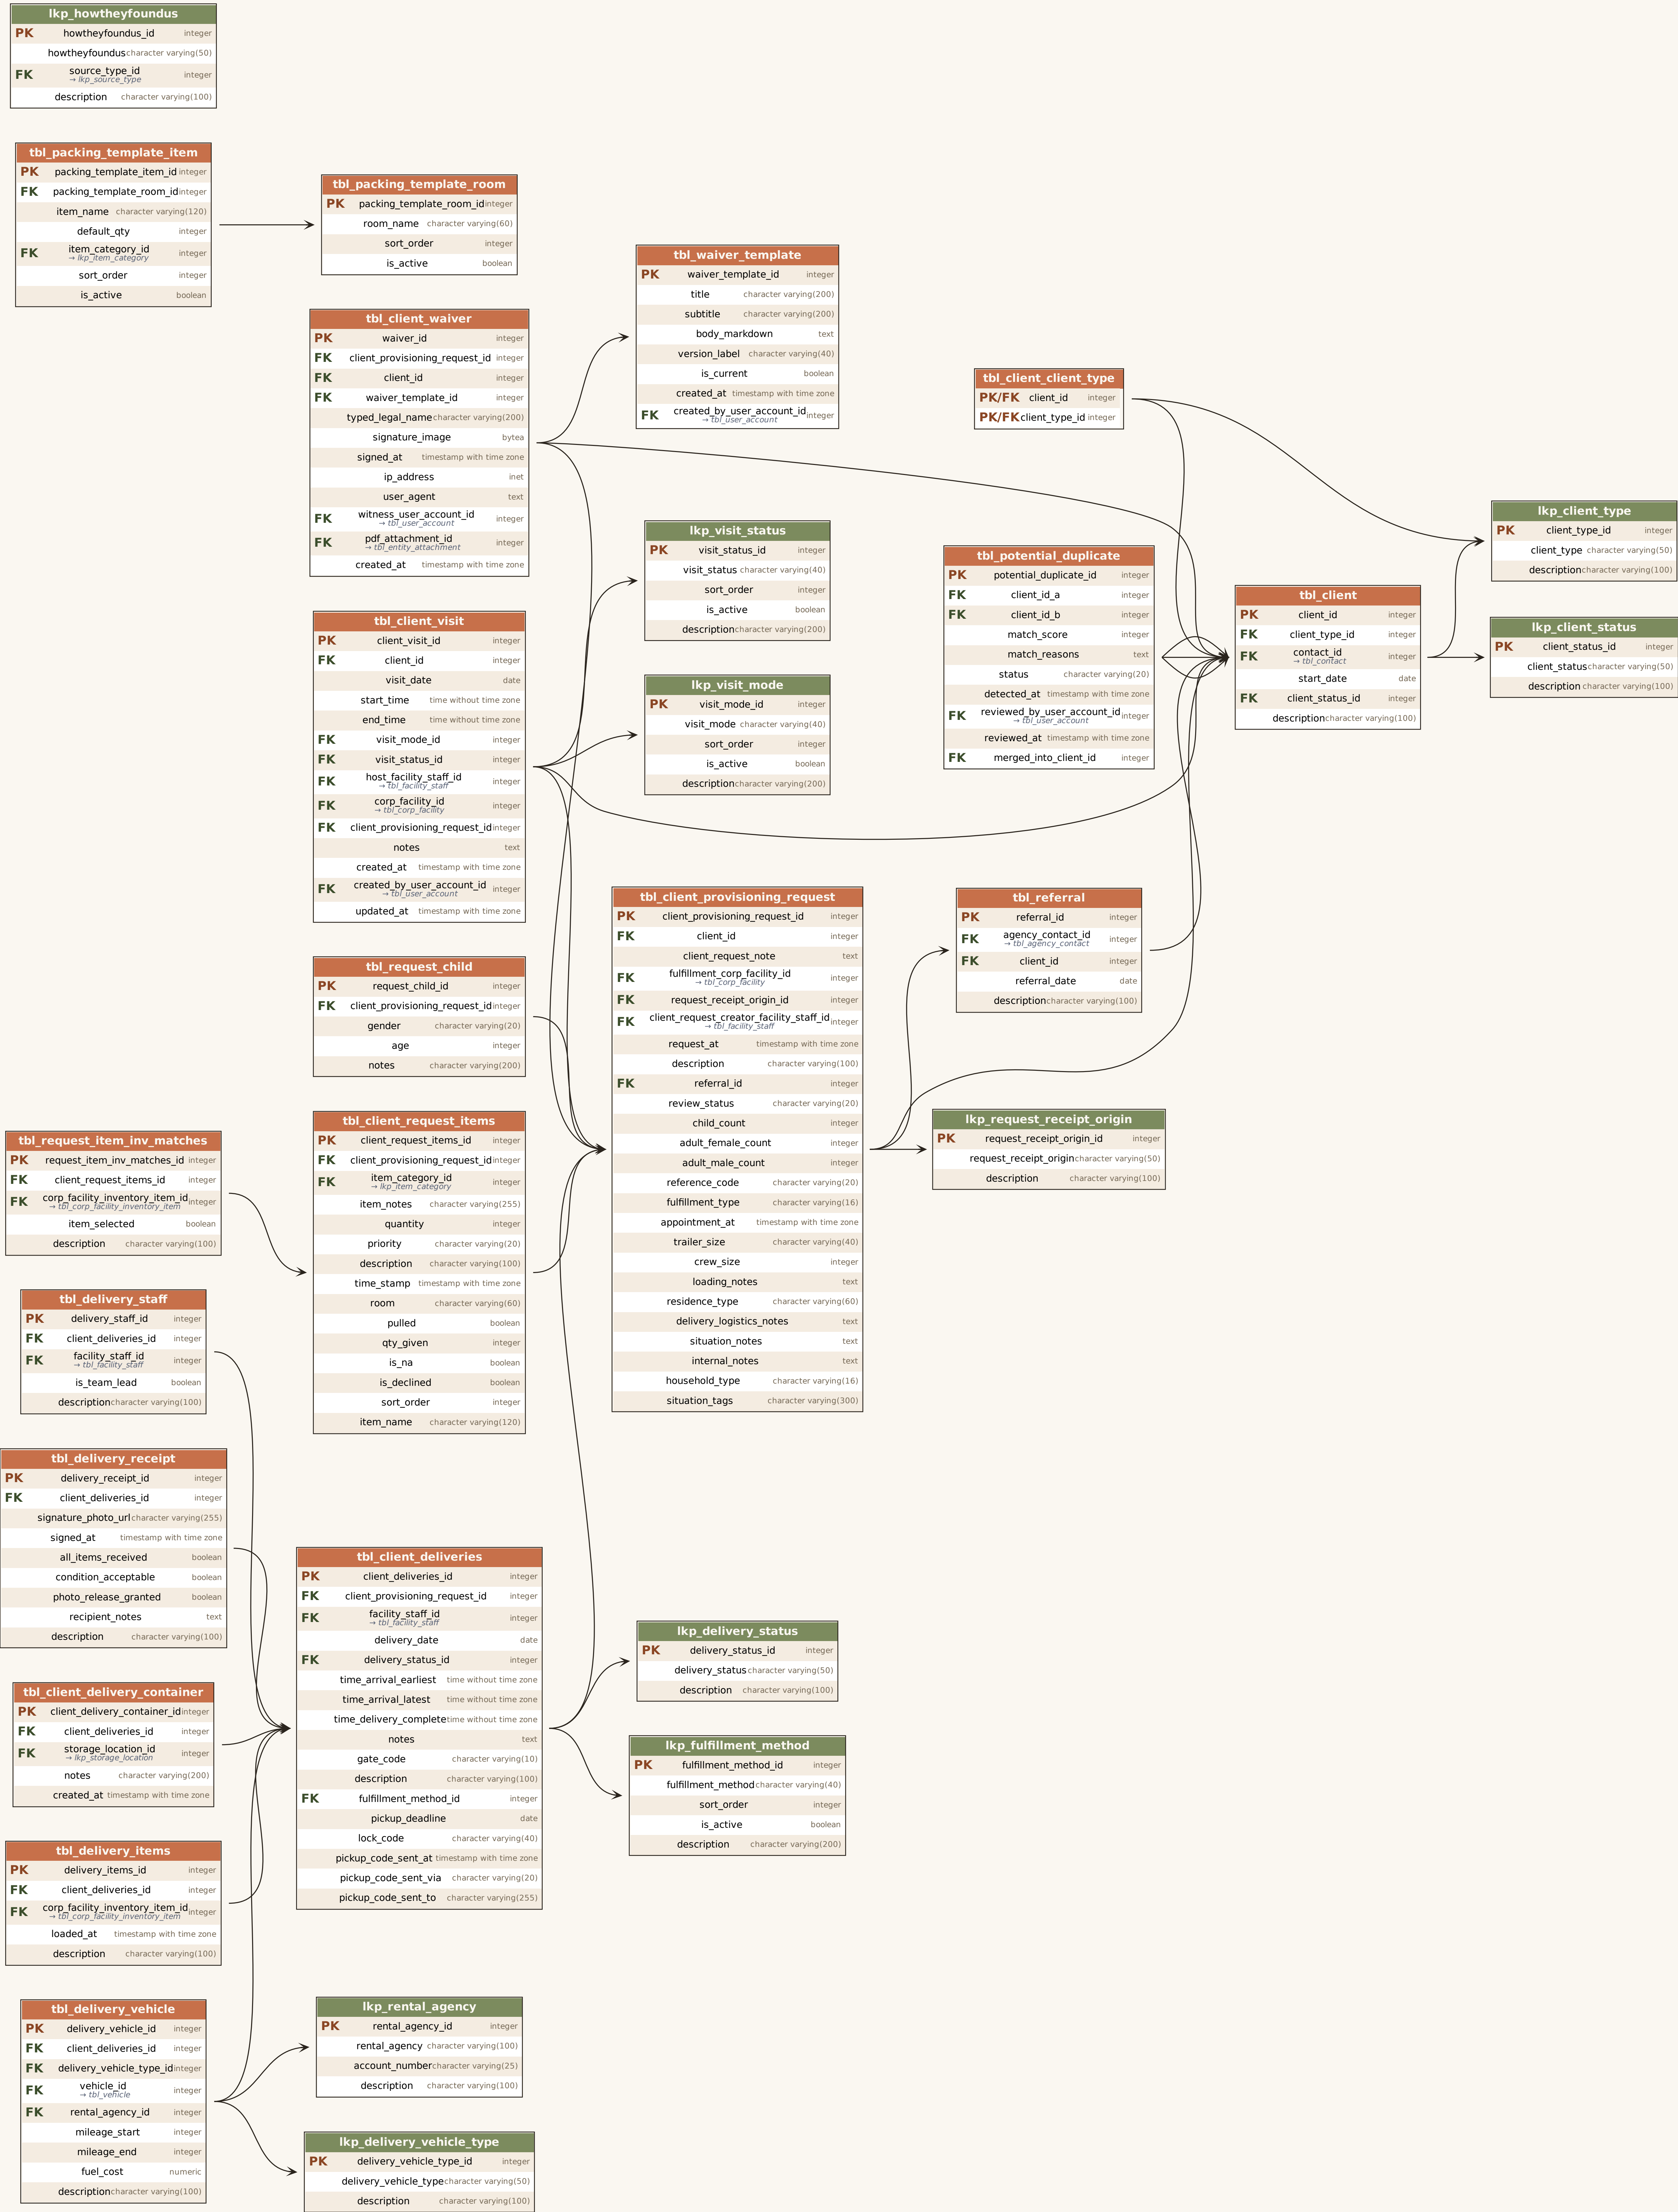


Donors, Donations & QuickBooks

Donor records, individual gifts, designations, pledges, and the QBO sync trail. Donation pickups (warehouse intake) also live here.

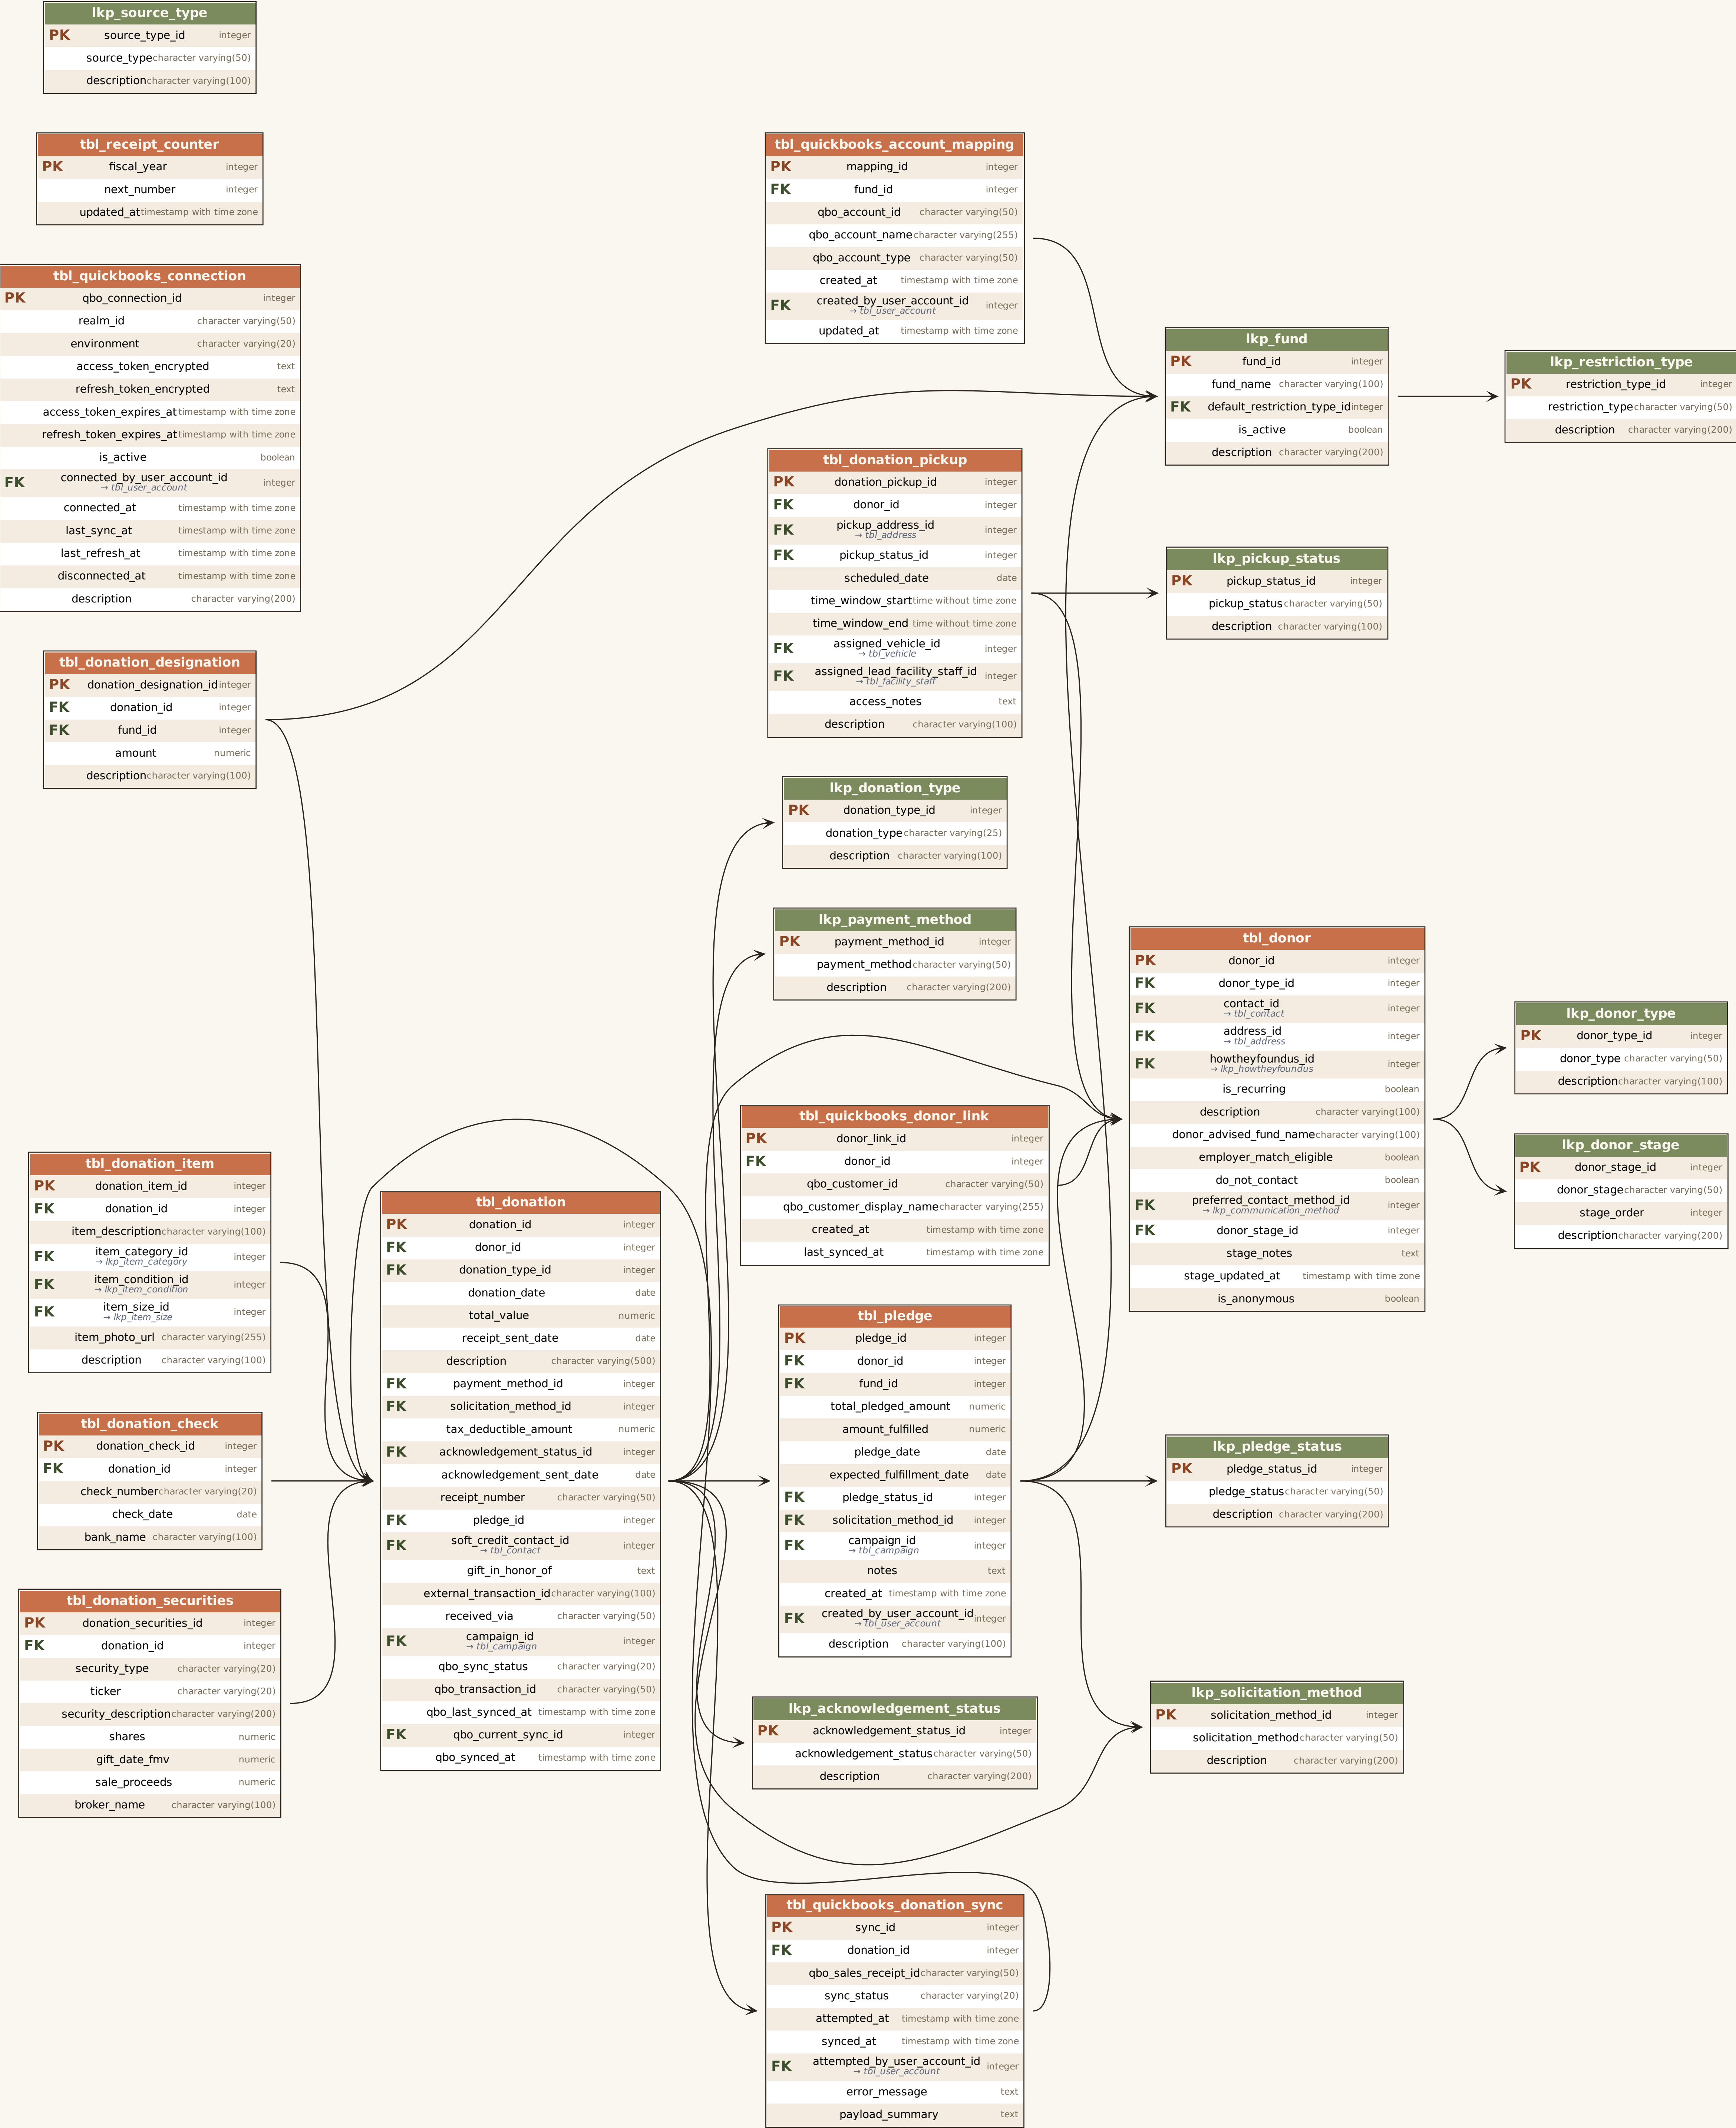


Inventory & Storage

Items currently in the warehouse, where they're stored, and how they get reserved against open client requests.

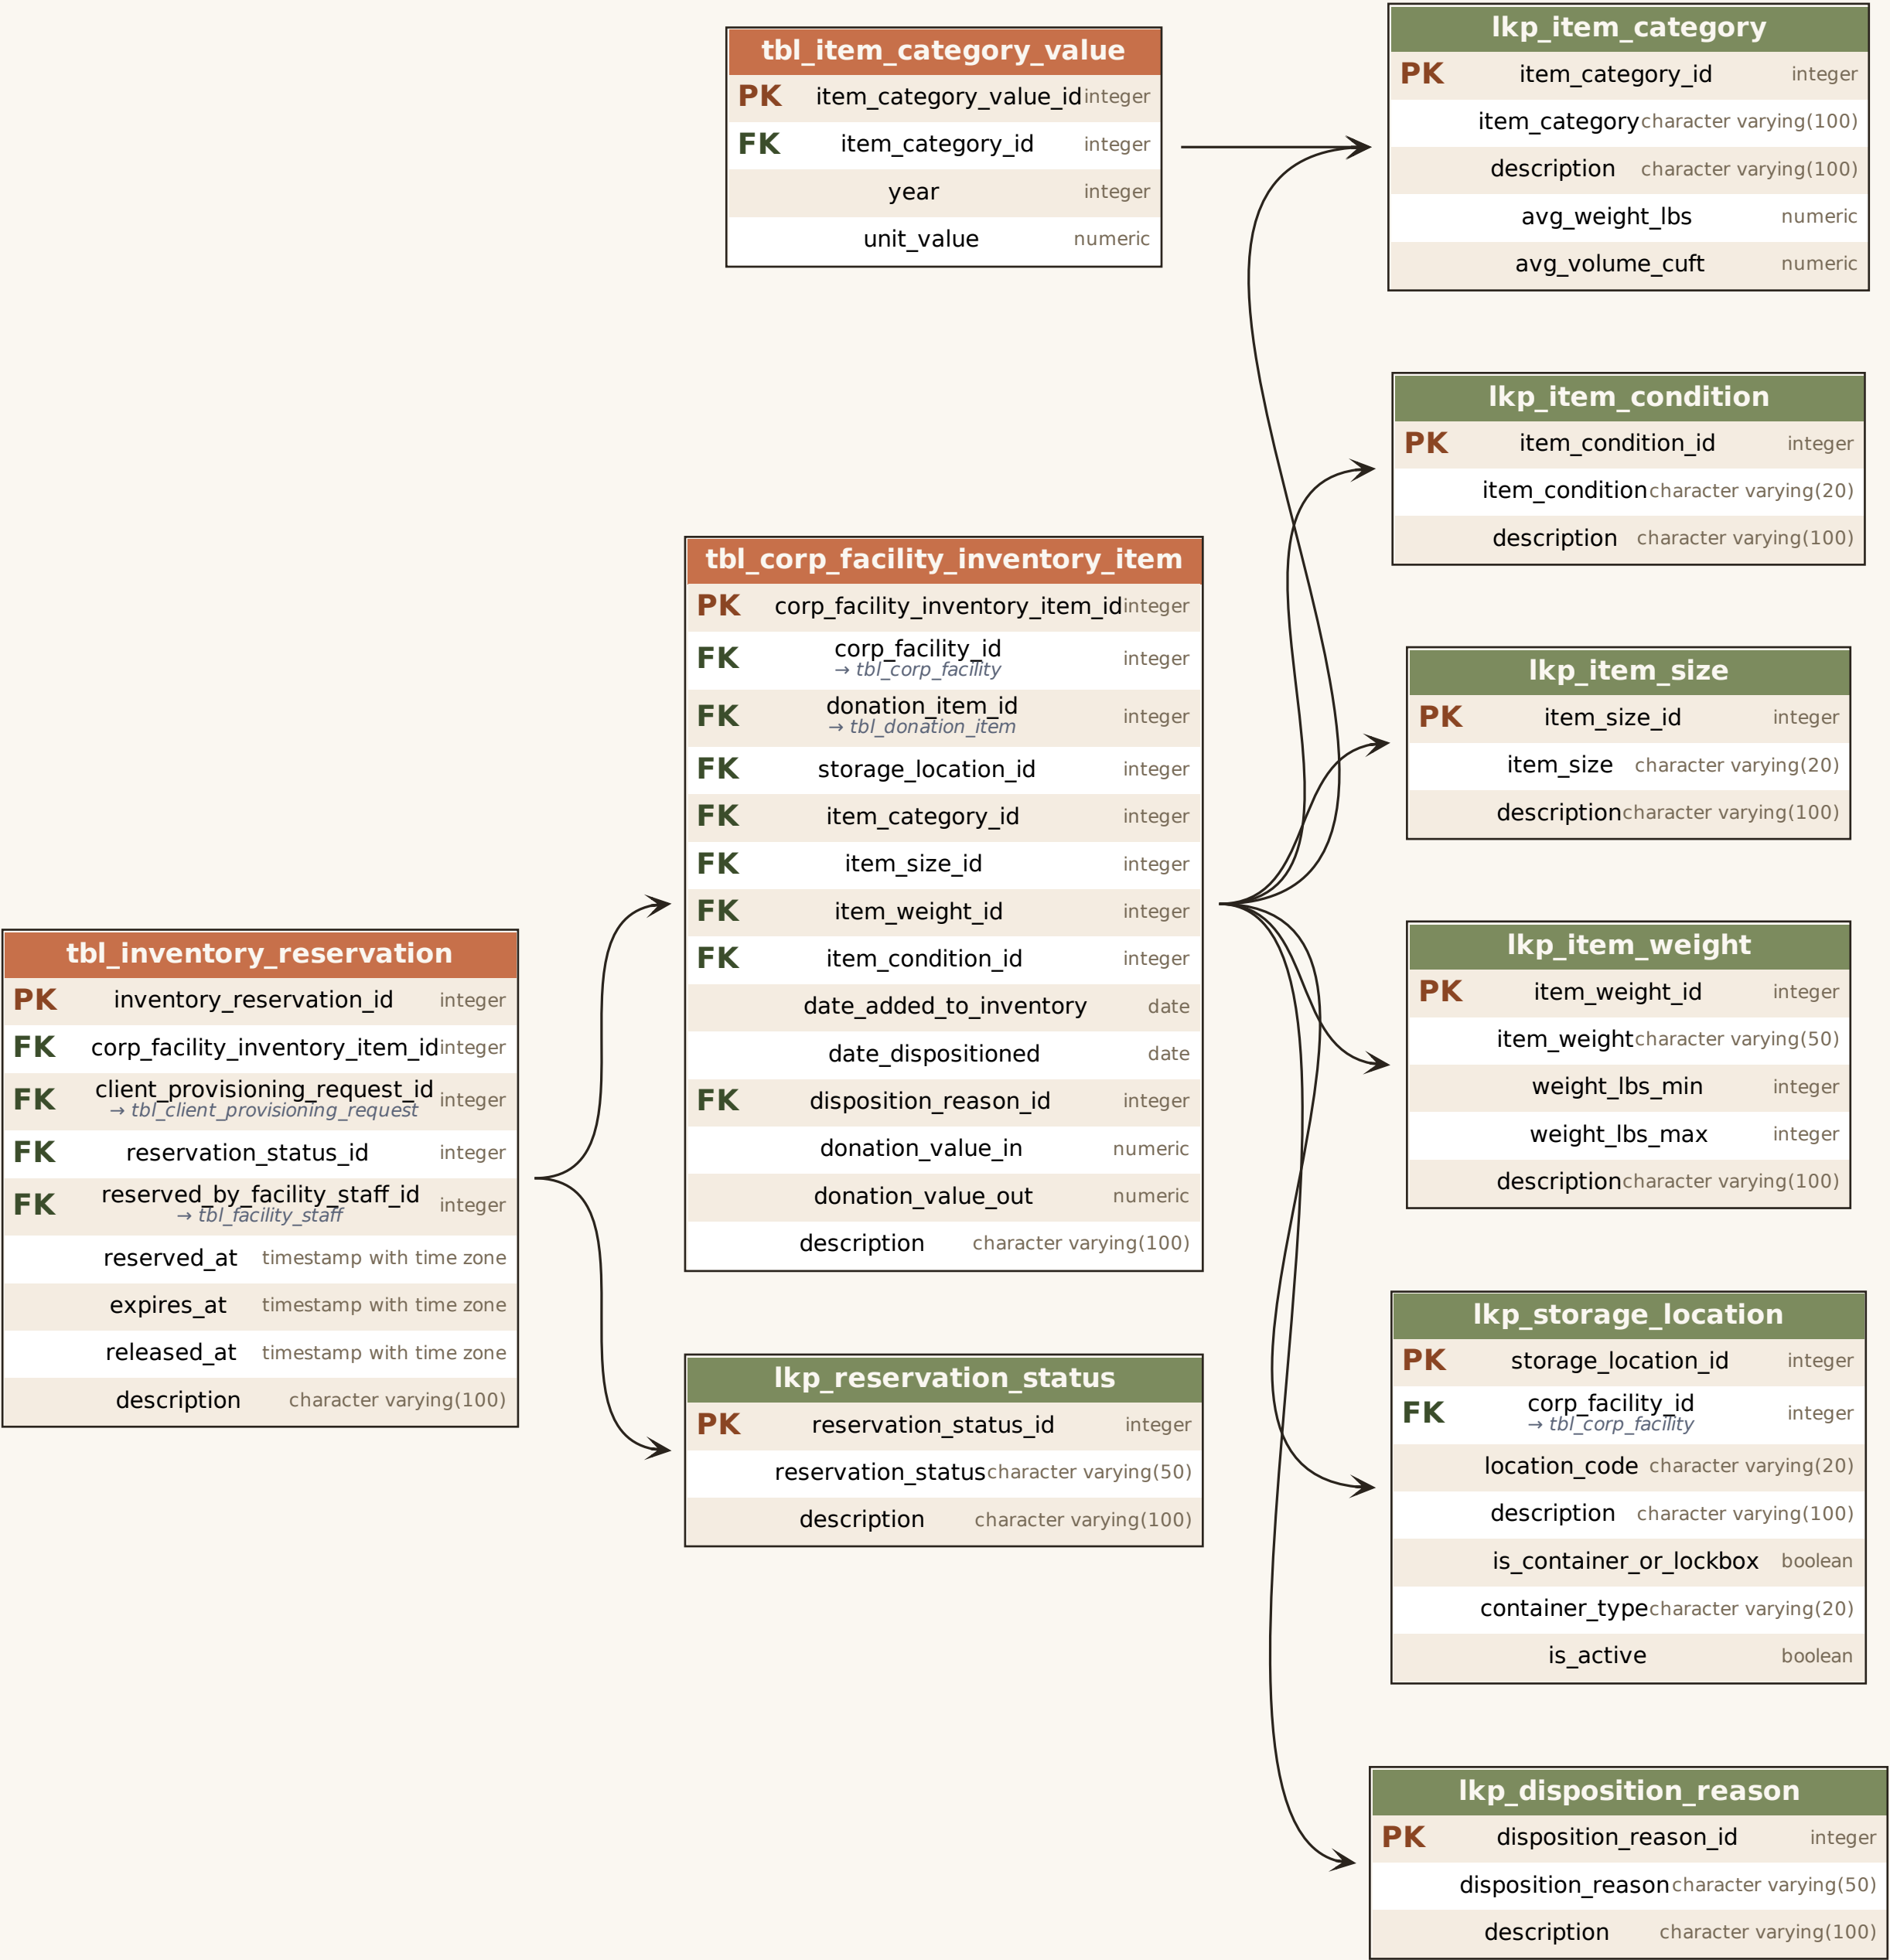


Facilities & Vehicles

Corporate org and physical sites (warehouses, showrooms), plus the company vehicle fleet and its maintenance log.

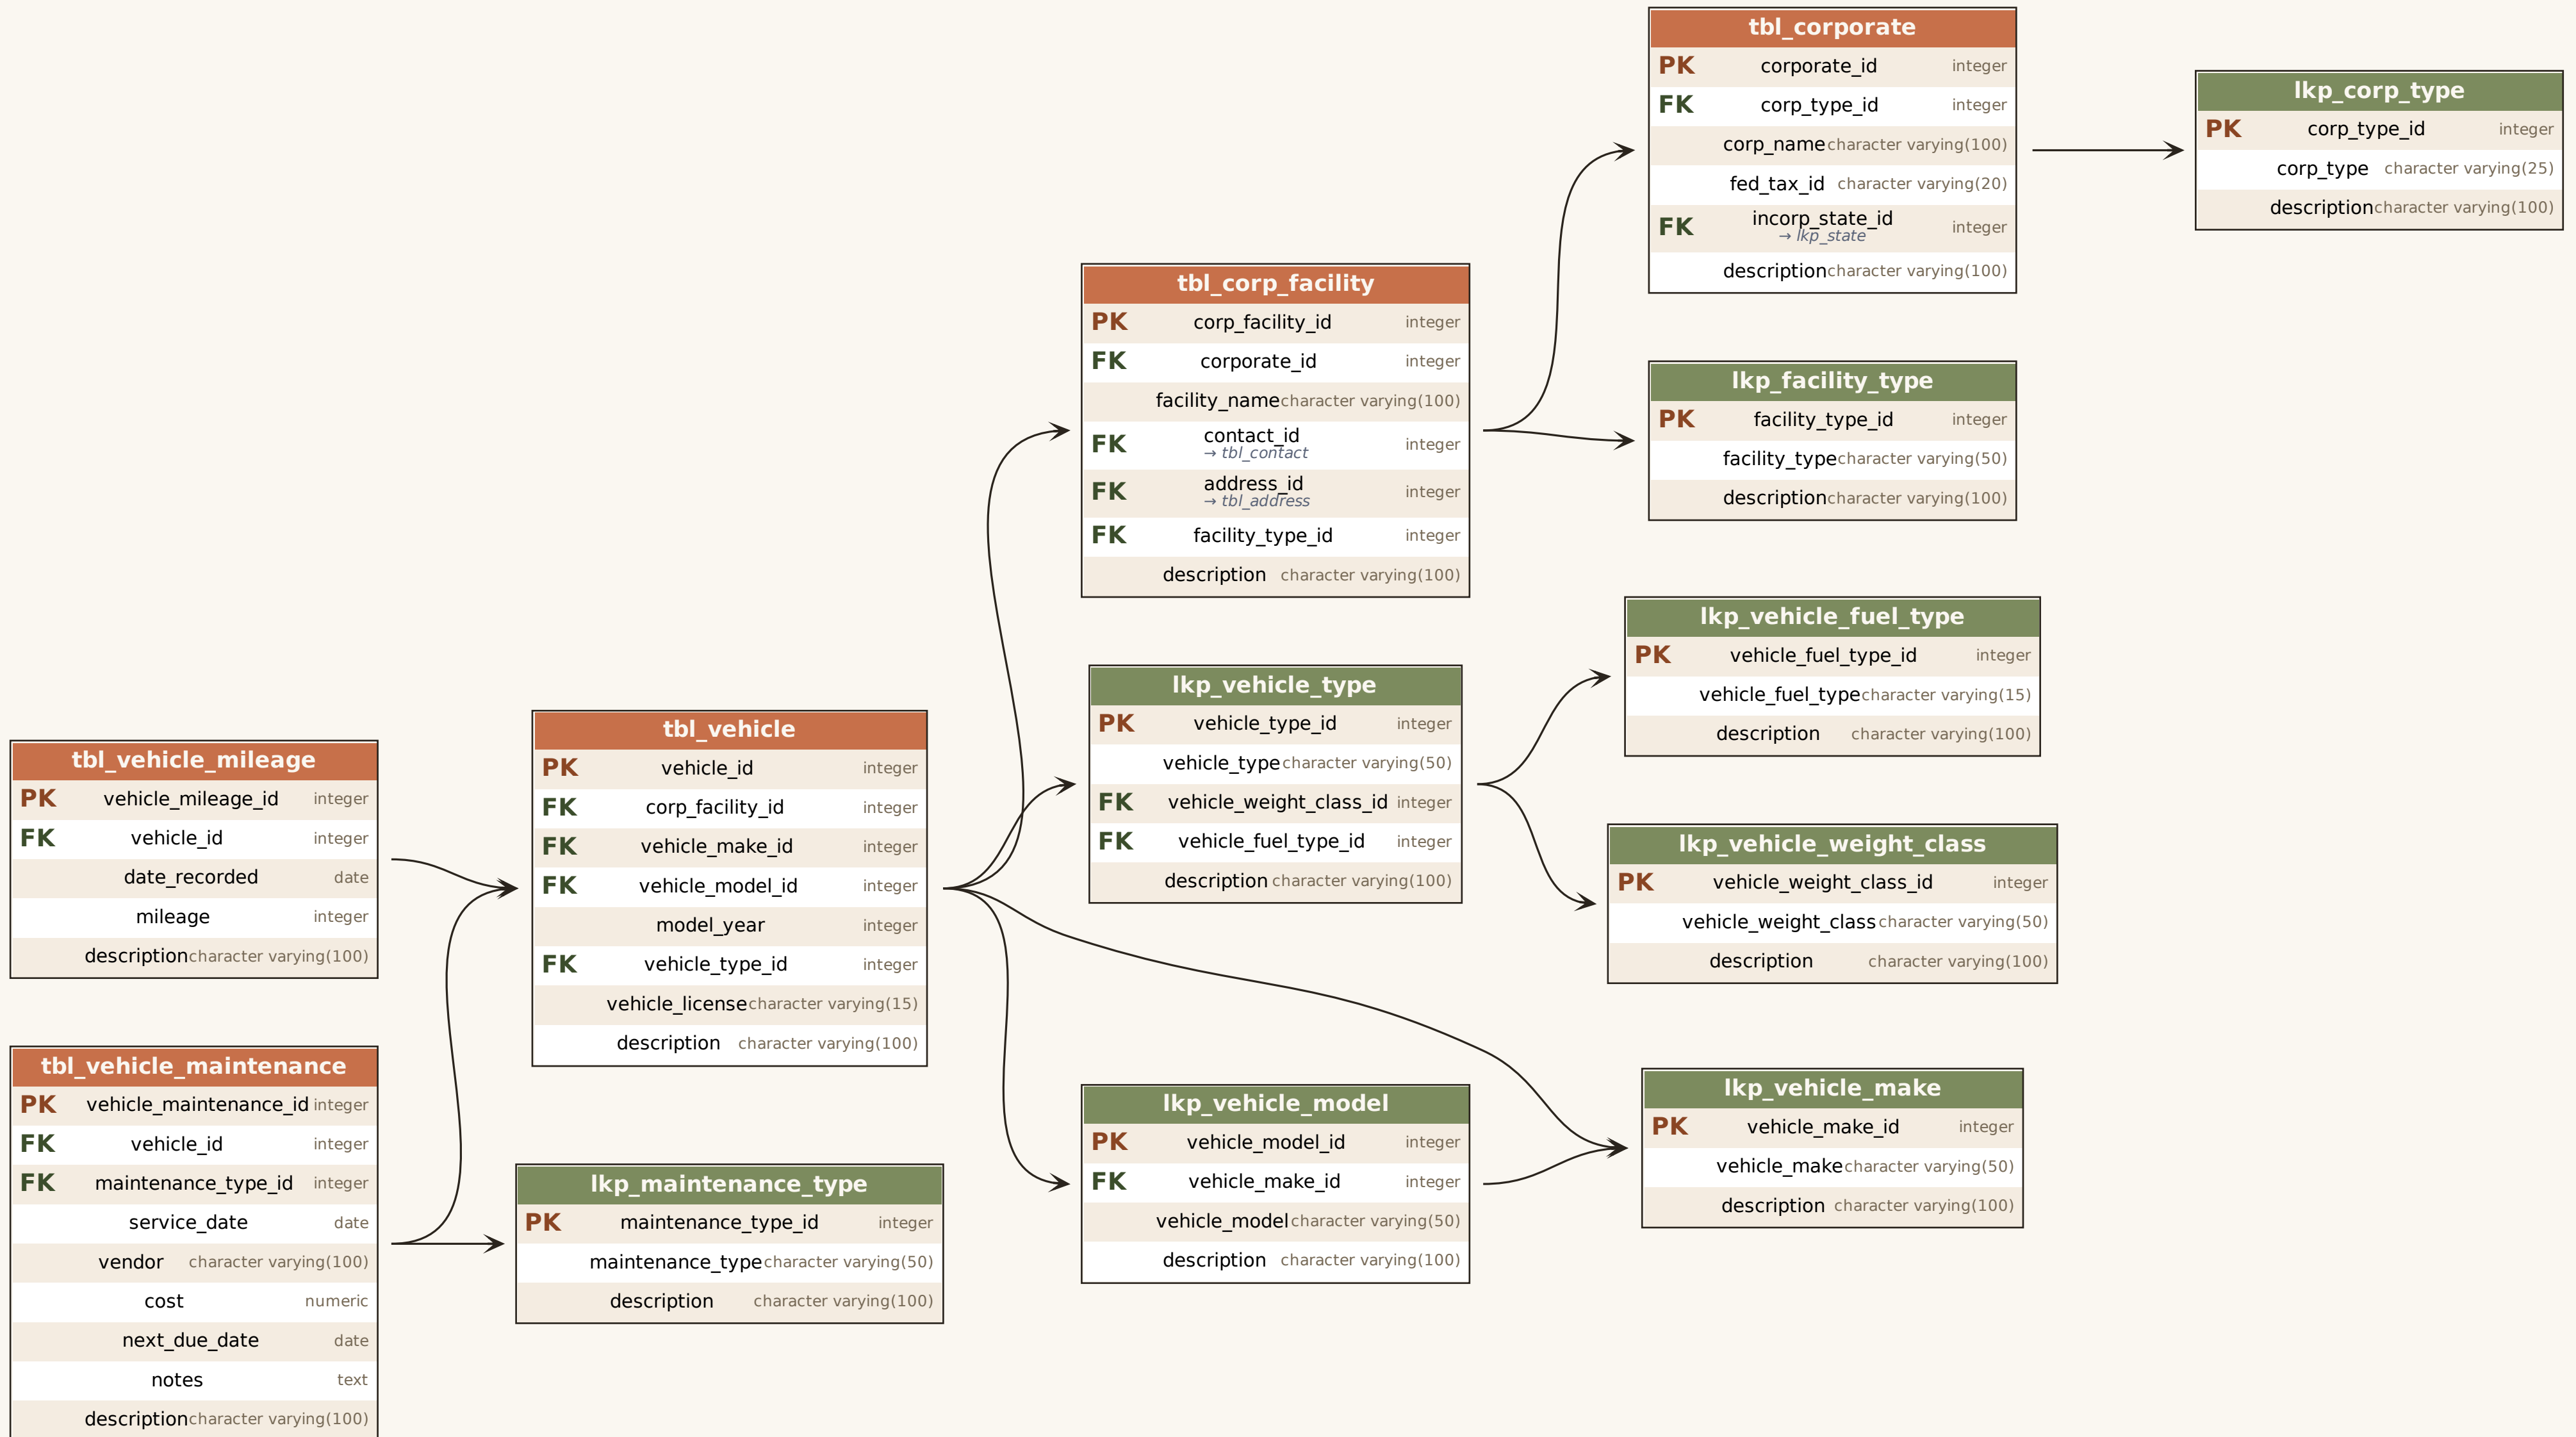

Staff, Volunteers & Shifts

Facility staff + volunteer rosters, the public volunteer-signup queue, shift templates, generated shifts, and individual signups + hours.

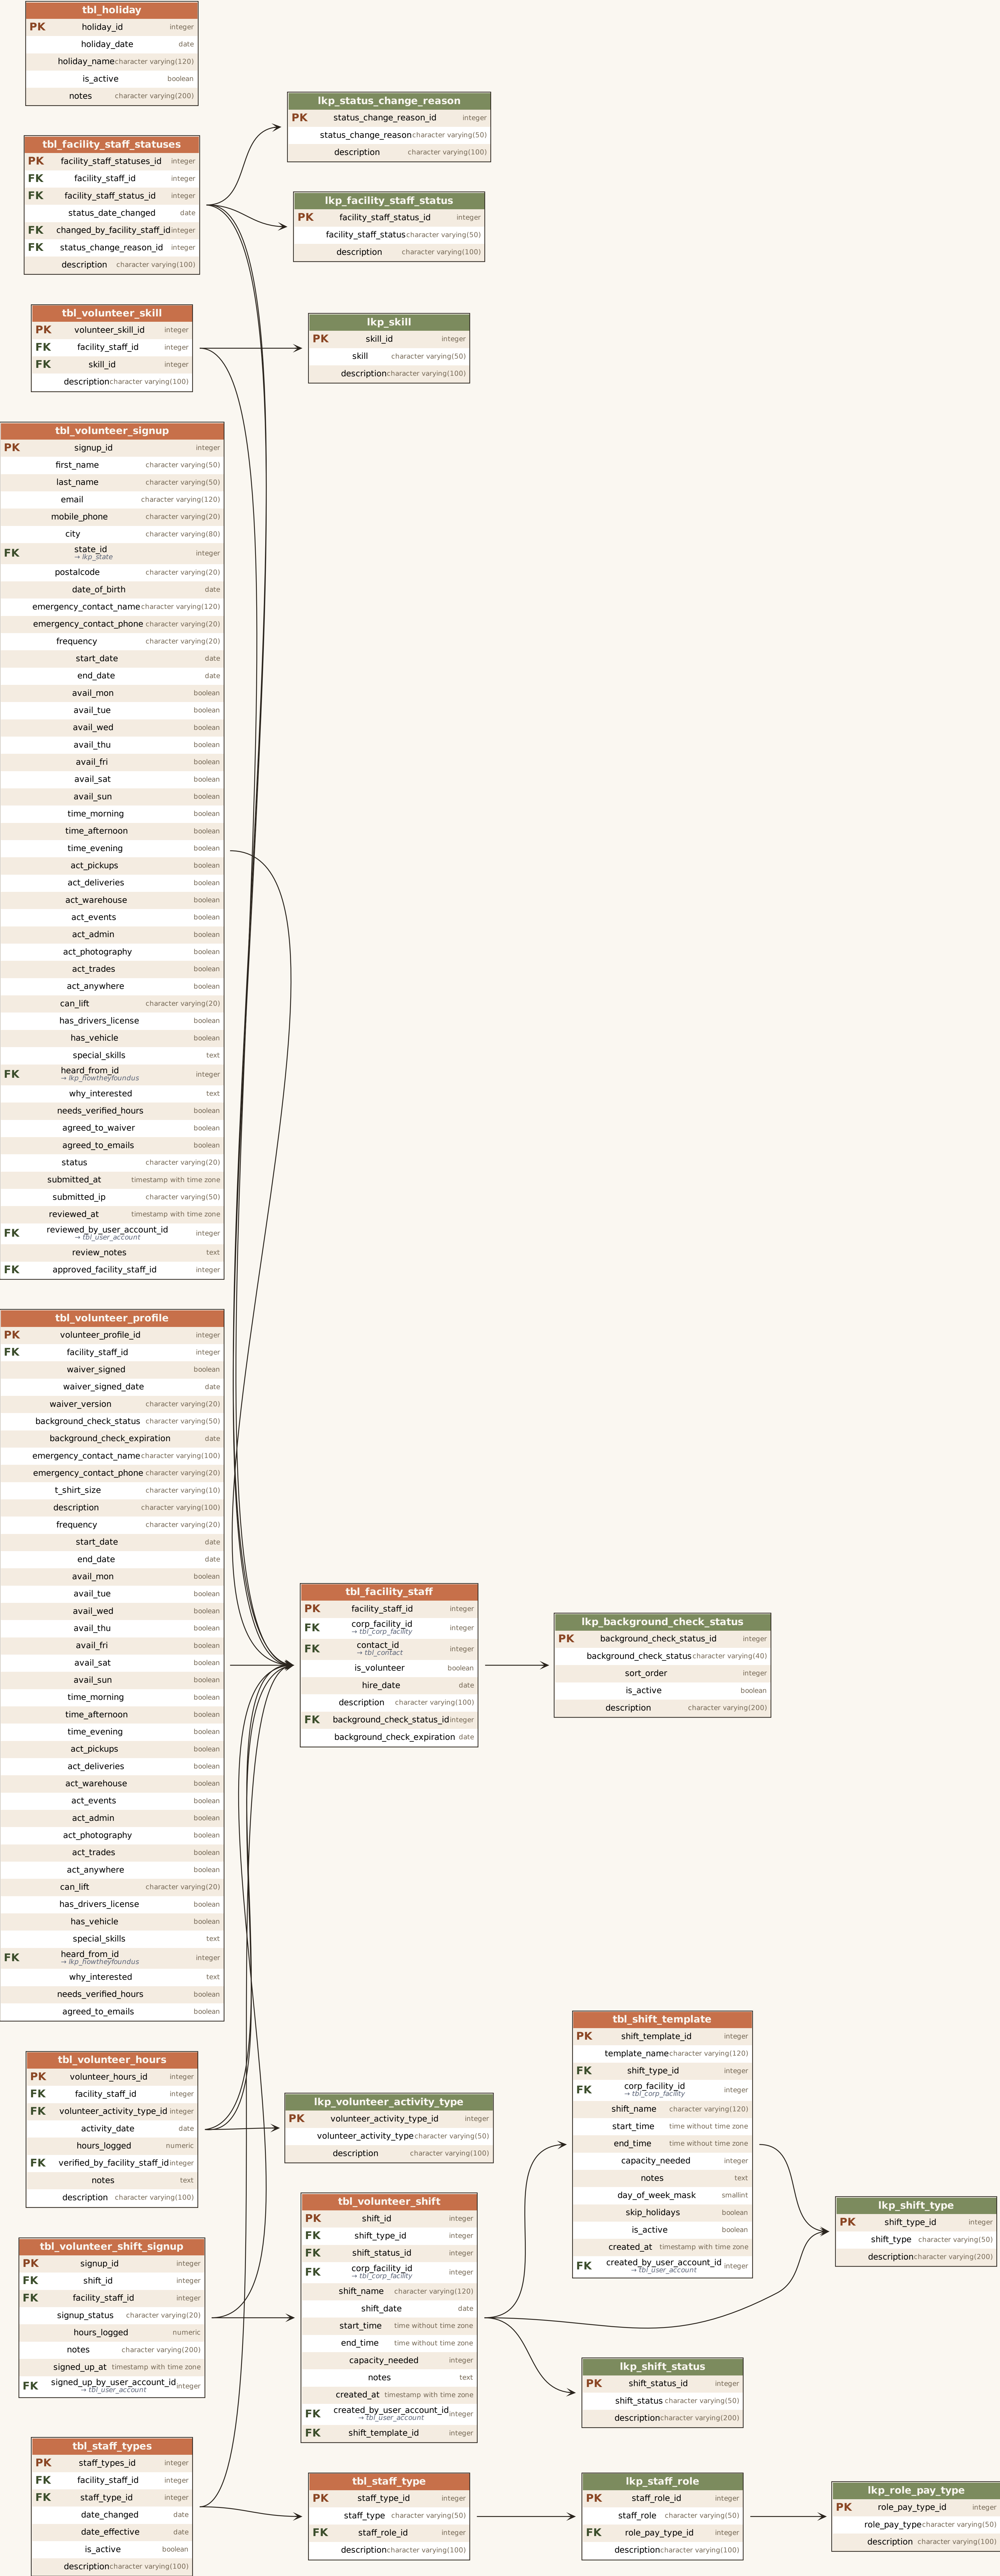

Fundraising: Campaigns, Events, Grants

Multi-gift campaigns, fundraising events with attendees and sponsors, and grant tracking.

tbl_grant		
PK	grant_id	integer
	funder_name	character varying(100)
	grant_name	character varying(100)
	award_amount	numeric
	period_start	date
	period_end	date
	reporting_deadline	date
	restrictions	text
	description	character varying(100)

tbl_event_attendee		
PK	event_attendee_id	integer
FK	event_id	integer
FK	contact_id	integer
	<i>→ tbl_contact</i>	
	rsvp_status	character varying(20)
	attended	boolean
	amount_contributed	numeric
	description	character varying(100)
	checked_in_at	timestamp with time zone
	ticket_count	integer
	notes	text
FK	rsvp_status_id	integer
FK	donation_id	integer
	<i>→ tbl_donation</i>	
	table_number	character varying(40)
	seat_number	character varying(20)
	dietary_notes	character varying(200)

tbl_event_sponsor		
PK	event_sponsor_id	integer
FK	event_id	integer
FK	corporate_id	integer
	<i>→ tbl_corporate</i>	
FK	contact_id	integer
	<i>→ tbl_contact</i>	
FK	sponsor_level_id	integer
	amount_pledged	numeric
	amount_paid	numeric
	acknowledged	boolean
	notes	text
FK	donation_id	integer
	<i>→ tbl_donation</i>	
	created_at	timestamp with time zone
	updated_at	timestamp with time zone

lkp_rsvp_status		
PK	rsvp_status_id	integer
	rsvp_status	character varying(40)
	sort_order	integer
	is_active	boolean

tbl_event		
PK	event_id	integer
FK	event_type_id	integer
	event_name	character varying(100)
	event_date	date
	start_time	time without time zone
	end_time	time without time zone
FK	address_id	integer
	<i>→ tbl_address</i>	
	goal_amount	numeric
	amount_raised	numeric
	description	character varying(100)
FK	campaign_id	integer
	is_public	boolean
	ticket_price	numeric
	notes	text
FK	manager_facility_staff_id	integer
	<i>→ tbl_facility_staff</i>	
FK	host_contact_id	integer
	<i>→ tbl_contact</i>	
FK	host_corporate_id	integer
	<i>→ tbl_corporate</i>	
	max_attendees	integer
	run_of_show	text
	staff_briefing	text

lkp_sponsor_level		
PK	sponsor_level_id	integer
	sponsor_level	character varying(40)
	sort_order	integer
	is_active	boolean
	description	character varying(200)

tbl_campaign		
PK	campaign_id	integer
	campaign_name	character varying(150)
FK	campaign_type_id	integer
FK	campaign_status_id	integer
FK	fund_id	integer
	<i>→ lkp_fund</i>	
	goal_amount	numeric
	start_date	date
	end_date	date
FK	manager_facility_staff_id	integer
	<i>→ tbl_facility_staff</i>	
	public_url	character varying(255)
	notes	text
	created_at	timestamp with time zone
FK	created_by_user_account_id	integer
	<i>→ tbl_user_account</i>	
	description	character varying(100)

lkp_event_type		
PK	event_type_id	integer
	event_type	character varying(50)
	description	character varying(100)

lkp_campaign_type		
PK	campaign_type_id	integer
	campaign_type	character varying(50)
	description	character varying(200)

lkp_campaign_status		
PK	campaign_status_id	integer
	campaign_status	character varying(50)
	description	character varying(200)

Vendors

Outside service providers Furnish Hope works with (plumbers, landscapers, suppliers) and the log of their service calls.

tbl_vendor_service		
PK	vendor_service_id	integer
FK	vendor_id	integer
	service_date	date
	start_time	time without time zone
	end_time	time without time zone
	location_text	character varying(300)
FK	corp_facility_id	integer
	description	text
	cost_estimate	numeric
FK	vendor_service_status_id	integer
	notes	text
FK	created_by_user_account_id	integer
	created_at	timestamp with time zone
	updated_at	timestamp with time zone

tbl_vendor		
PK	vendor_id	integer
FK	contact_id	integer
	→ tbl_contact	
FK	vendor_type_id	integer
FK	vendor_specialty_id	integer
	business_name	character varying(200)
	w9_received	boolean
	w9_received_date	date
	coi_received	boolean
	coi_expires_at	date
	default_hourly_rate	numeric
	payment_terms	character varying(80)
	tax_id	character varying(40)
	notes	text
	is_active	boolean
	qbo_vendor_id	character varying(40)
	qbo_synced_at	timestamp with time zone
	created_at	timestamp with time zone
	updated_at	timestamp with time zone


lkp_vendor_type		
PK	vendor_type_id	integer
	vendor_type	character varying(50)
	description	character varying(200)
	sort_order	integer

lkp_vendor_specialty		
PK	vendor_specialty_id	integer
	vendor_specialty	character varying(80)
	description	character varying(200)
	sort_order	integer

lkp_vendor_service_status		
PK	vendor_service_status_id	integer
	vendor_service_status	character varying(40)
	description	character varying(200)
	sort_order	integer

Partner Agencies

Outside agencies that refer households to Furnish Hope. Includes the self-serve application queue (pending → approved → agency), the populations-served join, and the one-time caseworker invitations that seed agency user accounts.

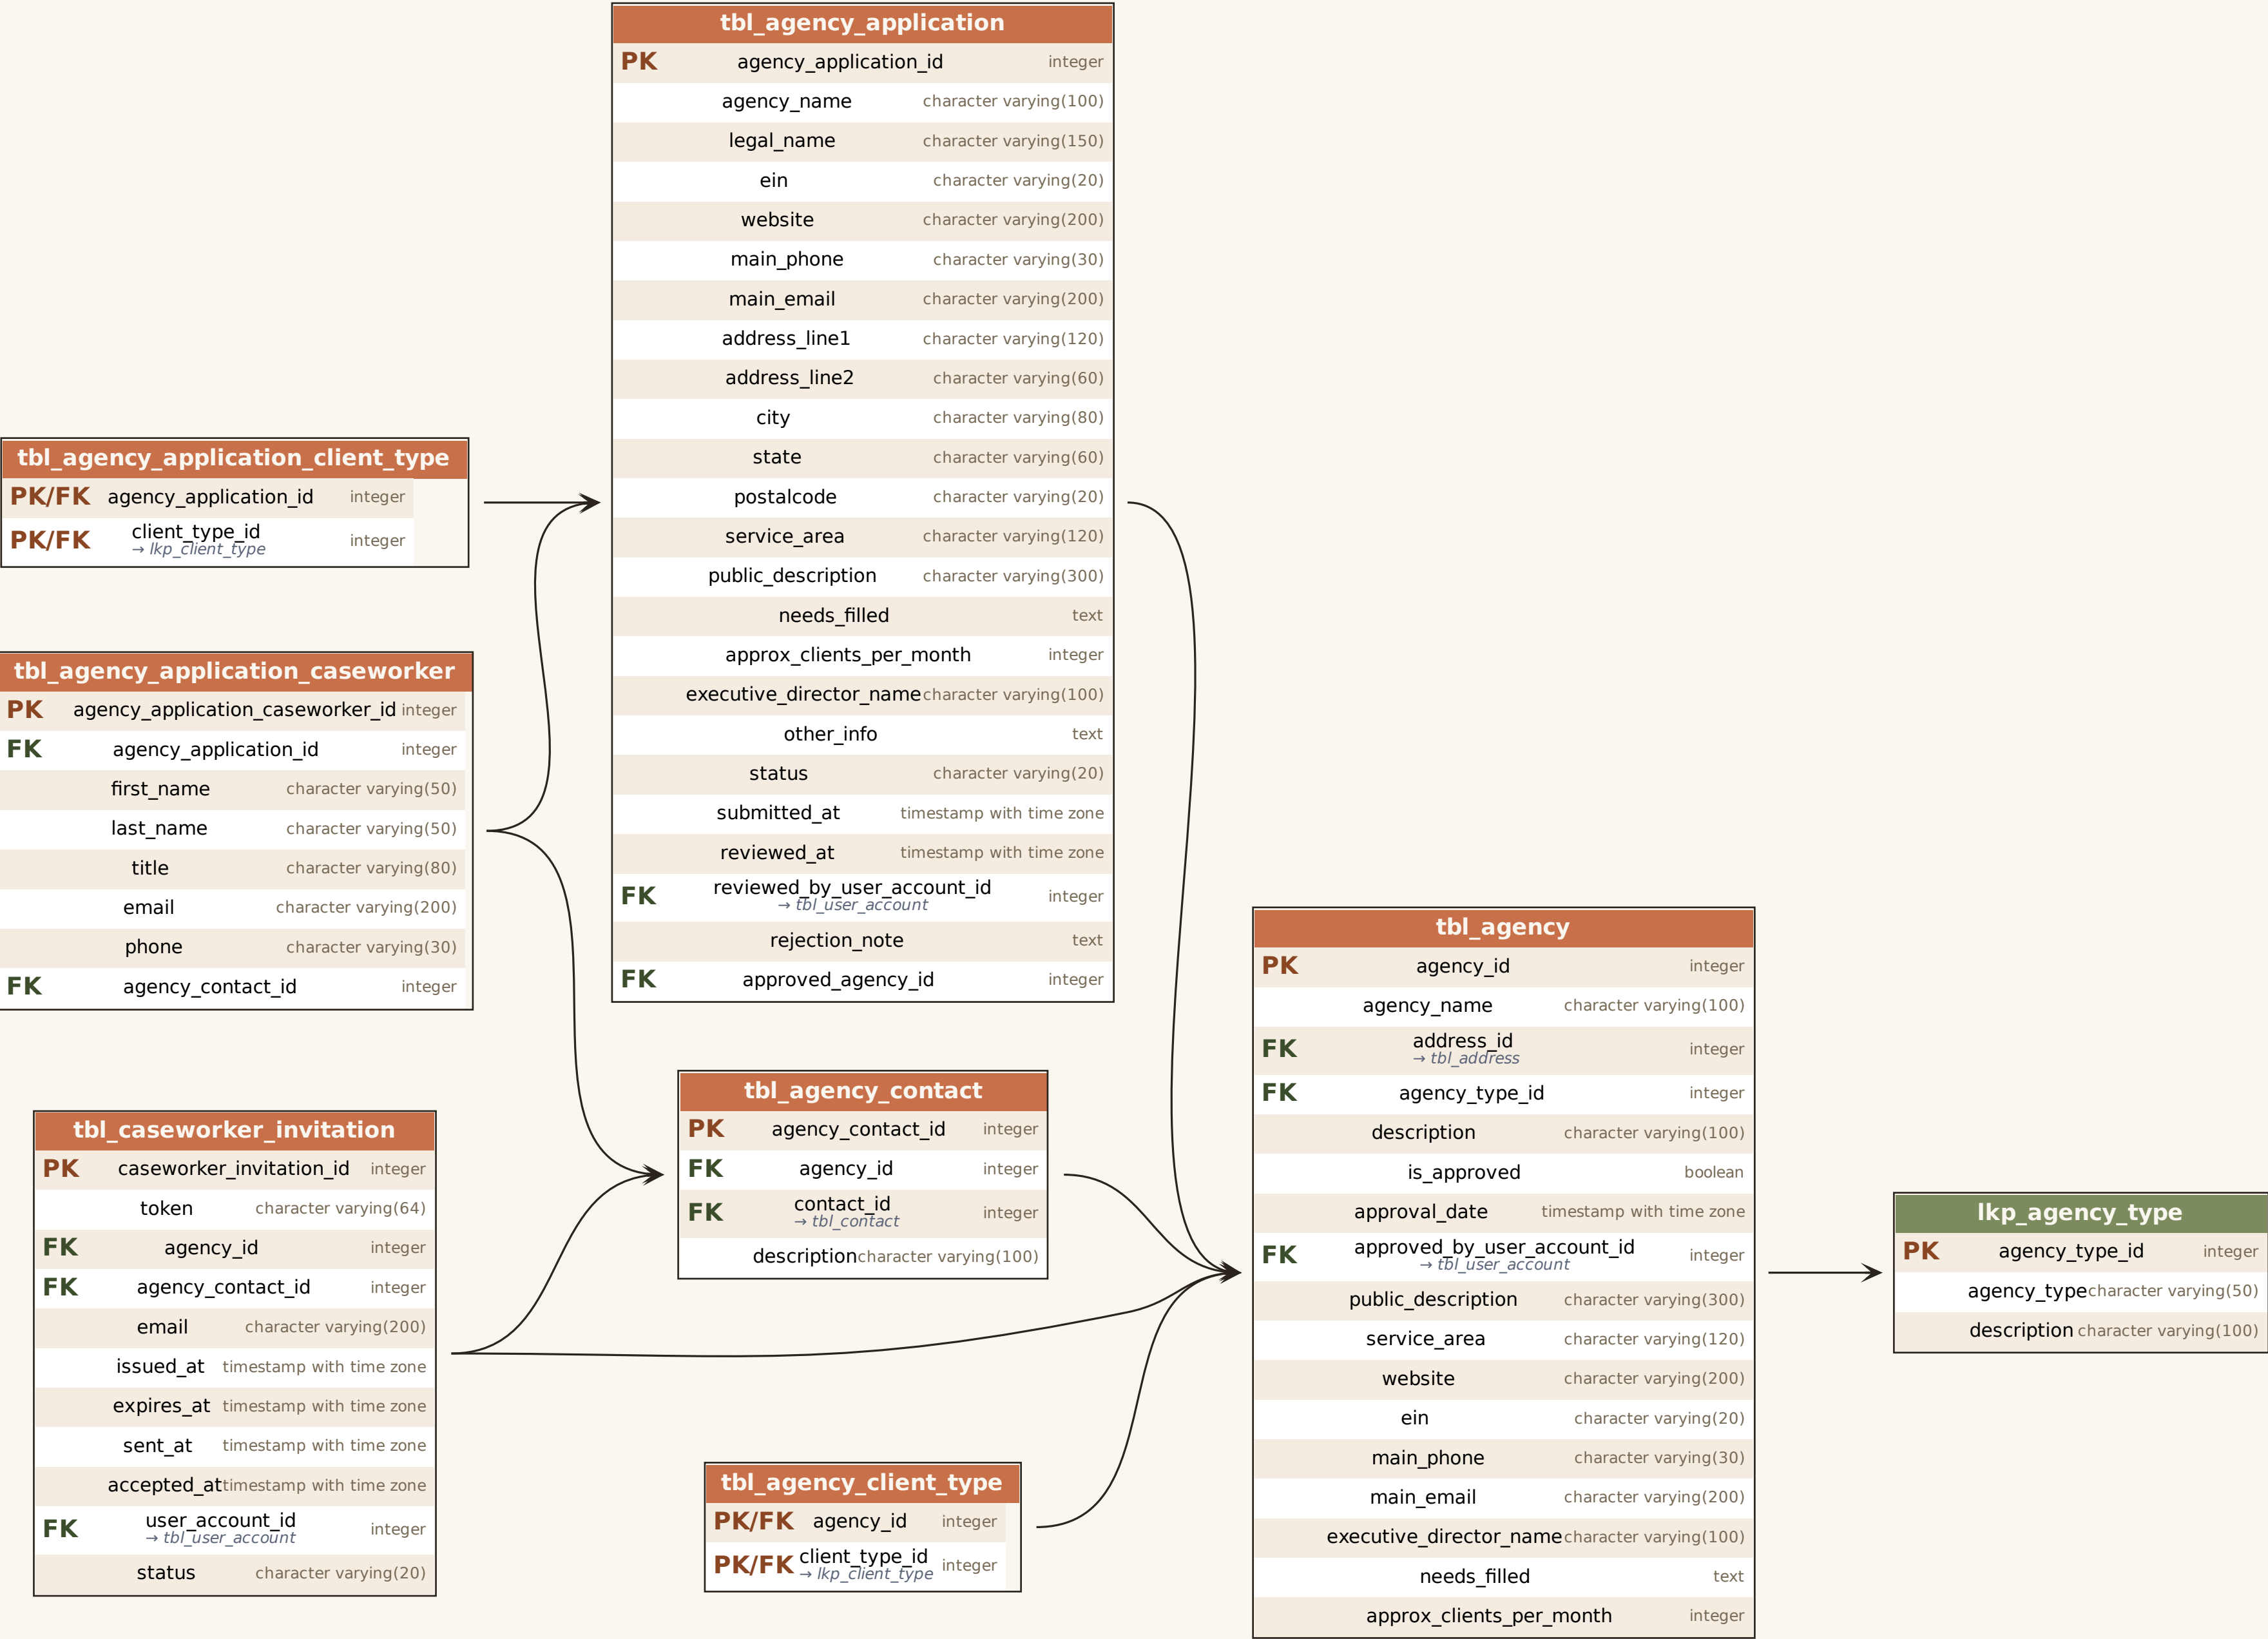

Email accounts, cached IMAP messages, templates, the outbound/inbound messaging layer (SMS + email with templates and triggers), the generic per-entity attachment table, and free-form notes.

tbl_email_account		
PK	email_account_id	integer
FK	user_account_id → tbl_user_account	integer
	display_name	character varying(100)
	email_address	character varying(255)
	provider	character varying(20)
	auth_type	character varying(20)
	imap_host	character varying(255)
	imap_port	integer
	imap_secure	boolean
	smtp_host	character varying(255)
	smtp_port	integer
	smtp_secure	boolean
	username	character varying(255)
	encrypted_password	text
	is_default_send	boolean
	last_tested_at	timestamp with time zone
	last_test_status	character varying(20)
	last_test_error	text
	created_at	timestamp with time zone
	description	character varying(100)
	signature	text
	oauth_provider	character varying(20)
	oauth_access_token_enc	text
	oauth_refresh_token_enc	text
	oauth_expires_at	timestamp with time zone
	oauth_scope	text

App-wide infrastructure: user accounts, audit log, app settings, the in-app issue tracker + developer broadcasts, org branding, and the user-manual screenshot store.

App-wide infrastructure: user accounts, audit log, app settings, the in-app issue tracker + developer broadcasts, org branding, and the user-manual screenshot store.

tbl_app_setting		
PK	setting_key	character varying(50)
	setting_value	text
	description	character varying(500)
	updated_at	timestamp with time zone
FK	updated_by_user_account_id	integer

tbl_app_broadcast		
PK	broadcast_id	integer
	message	text
	kind	character varying(20)
FK	related_issue_id	integer
	is_active	boolean
FK	created_by_user_account_id	integer
	created_at	timestamp with time zone
	expires_at	timestamp with time zone

tbl_app_issue		
PK	issue_id	integer
	title	character varying(200)
	description	text
	severity	character varying(20)
	status	character varying(20)
	page_url	text
	page_title	character varying(200)
	user_agent	text
	viewport_width	integer
	viewport_height	integer
	steps_to_reproduce	text
	expected_behavior	text
	actual_behavior	text
	screenshot_data	bytea
	screenshot_content_type	character varying(80)
FK	reporter_user_account_id	integer
FK	assignee_user_account_id	integer
	resolution_notes	text
	resolved_at	timestamp with time zone
	created_at	timestamp with time zone
	updated_at	timestamp with time zone

tbl_user_account		
PK	user_account_id	integer
	username	character varying(50)
	password_hash	character varying(255)
FK	facility_staff_id → <i>tbl_facility_staff</i>	integer
	agency_contact_id → <i>tbl_agency_contact</i>	integer
	last_login_at	timestamp with time zone
	is_active	boolean
	created_at	timestamp with time zone
	description	character varying(100)
	is_admin	boolean
	is_developer	boolean
	is_program_manager	boolean

tbl_org_branding		
PK	branding_id	integer
	logo_data	bytea
	content_type	character varying(80)
	filename	character varying(200)
	updated_at	timestamp with time zone
FK	updated_by_user_account_id	integer

tbl_manual_screenshot		
PK	slug	character varying(80)
	audience	character varying(20)
	caption	character varying(300)
	image_data	bytea
	content_type	character varying(80)
	filename	character varying(200)
	byte_size	integer
	uploaded_at	timestamp with time zone
FK	uploaded_by_user_account_id	integer