

Furnish Hope – Database ERD

A page per theme, in the order shown below.

Reading the diagrams

- **Orange header** = data table (tbl_*). **Green header** = lookup table (lkp_*).
- **PK** badge marks the primary key; **FK** badge marks a foreign key.
- A small italic → *tbl_other* under an FK column means that reference points OUT of this theme's page.
- Arrows are drawn only for relationships within the same theme; cross-theme links are listed inline.

Contents

1. **Contacts & Addresses**

Shared people + place rows that almost every other theme joins to. tbl_contact is the polymorphic identity row used by clients, donors, facility_staff, agency contacts, vendors, etc.

2.

Clients & Households

The client lifecycle — referral, intake, provisioning request, visit, waiver, and delivery. Container pickup tables live here too.

3.

Donors, Donations & QuickBooks

Donor records, individual gifts, designations, pledges, and the QBO sync trail. Donation pickups (warehouse intake) also live here.

4.

Inventory & Storage

Items currently in the warehouse, where they're stored, and how they get reserved against open client requests.

5.

Facilities & Vehicles

Corporate org and physical sites (warehouses, showrooms), plus the company vehicle fleet and its maintenance log.

6.

Staff, Volunteers & Shifts

Facility staff + volunteer rosters, the public volunteer-signup queue, shift templates, generated shifts, and individual signups + hours.

7.

Fundraising: Campaigns, Events, Grants

Multi-gift campaigns, fundraising events with attendees and sponsors, and grant tracking.

8.

Vendors

Outside service providers Furnish Hope works with (plumbers, landscapers, suppliers) and the log of their service calls.

9.

Partner Agencies

Outside agencies that refer households to Furnish Hope, plus the caseworker contacts attached to each agency.

10.

Communications, Files & Notes

Email accounts, cached IMAP messages, templates, the generic per-entity attachment table, and free-form notes.


11.

System: Auth, Audit, Issues, Settings


App-wide infrastructure: user accounts, audit log, app settings, the in-app issue tracker + developer broadcasts, org branding, and the user-manual screenshot store.

Contacts & Addresses

Shared people + place rows that almost every other theme joins to. tbl_contact is the polymorphic identity row used by clients, donors, facility_staff, agency contacts, vendors, etc.

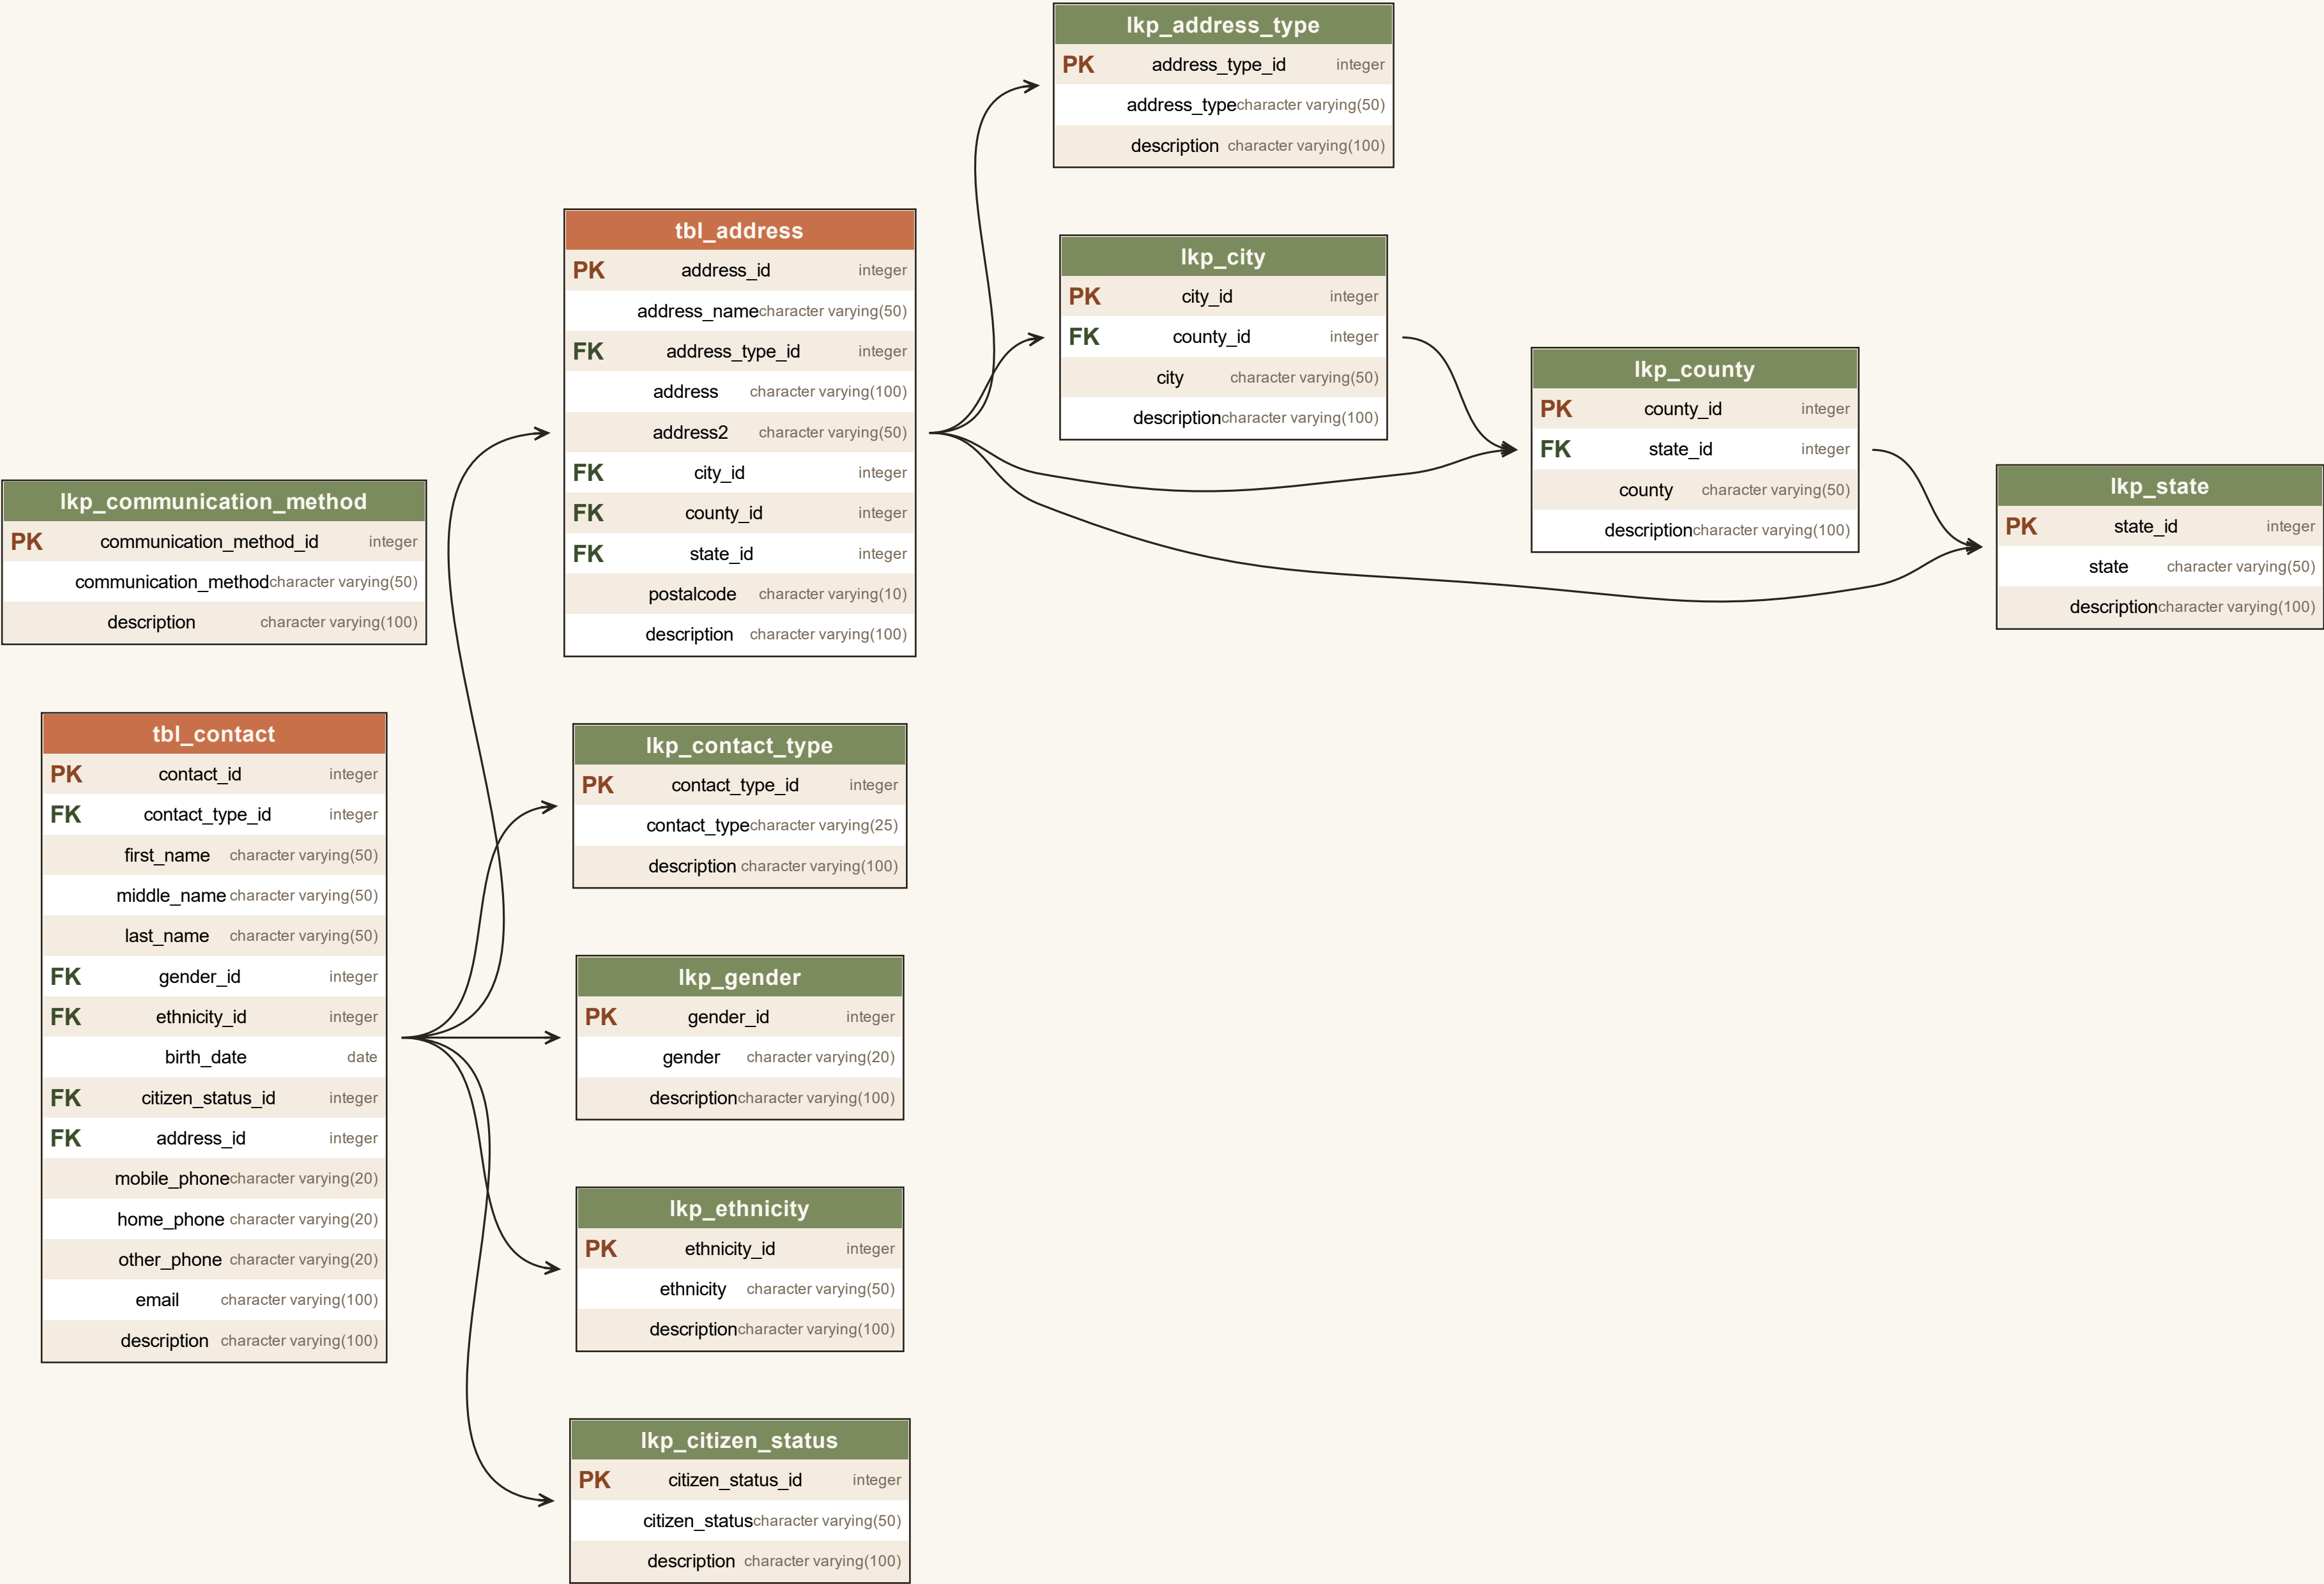


The client lifecycle — referral, intake, provisioning request, visit, waiver, and delivery. Container pickup tables live here too.

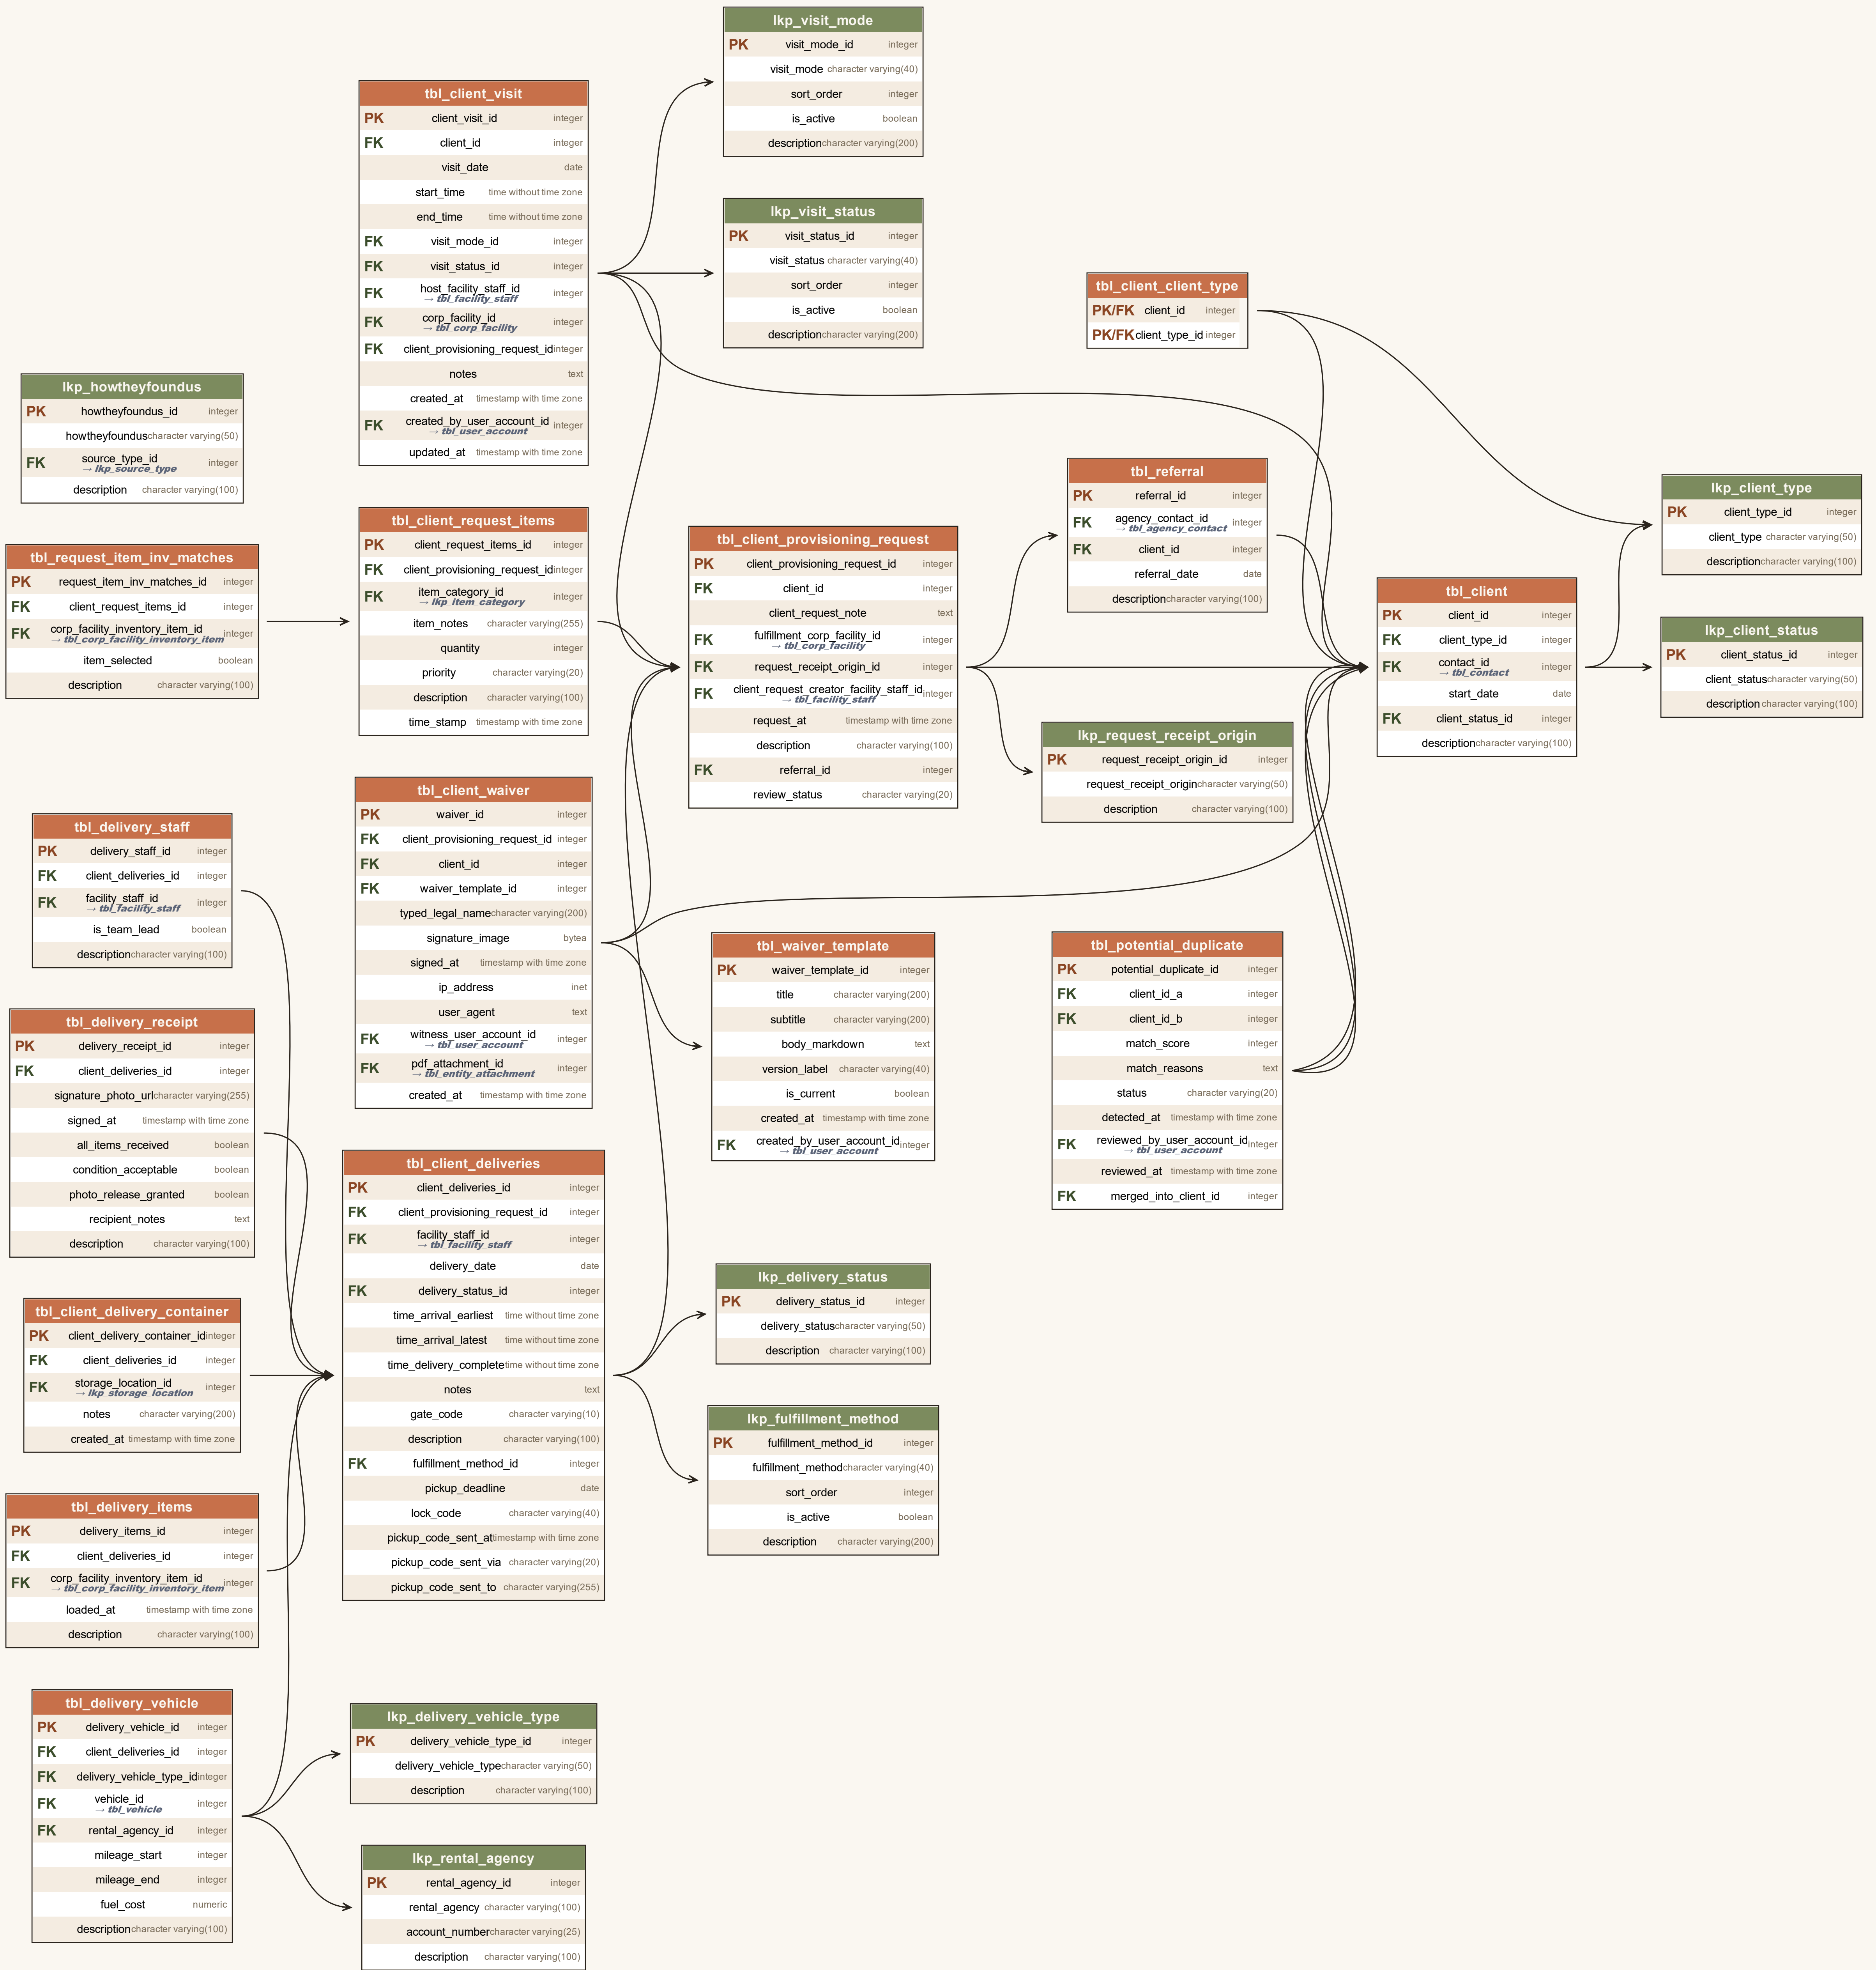

Donors, Donations & QuickBooks

Donor records, individual gifts, designations, pledges, and the QBO sync trail. Donation pickups (warehouse intake) also live here.

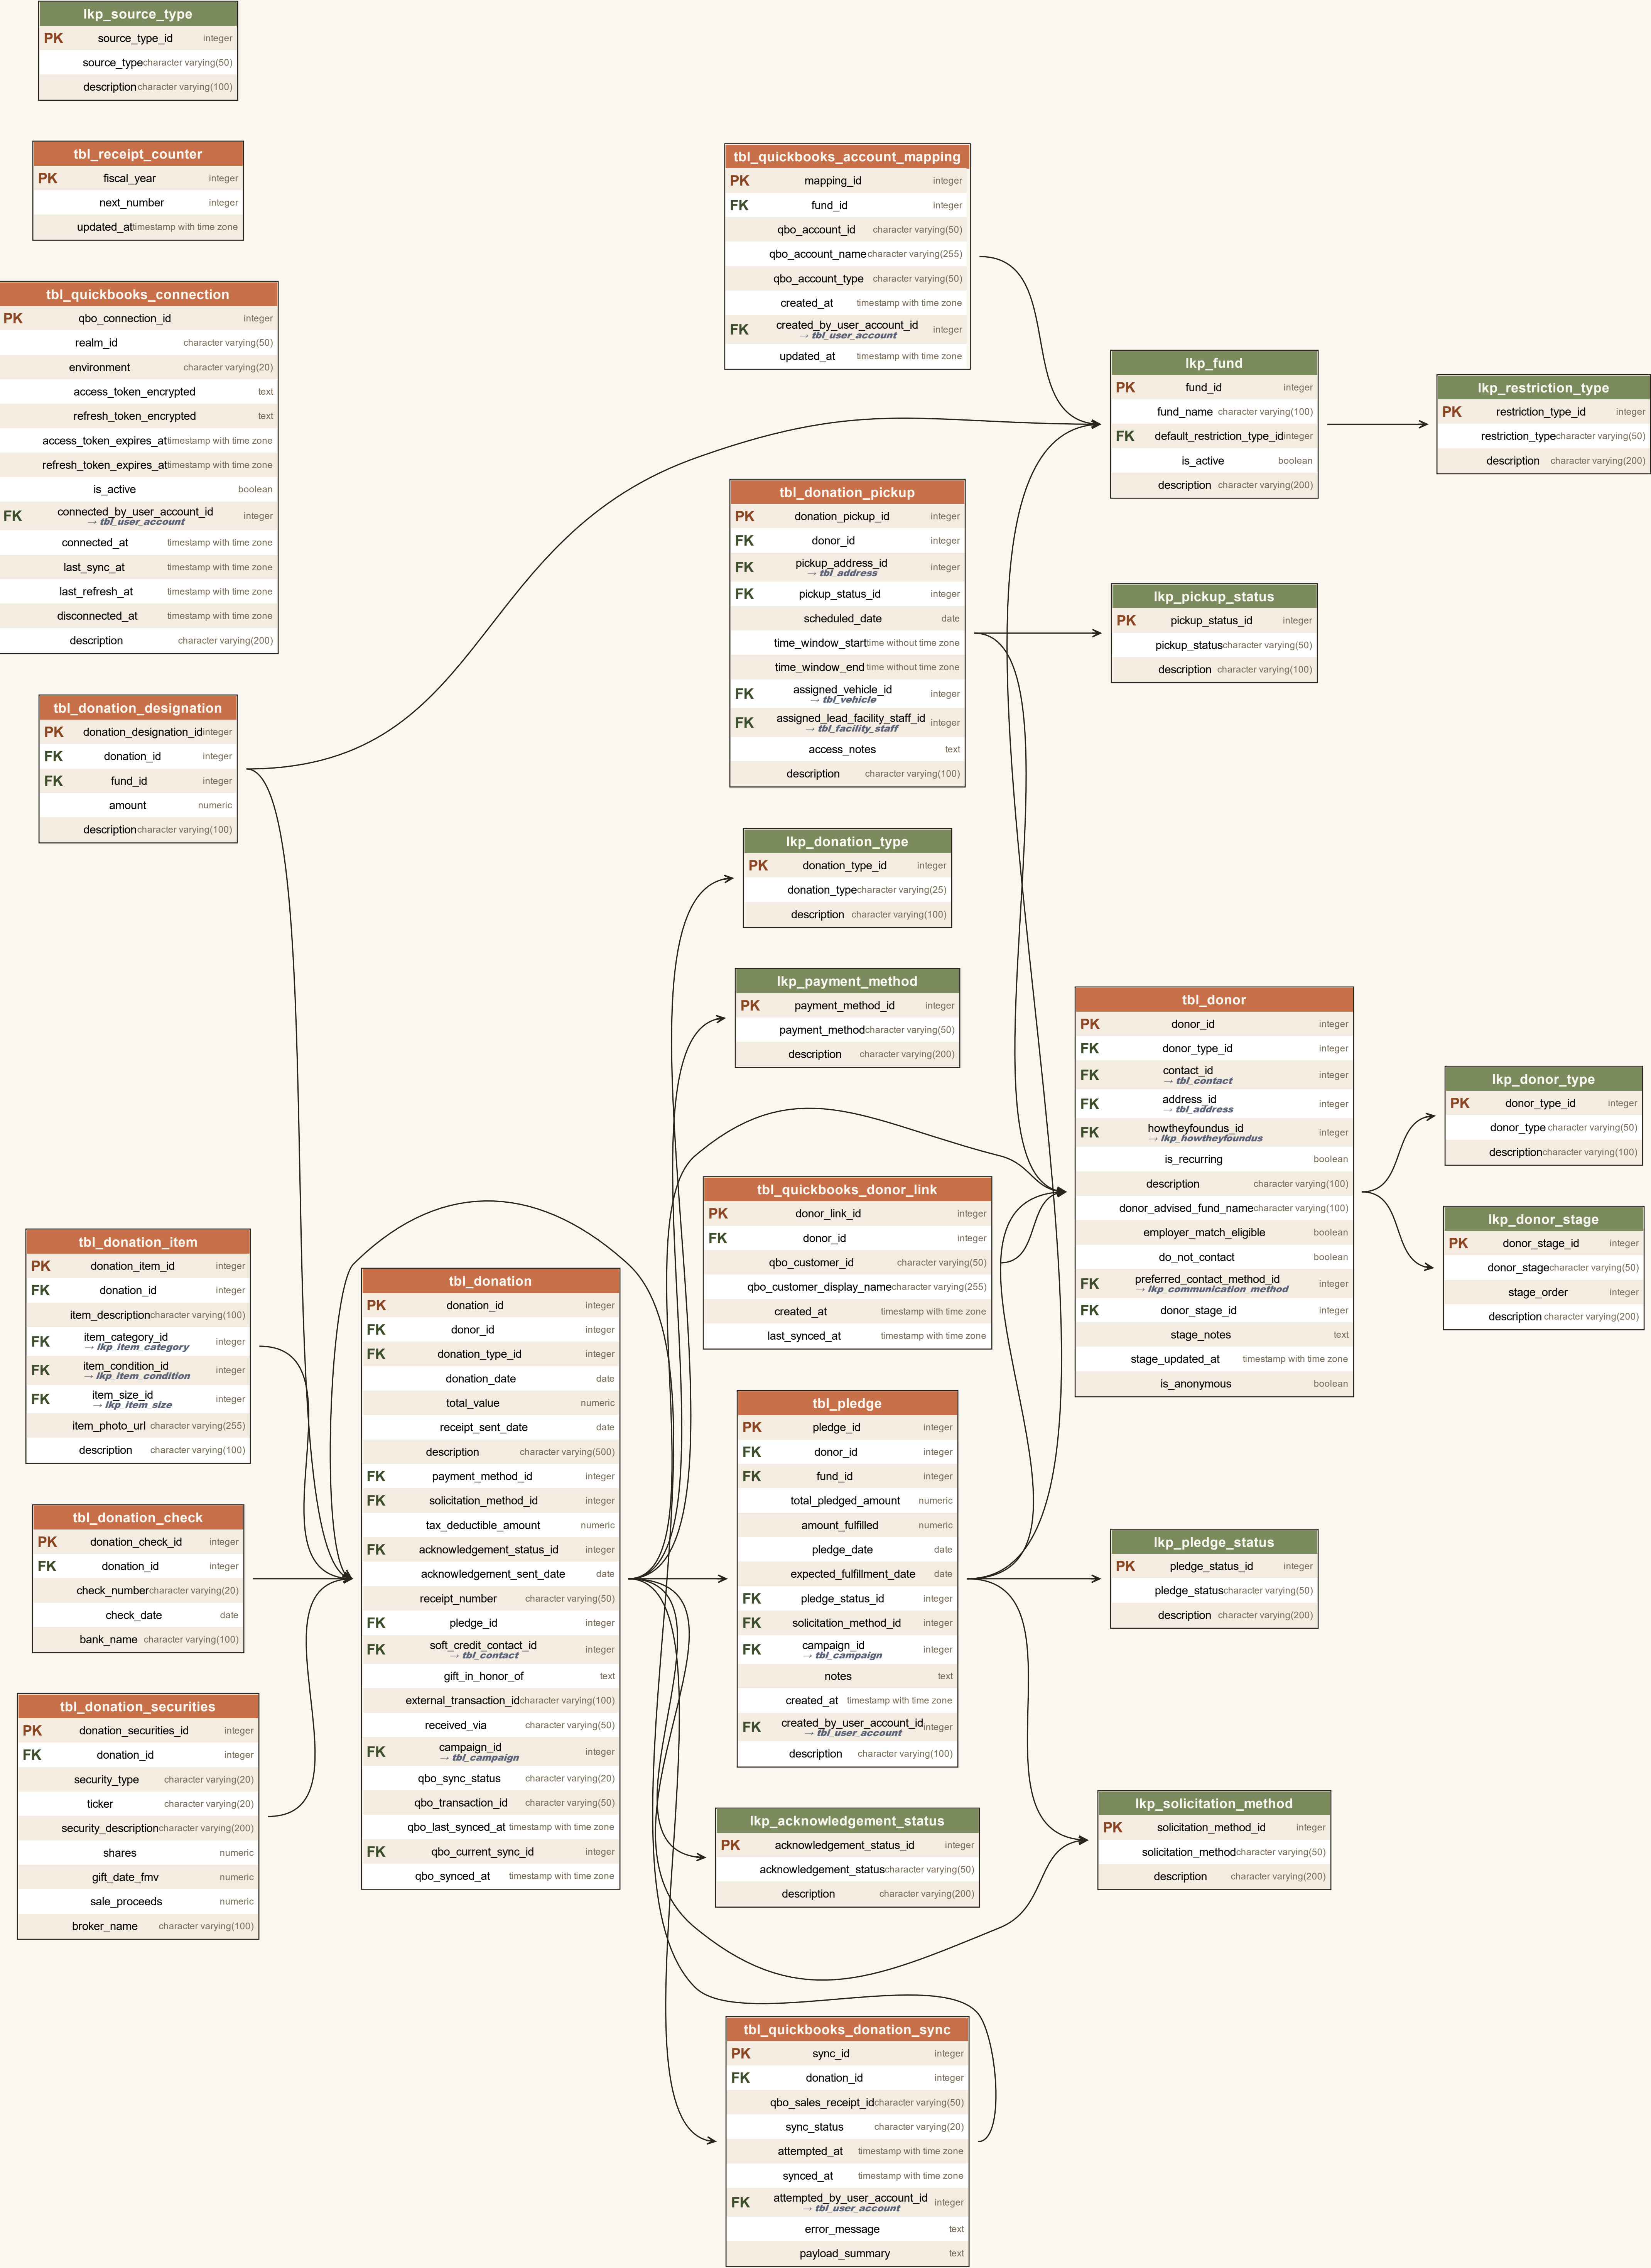

Inventory & Storage

Items currently in the warehouse, where they're stored, and how they get reserved against open client requests.

tbl_inventory_reservation			
PK	inventory_reservation_id	integer	
FK	corp_facility_inventory_item_id	integer	
FK	client_provisioning_request_id	integer	→ <i>tbl_client_provisioning_request</i>
FK	reservation_status_id	integer	
FK	reserved_by_facility_staff_id	integer	→ <i>tbl_facility_staff</i>
	reserved_at	timestamp with time zone	
	expires_at	timestamp with time zone	
	released_at	timestamp with time zone	
	description	character varying(100)	

tbl_corp_facility_inventory_item			
PK	corp_facility_inventory_item_id	integer	
FK	corp_facility_id	integer	→ <i>tbl_corp_facility</i>
FK	donation_item_id	integer	→ <i>tbl_donation_item</i>
FK	storage_location_id	integer	
FK	item_category_id	integer	
FK	item_size_id	integer	
FK	item_weight_id	integer	
FK	item_condition_id	integer	
	date_added_to_inventory	date	
	date_dispositioned	date	
FK	disposition_reason_id	integer	
	donation_value_in	numeric	
	donation_value_out	numeric	
	description	character varying(100)	

lkp_reservation_status			
PK	reservation_status_id	integer	
	reservation_status	character varying(50)	
	description	character varying(100)	

lkp_item_category			
PK	item_category_id	integer	
	item_category	character varying(100)	
	description	character varying(100)	

lkp_item_condition			
PK	item_condition_id	integer	
	item_condition	character varying(20)	
	description	character varying(100)	

lkp_item_size			
PK	item_size_id	integer	
	item_size	character varying(20)	
	description	character varying(100)	


lkp_item_weight			
PK	item_weight_id	integer	
	item_weight	character varying(50)	
	weight_lbs_min	integer	
	weight_lbs_max	integer	
	description	character varying(100)	

lkp_storage_location			
PK	storage_location_id	integer	
FK	corp_facility_id	integer	→ <i>tbl_corp_facility</i>
	location_code	character varying(20)	
	description	character varying(100)	
	is_container_or_lockbox	boolean	
	container_type	character varying(20)	
	is_active	boolean	

lkp_disposition_reason			
PK	disposition_reason_id	integer	
	disposition_reason	character varying(50)	
	description	character varying(100)	


Facilities & Vehicles

Corporate org and physical sites (warehouses, showrooms), plus the company vehicle fleet and its maintenance log.

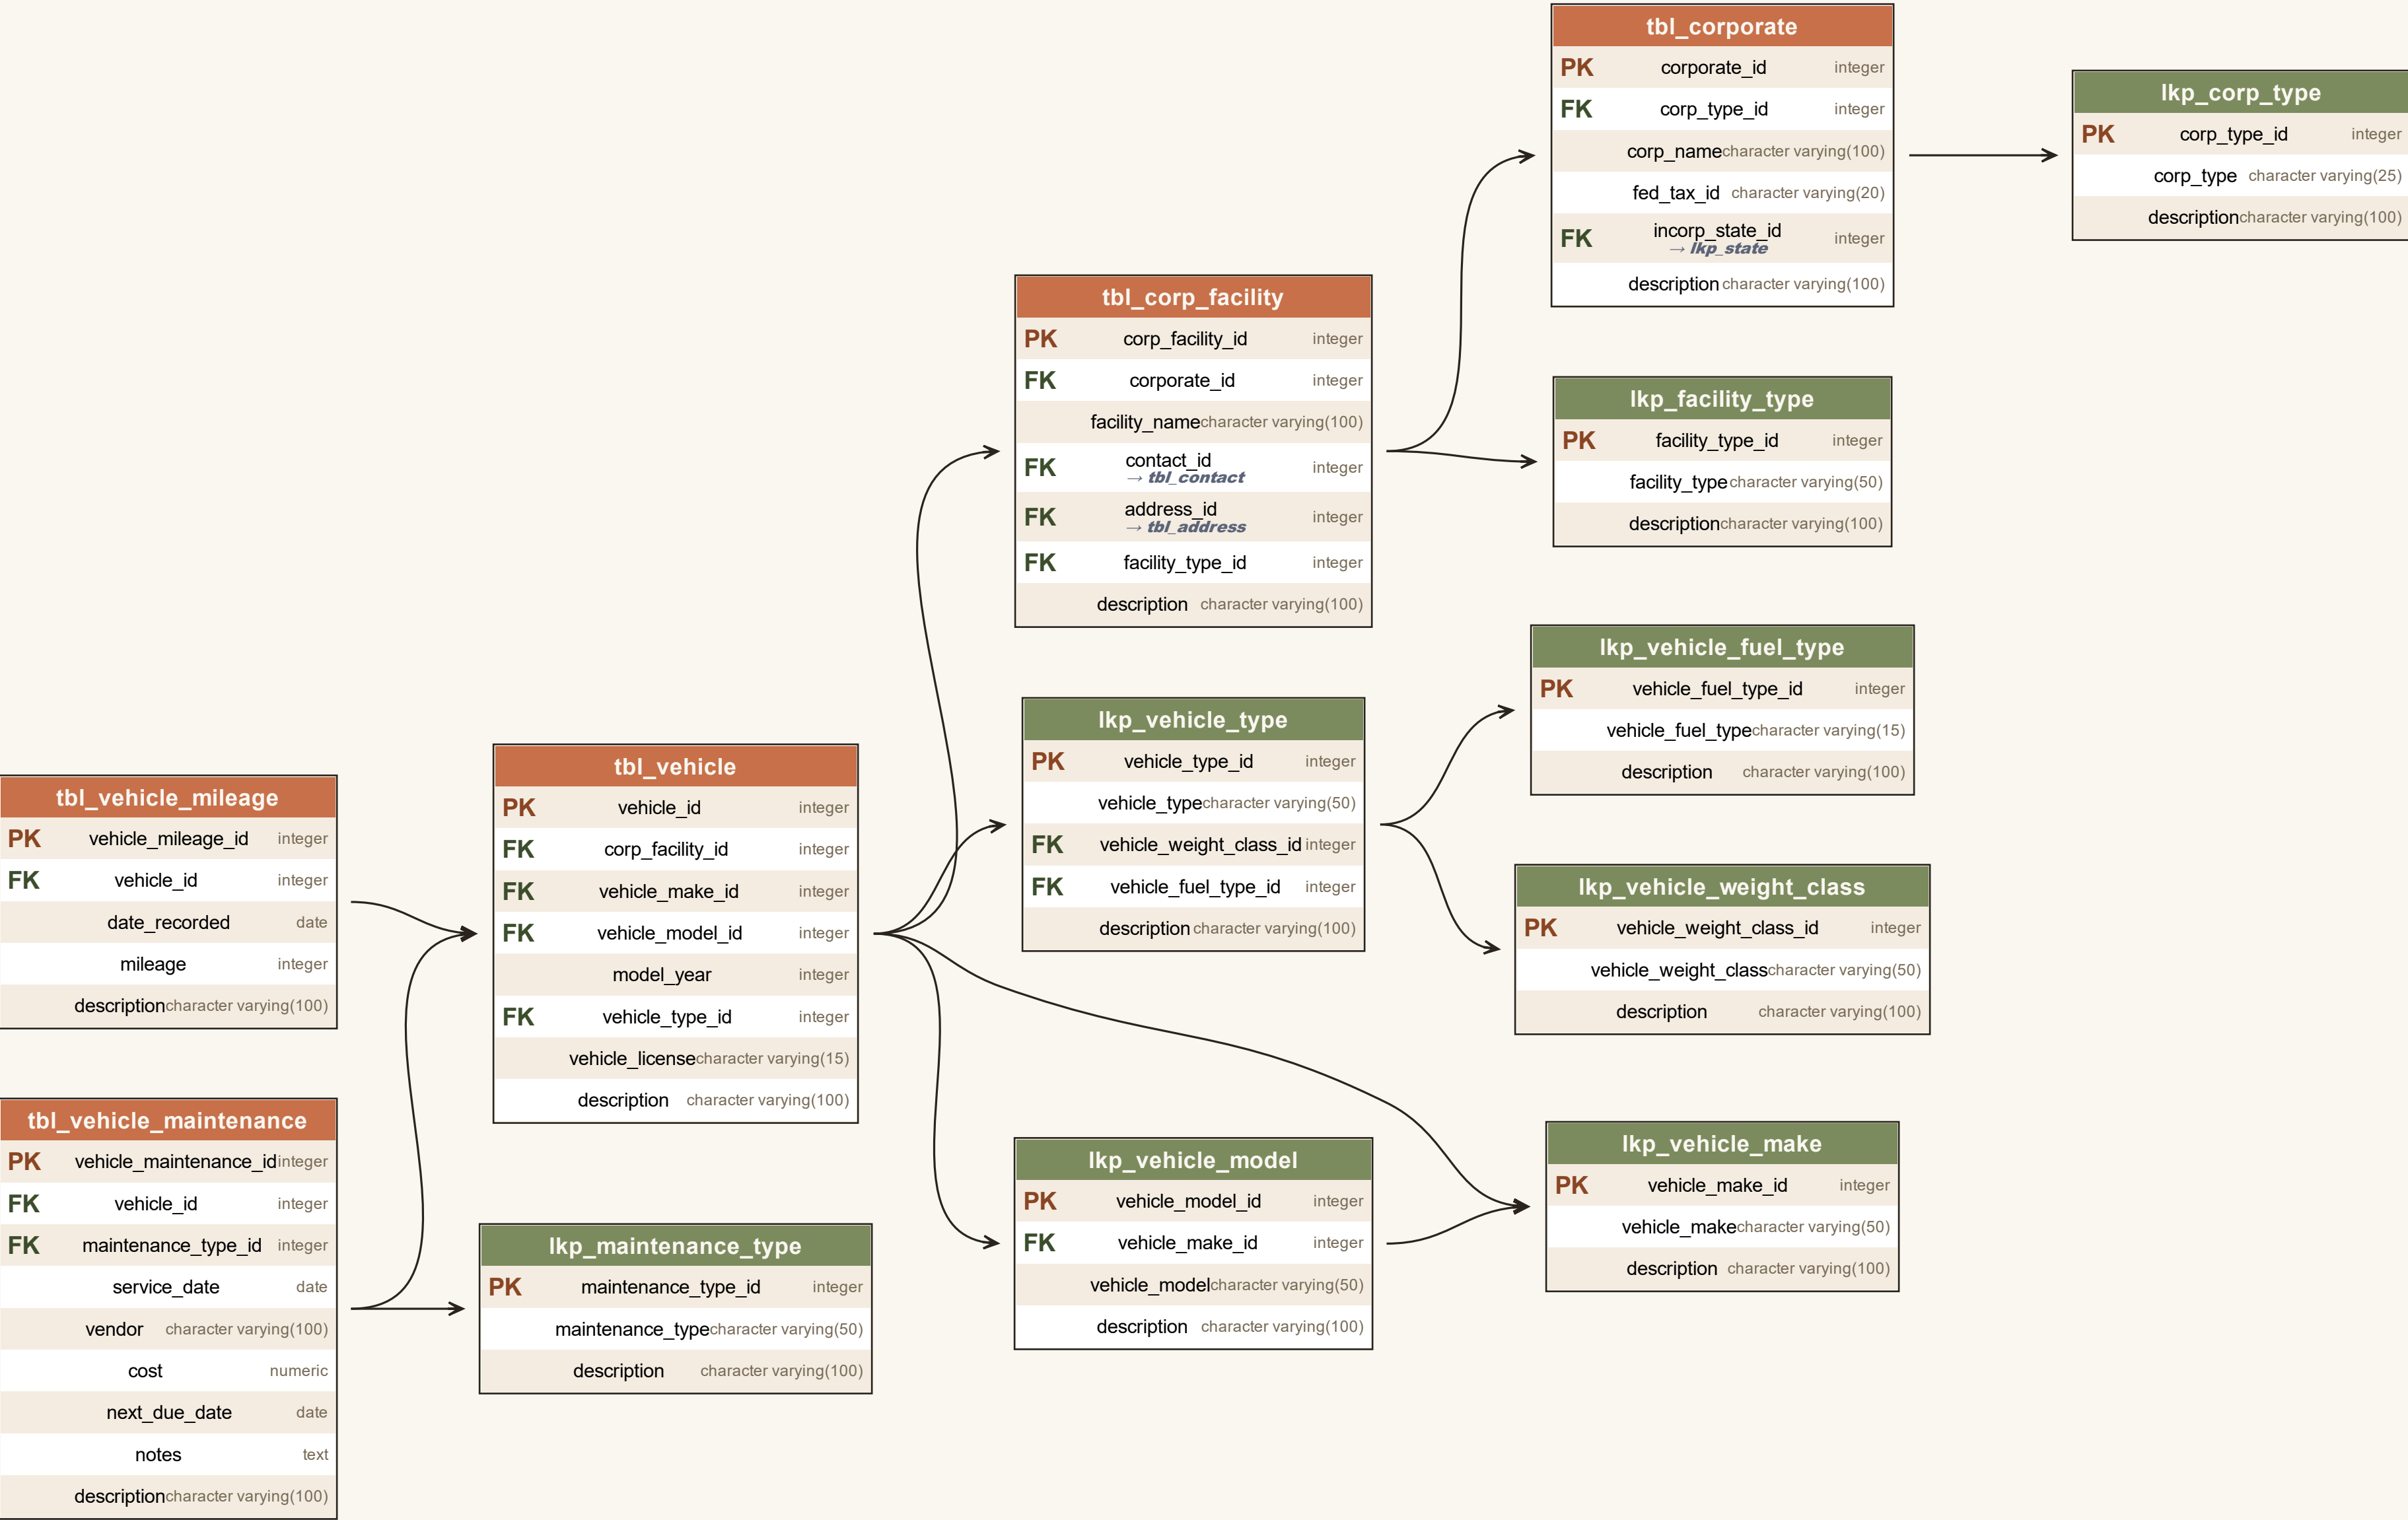

Staff, Volunteers & Shifts

Facility staff + volunteer rosters, the public volunteer-signup queue, shift templates, generated shifts, and individual signups + hours.

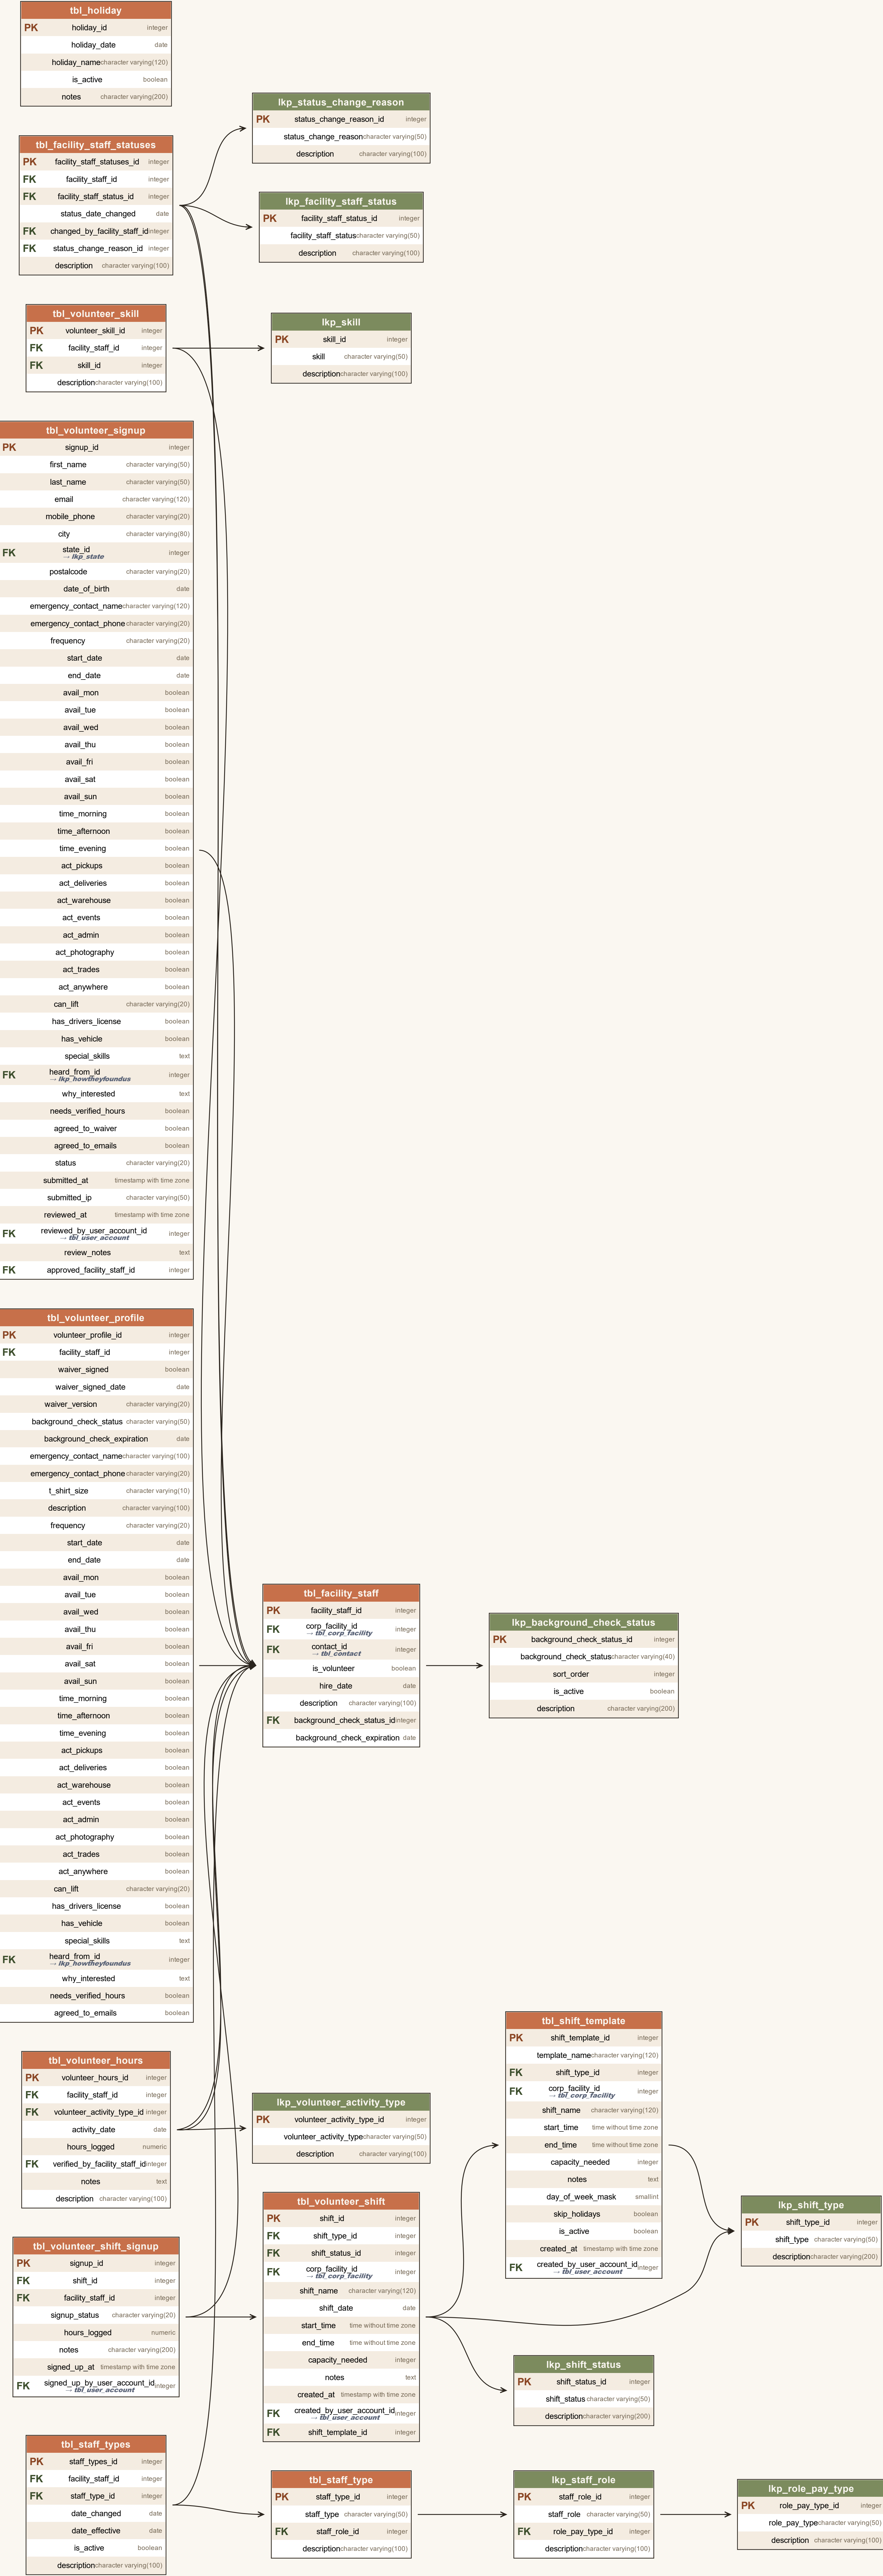

Fundraising: Campaigns, Events, Grants

Multi-gift campaigns, fundraising events with attendees and sponsors, and grant tracking.

tbl_grant		
PK	grant_id	integer
	funder_name	character varying(100)
	grant_name	character varying(100)
	award_amount	numeric
	period_start	date
	period_end	date
	reporting_deadline	date
	restrictions	text
	description	character varying(100)

tbl_event_attendee		
PK	event_attendee_id	integer
FK	event_id	integer
FK	contact_id	integer → <i>tbl_contact</i>
	rsvp_status	character varying(20)
	attended	boolean
	amount_contributed	numeric
	description	character varying(100)
	checked_in_at	timestamp with time zone
	ticket_count	integer
	notes	text
	table_number	character varying(40)
	seat_number	character varying(20)
	dietary_notes	character varying(200)
FK	rsvp_status_id	integer
FK	donation_id	integer → <i>tbl_donation</i>

lkp_rsvp_status		
PK	rsvp_status_id	integer
	rsvp_status	character varying(40)
	sort_order	integer
	is_active	boolean

tbl_event		
PK	event_id	integer
FK	event_type_id	integer
	event_name	character varying(100)
	event_date	date
	start_time	time without time zone
	end_time	time without time zone
FK	address_id	integer → <i>tbl_address</i>
	goal_amount	numeric
	amount_raised	numeric
	description	character varying(100)
FK	campaign_id	integer
	is_public	boolean
	ticket_price	numeric
	notes	text
FK	manager_facility_staff_id	integer → <i>tbl_facility_staff</i>
FK	host_contact_id	integer → <i>tbl_contact</i>
FK	host_corporate_id	integer → <i>tbl_corporate</i>
	max_attendees	integer
	run_of_show	text
	staff_briefing	text

tbl_campaign		
PK	campaign_id	integer
	campaign_name	character varying(150)
FK	campaign_type_id	integer
FK	campaign_status_id	integer
FK	fund_id	integer → <i>lkp_fund</i>
	goal_amount	numeric
	start_date	date
	end_date	date
FK	manager_facility_staff_id	integer → <i>tbl_facility_staff</i>
	public_url	character varying(255)
	notes	text
	created_at	timestamp with time zone
FK	created_by_user_account_id	integer → <i>tbl_user_account</i>
	description	character varying(100)

lkp_campaign_type		
PK	campaign_type_id	integer
	campaign_type	character varying(50)
	description	character varying(200)

lkp_campaign_status		
PK	campaign_status_id	integer
	campaign_status	character varying(50)
	description	character varying(200)

tbl_event_sponsor		
PK	event_sponsor_id	integer
FK	event_id	integer
FK	corporate_id	integer → <i>tbl_corporate</i>
FK	contact_id	integer → <i>tbl_contact</i>
FK	sponsor_level_id	integer
	amount_pledged	numeric
	amount_paid	numeric
	acknowledged	boolean
	notes	text
FK	donation_id	integer → <i>tbl_donation</i>
	created_at	timestamp with time zone
	updated_at	timestamp with time zone

lkp_event_type		
PK	event_type_id	integer
	event_type	character varying(50)
	description	character varying(100)

lkp_sponsor_level		
PK	sponsor_level_id	integer
	sponsor_level	character varying(40)
	sort_order	integer
	is_active	boolean
	description	character varying(200)

Vendors

Outside service providers Furnish Hope works with (plumbers, landscapers, suppliers) and the log of their service calls.

tbl_vendor_service		
PK	vendor_service_id	integer
FK	vendor_id	integer
	service_date	date
	start_time	time without time zone
	end_time	time without time zone
	location_text	character varying(300)
FK	corp_facility_id → <i>tbl_corp_facility</i>	integer
	description	text
	cost_estimate	numeric
FK	vendor_service_status_id	integer
	notes	text
FK	created_by_user_account_id → <i>tbl_user_account</i>	integer
	created_at	timestamp with time zone
	updated_at	timestamp with time zone

tbl_vendor		
PK	vendor_id	integer
FK	contact_id → <i>tbl_contact</i>	integer
FK	vendor_type_id	integer
FK	vendor_specialty_id	integer
	business_name	character varying(200)
	w9_received	boolean
	w9_received_date	date
	coi_received	boolean
	coi_expires_at	date
	default_hourly_rate	numeric
	payment_terms	character varying(80)
	tax_id	character varying(40)
	notes	text
	is_active	boolean
	qbo_vendor_id	character varying(40)
	qbo_synced_at	timestamp with time zone
	created_at	timestamp with time zone
	updated_at	timestamp with time zone

lkp_vendor_service_status		
PK	vendor_service_status_id	integer
	vendor_service_status	character varying(40)
	description	character varying(200)
	sort_order	integer

lkp_vendor_type		
PK	vendor_type_id	integer
	vendor_type	character varying(50)
	description	character varying(200)
	sort_order	integer

lkp_vendor_specialty		
PK	vendor_specialty_id	integer
	vendor_specialty	character varying(80)
	description	character varying(200)
	sort_order	integer

Partner Agencies

Outside agencies that refer households to Furnish Hope, plus the caseworker contacts attached to each agency.

tbl_agency_contact		
PK	agency_contact_id	integer
FK	agency_id	integer
FK	contact_id → <i>tbl_contact</i>	integer
	description character varying(100)	



tbl_agency		
PK	agency_id	integer
	agency_name character varying(100)	
FK	address_id → <i>tbl_address</i>	integer
FK	agency_type_id	integer
	description character varying(100)	



lkp_agency_type		
PK	agency_type_id	integer
	agency_type character varying(50)	
	description character varying(100)	

Communications, Files & Notes

Email accounts, cached IMAP messages, templates, the generic per-entity attachment table, and free-form notes.

tbl_attachment_blob		
PK	blob_id	integer
	content	bytea

tbl_attachment		
PK	attachment_id	integer
FK	attachment_entity_type_id	integer
	entity_id	integer
	file_url	character varying(255)
	file_name	character varying(100)
	mime_type	character varying(50)
FK	uploaded_by_facility_staff_id	integer → <i>tbl_facility_staff</i>
	uploaded_at	timestamp with time zone
	description	character varying(100)

lkp_attachment_entity_type		
PK	attachment_entity_type_id	integer
	attachment_entity_type	character varying(50)
	description	character varying(100)

tbl_entity_attachment		
PK	attachment_id	integer
	entity_type	character varying(40)
	entity_id	integer
	filename	character varying(255)
	mime_type	character varying(150)
	size_bytes	bigint
	description	character varying(500)
	storage_provider	character varying(40)
	storage_ref	text
	external_url	text
FK	uploaded_by_user_account_id	integer → <i>tbl_user_account</i>
	uploaded_at	timestamp with time zone
	last_modified_at	timestamp with time zone

tbl_communication_log		
PK	communication_log_id	integer
FK	note_entity_type_id	integer
	entity_id	integer
FK	communication_method_id	integer → <i>lkp_communication_method</i>
FK	facility_staff_id	integer → <i>tbl_facility_staff</i>
	communication_at	timestamp with time zone
	summary	text
	follow_up_needed	boolean
	follow_up_date	date
	description	character varying(100)

lkp_note_entity_type		
PK	note_entity_type_id	integer
	note_entity_type	character varying(50)
	description	character varying(100)

tbl_note		
PK	note_id	integer
FK	note_entity_type_id	integer
	entity_id	integer
FK	author_facility_staff_id	integer → <i>tbl_facility_staff</i>
	note_body	text
	created_at	timestamp with time zone
	description	character varying(100)

tbl_email_template		
PK	email_template_id	integer
FK	user_account_id	integer → <i>tbl_user_account</i>
	name	character varying(120)
	description	character varying(300)
	subject	character varying(500)
	body	text
	sort_order	integer
	created_at	timestamp with time zone
	updated_at	timestamp with time zone

tbl_email_attachment		
PK	email_attachment_id	integer
FK	message_id	integer
	filename	character varying(500)
	content_type	character varying(200)
	size_bytes	integer
	is_inline	boolean
	content_id	character varying(500)
	content	bytea
	created_at	timestamp with time zone

tbl_email_sync_state		
PK	sync_state_id	integer
FK	email_account_id	integer
	folder	character varying(40)
	last_uid	bigint
	last_synced_at	timestamp with time zone
	last_error	text

tbl_email_message		
PK	message_id	integer
FK	user_account_id	integer → <i>tbl_user_account</i>
FK	email_account_id	integer
	folder	character varying(40)
	direction	character varying(4)
	imap_uid	bigint
	message_id_header	character varying(998)
	in_reply_to	character varying(998)
	thread_refs	text
	from_address	character varying(255)
	from_name	character varying(200)
	to_addresses	text
	cc_addresses	text
	bcc_addresses	text
	subject	character varying(500)
	body_text	text
	body_html	text
	body_preview	character varying(300)
	has_attachments	boolean
	sent_at	timestamp with time zone
	received_at	timestamp with time zone
	cached_at	timestamp with time zone
	read_at	timestamp with time zone
	thread_id	integer

tbl_email_account		
PK	email_account_id	integer
FK	user_account_id	integer → <i>tbl_user_account</i>
	display_name	character varying(100)
	email_address	character varying(255)
	provider	character varying(20)
	auth_type	character varying(20)
	imap_host	character varying(255)
	imap_port	integer
	imap_secure	boolean
	smtp_host	character varying(255)
	smtp_port	integer
	smtp_secure	boolean
	username	character varying(255)
	encrypted_password	text
	is_default_send	boolean
	last_tested_at	timestamp with time zone
	last_test_status	character varying(20)
	last_test_error	text
	created_at	timestamp with time zone
	description	character varying(100)
	signature	text
	oauth_provider	character varying(20)
	oauth_access_token_enc	text
	oauth_refresh_token_enc	text
	oauth_expires_at	timestamp with time zone
	oauth_scope	text

System: Auth, Audit, Issues, Settings

App-wide infrastructure: user accounts, audit log, app settings, the in-app issue tracker + developer broadcasts, org branding, and the user-manual screenshot store.

