Why start with smaller examples?

Starting point: SPQR verification

ML-KEM and full erasure coding were too complex
for our first educational bridging examples.

Too much implementation detail before the bridge becomes clear.

Smaller examples, the same verification task

Lazy vs. eager sampling and **commitment schemes**

Write Rust with libsignal-style interfaces, extract with Aeneas,
and connect the result to existing VCVio specifications and proofs.

Goal: teach the bridge from implementation to specification.

Bridging implementation and specification

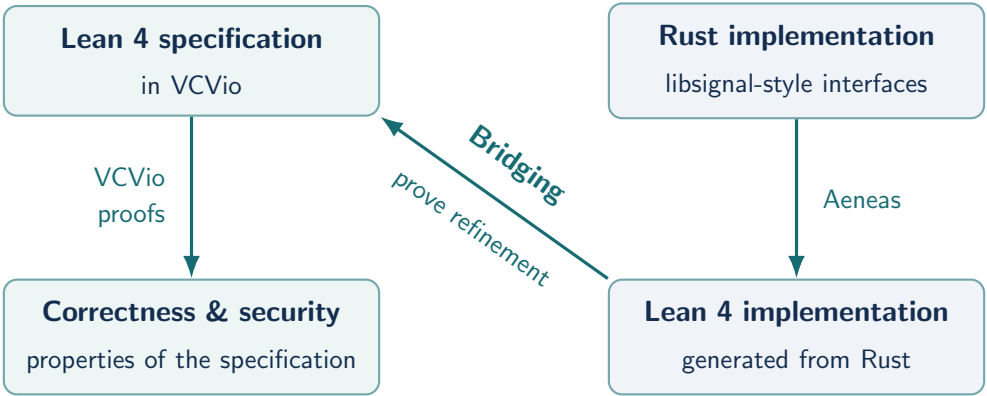

The bridge lets specification-level guarantees apply to the implementation.

Representation maps and RNG/oracle assumptions are explicit.