

Mine-RPN

Or how we were able to recognize pigs et. familia in Minecraft



SAPIENZA
UNIVERSITÀ DI ROMA

Dario Loi, Davide Marincione,
Benjamin Barda

Bachelor's degree in
Applied Computer Science and Artificial
Intelligence
Sapienza, University of Rome

A. Y. 2021 - 2022

Breaking the ice

FACCIAMO QUALCOSA DI SCEMO

Faster RCNN

Developed in 2015 by Facebook's researches, Faster-RCNN is still today an industry standard thanks to it's accuracy and performance, getting a step closer to real time object detection

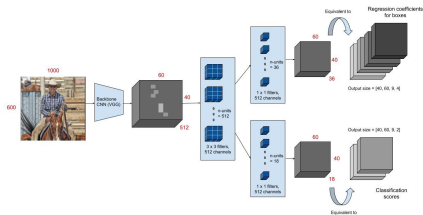


Figure: Faster-RCNN architecture.

Why minecraft?

Minecraft has several desirable qualities:

- Simple graphics.
- Sandbox.
- Available to every team member.
- Distinguishable entity silhouettes.



Figure: A Minecraft promotional image.

Behold, data!

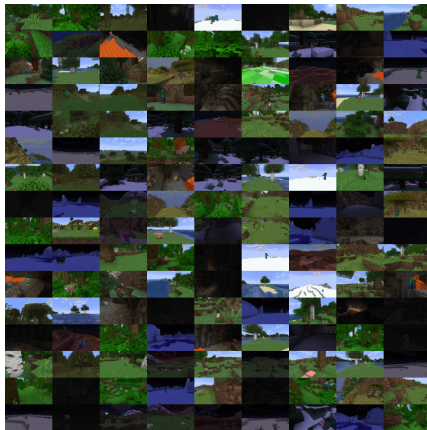


Figure: A representative chunk of our dataset

Tool

How to label 4000 images?

1. Load image
2. Create box / purge
3. Next



Figure: BBoxing in our tool

Our Backbone

The backbone is the convolutional *heart* of our model, it is:

- Blazingly fast.
- Adaptable to any resolution.

While also offering:

- A 92% accuracy when used as a Classifier.
- A mean training time of $\approx 2h$.

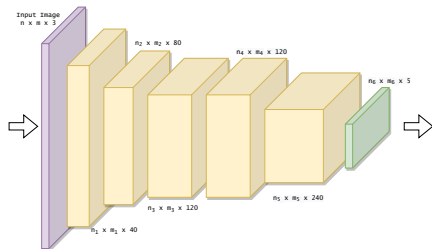


Figure: Our backbone.

Our RPN

Our RPN network extends our Backbone and is composed mainly of two twin layers:

1. A Classification layer.
2. A Regression layer.

Before feeding data into those, it also performs some pre-processing:

- Anchor Splashing.
- Base convolution.
- Flattening (how do we get to fully connected otherwise?)

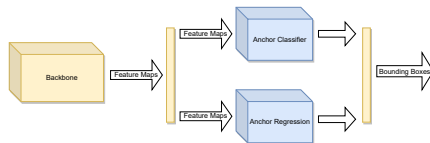


Figure: Our network's proposal layer.

Behold, data!

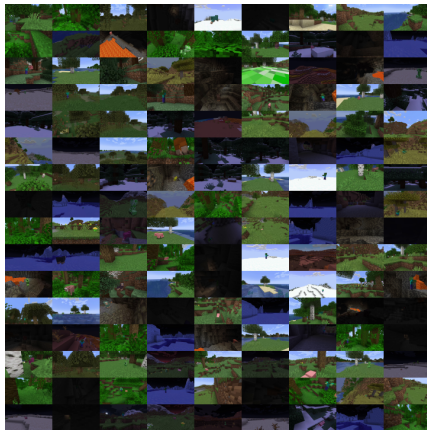


Figure: A representative chunk of our dataset