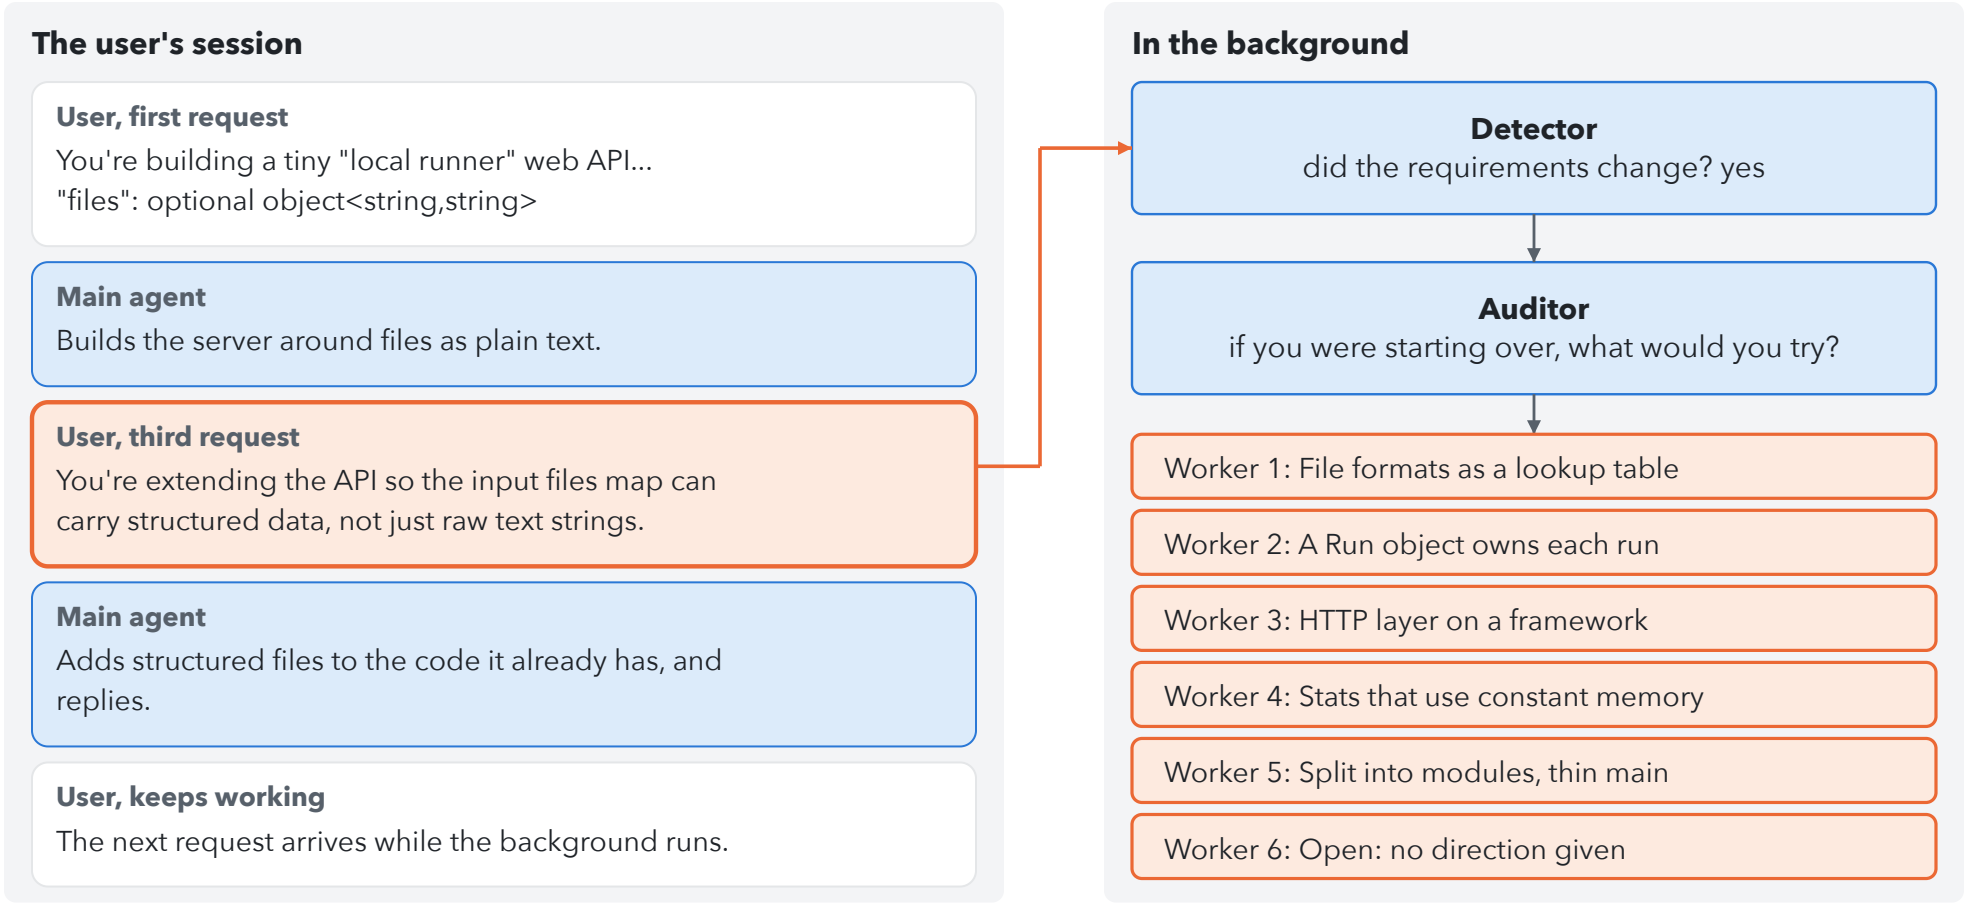
The user's session
User, first request
You're building a tiny "local runner" web API...
"files": optional object<string,string>
Main agent
Builds the server around files as plain text.
User, third request
You're extending the API so the input files map can carry structured data, not just raw text strings.
Main agent
Adds structured files to the code it already has, and replies.
User, keeps working
The next request arrives while the background runs.
In the background
Detector
did the requirements change? yes
Auditor
if you were starting over, what would you try?
Worker 1: File formats as a lookup table
Worker 2: A Run object owns each run
Worker 3: HTTP layer on a framework
Worker 4: Stats that use constant memory
Worker 5: Split into modules, thin main
Worker 6: Open: no direction given