

Thesis Data Analysis: The Psychology of Scientific Fraud

Benjamin Zubaly

2024-03-04

Table of contents

Introduction	1
Overview of Sections	2
Directory Set-Up	2
Variable Definitions	2
Initial Package Installations	3
Initial Import of Data	4
Data Cleaning	5
Data Exploration	6
Dealing with Missing Data	6
Descriptive Statistics	12
Data Visualization	28

Introduction

This document is intended to track the data analysis for my undergraduate thesis project on the psychology of scientific fraud. I have already planned out (and [preregistered](#)) my data analysis plan (see [here](#)), and I will note throughout the document if I deviate from this plan and why. This project is also being tracked in a private GitHub repository in case I need to revert back to a previous version of the project due to a fatal error.

Overview of Sections

- **Data Cleaning:** The data cleaning section will take the finalized dataset that I have included in the project directory and use it to create the remaining variables that we need for our analysis. We will also save this dataset.
- **Data Exploration:** In the data exploration section, we will check for and deal with missing data, run descriptive statistics of our outcome variables, visualize our data, and run bivariate correlations.
- **Testing Hypotheses:** In the hypothesis testing section, we will test each of our hypotheses one-by-one, according to our analysis plan.

Directory Set-Up

In order to ensure that this analysis is computationally reproducible, I have included everything that is needed to complete this analysis (just the finalized data file, “study_dataset.csv”) in the current working directory. The code will be displayed before the output of each analysis.

Variable Definitions

Although the following variables may not exist until after the data cleaning section, here is what each variable name refers to, so that you can refer to them while examining the code.

DOI: Unique identifier for each paper (i.e., the paper DOI).

PaperType: Categorical variable indicating SAFP, SAGP, MAFP, or MAGP.

LingObf: Continuous variable for linguistic obfuscation.

CertSent: Continuous variable for certainty sentiment.

Refs: Count variable for references.

FraudCorrAuth: Dichotomous variable indicating if the fraudulent author is the corresponding author (1) or is not (0). Unknown cases will be marked in a separate variable with this variable left blank.

NumAuth: Count variable indicating the number of authors for each paper.

abstraction: Abstraction index composed of the sum of standardized scores for **article**, **prep**, and **quantity**.

article: Articles from LIWC.

prep: Prepositions from LIWC.

quantity: Quantities from LIWC.

cause: Causation terms from LIWC.

jargon: The percent of words not captured by LIWC (100-Dic).

Dic: The percentage of words captured by all LIWC dictionaries.

emo_pos: Positive emotion terms from LIWC.

flesch_re: Flesch Reading Ease from ARTE.

Initial Package Installations

If you would like to reproduce this analysis, here are the package I will be using, so that they can be cued before starting.

```
install.packages("readr")      # For reading data
```

Installing package into '/Users/benjaminzubaly/Library/R/x86_64/4.3/library'
(as 'lib' is unspecified)

The downloaded binary packages are in
/var/folders/38/1ybnplc53zdb089bn6drqfn00000gn/T//RtmpAXt0Ss/downloaded_packages

```
install.packages("dplyr")      # For data manipulation and handling of missing data
```

Installing package into '/Users/benjaminzubaly/Library/R/x86_64/4.3/library'
(as 'lib' is unspecified)

The downloaded binary packages are in
/var/folders/38/1ybnplc53zdb089bn6drqfn00000gn/T//RtmpAXt0Ss/downloaded_packages

```
install.packages("psych")      # For descriptive statistics, correlations
```

Installing package into '/Users/benjaminzubaly/Library/R/x86_64/4.3/library'
(as 'lib' is unspecified)

The downloaded binary packages are in
/var/folders/38/1ybnplc53zdb089bn6drqfn00000gn/T//RtmpAXt0Ss/downloaded_packages

```
install.packages("ggplot2")      # For data visualization
```

Installing package into '/Users/benjaminzubaly/Library/R/x86_64/4.3/library'
(as 'lib' is unspecified)

The downloaded binary packages are in
/var/folders/38/1ybnplc53zdb089bn6drqfn00000gn/T//RtmpAXt0Ss/downloaded_packages

```
install.packages("car")          # For diagnostic tests such as Levene's test
```

Installing package into '/Users/benjaminzubaly/Library/R/x86_64/4.3/library'
(as 'lib' is unspecified)

The downloaded binary packages are in
/var/folders/38/1ybnplc53zdb089bn6drqfn00000gn/T//RtmpAXt0Ss/downloaded_packages

```
install.packages("rcompanion")  # For Games-Howell post-hoc test (if applicable)
```

Installing package into '/Users/benjaminzubaly/Library/R/x86_64/4.3/library'
(as 'lib' is unspecified)

The downloaded binary packages are in
/var/folders/38/1ybnplc53zdb089bn6drqfn00000gn/T//RtmpAXt0Ss/downloaded_packages

```
install.packages("dunn.test")   # For Dunn post-hoc test (if applicable)
```

Installing package into '/Users/benjaminzubaly/Library/R/x86_64/4.3/library'
(as 'lib' is unspecified)

The downloaded binary packages are in
/var/folders/38/1ybnplc53zdb089bn6drqfn00000gn/T//RtmpAXt0Ss/downloaded_packages

Initial Import of Data

We will not load in the dataset “study_dataset.csv” from the working directory.

```
library(readr) # Loading the readr package

data <- read_csv("study_dataset.csv") # Loading in study dataset as "data"
```

Rows: 88 Columns: 207

-- Column specification -----

Delimiter: ","

chr (26): DOI, Title, Subject, Institution, Journal, Publisher, Country, Au...

dbl (181): Record ID, RetractionPubMedID, OriginalPaperDate, year, OriginalP...

i Use `spec()` to retrieve the full column specification for this data.

i Specify the column types or set `show_col_types = FALSE` to quiet this message.

I have viewed the data frame, and the data seems to have loaded correctly.

Data Cleaning

To conduct the analysis, we will first need to calculate the LingObf variable by calculating the abstraction index and jargon words; creating standardized scores for **abstraction**, **cause**, **jargon**, **emo_pos**, and **flesch_re**; and calculating the LingObf composite variable from these standardized scores.

1. First, we will calculate the **abstraction** index by creating standardized scores for **article**, **prep**, and **quantity** and summing them.

```
# Calculate standardized scores for article, prep, and quantity and add them to the dataset
data$articles_standardized <- scale(data$article)
data$prep_standardized <- scale(data$prep)
data$quantity_standardized <- scale(data$quantity)
```

```
# Create the new variable 'abstraction' as the sum of the three standardized variables
data$abstraction <- (data$articles_standardized + data$prep_standardized + data$quantity_s...
```

- After viewing the data, the transformations and variable calculation seem to have occurred appropriately.

2. Next, we will calculate the **jargon** words by subtracting **Dic** from 100.

```
# Calculate the new variable 'jargon' by subtracting 'Dic' from 100
data$jargon <- (100 - data$Dic)
```

- After viewing the data, the variable calculation seem to have occurred appropriately.

3. Next, we will create standardized scores for each subcomponent of the `LingObf`.

```
# Standardize the new set of variables and add them to the dataset
data$abstraction_standardized <- scale(data$abstraction)
data$cause_standardized <- scale(data$cause)
data$jargon_standardized <- scale(data$jargon)
data$emo_pos_standardized <- scale(data$emo_pos)
data$flesch_re_standardized <- scale(data$flesch_re)
```

- After viewing the data, the variable transformations seem to have occurred appropriately.

4. Now we will calculate the `LingObf` variable using the following formula: $[\text{cause_standardized} + \text{abstraction_standardized} + \text{jargon_standardized}] - [\text{emo_pos_standardized} + \text{flesch_re_standardized}]$.

```
# Calculate 'LingObf'
data$LingObf <- (data$cause_standardized + data$abstraction_standardized + data$jargon_sta
```

- After viewing the data, the variable calculation seem to have occurred appropriately.

5. Lastly, our variable that indicates certainty sentiment is currently `certainty_avg`, but to make things easier I am going to copy this data into a new variables called `CertSent`.

```
data$CertSent <- data$certainty_avg
```

To ensure that our clean data is saved, we will write the dataset to the current working directory.

```
# Writing our data as a csv file in the current working directory
write.csv(data, "clean_study_data.csv")
```

- I have opened the saved data file outside of Rstudio, and it seems to have been written correctly.

Data Exploration

Dealing with Missing Data

1. Data will be first inspected for missing scores.

```
library(dplyr) # Loading the dplyr package for data manipulation and handling missing values
```

Attaching package: 'dplyr'

The following objects are masked from 'package:stats':

```
filter, lag
```

The following objects are masked from 'package:base':

```
intersect, setdiff, setequal, union
```

```
# To summarize the number of missing values in each column
missing_data_summary <- sapply(data, function(x) sum(is.na(x)))

print(missing_data_summary) # To see summary of missing values for all columns
```

DOI	Record ID
0	44
Title	Subject
0	44
Institution	Journal
0	0
Publisher	Country
0	0
Author	URLS
0	68
ArticleType	RetractionDate
0	44
RetractionDOI	RetractionPubMedID
48	51
OriginalPaperDate	year
44	0
OriginalPaperDOI	OriginalPaperPubMedID
0	51
RetractionNature	Reason
44	44
Paywalled	Notes
44	70

simple_reason	NumAuth
44	0
inst_pres	PaperType
0	0
gender	matched_DOI_SAFP_MAFP
0	44
matched_DOI_SAFP_SAGP	matched_DOI_MAFP_MAGP
44	44
matching_concessions	FraudCorrAuth
42	80
FCA_unknown	FCA_notes
66	66
different_country	year_difference
22	22
different_gender	different_inst_pres
22	22
different_journal	Refs
66	0
Abstract	flesch_re
0	0
wordcount	valence_min
0	0
valence_max	valence_avg
0	0
valence_std	extremity_min
0	0
extremity_max	extremity_avg
0	0
extremity_std	extremity_min_pos
0	0
extremity_max_pos	extremity_avg_pos
0	0
extremity_std_pos	extremity_min_neg
0	1
extremity_max_neg	extremity_avg_neg
1	1
extremity_std_neg	extremity_PosMinNeg
5	0
emotionality_min	emotionality_max
0	0
emotionality_avg	emotionality_std
0	0
emotionality_min_pos	emotionality_max_pos

0	0
emotionality_avg_pos	emotionality_std_pos
0	0
emotionality_min_neg	emotionality_max_neg
1	1
emotionality_avg_neg	emotionality_std_neg
1	5
emotionality_PosMinNeg	count_unique_evaluative_pos
0	0
count_total_evaluative_pos	count_unique_evaluative_neg
0	0
count_total_evaluative_neg	count_unique_evaluative
0	0
count_total_evaluative	count_evaluative_PosMinNeg
0	0
ambivalent	pos_dichotomous
0	87
certainty_min	certainty_max
0	0
certainty_avg	certainty_std
0	0
count_unique_certainty	count_total_certainty
0	0
Segment	WC
0	0
Analytic	Clout
0	0
Authentic	Tone
0	0
WPS	BigWords
0	0
Dic	Linguistic
0	0
function	pronoun
0	0
ppron	i
0	0
we	you
0	0
shehe	they
0	0
ipron	det
0	0

article	number
0	0
prep	auxverb
0	0
adverb	conj
0	0
negate	verb
0	0
adj	quantity
0	0
Drives	affiliation
0	0
achieve	power
0	0
Cognition	allnone
0	0
cogproc	insight
0	0
cause	discrep
0	0
tentat	certitude
0	0
differ	memory
0	0
Affect	tone_pos
0	0
tone_neg	emotion
0	0
emo_pos	emo_neg
0	0
emo_anx	emo_anger
0	0
emo_sad	swear
0	0
Social	socbehav
0	0
prosocial	polite
0	0
conflict	moral
0	0
comm	socrefs
0	0
family	friend

0	0
female	male
0	0
Culture	politic
0	0
ethnicity	tech
0	0
Lifestyle	leisure
0	0
home	work
0	0
money	relig
0	0
Physical	health
0	0
illness	wellness
0	0
mental	substances
0	0
sexual	food
0	0
death	need
0	0
want	acquire
0	0
lack	fulfill
0	0
fatigue	reward
0	0
risk	curiosity
0	0
allure	Perception
0	0
attention	motion
0	0
space	visual
0	0
auditory	feeling
0	0
time	focuspast
0	0
focuspresent	focusfuture
0	0

Conversation	0	netspeak	0
assent	0	nonflu	0
filler	0	AllPunc	0
Period	0	Comma	0
QMark	0	Exclam	0
Apostro	0	OtherP	0
Emoji	0	articles_standardized	0
prep_standardized	0	quantity_standardized	0
abstraction	0	jargon	0
abstraction_standardized	0	cause_standardized	0
jargon_standardized	0	emo_pos_standardized	0
flesch_re_standardized	0	LingObf	0
CertSent	0		

- Taking a look at our outcome variables, there are no missing scores, so we do not need to impute any values.

Descriptive Statistics

1. I will now generate descriptive statistics for each relevant variable in the dataset. I originally (in the preregistered plan) was simply going to deploy the `describe()` function on the entire dataset, but because I retained all of the columns from the Retraction Watch Database (*Retraction Watch Database*, 2023) and all of the output from the text analysis packages (Aggarwal, 2022; Boyd et al., 2022; Rocklage et al., 2023) there are currently 219 variables. Because this would be unmanageable, I am going to only calculate descriptive statistics for a selection of variables of interest. I will first create a dataframe with only the continuous variables that I am interested in generating descriptive statistics for, and I will use the `psych` package to produce the descriptive statistics for these variables.

```

library(psych) # Loading the psych package

# Selecting the continuous variables I am interested in getting descriptive statistics for
continuous_data_for_descriptives <- data[c("year", "Refs", "flesch_re", "WC", "abstraction", "jargon", "CertSent", "LingObf", "cause", "emo_pos", "article", "prep", "quantity", "PaperType*")]

# Generating descriptive statistics for variables of interest
continuous_descriptive_stats_all <- describe(continuous_data_for_descriptives)

# Displaying the results of the descriptive stats for the variables listed above
continuous_descriptive_stats_all

```

	vars	n	mean	sd	median	trimmed	mad	min	max
year	1	88	2009.70	10.47	2013.00	2011.14	7.41	1980.00	2022.00
Refs	2	88	45.82	23.47	39.00	43.21	20.02	12.00	146.00
flesch_re	3	88	34.90	10.94	36.45	35.46	10.28	-10.89	56.59
WC	4	88	4436.25	2248.24	3951.50	4238.17	1956.29	1124.00	13901.00
abstraction	5	88	0.00	1.83	0.09	0.04	1.86	-4.46	3.55
jargon	6	88	33.33	7.47	34.76	33.50	7.84	17.91	46.67
CertSent	7	88	6.17	0.25	6.18	6.18	0.22	5.21	6.76
LingObf	8	88	0.00	1.67	-0.14	-0.01	1.54	-5.84	4.28
cause	9	88	2.80	1.22	2.62	2.69	1.02	0.89	6.01
emo_pos	10	88	0.09	0.22	0.04	0.05	0.06	0.00	1.67
article	11	88	8.38	2.20	8.31	8.33	2.13	3.53	14.47
prep	12	88	15.43	1.68	15.66	15.51	1.34	9.76	20.67
quantity	13	88	4.23	1.32	4.08	4.14	1.33	1.69	8.66
PaperType*	14	88	2.50	1.12	2.50	2.50	1.48	1.00	4.00

	range	skew	kurtosis	se
year	42.00	-1.25	0.74	1.12
Refs	134.00	1.41	2.87	2.50
flesch_re	67.48	-0.85	2.16	1.17
WC	12777.00	1.21	2.18	239.66
abstraction	8.01	-0.20	-0.42	0.20
jargon	28.76	-0.27	-0.94	0.80
CertSent	1.55	-0.69	1.42	0.03
LingObf	10.12	-0.21	1.40	0.18
cause	5.12	0.80	0.14	0.13
emo_pos	1.67	5.66	34.22	0.02
article	10.94	0.33	-0.19	0.23
prep	10.91	-0.44	1.22	0.18
quantity	6.97	0.67	0.42	0.14
PaperType*	3.00	0.00	-1.40	0.12

- I won't make too many comments here, because for most of these measures there are no formal or informal norms against which to judge them. That being said:
 - **Year:** The mean year is mid-2009, with a standard deviation of 10 years (max 2022 and min 1980), indicating that the sample is recent enough to be relevant but also spans quite a number of years. This I think is good insofar as the recent history of academic publishing is represented more fully (some recent investigations limited their search to the three years prior to publication). There is some negative skew, which I suspect is due to the 1980 paper being quite a bit older than most papers.
 - **Refs:** The mean number of references is 45.82 with a standard deviation of 23.47. At least intuitively, this seems like a pretty standard distribution of references if we were to randomly select papers from the literature. However, the range is huge, with one paper showing 146 references—perhaps why the skew is positive. This may be something to consider when making group comparisons, as this point may have significant leverage.
 - **WC:** The average word count is 4436.25, and the standard deviation is 2248.24. It is also positively skewed, and although this should not affect our linguistic dependent variables it may be a confounding factor for references. Indeed, taking a look at the dataset I can see that the second highest value for word count (9670) also has the maximum value for references (the outlier noted above at 146 references). This will be something to watch out for.
- Now we will create descriptive statistics for each of the continuous variables above within the `PaperType` groups.

```
# Making PaperType a factor variable in the continuous variable dataframe to allow for group
continuous_data_for_descriptives$PaperType <- factor(continuous_data_for_descriptives$PaperType)

# Generating descriptive statistics within PaperType groups
descriptive_stats_by_PaperType <- describeBy(continuous_data_for_descriptives, group = continuous_data_for_descriptives$PaperType)

descriptive_stats_by_PaperType
```

```
Descriptive statistics by group
group: Single-Authored Fraudulent Papers
```

	vars	n	mean	sd	median	trimmed	mad	min	max
year	1	22	2008.95	11.74	2013.00	2010.39	6.67	1983.00	2022.00
Refs	2	22	44.18	19.93	36.00	42.89	17.79	18.00	87.00
flesch_re	3	22	36.09	9.17	37.06	36.29	10.53	18.49	54.36
WC	4	22	3998.91	1741.31	3796.50	3911.39	1829.53	1273.00	7330.00
abstraction	5	22	0.21	1.54	0.04	0.27	1.25	-3.27	2.95
jargon	6	22	34.23	8.33	36.94	34.90	8.49	17.91	44.35
CertSent	7	22	6.21	0.21	6.18	6.20	0.18	5.87	6.66

LingObf	8	22	-0.24	1.79	-0.04	-0.05	1.97	-4.23	2.25
cause	9	22	2.71	1.48	2.50	2.56	1.07	0.89	6.01
emo_pos	10	22	0.15	0.35	0.06	0.08	0.06	0.00	1.67
article	11	22	8.35	2.60	8.48	8.41	2.90	3.53	12.25
prep	12	22	15.75	1.60	15.75	15.79	1.43	11.79	18.42
quantity	13	22	4.27	0.97	4.11	4.21	1.13	2.59	6.59
PaperType	14	22	1.00	0.00	1.00	1.00	0.00	1.00	1.00

			range	skew	kurtosis	se
year	39.00	-1.02	-0.29	2.50		
Refs	69.00	0.56	-1.06	4.25		
flesch_re	35.87	-0.01	-0.63	1.95		
WC	6057.00	0.54	-0.67	371.25		
abstraction	6.21	-0.23	-0.33	0.33		
jargon	26.44	-0.56	-1.04	1.78		
CertSent	0.78	0.44	-0.57	0.04		
LingObf	6.48	-0.70	-0.32	0.38		
cause	5.12	0.93	-0.05	0.32		
emo_pos	1.67	3.81	13.82	0.07		
article	8.72	-0.16	-1.18	0.55		
prep	6.63	-0.34	-0.15	0.34		
quantity	4.00	0.49	-0.41	0.21		
PaperType	0.00	NaN	NaN	0.00		

group: Multi-Authored Fraudulent Papers

	vars	n	mean	sd	median	trimmed	mad	min	max
year	1	22	2010.14	9.59	2012.50	2011.67	8.15	1982.00	2022.00
Refs	2	22	44.00	19.66	39.50	42.06	17.05	18.00	94.00
flesch_re	3	22	34.18	9.64	31.41	33.58	9.38	20.08	56.59
WC	4	22	4705.91	2047.63	4274.00	4559.39	1931.83	1823.00	9004.00
abstraction	5	22	-0.45	1.83	-0.53	-0.44	1.95	-4.10	3.55
jargon	6	22	35.97	6.97	37.36	36.23	6.28	23.85	46.48
CertSent	7	22	6.22	0.18	6.20	6.23	0.24	5.82	6.47
LingObf	8	22	0.47	1.43	0.18	0.36	1.57	-1.66	4.13
cause	9	22	2.84	1.08	2.74	2.75	1.03	1.14	5.66
emo_pos	10	22	0.03	0.04	0.01	0.02	0.02	0.00	0.15
article	11	22	8.19	1.94	8.51	8.12	1.53	4.90	12.66
prep	12	22	14.84	1.64	15.19	14.84	1.75	11.80	17.58
quantity	13	22	4.22	1.39	4.10	4.15	1.54	2.27	6.95
PaperType	14	22	2.00	0.00	2.00	2.00	0.00	2.00	2.00
			range	skew	kurtosis	se			
year	40.00	-1.37	1.52	2.05					
Refs	76.00	0.86	-0.01	4.19					
flesch_re	36.51	0.59	-0.62	2.05					

WC	7181.00	0.56	-0.81	436.56
abstraction	7.65	0.02	-0.64	0.39
jargon	22.63	-0.38	-1.16	1.49
CertSent	0.64	-0.27	-1.00	0.04
LingObf	5.79	0.68	-0.15	0.30
cause	4.52	0.78	0.30	0.23
emo_pos	0.15	1.55	1.39	0.01
article	7.76	0.16	-0.34	0.41
prep	5.78	-0.11	-1.18	0.35
quantity	4.68	0.46	-1.11	0.30
PaperType	0.00	NaN	NaN	0.00

group: Single-Authored Genuine Papers

	vars	n	mean	sd	median	trimmed	mad	min	max
year	1	22	2008.95	12.24	2013.50	2010.61	5.93	1980.00	2022.00
Refs	2	22	51.05	32.53	40.50	46.28	28.91	12.00	146.00
flesch_re	3	22	34.46	15.72	38.40	36.15	10.34	-10.89	54.97
WC	4	22	4632.36	2424.81	4148.00	4491.00	2364.01	1141.00	9670.00
abstraction	5	22	0.80	1.89	1.00	0.91	2.13	-3.39	3.43
jargon	6	22	29.50	6.19	31.79	29.61	5.77	19.26	38.66
CertSent	7	22	6.07	0.28	6.13	6.07	0.31	5.55	6.49
LingObf	8	22	-0.25	1.77	-0.30	-0.15	1.56	-5.84	2.97
cause	9	22	2.73	1.04	2.55	2.67	1.05	1.18	4.91
emo_pos	10	22	0.12	0.26	0.06	0.06	0.09	0.00	1.23
article	11	22	9.13	2.45	8.61	8.95	2.64	5.91	14.47
prep	12	22	15.66	1.15	15.89	15.83	0.76	12.82	17.22
quantity	13	22	4.66	1.64	4.46	4.55	1.43	2.05	8.66
PaperType	14	22	3.00	0.00	3.00	3.00	0.00	3.00	3.00

	range	skew	kurtosis	se
year	42.00	-1.11	-0.07	2.61
Refs	134.00	1.32	1.43	6.94
flesch_re	65.86	-1.16	0.90	3.35
WC	8529.00	0.42	-0.93	516.97
abstraction	6.82	-0.42	-0.84	0.40
jargon	19.40	-0.30	-1.34	1.32
CertSent	0.94	-0.27	-1.13	0.06
LingObf	8.81	-1.03	2.29	0.38
cause	3.73	0.42	-0.61	0.22
emo_pos	1.23	3.38	11.22	0.06
article	8.56	0.48	-0.91	0.52
prep	4.40	-1.22	0.76	0.25
quantity	6.61	0.62	-0.27	0.35
PaperType	0.00	NaN	NaN	0.00

group: Multi-Authored Genuine Papers

	vars	n	mean	sd	median	trimmed	mad	min	max
year	1	22	2010.77	8.50	2012.50	2011.89	8.15	1990.00	2022.00
Refs	2	22	44.05	20.05	36.50	41.94	15.57	19.00	91.00
flesch_re	3	22	34.86	8.34	36.17	35.12	6.35	15.95	49.45
WC	4	22	4407.82	2741.91	3624.00	4009.67	1307.65	1124.00	13901.00
abstraction	5	22	-0.56	1.83	-0.42	-0.48	1.65	-4.46	3.07
jargon	6	22	33.61	7.19	35.03	33.51	6.42	20.86	46.67
CertSent	7	22	6.19	0.31	6.22	6.20	0.19	5.21	6.76
LingObf	8	22	0.02	1.69	-0.45	-0.16	1.05	-2.50	4.28
cause	9	22	2.90	1.30	2.44	2.83	0.79	1.04	5.56
emo_pos	10	22	0.04	0.05	0.04	0.04	0.05	0.00	0.17
article	11	22	7.88	1.62	7.71	7.78	1.06	4.22	12.06
prep	12	22	15.48	2.15	15.66	15.58	1.41	9.76	20.67
quantity	13	22	3.75	1.09	3.74	3.76	1.21	1.69	5.53
PaperType	14	22	4.00	0.00	4.00	4.00	0.00	4.00	4.00
	range	skew	kurtosis	se					
year	32.00	-0.95	0.15	1.81					
Refs	72.00	0.77	-0.61	4.27					
flesch_re	33.50	-0.41	-0.37	1.78					
WC	12777.00	1.90	3.92	584.58					
abstraction	7.53	-0.26	-0.37	0.39					
jargon	25.81	-0.16	-1.01	1.53					
CertSent	1.55	-1.02	2.09	0.07					
LingObf	6.78	1.08	0.44	0.36					
cause	4.52	0.65	-0.77	0.28					
emo_pos	0.17	0.88	0.00	0.01					
article	7.84	0.52	0.94	0.35					
prep	10.91	-0.37	1.33	0.46					
quantity	3.84	-0.05	-1.19	0.23					
PaperType	0.00	NaN	NaN	0.00					

- Some quick notes:

- **Year:** The year seems to be relatively similar between groups, with the single-author groups (SAGP and SAFP) both having mid-2008 as the mean and the multi-author groups both having mid-2010 as the mean. This may be partially due to there being single outliers (matched papers that are both outliers) at the lower end of the distribution.
- **Refs:** As I suspected, the outlier of 146 seems to be pulling the mean for SAGP up to 51.05 (the means for all other groups are around 44). This is corroborated by the skew statistics which show that only the SAGP group has a skew value above

1. I may run the analyses where references is the outcome variable both with and without this case in the model, or I may use word count as a covariate in the model to try to account for it.
- **WC:** For some reason, there seems to be a notable difference in mean word count between the single-authored fraudulent group and the rest of the groups. I could speculate as to why this is the case, but I may do an unplanned follow-up analysis of this.
2. Frequencies will now be produced for categorical variables, both for the data in general and within `PaperType` groups.
 - First, we will make the variables `inst_pres`, `gender`, `simple_reason`, `Country`, and `PaperType` factor variables.

```
# Changing inst_pres (institutional prestige), gender, simple_reason, Country, and PaperType
data$inst_pres <- factor(data$inst_pres, levels = c(0, 1), labels = c("Not Major Research", "Major Research"))
data$gender <- factor(data$gender, levels = c("FEMALE", "MALE"), labels = c("Female", "Male"))
data$simple_reason <- factor(data$simple_reason, levels = c("f_data", "f_image", "m_image"))
data$Country <- factor(data$Country)
data$PaperType <- factor(data$PaperType)
```

- Next, we will produce frequency tables for each categorical variable of interest for the whole dataset.

```
# Creating the frequency tables for each categorical variable
freq_tab_inst_pres <- table(data$inst_pres)
freq_tab_gender <- table(data$gender)
freq_tab_simple_reason <- table(data$simple_reason)
freq_tab_Country <- table(data$Country)
freq_tab_PaperType <- table(data$PaperType)

# Displaying the frequency tables
freq_tab_inst_pres
```

Not Major Research Institution	Major Research Institution
70	18

```
freq_tab_gender
```

Female	Male
15	73

freq_tab_simple_reason

Fabricated/Falsified Data	Fabricated/Falsified Image
27	3
Manipulated Image	Fabricated/Falsified Data and Image
12	2

freq_tab_Country

Australia	Belgium	China	Egypt	Ethiopia
1	1	10	3	2
India	Iran	Israel	Italy	Japan
10	1	1	1	3
Latvia	Malaysia	Netherlands	Pakistan	Poland
1	2	6	3	2
Portugal	South Africa	South Korea	Taiwan	Turkey
2	1	2	1	2
United Kingdom	United States			
4	29			

freq_tab_PaperType

MAFP	MAGP	SAFP	SAGP
22	22	22	22

- Let's take a look at the way these are split:
 - First, there seems to be a preponderance of lower status (not major) research institutions in the whole dataset (70:18).
 - Next, most of the papers were retracted due to fabricated/falsified data ($n = 27$), followed by those that manipulated images ($n = 12$), fabricated/falsified images ($n = 3$), or both fabricated/falsified data and images ($n = 2$).
 - For country, the most common category of papers seem to be from the United States ($n = 29$), followed by China and India (both $n = 10$) and the Netherlands ($n = 6$), with no other countries totaling more than $n = 4$.
 - Finally, we can see that the papers are evenly split between each of our groups ($n = 22$; $N = 88$).

- Next, we will produce the frequencies within **PaperType** groups. Because we were not able to perfectly match across our matching characteristics, we will take this opportunity to look at how far off we were. A proportion table will be produced to more easily compare frequencies across **PaperType** groups. First, however, we need to make the matching dummy variables into factor variables with labels to make them more interpretable.

```
# Creating factor variables out of the dummy variables that track matching across groups
data$different_country <- factor(data$different_country, levels = c(0, 1), labels = c("Same", "Different"))
data$different_gender <- factor(data$different_gender, levels = c(0, 1), labels = c("Same", "Different"))
data$different_inst_pres <- factor(data$different_inst_pres, levels = c(0, 1), labels = c("Same", "Different"))
data$different_journal <- factor(data$different_journal, levels = c(0, 1), labels = c("Same", "Different"))
```

- I have checked the data set, and the labels seem to have been assigned correctly. Now we will produce the frequency tables and proportion tables.
 - Because we are taking a look at matching characteristics here, I will also take a look at the **year_difference** (the difference between the years of publication for the matched papers) variable within each group by using the **describe()** function from the **psych** package (like for the continuous variables above). In addition, I will take a look at the **NumAuth** (number of authors) for each of the groups.

```
# Frequency tables and proportion tables
# institutional prestige
frequency_table_by_PaperType_inst_pres <- table(data$PaperType, data$inst_pres)
frequency_table_by_PaperType_inst_pres
```

	Not Major Research Institution	Major Research Institution
MAFP	17	5
MAGP	18	4
SAFP	18	4
SAGP	17	5

```
proportion_table_by_PaperType_inst_pres <- prop.table(frequency_table_by_PaperType_inst_pres)
proportion_table_by_PaperType_inst_pres
```

	Not Major Research Institution	Major Research Institution
MAFP	0.7727273	0.2272727
MAGP	0.8181818	0.1818182
SAFP	0.8181818	0.1818182
SAGP	0.7727273	0.2272727

```
# gender
frequency_table_by_PaperType_gender <- table(data$PaperType, data$gender)
frequency_table_by_PaperType_gender
```

	Female	Male
MAFP	4	18
MAGP	4	18
SAFP	3	19
SAGP	4	18

```
proportion_table_by_PaperType_gender <- prop.table(frequency_table_by_PaperType_gender, ma
proportion_table_by_PaperType_gender
```

	Female	Male
MAFP	0.1818182	0.8181818
MAGP	0.1818182	0.8181818
SAFP	0.1363636	0.8636364
SAGP	0.1818182	0.8181818

```
# reason
frequency_table_by_PaperType_reason <- table(data$PaperType, data$simple_reason)
frequency_table_by_PaperType_reason
```

	Fabricated/Falsified Data	Fabricated/Falsified Image	Manipulated Image
MAFP	12	1	7
MAGP	0	0	0
SAFP	15	2	5
SAGP	0	0	0

	Fabricated/Falsified Data and Image
MAFP	2
MAGP	0
SAFP	0
SAGP	0

```
proportion_table_by_PaperType_reason <- prop.table(frequency_table_by_PaperType_reason, ma
proportion_table_by_PaperType_reason
```

	Fabricated/Falsified Data	Fabricated/Falsified Image	Manipulated Image
MAFP	0.54545455	0.04545455	0.31818182
MAGP			
SAFP	0.68181818	0.09090909	0.22727273
SAGP			

	Fabricated/Falsified Data and Image
MAFP	0.09090909
MAGP	
SAFP	0.00000000
SAGP	

```
# country
frequency_table_by_PaperType_country <- table(data$PaperType, data$Country)
frequency_table_by_PaperType_country
```

	Australia	Belgium	China	Egypt	Ethiopia	India	Iran	Israel	Italy	Japan
MAFP	0	0	4	0	0	3	0	0	0	1
MAGP	0	0	4	0	0	3	0	0	0	1
SAFP	0	1	2	2	1	4	0	0	0	1
SAGP	1	0	0	1	1	0	1	1	1	0

	Latvia	Malaysia	Netherlands	Pakistan	Poland	Portugal	South Africa
MAFP	0	1	2	1	1	1	0
MAGP	0	1	1	1	1	1	0
SAFP	0	0	1	0	0	0	0
SAGP	1	0	2	1	0	0	1

	South Korea	Taiwan	Turkey	United Kingdom	United States
MAFP	0	0	0	0	8
MAGP	0	0	0	0	9
SAFP	1	0	1	1	7
SAGP	1	1	1	3	5

```
proportion_table_by_PaperType_country <- prop.table(frequency_table_by_PaperType_country,
proportion_table_by_PaperType_country)
```

	Australia	Belgium	China	Egypt	Ethiopia	India
MAFP	0.00000000	0.00000000	0.18181818	0.00000000	0.00000000	0.13636364
MAGP	0.00000000	0.00000000	0.18181818	0.00000000	0.00000000	0.13636364

SAFP	0.00000000	0.04545455	0.09090909	0.09090909	0.04545455	0.18181818
SAGP	0.04545455	0.00000000	0.00000000	0.04545455	0.04545455	0.00000000

	Iran	Israel	Italy	Japan	Latvia	Malaysia
MAFP	0.00000000	0.00000000	0.00000000	0.04545455	0.00000000	0.04545455
MAGP	0.00000000	0.00000000	0.00000000	0.04545455	0.00000000	0.04545455
SAFP	0.00000000	0.00000000	0.00000000	0.04545455	0.00000000	0.00000000
SAGP	0.04545455	0.04545455	0.04545455	0.00000000	0.04545455	0.00000000

	Netherlands	Pakistan	Poland	Portugal	South Africa	South Korea
MAFP	0.09090909	0.04545455	0.04545455	0.04545455	0.00000000	0.00000000
MAGP	0.04545455	0.04545455	0.04545455	0.04545455	0.00000000	0.00000000
SAFP	0.04545455	0.00000000	0.00000000	0.00000000	0.00000000	0.04545455
SAGP	0.09090909	0.04545455	0.00000000	0.00000000	0.04545455	0.04545455

	Taiwan	Turkey	United Kingdom	United States
MAFP	0.00000000	0.00000000	0.00000000	0.36363636
MAGP	0.00000000	0.00000000	0.00000000	0.40909091
SAFP	0.00000000	0.04545455	0.04545455	0.31818182
SAGP	0.04545455	0.04545455	0.13636364	0.22727273

```
# And for the matching characteristic dummy variables
```

```
# Country different
```

```
frequency_table_by_PaperType_different_country <- table(data$PaperType, data$different_country)
frequency_table_by_PaperType_different_country
```

	Same Country	Different Country
MAFP	14	8
MAGP	21	1
SAFP	0	0
SAGP	10	12

```
proportion_table_by_PaperType_different_country <- prop.table(frequency_table_by_PaperType_different_country)
proportion_table_by_PaperType_different_country
```

	Same Country	Different Country
MAFP	0.63636364	0.36363636
MAGP	0.95454545	0.04545455
SAFP		
SAGP	0.45454545	0.54545455

```
# Gender different
frequency_table_by_PaperType_different_gender <- table(data$PaperType, data$different_gender)
frequency_table_by_PaperType_different_gender
```

	Same Gender	Different Gender
MAFP	18	4
MAGP	20	2
SAFP	0	0
SAGP	19	3

```
proportion_table_by_PaperType_different_gender <- prop.table(frequency_table_by_PaperType_different_gender)
proportion_table_by_PaperType_different_gender
```

	Same Gender	Different Gender
MAFP	0.81818182	0.18181818
MAGP	0.90909091	0.09090909
SAFP		
SAGP	0.86363636	0.13636364

```
# Institutional prestige different
frequency_table_by_PaperType_different_inst_pres <- table(data$PaperType, data$different_institutional_prestige)
frequency_table_by_PaperType_different_inst_pres
```

	Same Institutional Prestige	Different Institutional Prestige
MAFP	17	5
MAGP	21	1
SAFP	0	0
SAGP	21	1

```
proportion_table_by_PaperType_different_inst_pres <- prop.table(frequency_table_by_PaperType_different_inst_pres)
proportion_table_by_PaperType_different_inst_pres
```

	Same Institutional Prestige	Different Institutional Prestige
MAFP	0.77272727	0.22727273
MAGP	0.95454545	0.04545455
SAFP		
SAGP	0.95454545	0.04545455


```
# Journal different
frequency_table_by_PaperType_different_journal <- table(data$PaperType, data$different_journal)
frequency_table_by_PaperType_different_journal
```

	Same Journal	Different Journal
MAFP	11	11
MAGP	0	0
SAFP	0	0
SAGP	0	0

```
proportion_table_by_PaperType_different_journal <- prop.table(frequency_table_by_PaperType_different_journal)
proportion_table_by_PaperType_different_journal
```

	Same Journal	Different Journal
MAFP	0.5	0.5
MAGP		
SAFP		
SAGP		

```
# Descriptive statistics for year off within PaperType groups
year_difference_descriptives <- describeBy(data$year_difference, group = data$PaperType, n)
```

Warning in min(x, na.rm = na.rm): no non-missing arguments to min; returning Inf

Warning in max(x, na.rm = na.rm): no non-missing arguments to max; returning -Inf

```
year_difference_descriptives
```

```
Descriptive statistics by group
group: MAFP
  vars  n  mean   sd median trimmed  mad min max range skew kurtosis   se
X1    1  22 -1.36 6.15      0   -0.22 1.48 -21   8    29  -1.9    3.45 1.31
-----
group: MAGP
  vars  n  mean   sd median trimmed  mad min max range  skew kurtosis   se
```

```
X1      1 22 -0.64 2.15      0   -0.22   0 -10   1    11 -3.72    13.37 0.46
```

```
-----
```

```
group: SAFP
```

```
vars n mean sd median trimmed mad min max range skew kurtosis se
X1    1 0  NaN NA      NA      NaN  NA Inf -Inf  -Inf   NA      NA NA
```

```
-----
```

```
group: SAGP
```

```
vars  n mean  sd median trimmed mad min max range skew kurtosis  se
X1    1 22    0 1.35      0   -0.06   0  -4   4    8 0.11    4.36 0.29
```

```
num_auth_descriptives <- describeBy(data$NumAuth, group = data$PaperType, na.rm = TRUE)
num_auth_descriptives
```

Descriptive statistics by group

```
group: MAFP
```

```
vars  n mean  sd median trimmed  mad min max range skew kurtosis  se
X1    1 22 3.73 1.32      4    3.61 1.48   2   7    5 0.6    -0.17 0.28
```

```
-----
```

```
group: MAGP
```

```
vars  n mean  sd median trimmed  mad min max range skew kurtosis  se
X1    1 22 4.05 1.91      4    3.78 1.48   2   9    7 0.99    0.29 0.41
```

```
-----
```

```
group: SAFP
```

```
vars  n mean sd median trimmed mad min max range skew kurtosis se
X1    1 22   1 0      1      1   0   1   1    0 NaN      NaN 0
```

```
-----
```

```
group: SAGP
```

```
vars  n mean sd median trimmed mad min max range skew kurtosis se
X1    1 22   1 0      1      1   0   1   1    0 NaN      NaN 0
```

• Overview of Categorical Variables:

- **Institutional Prestige:** The split for frequencies/proportion of is very close to even across groups. The MAFP and SAGP groups have 17 papers from major research institutions and 5 from lower status research institutions (.77/.22), and the MAGP and SAFP groups have 18 papers from major research institutions and 4 from lower status research institutions (.82/.18).
- **Gender:** The split between groups is also very similar for gender, with MAFP, MAGP, and SAGP groups each having 4 female first authors and 18 male first authors (.18/.82). SAFP had 3 female first authors and 19 male first authors (.14/.86).

- **Reason (Not Matched Between Groups During Data Collection):** The reason for retraction is only relevant for the fraudulent paper groups, and there is a similar split between them. The SAFP had 15 papers in the group for Fabricated/Falsified Data, 2 paper for Fabricated/Falsified Images, 5 for Manipulated Images, and 0 that Fabricated/Falsified Data and Images (.68/.09/.22/.00). The MAFP had 12 papers in the group for Fabricated/Falsified Data, 1 paper for Fabricated/Falsified Images, 7 for Manipulated Images, and 2 for Fabricated/Falsified Data and Images (.55/.05/.32/.09).
- **Country:** Because there are many countries, I will not delineate them all here but rather refer you to the data printed above if you are interested in diving deeper. To highlight one thing, we can see that papers from the United States (our most common country in the whole data set) tend to be overrepresented in the frequencies for each group (MAFP, 8/.36; MAGP, 9/.40; SAFP, 7/.32; SAGP, 5/.23). There are no other countries with proportions that exceed the lowest proportion of United States papers in any group (all<.23).
- **Overview of Matching Characteristic Dummy Variables and Average Differences:**
 - Although the frequencies and proportions of the matched variables within groups above indicates to some degree how similar each group is, the more important metric of how closely matched the groups are is between the groups for which comparisons are to be made. For this reason, I dummy coded whether each paper matched it's pair on each characteristic or not as a binary variable (which we labeled above) before loading the data. Because the SAFP papers were not gathered by matching to any group, there are no data for the SAFP group for any of the dummy variables, and journal only didn't match across some of the SAFP and MAFP pairs. Each of the other groups is in reference to the group against which it will be compared (i.e., data for MAFP represent how well they match SAFP papers, data for MAGP represent how well they match with MAFP, data for SAGP represent how well they match with SAFP). In addition, I coded how different the year was between papers, such that positive values indicate the number of years the original paper was published after the matched paper (negative values indicate the matched paper was published after the paper it was being matched to).
 - **MAFP compared with SAFP:**
 - * Country was the same for 14 (.64) pairs and different for 8 (.36) pairs.
 - * Gender was the same for 18 (.82) pairs and different for 4 (.18) pairs.
 - * Institutional prestige was the same for 17 (.77) pairs and different for 5 (.23) pairs.
 - * Journal was the same for 11 (.50) pairs and different for 11 (.50) pairs.

- * The average year difference was -1.36, indicating that the MAFP tended to be slightly more recent than the SAFP.
- * Finally, the mean number of authors for MAFP is 3.73.
- **MAGP compared with MAFP:**
 - * Country was the same for 21 (.95) pairs and different for 1 (.05) pairs.
 - * Gender was the same for 20 (.91) pairs and different for 2 (.09) pairs.
 - * Institutional prestige was the same for 21 pairs (.95) and different for 1 (.05) pair.
 - * Journal was the same for every paper.
 - * The average year difference was -.64, indicating that the MAGP tended to be slightly more recent than the MAFP.
 - * Finally, the mean number of authors for MAFP is 4.05.
- **SAGP compared with SAFP:**
 - * Country was the same for 10 (.45) pairs and different for 12 (.55) pairs.
 - * Gender was the same for 19 (.86) pairs and different for 3 (.14) pairs.
 - * Institutional prestige was the same for 21 pairs (.95) and different for 1 (.05) pair.
 - * Journal was the same for every paper.
 - * The average year difference was 0, indicating that the SAGP and SAFP are exactly matched for the average year of publication.
- **Summary of matching characteristics:**
 - Looking at the data, the most difficult characteristic to match was country across all categories of papers, except for MAFP compared with SAFP, where journal was the most difficult to match. Nevertheless, for many of the situations where we were unable to match the specific paper, this was balanced out by not being able to match another paper in the opposite direction, as the frequencies within paper types demonstrates.

Data Visualization

1. Using the `ggplot2` package, frequency distributions and box plots will be generated for `LingObf`, `CertSent`, and `Refs`. A bar plot will be produced for `FraudCorrAuth`.

```
library(ggplot2) # To load the ggplot2 package
```


Attaching package: 'ggplot2'

The following objects are masked from 'package:psych':


%+%, alpha

```
# To produce histogram and box plot for LingObf
ggplot(data, aes(x = LingObf)) +
  geom_histogram(fill = "blue", color = "black") +
  labs(title = "Histogram of Linguistic Obfuscation for Entire Dataset")
```

`stat_bin()` using `bins = 30`. Pick better value with `binwidth`.

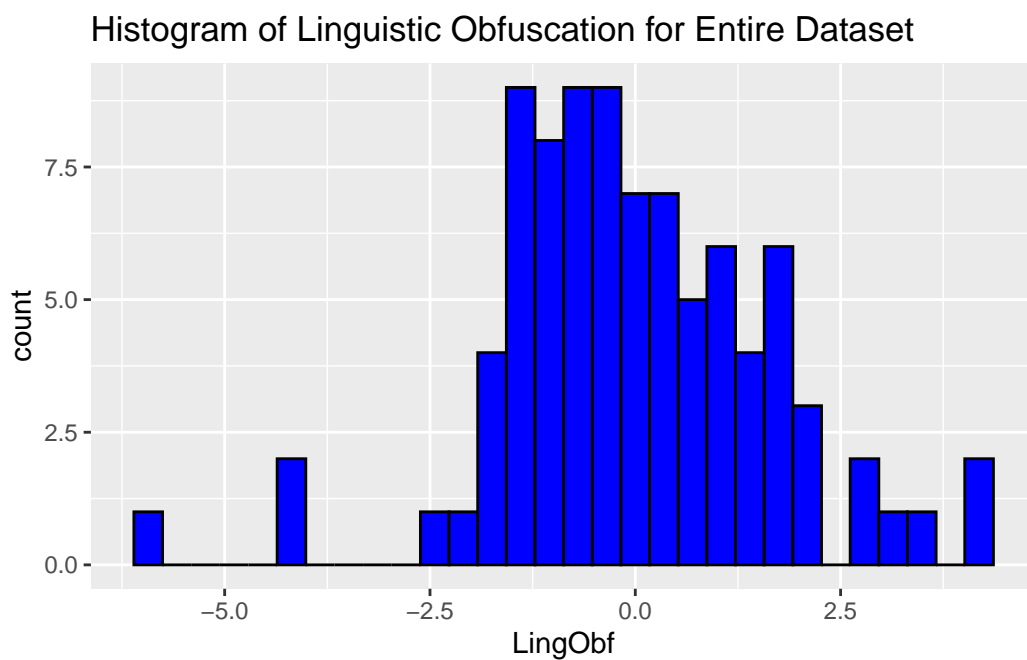


```
ggplot(data, aes(y = LingObf)) +
  geom_boxplot(fill = "lightblue", color = "black") +
  labs(title = "Box Plot of Linguistic Obfuscation for Entire Dataset")
```

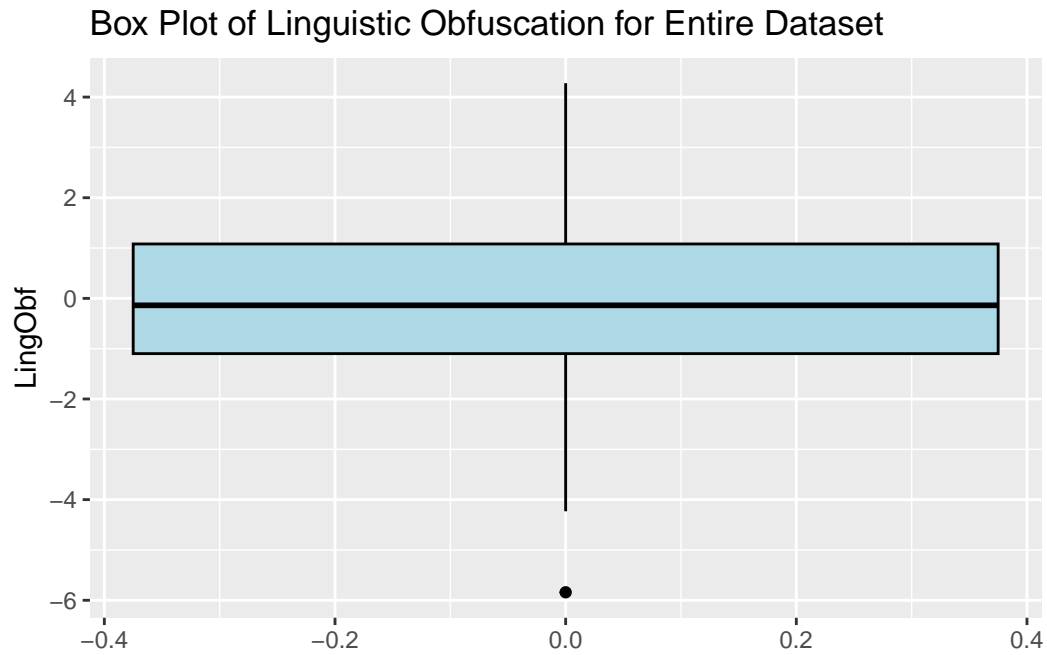

```
# To produce histogram and box plot for CertSent
ggplot(data, aes(x = CertSent)) +
  geom_histogram(fill = "blue", color = "black") +
  labs(title = "Histogram of Certainty Sentiment for Entire Dataset")
```


`stat_bin()` using `bins = 30`. Pick better value with `binwidth`.

Histogram of Certainty Sentiment for Entire Dataset

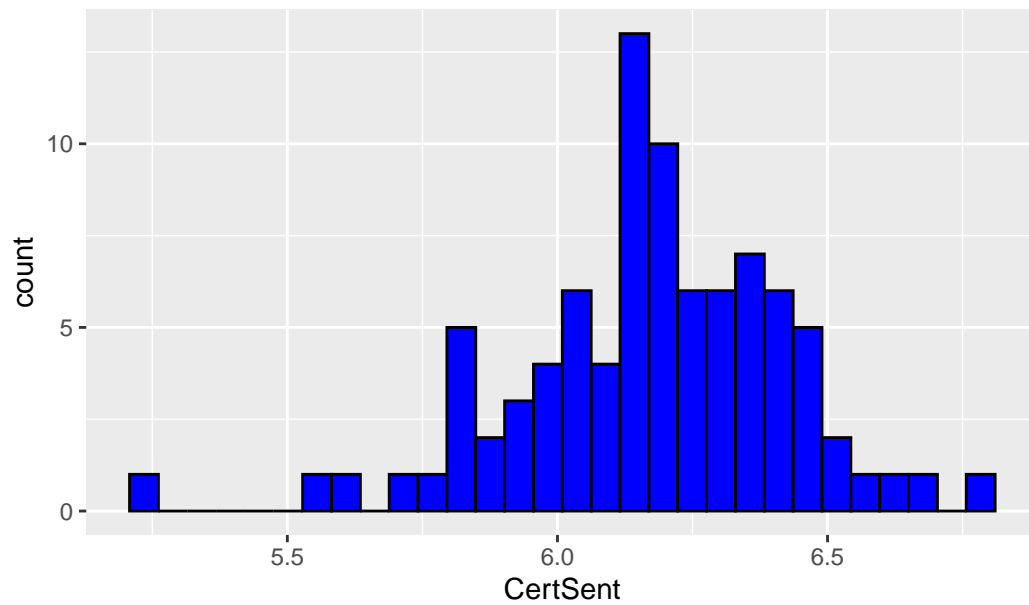


```
ggplot(data, aes(y = CertSent)) +  
  geom_boxplot(fill = "lightblue", color = "black") +  
  labs(title = "Box Plot of Certainty Sentiment for Entire Dataset")
```

Box Plot of Certainty Sentiment for Entire Dataset

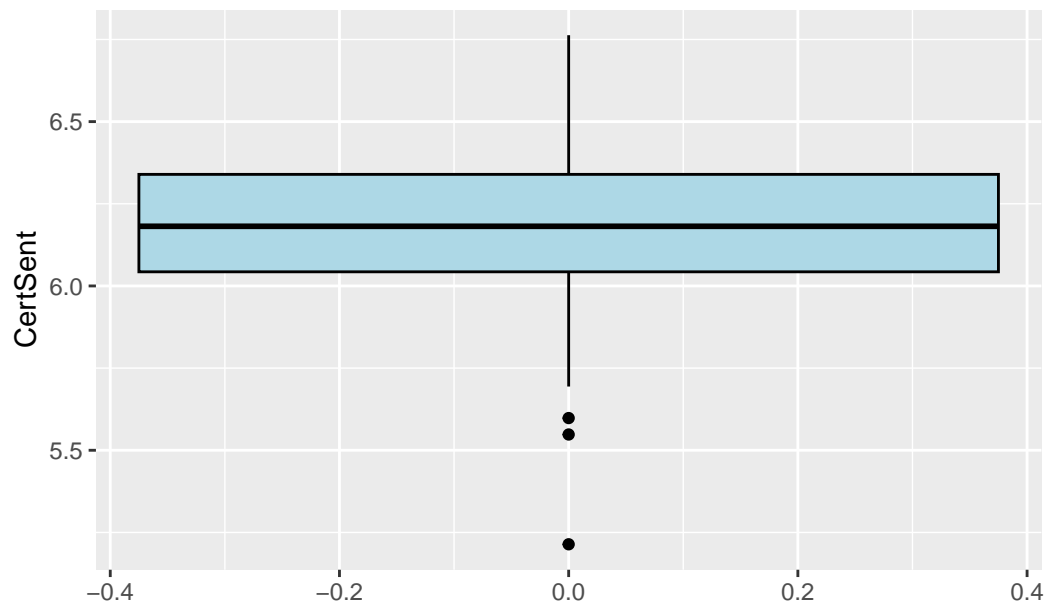


```
# To produce histogram and box plot for Refs
ggplot(data, aes(x = Refs)) +
  geom_histogram(fill = "blue", color = "black") +
  labs(title = "Histogram of References for Entire Dataset")
```

`stat_bin()` using `bins = 30`. Pick better value with `binwidth`.

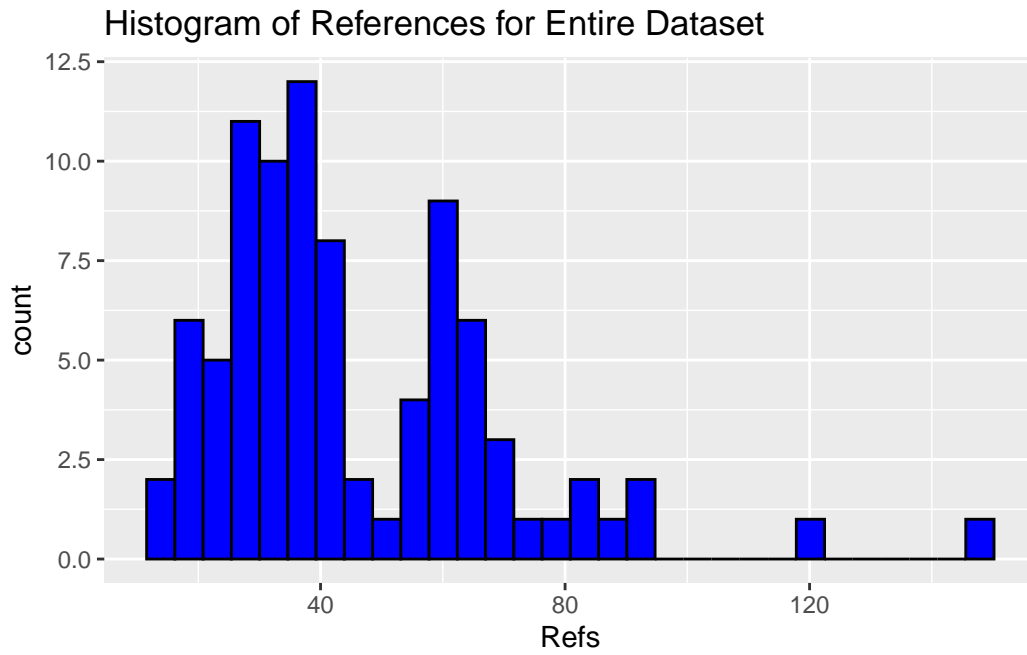


```
ggplot(data, aes(y = Refs)) +  
  geom_boxplot(fill = "lightblue", color = "black") +  
  labs(title = "Box Plot of References for Entire Dataset")
```

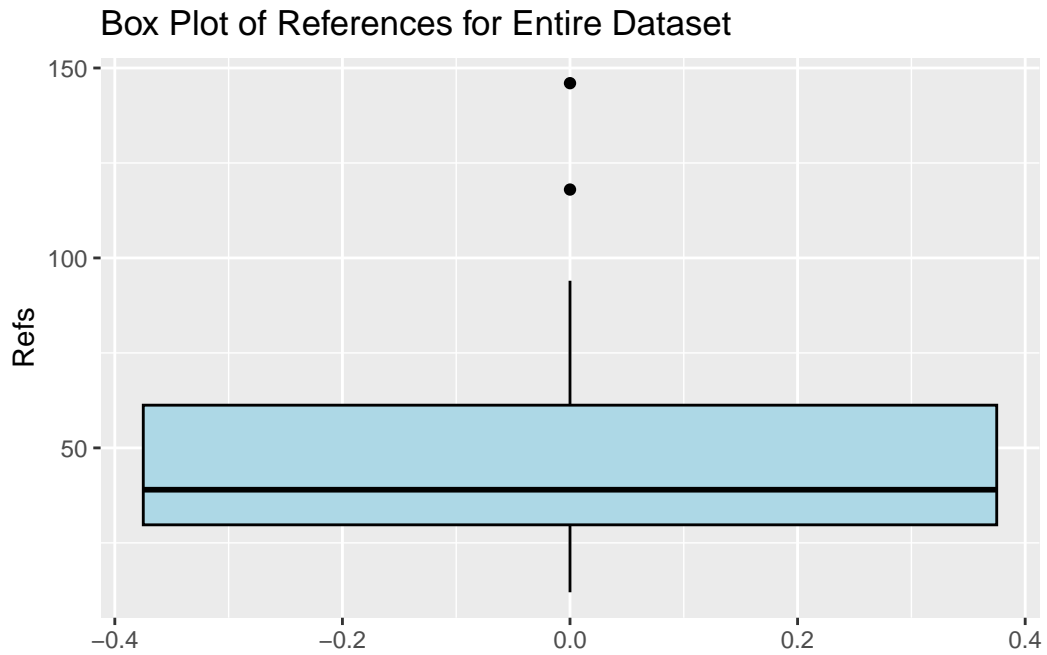

```
# To produce bar plot for FraudCorrAuth
ggplot(data, aes(x = FraudCorrAuth)) +
  geom_bar(fill = "coral") +
  labs(title = "Bar Plot of Fraudulent Corresponding Author for MAFP")
```

Warning: Removed 80 rows containing non-finite outside the scale range (``stat_count()``).

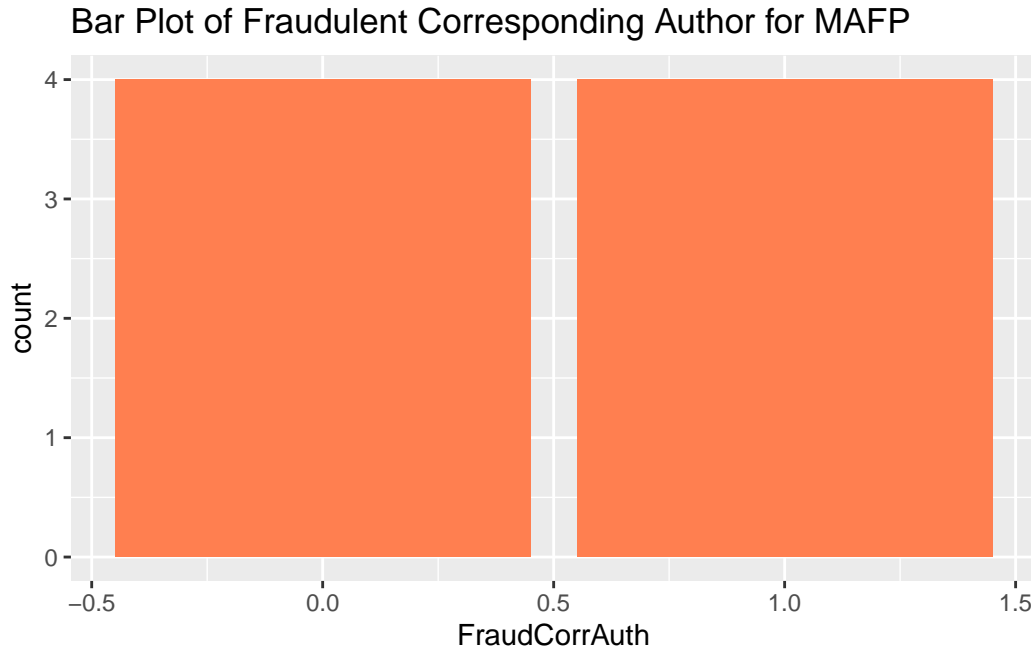

- **LingObf:** Linguistic obfuscation seems to have a bit of a wonky distribution with a few outliers at the low end of the distribution ($M = 0$, $SD = 1.67$; from descriptives above). This can be observed in the box plot as well, which shows one of the particularly low values.
- **CertSent:** Certainty sentiment does not seem to be skewed despite having an outlier at the low end of the distribution as well. The box plot highlights three values at the low end of the scale as being outliers.
- **Refs:** References has a strange distribution, one that looks like it is actually composed of two latent classes. It also has two outlier values way at the high end of the distribution, as shown by the histogram and the box plot.
- **FraudCorrAuth:** The fraudulent corresponding author variable shows an even split between papers for which the fraudulent author was and was not the corresponding author.

2.

Aggarwal, S. B., Chaitanya. (2022). *textstat: Calculate statistical features from text* [Python]. <https://github.com/shivam5992/textstat>

Boyd, R. L., Ashokkumar, A., Seraj, S., & Pennebaker, J. W. (2022). The development and psychometric properties of LIWC-22. *Austin, TX: University of Texas at Austin*, 1–47. https://www.researchgate.net/profile/Ryan-Boyd-8/publication/358725479_The_Development_and_Psychometric_Properties_of_LIWC-22

[22/links/6210f62c4be28e145ca1e60b/The-Development-and-Psychometric-Properties-of-LIWC-22.pdf](#)

Retraction Watch Database. (2023). <http://retractiondatabase.org/RetractionSearch.aspx?>

Rocklage, M. D., He, S., Rucker, D. D., & Nordgren, L. F. (2023). Beyond Sentiment: The Value and Measurement of Consumer Certainty in Language. *Journal of Marketing Research*, 60(5), 870–888. <https://doi.org/10.1177/00222437221134802>