

UNIVERSITI TUNKU ABDUL RAHMAN
Faculty of Information and Communication Technology



UCCD3223 Mobile Applications Development
(June 2026 Trimester)

Group Assignment 2

Name	Student ID	Course	Practical Group	Group ID	Group Name	Total
LIEW KAIY BIN	2302391	CS	P3	9	ReEvent	/100
MAH JUIN HONG	TBC	CS	P3	9	ReEvent	/100
WONG JIE YING	2401105	CS	P3	9	ReEvent	/100
WONG LOONG JIE	2302662	CS	P3	9	ReEvent	/100

Marking scheme	Marks	Remarks
Program completeness & functionality	X 3	
Actual design and creativity	X 1	
Potential for civil or commercial use	X 0.5	
Tidiness of source code	X 0.5	
SUB-TOTAL	/50	

Individual marking scheme for Documentation, Presentation and Q&A

Name	Documentation	Presentation	Q&A	Sub-Total
LIEW KAIY BIN	x 2	x 1.5	x 1.5	/50
MAH JUIN HONG	x 2	x 1.5	x 1.5	/50
WONG JIE YING	x 2	x 1.5	x 1.5	/50
WONG LOONG JIE	x 2	x 1.5	x 1.5	/50

Table of Contents

1 Executive Summary and Introduction	1
1.1 Problem and objectives	1
2 Solution Evolution and Originality	2
3 System Architecture and Technology	3
3.1 Remote, public and device services	3
4 Implemented Functionalities and Completeness	4
4.1 End-to-end user journeys	4
4.2 Lifecycle integrity and data boundaries	5
4.3 Matching and impact claims	5
4.4 Completeness boundary	5
5 UI/UX Design and Creativity	6
5.1 Final UI evidence placeholders.....	6
5.2 Role workflows and visual continuity	7
6 Testing, Code Quality, and Contributions	8
6.1 Current validation evidence	8
6.2 Source-code tidiness	8
7 Civil and Commercial Potential.....	9
7.1 Limitations and risks.....	9
7.2 Future work.....	9
7.3 Conclusion	9
References.....	10
Appendix A — Privacy-conscious QR payload contract.....	11
Appendix B — Circular Matching Excerpt	12
Appendix C — Impact calculation guardrails	13
Appendix D — Server-authoritative lifecycle gateway	14
Appendix E — Validation evidence and maintained commands.....	15
Appendix F — Git contribution evidence.....	16

List of Figures

Figure 1: ReEvent system architecture	3
Figure 2: Authentication and role selection	6
Figure 3: Organiser dashboard and event management	6
Figure 4: Resource editor and persistent photo	6
Figure 5: Digital passport and QR workflow	6
Figure 6: Marketplace and transaction lifecycle	7
Figure 7: Partner map, matching, and workbench	7
Figure 8: Impact dashboard.....	7

List of Tables

Table 1: Assignment minimum-requirement compliance	1
Table 2: Proposal-to-implementation traceability	2
Table 3: Implemented functionality and verification status	4
Table 4: Automated and manual testing evidence	8
Table 5: Member roles and contributions.....	8
Table 6: Appendix A — Privacy-conscious QR payload contract metadata	11
Table 7: Appendix B — Circular Matching Excerpt metadata	12
Table 8: Appendix C — Impact calculation guardrails metadata.....	13
Table 9: Appendix D — Server-authoritative lifecycle gateway metadata	14
Table 10: Validation command summary	15
Table 11: Git contribution snapshot	16

1 Executive Summary and Introduction

ReEvent is a role-based circular event resource platform designed to help organisers, participants, and recovery partners keep event materials in productive use. The implementation combines event and resource records, a circular marketplace, recovery programmes, digital passports, QR-assisted handovers, deterministic matching, and evidence-led impact reporting. It responds directly to Sustainable Development Goal 12 by encouraging responsible consumption, reuse, repair, redistribution, and recycling across an event's resource lifecycle (United Nations, n.d.).

1.1 Problem and objectives

Temporary events often create a fragmented trail of banners, furniture, decorations, packaging, equipment, and surplus stock. Their value is lost when ownership, condition, quantity, and recovery options are not visible at the moment a decision is made. ReEvent's objective is to make each item traceable, make circular routes discoverable, and make transaction completion auditable without exposing private identifiers in public QR payloads.

Report status This report is a source-evidenced implementation draft. Screenshot callouts and device-acceptance claims are deliberately labelled as pending until the final application is accepted on representative hardware.

Table 1: Assignment minimum-requirement compliance

Minimum requirement	ReEvent evidence	Status
Custom application icon	ReEvent-specific launcher branding and Android resources are present in the application module.	Implemented in source
Local storage	Room provides account/environment-scoped records; DataStore retains session and preference state; WorkManager supports synchronisation.	Implemented in source
Remote or public data source	Supabase provides authentication, Postgres, Storage and RPC endpoints; the public website resolves passport URLs; MapTiler supplies map tiles.	Automatically verified on 30 August 2026

2 Solution Evolution and Originality

The proposal established the circular-event problem and three-role experience. The implementation retains that identity while replacing prototype assumptions with stricter, testable boundaries. The result is an event-specific exchange rather than a generic resale application: resources remain connected to an origin event, a responsible custodian, a programme or transaction, and an auditable outcome.

Table 2: Proposal-to-implementation traceability

Proposal direction	Implemented evolution	Reason for change
Landing concept	Editorial role-aware entry and session restoration.	Clarifies the next action and reduces navigation ambiguity.
Organiser, participant and partner roles	Role routing and role-specific navigation/workspaces.	Separates responsibilities and least-privilege actions.
Organiser recovery dashboard	Event/resource management plus completed-outcome impact views.	Connects management data to verifiable lifecycle events.
Circular marketplace	Published listings with quantity-aware, server-authoritative requests.	Prevents optimistic local state from becoming the source of truth.
Resource editor and photo capture	Typed resource records and persisted photo metadata/storage.	Improves traceability beyond a visual prototype.
Digital passport and QR	Opaque-token HTTPS verifier with legacy-code safeguards.	Avoids exposing resource or account identifiers.
AI recovery match	Deterministic Smart/Circular Matching with explanations.	Produces reproducible, testable recommendations; AI remains future work.
Partner map/network	Partner discovery, programmes, geocoding controls and map presentation.	Turns discovery into a programme request workflow.
Impact dashboard	Metrics from completed transactions and documented factors only.	Proposal values are illustrative, not evidence of achieved impact.

Originality lies in the combination of event provenance, resource condition, circular-route matching, public passport verification, controlled custody transfers, and conservative impact visibility. The implemented workflow intentionally prioritises security and reproducibility over the proposal's more speculative language.

3 System Architecture and Technology

ReEvent uses a layered Kotlin architecture. Jetpack Compose renders adaptive role-based screens; ViewModels and use cases coordinate interaction; repository interfaces isolate storage and network details; and pure domain policies implement matching, QR validation, and impact summaries. Hilt supplies dependencies, Room caches account/environment-scoped state, DataStore persists lightweight preferences, and WorkManager coordinates background work.

ReEvent implementation architecture

Local-first Android experience with server-authoritative lifecycle operations

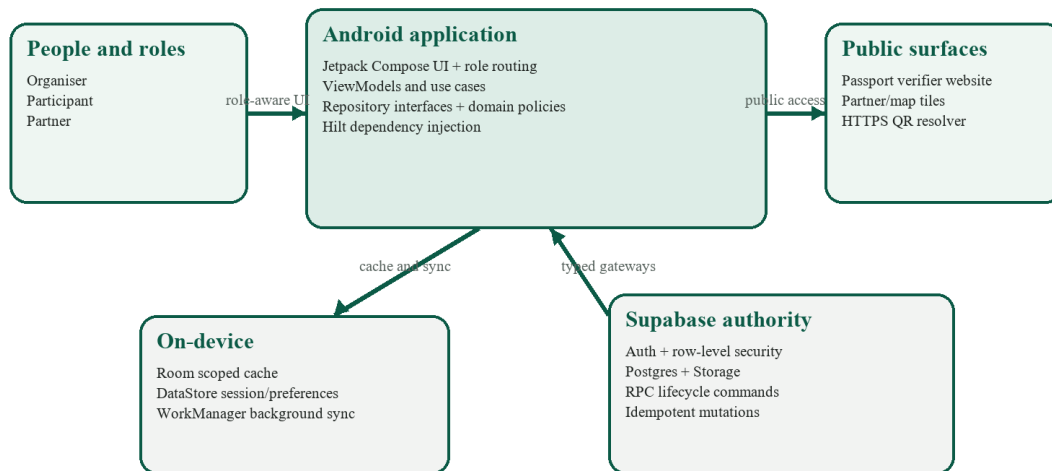


Figure 1: ReEvent system architecture

3.1 Remote, public and device services

Supabase Auth, Postgres, Storage, row-level security, and typed RPC gateways provide the authoritative multi-user boundary. Critical lifecycle mutations include idempotency keys and are not completed offline. The public website resolves opaque passport tokens without revealing private record identifiers. MapLibre/MapTiler supports partner discovery, ZXing renders QR codes, and ML Kit supports scanning.

The local-first design improves responsiveness and read availability, while server authority protects shared quantities, permissions, custody, and completion states from conflicting device-side assumptions.

4 Implemented Functionalities and Completeness

4.1 End-to-end user journeys

An organiser can authenticate, create an event, record a resource and photo, publish it or route it to a programme, review requests, authorise a handover, and observe the completed outcome. A participant can discover a listing, request an eligible quantity, follow the handover/receipt or return path, and display an authorised passport. A partner can publish recovery programmes, appear in discovery, receive compatible requests, and operate the relevant workbench. Public users can resolve a valid passport URL through the verifier website.

Table 3: Implemented functionality and verification status

Capability	Implementation evidence	Verification status
Authentication and role routing	Supabase-backed identity, session handling and role-specific destinations.	Implemented in source
Events and resources	Typed models, Room/cache boundaries, create/edit/status workflows and validation.	Implemented in source
Resource photos	Persisted local/remote metadata and Storage integration.	Implemented in source
Marketplace	Published listings, request quantities, eligibility and server-side lifecycle decisions.	Automatically verified on 30 August 2026
Digital passports and QR	Opaque HTTPS v1 payloads, validation and public verifier routing.	Automatically verified on 30 August 2026
Partner programmes/map	Programme authoring/discovery, map presentation and geocoding safeguards.	Automatically verified on 30 August 2026
Smart/Circular Matching	Deterministic condition/material/location ranking with explanations.	Implemented in source
Impact dashboard	Completed-transaction summaries and guarded numeric estimates.	Implemented in source
Offline behaviour	Scoped cache/read continuity; critical shared mutations remain online-only.	Manual/device acceptance pending
Account deletion	Server and app deletion paths covered by current automated suites.	Automatically verified on 30 August 2026
Public passport website	Lint, type checking, production build and route tests.	Automatically verified on 30 August 2026

4.2 Lifecycle integrity and data boundaries

A lifecycle command gateway turns user intent into typed Supabase RPC calls. The server validates actors, resource side, quantities, open listings, category/condition acceptance, custody, and state transitions. Idempotency keys make retries safe and prevent the same client intention from being applied as a different operation. Failure codes are classified so the UI can distinguish retryable transport problems from terminal rule violations.

4.3 Matching and impact claims

Smart/Circular Matching is a deterministic rules engine, not a completed AI feature. It rejects inactive or empty resources, orders routes by condition, filters active programmes by material, considers location compatibility, and returns an explanation. This supports predictable demonstrations and unit testing. Optional learned ranking can be explored only after a suitable dataset, consent basis, evaluation method, and fallback behaviour exist.

Impact totals are derived from completed transactions and valid impact records. The only current numeric emissions estimate is a demonstration for completed plastic/acrylic recycling recorded in kilograms, using a documented factor of 1.59710826 kgCO₂e per kilogram. The factor is derived from UK Government 2025 conversion-factor material and is presented as a conservative product estimate, not a full life-cycle assessment (Department for Energy Security and Net Zero, 2025). When evidence is absent, the application displays an unavailable reason instead of inventing a value.

4.4 Completeness boundary

The repository contains broad feature coverage, but the maintained acceptance tracker still records 0 of 16 modules as finally accepted. AppGallery publication is deferred. This reflects a deliberate distinction between implementation, automated verification, and hands-on device acceptance. Final screenshots and claims of device readiness must therefore wait for the remaining test-source correction and representative-device checks.

Evidence rule The proposal's 83% recovery, 1.8 tonnes and RM7.4k figures are prototype display data. They are not reused anywhere in this report as achieved project outcomes.

5 UI/UX Design and Creativity

The implementation evolves the proposal into an editorial, task-focused interface. Role-specific navigation reduces irrelevant choices; prominent states explain loading, emptiness, connectivity, permission, and validation outcomes; and adaptive Compose layouts support different phone dimensions. Dark green, neutral surfaces, strong hierarchy, and restrained cards preserve the sustainability identity without allowing decoration to obscure workflow state.

5.1 Final UI evidence placeholders

Each placeholder below is a controlled insertion point. It must be replaced only with a screenshot from the current accepted build, using sanitised test data and the same caption so the List of Figures updates automatically.



Figure 2: Authentication and role selection

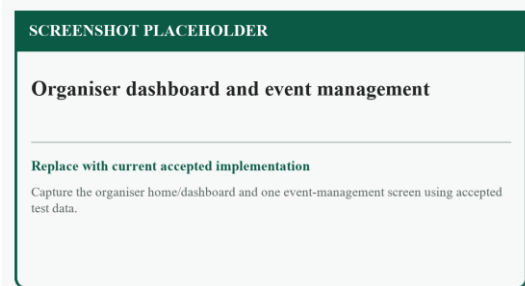


Figure 3: Organiser dashboard and event management



Figure 4: Resource editor and persistent photo

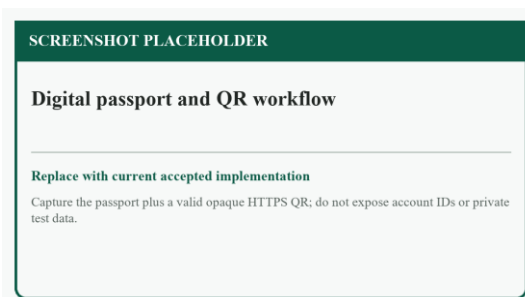


Figure 5: Digital passport and QR workflow

5.2 Role workflows and visual continuity

The organiser's view emphasises event and recovery management; the participant's view emphasises discovery, requests, passports and returns; and the partner's view emphasises programmes, compatible resources and operational decisions. The following placeholders cover the remaining recovery, matching and impact surfaces.

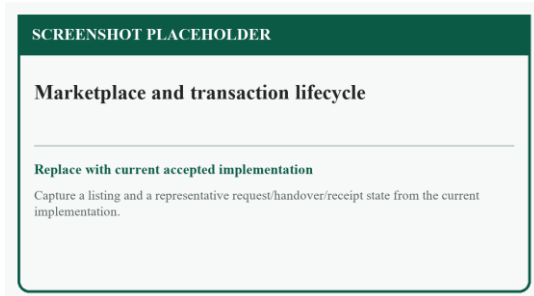


Figure 6: Marketplace and transaction lifecycle

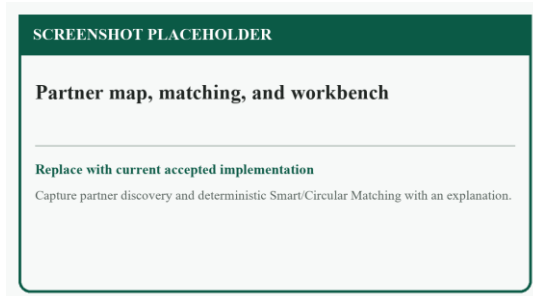


Figure 7: Partner map, matching, and workbench

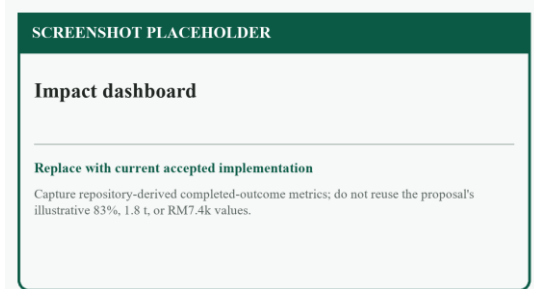


Figure 8: Impact dashboard

Reserved for an additional accepted screenshot if required.

Before submission, replace all seven placeholders, refresh fields, and confirm that no proposal screenshot is presented as final-app evidence.

6 Testing, Code Quality, and Contributions

6.1 Current validation evidence

Table 4: Automated and manual testing evidence

Validation area	Result recorded on 30 August 2026	Status
Android build/lint	Debug/release builds, lint and instrumentation-test Kotlin compile passed.	Automatically verified on 30 August 2026
Android JVM test source	Unit-test Kotlin compile is blocked by four unresolved Compose assertion imports.	Manual/device acceptance pending
Supabase suite	27/27 schema, security and lifecycle tests passed.	Automatically verified on 30 August 2026
Public website	Lint, type check, build and 3/3 route tests passed.	Automatically verified on 30 August 2026
Repository hygiene	Encoding and whitespace/diff checks passed.	Automatically verified on 30 August 2026
Manual/device matrix	Final accepted count remains 0/16 modules.	Manual/device acceptance pending

6.2 Source-code tidiness

UI, state coordination, domain policy, repository contracts, storage and remote gateways are separated. Typed results make failures explicit; server RPC gateways own shared mutations; and pure functions cover QR validation, matching and impact calculation.

Table 5: Member roles and contributions

Member	Primary ownership	Git evidence snapshot
Liew Kaiy Bin (2302391)	Platform, authentication, persistence, Supabase and integration.	Benliew0928 — 33 commits.
Mah Juin Hong (TBC)	Marketplace and partner programme workflows.	juinhong05 — 3 commits.
Wong Jie Ying (2401105)	Events/resources, UI, photos, passports and QR.	Jie Ying — 5 commits.
Wong Loong Jie (2302662)	Matching, impact, QA and deployment preparation.	Jackwong — 4 commits.

The team must confirm the ownership descriptions and Mah Juin Hong's student ID before submission.

7 Civil and Commercial Potential

ReEvent can support universities, municipal councils, event organisers, venues, NGOs, reuse networks, repairers and recycling partners. A campus could retain ownership and condition history for reusable staging assets; a venue could expose surplus resources after an exhibition; and a recovery partner could publish accepted materials, service areas and programme rules. Commercial pathways include organisation workspaces, managed partner networks, compliance exports, verified material passports, and service fees for coordinated recovery, while civil deployments may prioritise open access and community redistribution.

7.1 Limitations and risks

Device acceptance is incomplete, and the current Android JVM test-source compile failure must be corrected before claiming a clean full test run.

The website dependency audit reports 18 known issues (2 low and 16 high); versions and transitive dependencies require controlled remediation and regression testing.

Map and geocoding functionality depends on valid configuration, quotas, network access, attribution and provider terms.

Impact figures depend on complete transaction records, compatible units and documented factors; unavailable values must remain explicit.

Public passport access reduces friction but requires careful token lifecycle, revocation, privacy review and monitoring.

7.2 Future work

Immediate priorities are correcting the Compose assertion imports, completing the 16-module manual/device matrix, inserting final screenshots, resolving dependency audit findings, validating deployment configuration, and preparing AppGallery evidence. Optional AI-assisted ranking should remain a separately evaluated enhancement with transparent explanations and a deterministic fallback.

7.3 Conclusion

ReEvent has progressed from a visual proposal into a substantial circular-resource implementation with role-aware journeys, traceable resources, authoritative lifecycle commands, privacy-conscious passports, deterministic recovery matching, and guarded impact reporting. Its strongest submission position is evidence-led: implemented capabilities are distinguished from automated results, manual acceptance, and deferred work. Completing device validation and replacing the controlled placeholders will convert this draft into the final Part 2 implementation record.

References

- Department for Energy Security and Net Zero. (2025). Greenhouse gas reporting: Conversion factors 2025. UK Government.
<https://www.gov.uk/government/publications/greenhouse-gas-reporting-conversion-factors-2025>
- ReEvent Group. (2026). ReEvent proposal [Unpublished group assignment proposal].
Universiti Tunku Abdul Rahman.
- United Nations. (n.d.). Goal 12: Ensure sustainable consumption and production patterns.
Sustainable Development Goals. <https://sdgs.un.org/goals/goal12>

Appendix A — Privacy-conscious QR payload contract

Table 6: Appendix A — Privacy-conscious QR payload contract metadata

File path	Purpose	Contributor
ReEvent\app\src\main\java\com\reevent\app\feature\passports\PassportQrPayload.kt	Creates and validates the canonical HTTPS verifier URL while rejecting malformed or unconfigured values.	Wong Jie Ying
<pre> 47 is Validation.Canonical -> RenderResult.Ready(value) 48 Validation.Legacy -> RenderResult.Unavailable(49 "This legacy passport must be reissued before it can be shown as a return QR." 50) 51 is Validation.Invalid -> RenderResult.Unavailable(52 "This passport is not a renderable ReEvent v1 QR. Refresh it or ask the organiser to reissue it." 53) 54 } 55 } 56 57 /** Returns a renderable v1 QR URL only when this build has a valid HTTPS verifier host. */ 58 fun canonicalPayload(publicBaseUrl: String, publicToken: String): String? { 59 if (!tokenPattern.matches(publicToken)) return null 60 val base = configuredBaseUri(publicBaseUrl) ?: return null 61 val basePath = base.rawPath.orEmpty().trimEnd('/') 62 return "\${base.scheme}://\${base.authority}\$basePath/\$PATH_SEGMENT/\$VERSION_SEGMENT/\$publicToken" 63 } 64 65 fun validate(payload: String, publicBaseUrl: String): Validation { 66 val value = payload.trim() 67 if (value != payload value.isEmpty()) return Validation.Invalid("Use the complete ReEvent passport QR value.") 68 if (value.startsWith("reevent://")) return validateLegacy(value) 69 70 val configuredBase = configuredBaseUri(publicBaseUrl) 71 ?: return Validation.Invalid("Passport verifier is not configured in this build. Configure PUBLIC BASE URL before scanning v1 codes.") 72 val uri = parseUri(value) ?: return Validation.Invalid("This is not a valid ReEvent passport QR code.") 73 val basePath = configuredBase.rawPath.orEmpty().trimEnd('/') 74 val expectedPrefix = "\$basePath/\$PATH_SEGMENT/\$VERSION_SEGMENT/" 75 val token = uri.rawPath?.removePrefix(expectedPrefix) 76 77 return if (78 uri.scheme.equals("https", ignoreCase = true) && 79 uri.host.equals(configuredBase.host, ignoreCase = true) && </pre>		

Excerpt note: This is a focused implementation excerpt rather than a complete source listing. The repository version remains authoritative.

Appendix B — Circular Matching Excerpt

Table 7: Appendix B — Circular Matching Excerpt metadata

File path	Purpose	Contributor
ReEvent\app\src\main\java\com\reevent\app\feature\matching\CircularRecommendationEngine.kt	Ranks eligible recovery routes by resource state, material compatibility and location, returning an explanation rather than an opaque AI score.	Wong Loong Jie
<pre> 11 fun recommend(12 resource: ResourceItem, 13 programmes: List<CircularProgramme>, 14 eventLocation: String = "" 15): RecommendationResult { 16 if (resource.status != ResourceStatus.ACTIVE) { 17 return RecommendationResult(18 primary = null, 19 alternatives = emptyList(), 20 ineligibilityReason = "This resource is not available for a new recovery route." 21) 22 } 23 if (resource.quantity <= 0.0) { 24 return RecommendationResult(25 primary = null, 26 alternatives = emptyList(), 27 ineligibilityReason = "This resource has no available quantity for a new recovery route." 28) 29 } 30 31 val rankedProgrammes = rankProgrammes(resource, programmes, eventLocation) 32 val usedProgrammeTypes = mutableSetOf<ProgrammeType>() 33 val candidates = actionOrder(resource.condition).mapNotNull { action -> </pre>		

Excerpt note: This is a focused implementation excerpt rather than a complete source listing. The repository version remains authoritative.

Appendix C — Impact calculation guardrails

Table 8: Appendix C — Impact calculation guardrails metadata

File path	Purpose	Contributor
ReEvent\app\src\main\java\com\reevent\app\feature\impact\ImpactCalculator.kt	Uses completed transactions and valid impact records, and reports why estimates are unavailable.	Wong Loong Jie
<pre> 11 fun summarize(12 resources: List<ResourceItem>, 13 transactions: List<CircularTransaction>, 14 records: List<ImpactRecord> 15): ImpactDashboardState { 16 val completed = transactions.filter { it.status == TransactionStatus.COMPLETED } 17 val reused = completed.count { it.type == TransactionType.BORROW it.type == TransactionType.RENT } 18 val repaired = completed.count { it.type == TransactionType.REPAIR } 19 val donated = completed.count { it.type == TransactionType.DONATE } 20 val recycled = completed.count { it.type == TransactionType.RECYCLE } 21 val recovered = resources.count { it.status == ResourceStatus.RECOVERED } 22 val rate = resources.takeIf { it.isNotEmpty() }?.let { recovered.toFloat() / it.size } 23 val completedTransactionIds = completed.map(CircularTransaction::id).toSet() 24 val validRecords = records.filter { 25 it.transactionId in completedTransactionIds && 26 (it.materialDivertedKg == null it.materialDivertedKg.isFinite() && it.materialDivertedKg >= 0) && 27 (it.emissionsAvoidedKg == null it.emissionsAvoidedKg.isFinite() && it.emissionsAvoidedKg >= 0) && 28 it.recoinsTransferred >= 0 && it.recoinsRewarded >= 0 29 } 30 val hasRecords = validRecords.isNotEmpty() 31 val estimatedTransactionIds = validRecords 32 .filter { it.materialDivertedKg != null it.emissionsAvoidedKg != null } 33 .map(ImpactRecord::transactionId) 34 .toSet() 35 val hasCompletedOutcomeWithoutEstimate = completed.any { it.id !in estimatedTransactionIds } 36 val channels = listOf(reused, repaired, donated, recycled) 37 val channelTotal = channels.sum() 38 val badge = when { 39 recovered == 0 -> null 40 rate != null && rate >= 0.75f -> ImpactBadge.HIGH_RECOVERY 41 recovered >= 3 -> ImpactBadge.CIRCULAR_STARTER 42 else -> ImpactBadge.FIRST_RECOVERY </pre>		

Excerpt note: This is a focused implementation excerpt rather than a complete source listing. The repository version remains authoritative.

Appendix D — Server-authoritative lifecycle gateway

Table 9: Appendix D — Server-authoritative lifecycle gateway metadata

File path	Purpose	Contributor
ReEvent\app\src\main\java\com\reevent\app\core\network\LifecycleCommandGateway.kt	Converts typed commands into idempotent Supabase RPC requests so shared lifecycle state is decided by the server.	Liew Kaiy Bin
<pre> 46 interface LifecycleCommandGateway { 47 fun isConfigured(): Boolean 48 suspend fun resolvePublishedListingId(resourceId: String): String 49 suspend fun execute(50 type: LifecycleCommandType, 51 payload: LifecycleCommandPayload, 52 idempotencyKey: String 53): CircularTransaction 54 } 55 56 @Singleton 57 class SupabaseLifecycleCommandGateway @Inject constructor(58 private val authGateway: SupabaseAuthGateway 59): LifecycleCommandGateway { 60 override fun isConfigured(): Boolean = authGateway.isConfigured() 61 62 override suspend fun resolvePublishedListingId(resourceId: String): String = 63 authGateway.withConfiguredClient { client -> 64 client.from("marketplace_listings").select { 65 filter { 66 eq("resource_id", resourceId) 67 eq("status", "PUBLISHED") 68 } 69 }.decodeSingle<ListingReference>().id 70 } 71 72 override suspend fun execute(73 type: LifecycleCommandType, 74 payload: LifecycleCommandPayload, 75 idempotencyKey: String 76): CircularTransaction = when (type) { 77 LifecycleCommandType.REQUEST_MARKETPLACE -> rpc(78 "request_listing_transaction", 79 buildJsonObject { 80 put("p_listing_id", payload.require(LifecycleCommandPayload::listingId, "listingId")) 81 put("p_transaction_type", payload.require(LifecycleCommandPayload::transactionType, "transactionType")) 82 put("p_quantity", payload.require(LifecycleCommandPayload::quantity, "quantity")) 83 put("p_counter_resource_id", payload.counterResourceId?.let(::JsonPrimitive) ?: JsonNull) 84 put("p_request_reason", payload.reason?.let(::JsonPrimitive) ?: JsonNull) 85 put("p_idempotency_key", idempotencyKey) 86 } 87) </pre>		

Excerpt note: This is a focused implementation excerpt rather than a complete source listing. The repository version remains authoritative.

Appendix E — Validation evidence and maintained commands

The maintained command boundary is defined in docs/testing.md. The following snapshot records the report-generation run; it does not replace final device acceptance.

Table 10: Validation command summary

Area	Command family	Recorded result
Android	Gradle compile/lint/assemble tasks	Build/lint/instrumentation-test compile passed; JVM test-source compile pending correction.
Supabase	npm ci; npm test	27/27 tests passed.
Website	npm ci; lint; typecheck; build; test	All commands passed; 3/3 route tests passed; dependency audit finding recorded.
Repository	encoding check; git diff --check	Passed without errors.
Manual/device	docs/REEVENT_ASSIGNMENT_PROGRESS.md	0/16 modules finally accepted; manual/device acceptance pending.

Known Android test-source error: unresolved assertExists/assertDoesNotExist imports in EventDetailEditorialScreenTest.kt, EventListEditorialScreenTest.kt, PassportScreenTest.kt, and ResourceEditorEditorialScreenTest.kt.

Appendix F — Git contribution evidence

Repository snapshot from git shortlog -sne --all on 30 August 2026:

Table 11: Git contribution snapshot

Repository author alias	Commit count	Mapped member	Interpretation
Benliew0928	33	Liew Kaiy Bin	Core/integration activity across all refs.
Jie Ying	5	Wong Jie Ying	Recent editorial, resource/passport and map UI activity.
Jackwong	4	Wong Loong Jie	Matching/impact/QA-related ownership record.
juinhong05	3	Mah Juin Hong	Login, marketplace and partner-workflow ownership record.

Interpretation caution: commit counts measure recorded commits, not effort, complexity, review, coordination or pair work. The named ownership table in the main report is the presentation and Q&A accountability record and should be confirmed by all members.