

Security Incident Report

Port Scan Detection

INCIDENT CLASSIFICATION

Reconnaissance — Network Service Discovery

PREPARED BY

Othmane Benmezian

DATE ISSUED

23 June 2026

1 - Executive Summary

A TCP SYN port scanning activity originating from 10.0.0.99 targeted the Windows host 10.0.0.30. The activity was detected by Suricata IDS using a custom detection rule (SID 100101) and correlated by Wazuh SIEM. The event was classified as reconnaissance behavior and mapped to MITRE ATT&CK T1046 – Network Service Discovery.

2 - Timeline

Time	Event	Source
2026-06-23 22:08	Port scan initiated	Nmap
2026-06-23T22:08:32.454834+0100	Suricata triggered SID 100101 (PORT SCAN DETECTED)	Suricata IDS
2026-06-23T22:08:32.779+0100	Alert ingested and indexed by Wazuh SIEM	Wazuh SIEM

3 - Detection Details

Field	Value
Source IP	10.0.0.99
Target Host	10.0.0.30
Signature	PORT SCAN DETECTED
SID	100101
Wazuh Rule	86601

Detection Source

- Suricata IDS
- Wazuh SIEM

MITRE ATT&CK

Tactic	Technique
Discovery	T1046 – Network Service Discovery

4 - Evidence Collected

Figure 1 — Nmap TCP SYN Port Scan

```
[kali@kali:~/Desktop]
$ nmap -sS -T4 10.0.0.30
Starting Nmap 7.94SUN ( https://nmap.org ) at 2026-06-23 22:08 +01
nmap_dns: warning: Unable to determine any DNS servers. Reverse DNS is disabled. Try using --system-dns or specify valid servers with --dns-servers
Nmap scan report for 10.0.0.30
Host is up (0.00000s latency).
Not shown: 999 filtered tcp ports (no-response)
PORT      STATE SERVICE
22/tcp    open  ssh
MAC Address: 00:0C:29:70:B4:5F (VMware)

Nmap done: 1 IP address (1 host up) scanned in 4.59 seconds
```

Figure 2 — Suricata Alert (SID 100101)

```
{ "timestamp": "2026-06-23T22:08:32.454834+0100", "flow_id": "264648872983433", "in_iface": "ens33", "event_type": "alert", "src_ip": "10.0.0.99", "src_port": 39123, "dest_ip": "10.0.0.30", "dest_port": 80, "proto": "TCP", "pkt_src": "wire/pcap", "alert": { "action": "allowed", "gid": 1, "signature_id": 100101, "rev": 2, "signature": "PORT SCAN DETECTED", "category": "portscan", "severity": 3, "metadata": { "attack_target": "Host", "mitre_tactic": "Discovery", "mitre_technique": "T1046" } }, "direction": "to_server", "flow": { "pkts_to_server": 1, "pkts_to_client": 0, "bytes_to_server": 60, "bytes_to_client": 0, "start": "2026-06-23T22:08:32.454834+0100", "src_ip": "10.0.0.99", "dest_ip": "10.0.0.30", "src_port": 39123, "dest_port": 80 } }
```

Figure 3 — Wazuh Alert Overview

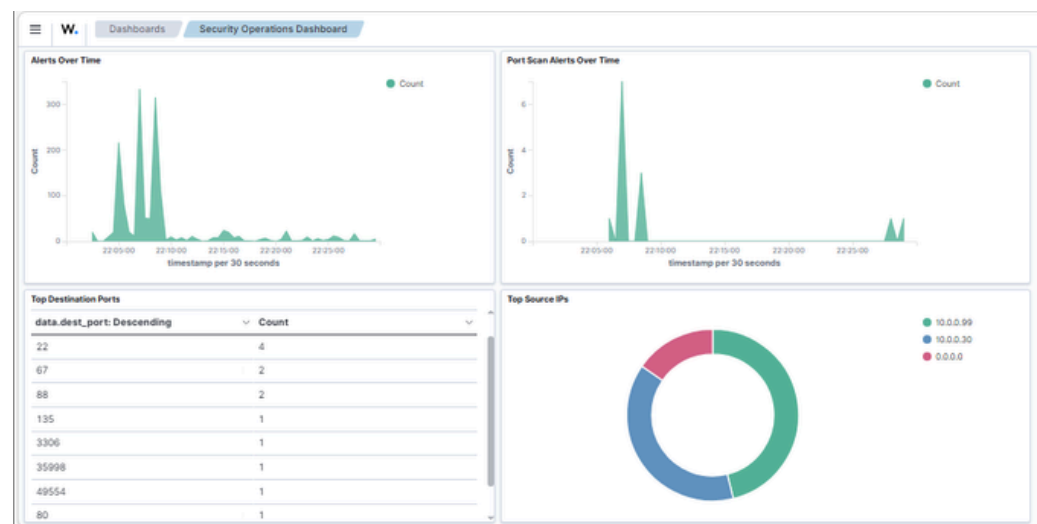


Figure 4 — Wazuh Alert Technical Details

data.flow.start	2026-06-23T22:08:32.454834+0100	data.alert.metadata.mitre_tactic	Discovery
data.flow_id	264648872983433.000000	data.alert.metadata.mitre_technique	T1046
data.in_iface	ens33	data.alert.rev	2
data.pkt_src	wire/pcap	data.alert.severity	3
data.proto	TCP	data.alert.signature	PORT SCAN DETECTED
data.src_ip	10.0.0.99	data.alert.signature_id	100101
data.src_port	39123	data.dest_ip	10.0.0.30
data.timestamp	Jun 23, 2026 @ 22:08:32.454	data.dest_port	80
decoder.name	json	data.direction	to_server
id	1782248912.9631768	data.event_type	alert
input.type	log	data.flow.bytes_to_client	0
location	/var/log/suricata/eve.json	data.flow.bytes_to_server	60
manager.name	wazuh.manager	data.flow.dest_ip	10.0.0.30
rule.description	Suricata: Alert - PORT SCAN DETECTED		
rule.firedtimes	9		
rule.groups	ids, suricata		
rule.id	86601		
rule.level	3		
rule.mail	false		
timestamp	Jun 23, 2026 @ 22:08:32.779		

5 - Investigation Findings

- Source IP identified as 10.0.0.99
- Multiple destination ports were probed
- Scan pattern consistent with reconnaissance activity
- No exploitation attempts observed during this stage
- The identified open services could be leveraged during subsequent attack phases.

6 - Impact Assessment

Category	Assessment
Confidentiality	No impact
Integrity	No impact
Availability	No impact

"Note: While no direct impact occurred during this reconnaissance stage, the exposure of open services represents a potential risk for future exploitation."

7 - Root Cause Analysis

The scanning activity originated from an internal host (10.0.0.99) within the network, which performed a TCP SYN scan against the target host (10.0.0.30) using Nmap. The activity is consistent with reconnaissance behavior aimed at identifying open ports and active services on the target system. At the time of the investigation, the identity and authorization status of the source host (10.0.0.99), whether belonging to an unauthorized actor, a compromised internal asset, or an authorized security assessment, had not yet been confirmed. Further investigation is required to determine the origin and intent behind this activity.

8 - Recommendations

- Review exposed network services.
- Disable unnecessary listening ports.
- Investigate subsequent activity from the same source.
- Apply network segmentation.
- Maintain continuous IDS monitoring.

9 - Conclusion

The activity was confirmed as reconnaissance and mapped to MITRE ATT&CK T1046. No exploitation was observed during this incident; however, continued monitoring of the identified source host was recommended due to the possibility of follow-on attacks.