https://www.isabeldhalle.be/



Performance



Accessibility



Best Practices



SE₀



PWA




Performance

Values are estimated and may vary. The performance score is calculated directly from these metrics. See calculator.

0 - 49

50-89

90-100

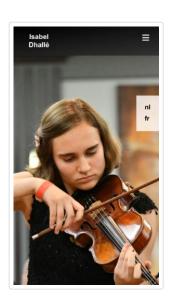

METRICS

- First Contentful Paint
 - 1.6 s
- Speed Index
 - 1.9 s
- Largest Contentful Paint
 - 2.5 s

- Time to Interactive
 - 2.7 s
- **Total Blocking Time**
 - 60 ms
- **Cumulative Layout Shift**
 - 0

View Treemap





















Expand view











Opportunity Estimated Savings

▲ Serve images in next-gen formats

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. <u>Learn more</u>.

	URL	Resource Size	Potential Savings
<pre>body.id="myBody" <body class='id="myBody"'></body></pre>	/Images/isabel-main- cropped.JPG (www.isabeldhalle.be)	1,279.6 KiB	1,096.8 KiB

▲ Efficiently encode images

4.05 s ^

5.58 s ^

Optimized images load faster and consume less cellular data. Learn more.

	URL	Resource Size	Potential Savings
<pre>body.id="myBody" <body class='id="myBody"'></body></pre>	/Images/isabel-main- cropped.JPG (www.isabeldhalle.be)	1,279.6 KiB	807.2 KiB

▲ Eliminate render-blocking resources

0.81 s ^

Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. <u>Learn more</u>. FCP [LCP]

URL	Transfer Size	Potential Savings
/bb7e8176a5.js (kit.fontawesome.com)	4.6 KiB	780 ms

Reduce unused JavaScript

■ 0.45 s ^

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. <u>Learn more</u>. [LCP]

URL	Transfer Size	Potential Savings
/gtag/js?id=G-GVZ7K4PRGQ (www.googletagmanager.com)	69.1 KiB	26.1 KiB

Defer offscreen images

0.3 s ^

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. Learn more.

	URL	Resource Size	Potential Savings
<pre>body.id="myBody" <body class='id="myBody"'></body></pre>	/Images/isabel-main- cropped.JPG (www.isabeldhalle.be)	1,279.6 KiB	1,279.6 KiB

These suggestions can help your page load faster. They don't directly affect the Performance score.

DIAGNOSTICS

▲ Serve static assets with an efficient cache policy — 2 resources found

^

A long cache lifetime can speed up repeat visits to your page. Learn more.

URL	Cache TTL	Transfer Size
/Images/isabel-main-cropped.JPG (www.isabeldhalle.be)	10 m	1,280 KiB
/style.css (www.isabeldhalle.be)	10 m	3 KiB

First Contentful Paint (3G) - 3118 ms

^

First Contentful Paint 3G marks the time at which the first text or image is painted while on a 3G network. <u>Learn more</u>.

○ Avoid chaining critical requests — 3 chains found

^

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of

unnecessary resources to improve page load. Learn more. FCP [LCP]

Maximum critical path latency: 490 ms

Initial Navigation

https://www.isabeldhalle.be

/style.css (www.isabeldhalle.be) - 160 ms, 3.05 KiB

/bb7e8176a5.js (kit.fontawesome.com) - 20 ms, 4.62 KiB

...webfonts/free-fa-solid-900.woff2 (ka-f.fontawesome.com) - 40 ms, 151.76 KiB

○ Keep request counts low and transfer sizes small — 11 requests • 1,541 KiB

To set budgets for the quantity and size of page resources, add a budget.json file. Learn more.

Resource Type	Requests	Transfer Size
Total	11	1,541.1 KiB
Image	1	1,280.3 KiB
Font	1	151.8 KiB
Script	2	73.7 KiB
Other	5	29.9 KiB
Stylesheet	1	3.1 KiB
Document	1	2.4 KiB
Media	0	0.0 KiB
Third-party	8	255.3 KiB

○ Largest Contentful Paint element - 1 element found

This is the largest contentful element painted within the viewport. Learn More [LCP]




O Avoid long main-thread tasks — 3 long tasks found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. <u>Learn more [TBT]</u>

URL	Start Time	Duration
/gtag/js?id=G-GVZ7K4PRGQ (www.googletagmanager.com)	2,675 ms	146 ms
/gtag/js?id=G-GVZ7K4PRGQ (www.googletagmanager.com)	2,610 ms	65 ms
/bb7e8176a5.js (kit.fontawesome.com)	1,560 ms	58 ms

More information about the performance of your application. These numbers don't directly affect the Performance score.

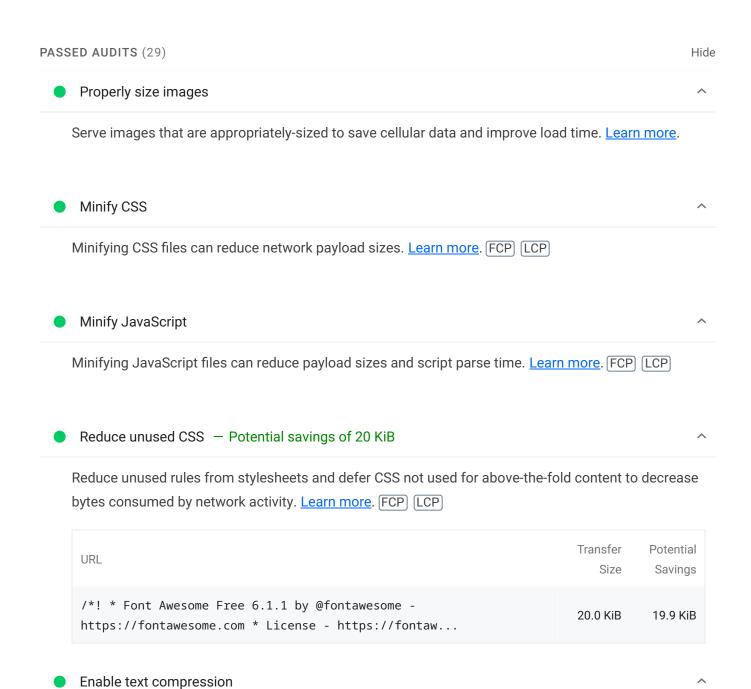

Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. Learn more. FCP LCP

Preconnect to required origins

Consider adding `preconnect` or `dns-prefetch` resource hints to establish early connections to important third-party origins. <u>Learn more</u>. FCP LCP

● Initial server response time was short — Root document took 160 ms

Keep the server response time for the main document short because all other requests depend on it. <u>Learn more</u>. FCP [LCP]

URLTime Spenthttps://www.isabeldhalle.be160 ms

Avoid multiple page redirects

Redirects introduce additional delays before the page can be loaded. Learn more. FCP [LCP]

Preload key requests

Consider using `<link rel=preload>` to prioritize fetching resources that are currently requested later in page load. <u>Learn more</u>. FCP LCP

Use video formats for animated content

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. <u>Learn more [LCP]</u>

Remove duplicate modules in JavaScript bundles

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. [TBT]

Avoid serving legacy JavaScript to modern browsers

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. For your bundled JavaScript, adopt a modern script deployment strategy using module/nomodule feature detection to reduce the amount of code shipped to modern browsers, while retaining support for legacy browsers. Learn More TBT

Preload Largest Contentful Paint image

Preload the image used by the LCP element in order to improve your LCP time. Learn more. [LCP]

Avoids enormous network payloads — Total size was 1,541 KiB

Large network payloads cost users real money and are highly correlated with long load times. <u>Learn</u> more. [LCP]

✓ Show 3rd-party resources (7)

URL	Transfer Size
/Images/isabel-main-cropped.JPG (www.isabeldhalle.be)	1,280.3 KiB
webfonts/free-fa-solid-900.woff2 (ka-f.fontawesome.com)	151.8 KiB
/gtag/js?id=G-GVZ7K4PRGQ (www.googletagmanager.com)	69.1 KiB
css/free.min.css?token=bb7e8176a5 (ka-f.fontawesome.com)	21.5 KiB
css/free-v4-shims.min.css?token=bb7e8176a5 (ka-f.fontawesome.com)	5.2 KiB
/bb7e8176a5.js (kit.fontawesome.com)	4.6 KiB
/style.css (www.isabeldhalle.be)	3.1 KiB
https://www.isabeldhalle.be	2.4 KiB
css/free-v4-font-face.min.css?token=bb7e8176a5 (ka-f.fontawesome.com)	1.7 KiB
css/free-v5-font-face.min.css?token=bb7e8176a5 (ka-f.fontawesome.com)	1.4 KiB

● Avoids an excessive DOM size − 14 elements

A large DOM will increase memory usage, cause longer <u>style calculations</u>, and produce costly <u>layout</u> <u>reflows</u>. <u>Learn more</u>. <u>TBT</u>



User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. <u>Learn more</u>.

● JavaScript execution time − 0.4 s

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. <u>Learn more</u>. TBT

✓ Show 3rd-party resources (2)

URL	Total CPU Time	Script Evaluation	Script Parse
/gtag/js?id=G-GVZ7K4PRGQ (www.googletagmanager.com)	267 ms	236 ms	14 ms
https://www.isabeldhalle.be	200 ms	12 ms	6 ms
Unattributable	133 ms	19 ms	1 ms
/bb7e8176a5.js (kit.fontawesome.com)	73 ms	70 ms	2 ms

■ Minimizes main-thread work − 0.7 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. <u>Learn more (TBT)</u>

Category	Time Spent
Script Evaluation	337 ms
Other	180 ms
Style & Layout	114 ms
Script Parsing & Compilation	23 ms
Rendering	14 ms
Parse HTML & CSS	11 ms

All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. <u>Learn</u> more. [FCP] [LCP]

● Minimize third-party usage — Third-party code blocked the main thread for 90 ms

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. <u>Learn more</u>.

TBT

Third-Party	Transfer Size	Main-Thread Blocking Time
Google Tag Manager	69 KiB	94 ms
/gtag/js?id=G-GVZ7K4PRGQ (www.googletagmanager.com)	69 KiB	94 ms
FontAwesome CDN	186 KiB	0 ms
webfonts/free-fa-solid-900.woff2 (ka-f.fontawesome.com)	152 KiB	0 ms
css/free.min.css?token=bb7e8176a5 (ka-f.fontawesome.com)	21 KiB	0 ms
Other resources	13 KiB	0 ms
Google Analytics	0 KiB	0 ms

Lazy load third-party resources with facades

Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. <u>Learn more</u>. <u>(TBT)</u>

Largest Contentful Paint image was not lazily loaded

Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. <u>Learn more</u>.

Avoid large layout shifts

These DOM elements contribute most to the CLS of the page. CLS

Uses passive listeners to improve scrolling performance

Consider marking your touch and wheel event listeners as `passive` to improve your page's scroll performance. Learn more.

Avoids document.write()

For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. <u>Learn more</u>.

Avoid non-composited animations

Animations which are not composited can be janky and increase CLS. Learn more CLS

Image elements have explicit width and height

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. <u>Learn</u> more CLS

Has a <meta name="viewport"> tag with width or initial-scale

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents <u>a</u> <u>300 millisecond delay to user input</u>. <u>Learn more</u>. TBT

Avoids unload event listeners


The `unload` event does not fire reliably and listening for it can prevent browser optimizations like the Back-Forward Cache. Use `pagehide` or `visibilitychange` events instead. <u>Learn more</u>



Accessibility

These checks highlight opportunities to improve the accessibility of your web app. Only a subset of accessibility issues can be automatically detected so manual testing is also encouraged.

NAMES AND LABELS

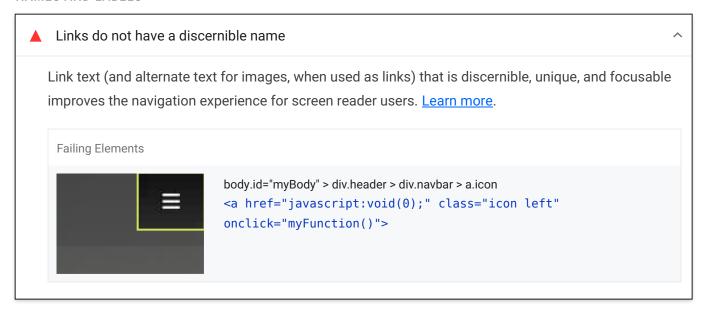

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

The page has a logical tab order

Hide

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen.

Learn more.

Interactive controls are keyboard focusable

Custom interactive controls are keyboard focusable and display a focus indicator. <u>Learn more</u> .	
Interactive elements indicate their purpose and state	^
Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. <u>Learn more</u> .	
The user's focus is directed to new content added to the page	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. <u>Learn more</u> .	
O User focus is not accidentally trapped in a region	^
A user can tab into and out of any control or region without accidentally trapping their focus. <u>Learn more</u> .	
O Custom controls have associated labels	^
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. <u>Learn</u> more.	
O Custom controls have ARIA roles	^
Custom interactive controls have appropriate ARIA roles. <u>Learn more</u> .	
O Visual order on the page follows DOM order	^
DOM order matches the visual order, improving navigation for assistive technology. <u>Learn more</u> .	
Offscreen content is hidden from assistive technology	^
Offscreen content is hidden with display: none or aria-hidden=true. <u>Learn more</u> .	
O HTML5 landmark elements are used to improve navigation	^
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more.</nav></main>	or

These items address areas which an automated testing tool cannot cover. Learn more in our guide on conducting an accessibility review.

5/28/22, 8:32 PM Lighthouse Report Viewer

PASSED AUDITS (8)

[aria-hidden="true"] is not present on the document <body> Assistive technologies, like screen readers, work inconsistently when `aria-hidden="true"` is set on the document `<body>`. Learn more. [user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximumscale] attribute is not less than 5. Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more. [aria-hidden="true"] elements do not contain focusable descendents Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. Learn more. The page contains a heading, skip link, or landmark region Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. Learn more. Background and foreground colors have a sufficient contrast ratio Low-contrast text is difficult or impossible for many users to read. Learn more. Document has a <title> element The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. Learn more. <html> element has a [lang] attribute If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default

Hide

language, then the screen reader might not announce the page's text correctly. Learn more.

• <html> element has a valid value for its [lang] attribute

Specifying a valid BCP 47 language helps screen readers announce text properly. Learn more.

NOT APPLICABLE (35)
Hide

[accesskey] values are unique Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more. [aria-*] attributes match their roles Each ARIA 'role' supports a specific subset of 'aria-*' attributes. Mismatching these invalidates the `aria-*` attributes. Learn more. O button, link, and menuitem elements have accessible names When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more. ARIA input fields have accessible names When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more. ARIA meter elements have accessible names When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more. ARIA progressbar elements have accessible names When a 'progressbar' element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. Learn more.

[role]s have all required [aria-*] attributes

Some ARIA roles have required attributes that describe the state of the element to screen readers. <u>Learn more</u> .	
Elements with an ARIA [role] that require children to contain a specific [role] have all required children.	^
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. <u>Learn more</u> .	
O [role]s are contained by their required parent element	^
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. <u>Learn more</u> .	
O [role] values are valid	^
ARIA roles must have valid values in order to perform their intended accessibility functions. <u>Learn more</u> .	
ARIA toggle fields have accessible names	^
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name making it unusable for users who rely on screen readers. <u>Learn more</u> .	ne,
O ARIA tooltip elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more</u> .	ני
O ARIA treeitem elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more</u> .	·},
O [aria-*] attributes have valid values	^
Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. <u>Learn more</u> .	
O [aria-*] attributes are valid and not misspelled	^

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. <u>Learn</u> more.
O Buttons have an accessible name
When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. <u>Learn more</u> .
<pre><dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements.</pre></td></tr><tr><td>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. <u>Learn more</u>.</td></tr><tr><td>O Definition list items are wrapped in <dl> elements</td></tr><tr><td>Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. <u>Learn more</u>.</td></tr><tr><td>O [id] attributes on active, focusable elements are unique</td></tr><tr><td>All focusable elements must have a unique `id` to ensure that they're visible to assistive technologies. <u>Learn more</u>.</td></tr><tr><td>O ARIA IDs are unique</td></tr><tr><td>The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. <u>Learn more</u>.</td></tr><tr><td>O No form fields have multiple labels</td></tr><tr><td>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. <u>Learn more</u>.</td></tr><tr><td>O <frame> or <iframe> elements have a title</td></tr><tr><td>Screen reader users rely on frame titles to describe the contents of frames. <u>Learn more</u>.</td></tr><tr><td>O Heading elements appear in a sequentially-descending order</td></tr><tr><td>Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. <u>Learn more</u>.</td></tr></tbody></table></script></dd></dt></dl></pre>

O Image elements have [alt] attributes	^
Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. <u>Learn more</u> .	
O <input type="image"/> elements have [alt] text	^
When an image is being used as an ` <input/> ` button, providing alternative text can help screen readusers understand the purpose of the button. <u>Learn more</u> .	der
O Form elements have associated labels	^
Labels ensure that form controls are announced properly by assistive technologies, like screen readers. <u>Learn more</u> .	
O Lists contain only elements and script supporting elements (<script> and <template>).</td><td>^</td></tr><tr><td>Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. <u>Learn more</u>.</td><td></td></tr><tr><td>O List items () are contained within or parent elements</td><td>^</td></tr><tr><td>Screen readers require list items (`') to be contained within a parent `' or `' to be announced properly. Learn more.</td><td></td></tr><tr><td>O The document does not use <meta http-equiv="refresh"></td><td>^</td></tr><tr><td>Users do not expect a page to refresh automatically, and doing so will move focus back to the top the page. This may create a frustrating or confusing experience. <u>Learn more</u>.</td><td>of</td></tr><tr><td>O <object> elements have alternate text</td><td>^</td></tr><tr><td>Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements help screen readers convey meaning to users. <u>Learn more</u>.</td><td>os</td></tr><tr><td>O No element has a [tabindex] value greater than 0</td><td>^</td></tr><tr><td>A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. <u>Learn more</u>.</td><td></td></tr><tr><td>Cells in a element that use the [headers] attribute refer to table cells within the same table.</td><td>^</td></tr></tbody></table></script>	

Screen readers have features to make navigating tables easier. Ensuring `` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. Learn more.

elements and elements with [role="columnheader"/"rowheader"] have data cells they
describe.

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. <u>Learn more</u>.

O [lang] attributes have a valid value

Specifying a valid <u>BCP 47 language</u> on elements helps ensure that text is pronounced correctly by a screen reader. <u>Learn more</u>.

<video> elements contain a <track> element with [kind="captions"]

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. Learn more.



GENERAL

 \mathbf{A}

Browser errors were logged to the console

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. <u>Learn more</u>

Source	Description
https:// www.is abeldha lle.be:1:	Access to internal resource at 'https://isabeldhalle.be/Images/favicon/site.webmanifest' from origin 'https://www.isabeldhalle.be' has been blocked by CORS policy: No 'Access-Control-Allow-Origin' header is present on the requested resource.

TRUST AND SAFETY



PASSED AUDITS (12) Hide



All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding <u>mixed content</u>, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. <u>Learn more</u>.

Avoids requesting the geolocation permission on page load

Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. <u>Learn more</u>.

Avoids requesting the notification permission on page load

Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. Learn more. Avoids front-end JavaScript libraries with known security vulnerabilities Some third-party scripts may contain known security vulnerabilities that are easily identified and exploited by attackers. Learn more. Allows users to paste into password fields Preventing password pasting undermines good security policy. Learn more. Displays images with correct aspect ratio Image display dimensions should match natural aspect ratio. Learn more. Serves images with appropriate resolution Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. Learn more. Page has the HTML doctype Specifying a doctype prevents the browser from switching to quirks-mode. Learn more. Properly defines charset A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. Learn more. Avoids deprecated APIs Deprecated APIs will eventually be removed from the browser. Learn more. No issues in the Issues panel in Chrome Devtools

Issues logged to the 'Issues' panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Page has valid source maps

Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn more.

NOT APPLICABLE (2) Hide

Fonts with font-display: optional are preloaded Preload 'optional' fonts so first-time visitors may use them. Learn more **Detected JavaScript libraries** All front-end JavaScript libraries detected on the page. Learn more.



These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on Core Web Vitals. Learn more.

CRAWLING AND INDEXING



To appear in search results, crawlers need access to your app.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

Structured data is valid

Run the <u>Structured Data Testing Tool</u> and the <u>Structured Data Linter</u> to validate structured data. <u>Learn</u> more.

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (11) Hide

Has a <meta name="viewport"> tag with width or initial-scale

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents <u>a</u> <u>300 millisecond delay to user input</u>. <u>Learn more</u>. [TBT]

Document has a <title> element

The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. <u>Learn more</u>.

Document has a meta description

Meta descriptions may be included in search results to concisely summarize page content. Learn more. Page has successful HTTP status code Pages with unsuccessful HTTP status codes may not be indexed properly. Learn more. Links have descriptive text Descriptive link text helps search engines understand your content. Learn more. Page isn't blocked from indexing Search engines are unable to include your pages in search results if they don't have permission to crawl them. Learn more. robots.txt is valid If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more. Document has a valid hreflang hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more. Document uses legible font sizes — 100% legible text Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive to have >60% of page text ≥12px. Learn more. Source % of Page Text Font Size Selector Legible text 100.00% ≥ 12px Document avoids plugins

Search engines can't index plugin content, and many devices restrict plugins or don't support them. Learn more.

Tap targets are sized appropriately - 100% appropriately sized tap targets

Interactive elements like buttons and links should be large enough (48x48px), and have enough space around them, to be easy enough to tap without overlapping onto other elements. Learn more.

NOT APPLICABLE (2) Hide

Image elements have [alt] attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more.

Document has a valid rel=canonical



Canonical links suggest which URL to show in search results. Learn more.



PWA

These checks validate the aspects of a Progressive Web App. Learn more.



Web app manifest or service worker do not meet the installability requirements -1 reason

Service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. With proper service worker and manifest implementations, browsers can proactively prompt users to add your app to their homescreen, which can lead to higher engagement. <u>Learn more</u>.

Failure reason

No manifest was fetched



Does not register a service worker that controls page and start_url

The service worker is the technology that enables your app to use many Progressive Web App features, such as offline, add to homescreen, and push notifications. <u>Learn more</u>.

▲ Is not configured for a custom splash screen Failures: No manifest was fetched.

A themed splash screen ensures a high-quality experience when users launch your app from their homescreens. <u>Learn more</u>.

▲ Does not set a theme color for the address bar. Failures: No manifest was fetched.

The browser address bar can be themed to match your site. Learn more.

Content is sized correctly for the viewport

If the width of your app's content doesn't match the width of the viewport, your app might not be optimized for mobile screens. <u>Learn more</u>.

● Has a <meta name="viewport"> tag with width or initial-scale

A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents <u>a</u> 300 millisecond delay to user input. <u>Learn more</u>. [TBT]

Provides a valid apple-touch-icon

For ideal appearance on iOS when users add a progressive web app to the home screen, define an `apple-touch-icon`. It must point to a non-transparent 192px (or 180px) square PNG. <u>Learn More</u>.

Manifest doesn't have a maskable icon No manifest was fetched

A maskable icon ensures that the image fills the entire shape without being letterboxed when installing the app on a device. Learn more.

ADDITIONAL ITEMS TO MANUALLY CHECK (3)

Hide

Site works cross-browser

To reach the most number of users, sites should work across every major browser. Learn more.

Page transitions don't feel like they block on the network

Transitions should feel snappy as you tap around, even on a slow network. This experience is key to a user's perception of performance. Learn more.

Each page has a URL

Ensure individual pages are deep linkable via URL and that URLs are unique for the purpose of shareability on social media. Learn more.

These checks are required by the baseline PWA Checklist but are not automatically checked by Lighthouse. They do not affect your score but it's important that you verify them manually.

Captured at May 28, 2022, 8:31 PM

Emulated Moto G4 with Lighthouse

Single page load

GMT+2

9.3.0

Initial page load Unknown Using HeadlessChromium 98.0.4758.102 with Ir

Generated by Lighthouse 9.3.0 | File an issue