

Simple Line Plots

Perhaps the **simplest** of all plots is the visualization of a single function $y = f(x)$.

Here we will take a first look at creating a simple plot of this type.


As in all the following chapters, we'll start by setting up the notebook for plotting and importing the packages we will use:

```
In [ ]: %matplotlib inline
import matplotlib.pyplot as plt
plt.style.use('seaborn-whitegrid')
import numpy as np
```

For all Matplotlib plots, we **start** by creating **a figure and axes**.

In their simplest form, this can be done as follows (see the following figure):

```
In [ ]: fig = plt.figure()  
        ax = plt.axes()
```

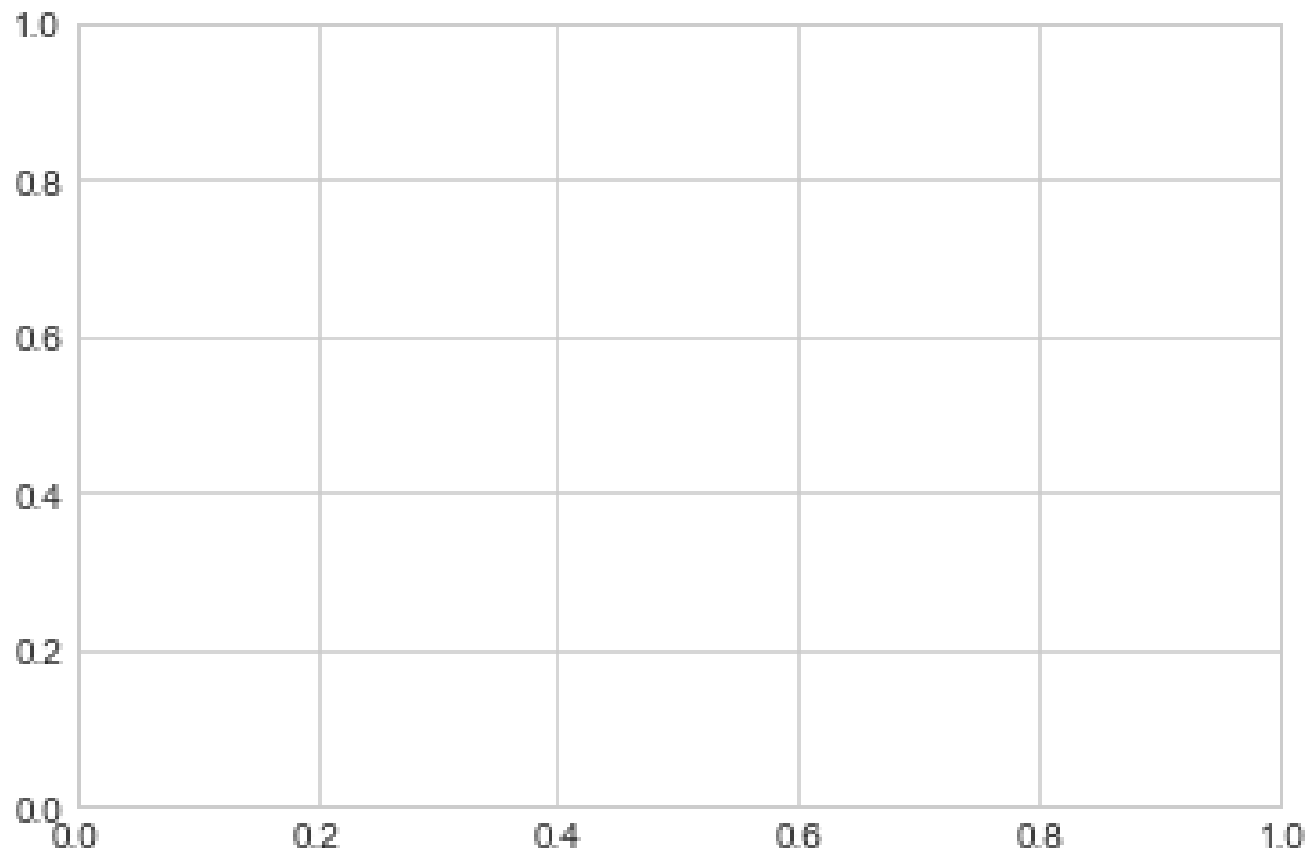

In Matplotlib, the **figure** (an instance of the class `plt.Figure`) can be thought of as a single container that contains all the objects representing axes, graphics, text, and labels.

The *axes* (an instance of the class `plt.Axes`) is what we see above:


a bounding box with ticks, grids, and labels, which will eventually contain the plot elements that make up our visualization.

Throughout this part of the book, we'll commonly use the variable name `fig` to refer to a figure instance and `ax` to refer to **an axes instance** or **group of axes instances**.

Once we have created an axes, we can use the `ax.plot` method to plot some data.

Let's start with a simple sinusoid, as shown in the following figure:

```
In [ ]: fig = plt.figure()  
        ax = plt.axes()  
  
        x = np.linspace(0, 10, 1000)  
        ax.plot(x, np.sin(x));
```

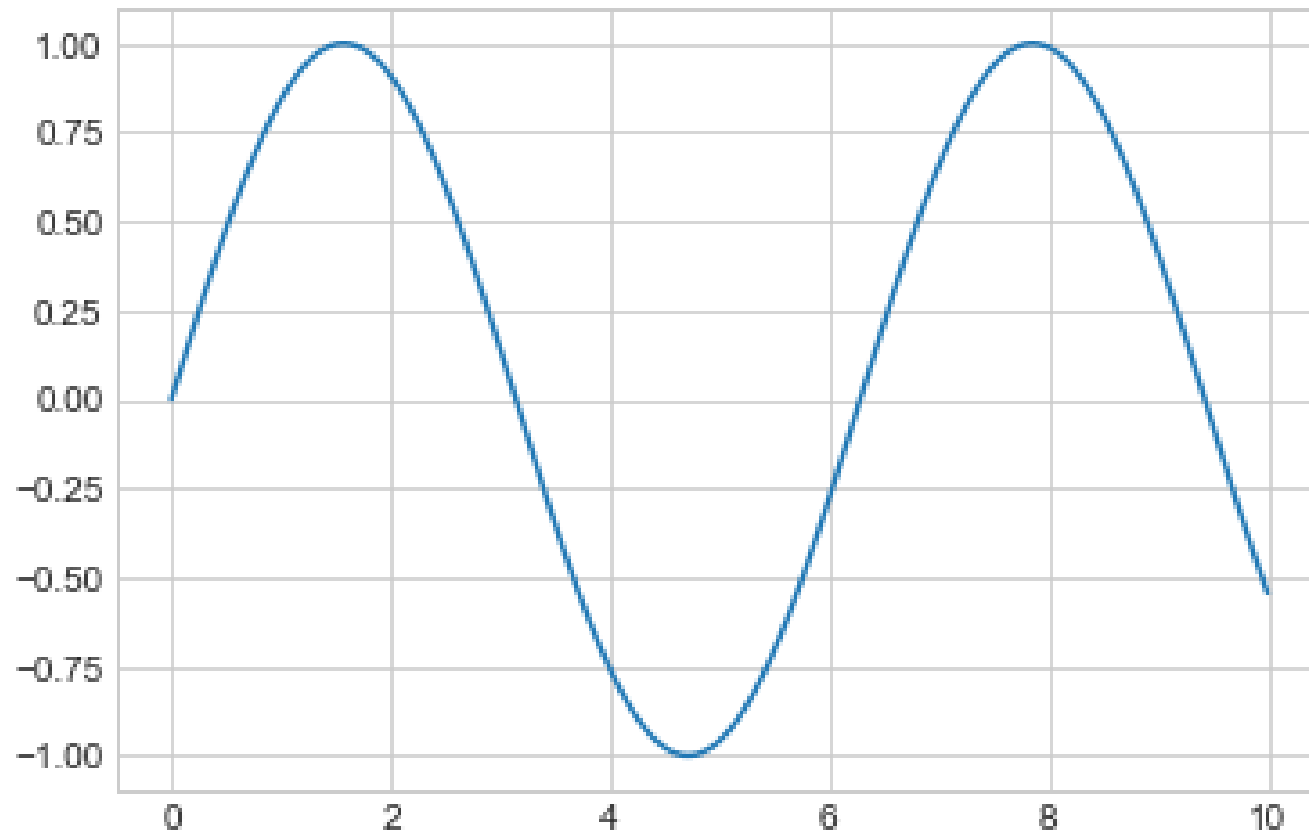


Note that the **semicolon** at the end of the last line is intentional:

it **suppresses the textual representation** of the plot from the output.

Alternatively, we can use the PyLab interface and let the figure and axes be created for us in the background;


as the following figure shows, the result is the same:

```
In [ ]: plt.plot(x, np.sin(x));
```

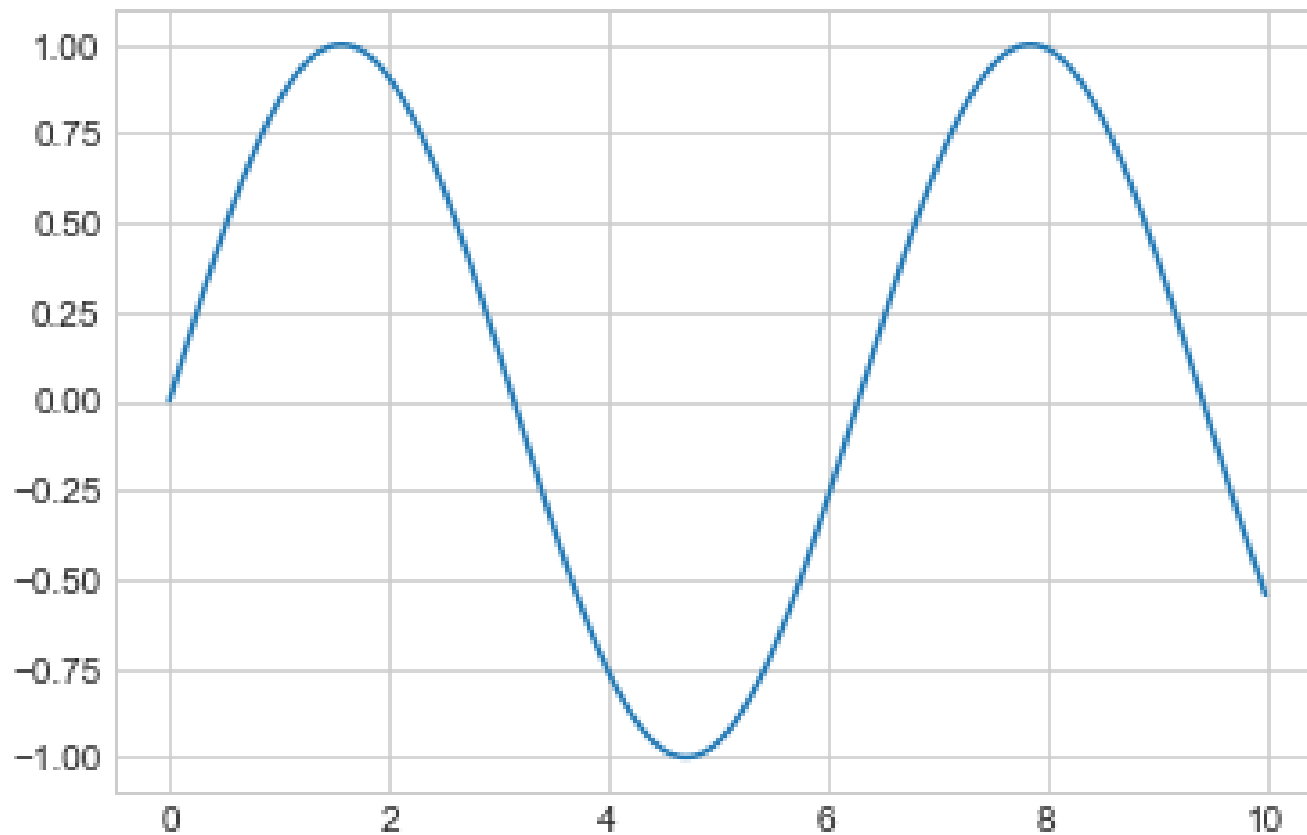

If we want to create a **single figure** with multiple lines (see the following figure), we can simply call the `plot` function multiple times:

```
In [ ]: plt.plot(x, np.sin(x))  
plt.plot(x, np.cos(x));
```

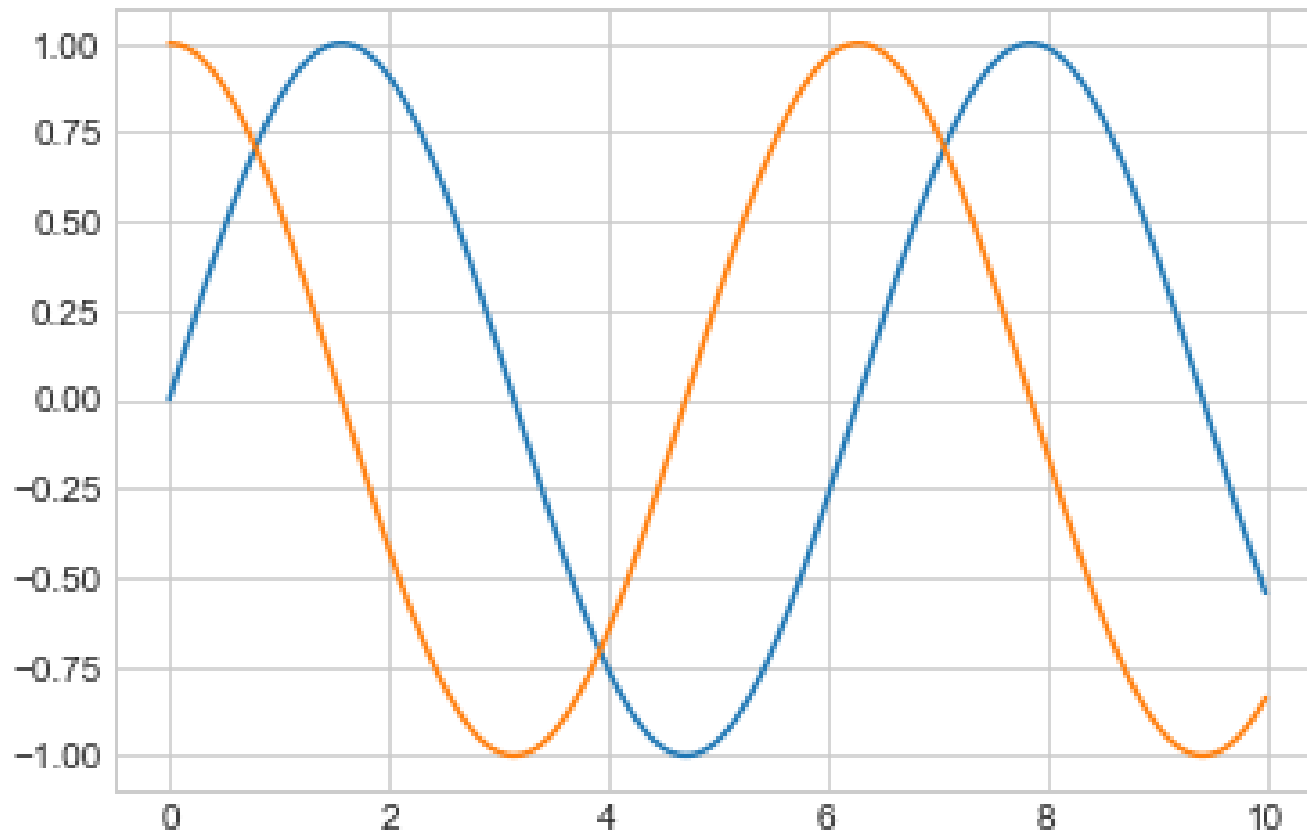

That's all there is to plotting simple functions in Matplotlib!

We'll now dive into some more details about how to **control the appearance** of the axes and lines.

Adjusting the Plot: Line Colors and Styles

The first adjustment you might wish to make to a plot is to control the **line colors and styles**.


The `plt.plot` function takes **additional arguments** that can be used to specify these.

To **adjust the color**, you can use the `color` keyword, which accepts a string argument representing virtually any imaginable color.

The color can be specified in a variety of ways;

see the following figure for the output of the following examples:

```
In [ ]: plt.plot(x, np.sin(x - 0), color='blue')           # specify color
plt.plot(x, np.sin(x - 1), color='g')                   # short color
plt.plot(x, np.sin(x - 2), color='0.75')               # grayscale b
plt.plot(x, np.sin(x - 3), color='#FFDD44')            # hex code (h
plt.plot(x, np.sin(x - 4), color=(1.0,0.2,0.3))         # RGB tuple,
plt.plot(x, np.sin(x - 5), color='chartreuse');         # HTML color
```

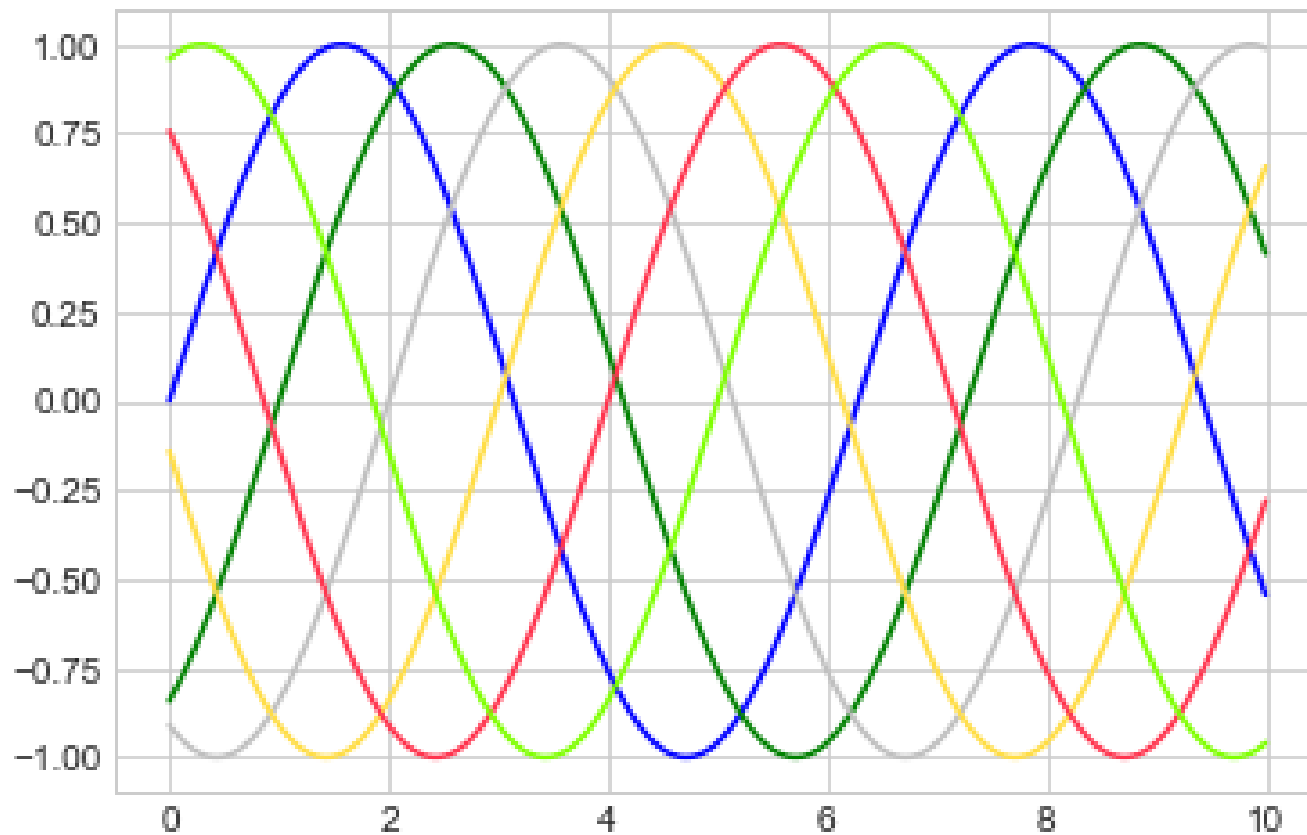



If **no color is specified**, Matplotlib will automatically cycle through a set of default colors for multiple lines.

Similarly, the **line style** can be adjusted using the `linestyle` keyword (see the following figure):

```
In [ ]: plt.plot(x, x + 0, linestyle='solid')
plt.plot(x, x + 1, linestyle='dashed')
plt.plot(x, x + 2, linestyle='dashdot')
plt.plot(x, x + 3, linestyle='dotted');

# For short, you can use the following codes:
plt.plot(x, x + 4, linestyle='-') # solid
plt.plot(x, x + 5, linestyle='--') # dashed
plt.plot(x, x + 6, linestyle='-.') # dashdot
plt.plot(x, x + 7, linestyle=':'); # dotted
```

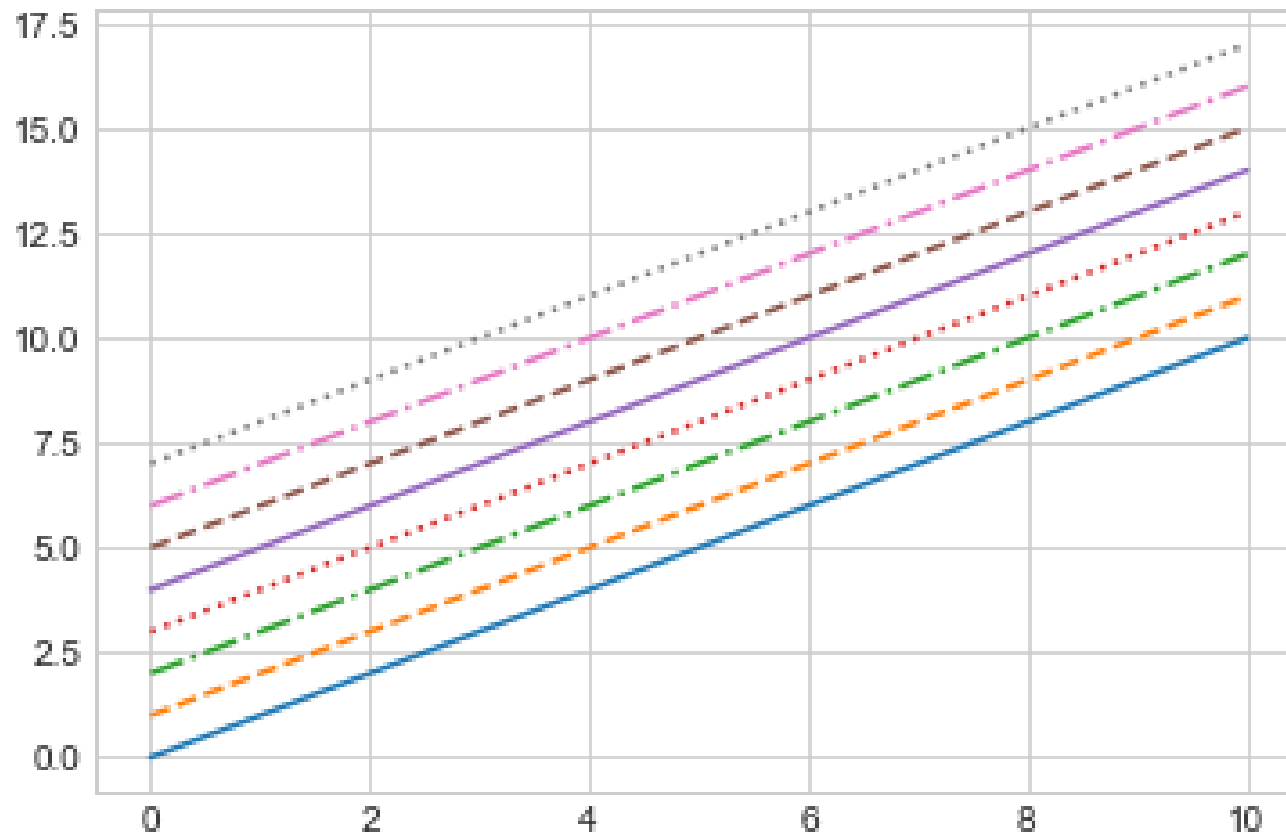


Though it may be less clear to someone reading your code,

you can **save some keystrokes** by **combining** these `linestyle` and `color` codes into a single non-keyword argument to the `plt.plot` function;

the following figure shows the result:

```
In [ ]: plt.plot(x, x + 0, '-g')    # solid green  
plt.plot(x, x + 1, '--c')    # dashed cyan  
plt.plot(x, x + 2, '-.k')    # dashdot black  
plt.plot(x, x + 3, ':r');    # dotted red
```

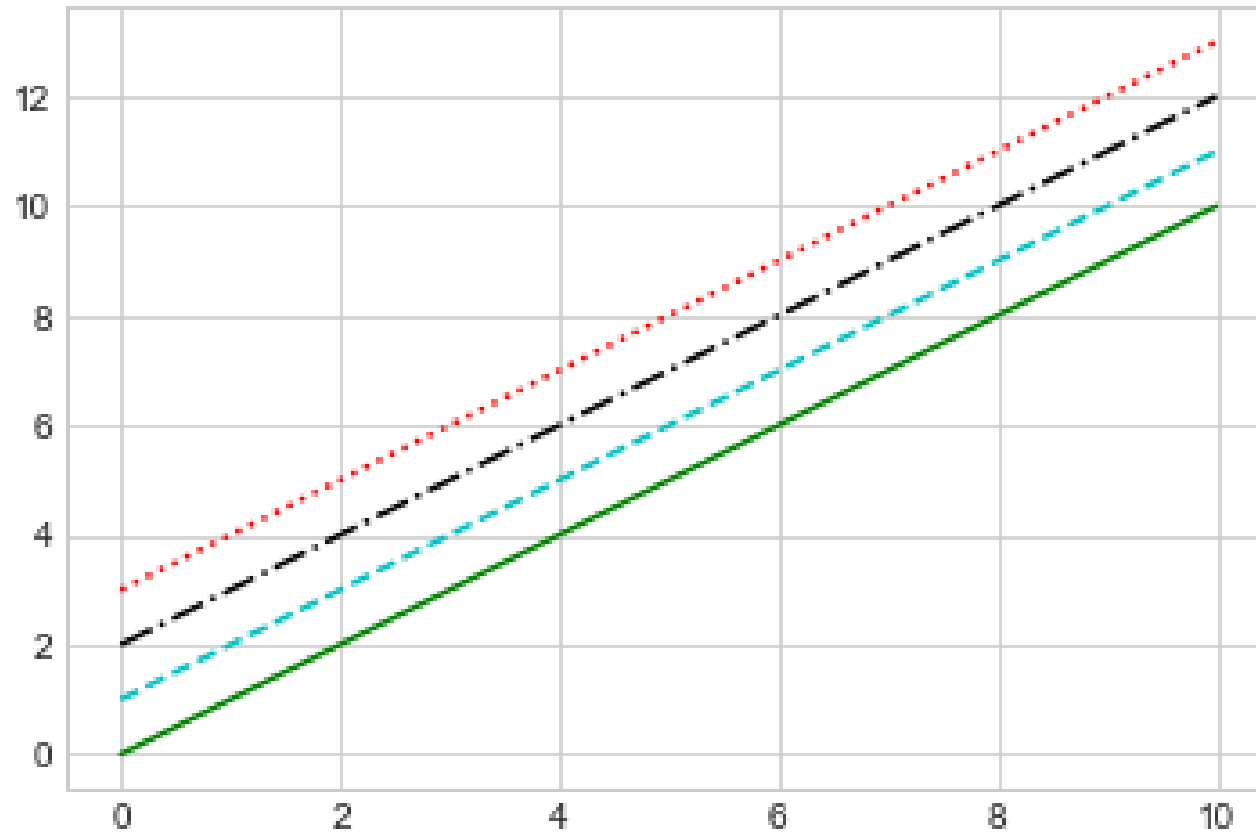

These single-character color codes reflect the standard abbreviations in the RGB (Red/Green/Blue) and CMYK (Cyan/Magenta/Yellow/black) **color systems**.

There are **many other keyword arguments** that can be used to fine-tune the appearance of the plot;

for details, read through the docstring of the `plt.plot` function using IPython's help tools.


Adjusting the Plot: Axes Limits

Matplotlib does a decent job of choosing **default axes limits** for your plot, but sometimes it's nice to have finer control.

The most basic way to **adjust the limits** is to use the `plt.xlim` and `plt.ylim` functions (see the following figure):

```
In [ ]: plt.plot(x, np.sin(x))
```

```
plt.xlim(-1, 11)  
plt.ylim(-1.5, 1.5);
```

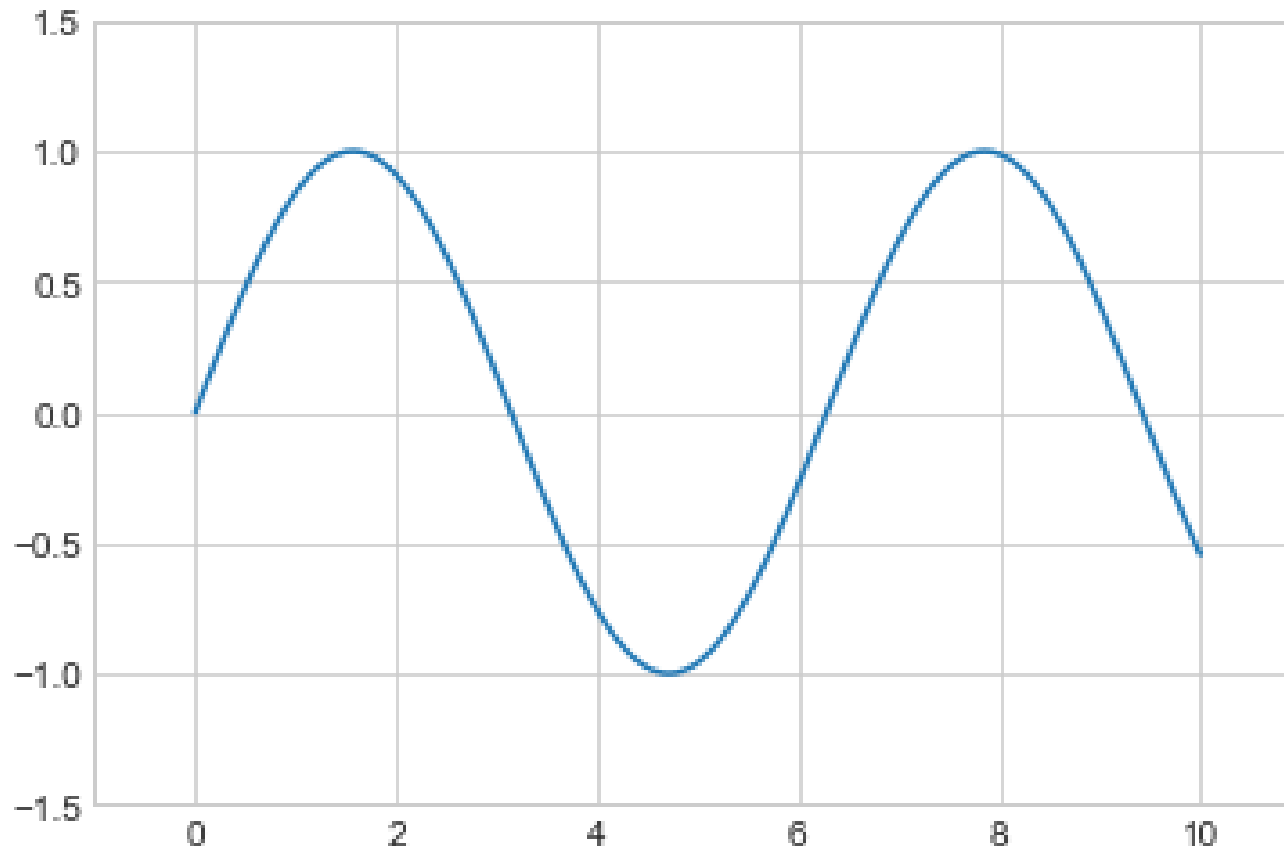


If for some reason you'd like either axis to be displayed in reverse, you can simply **reverse** the order of the arguments (see the following figure):

```
In [ ]: plt.plot(x, np.sin(x))
```

```
plt.xlim(10, 0)
```

```
plt.ylim(1.2, -1.2);
```

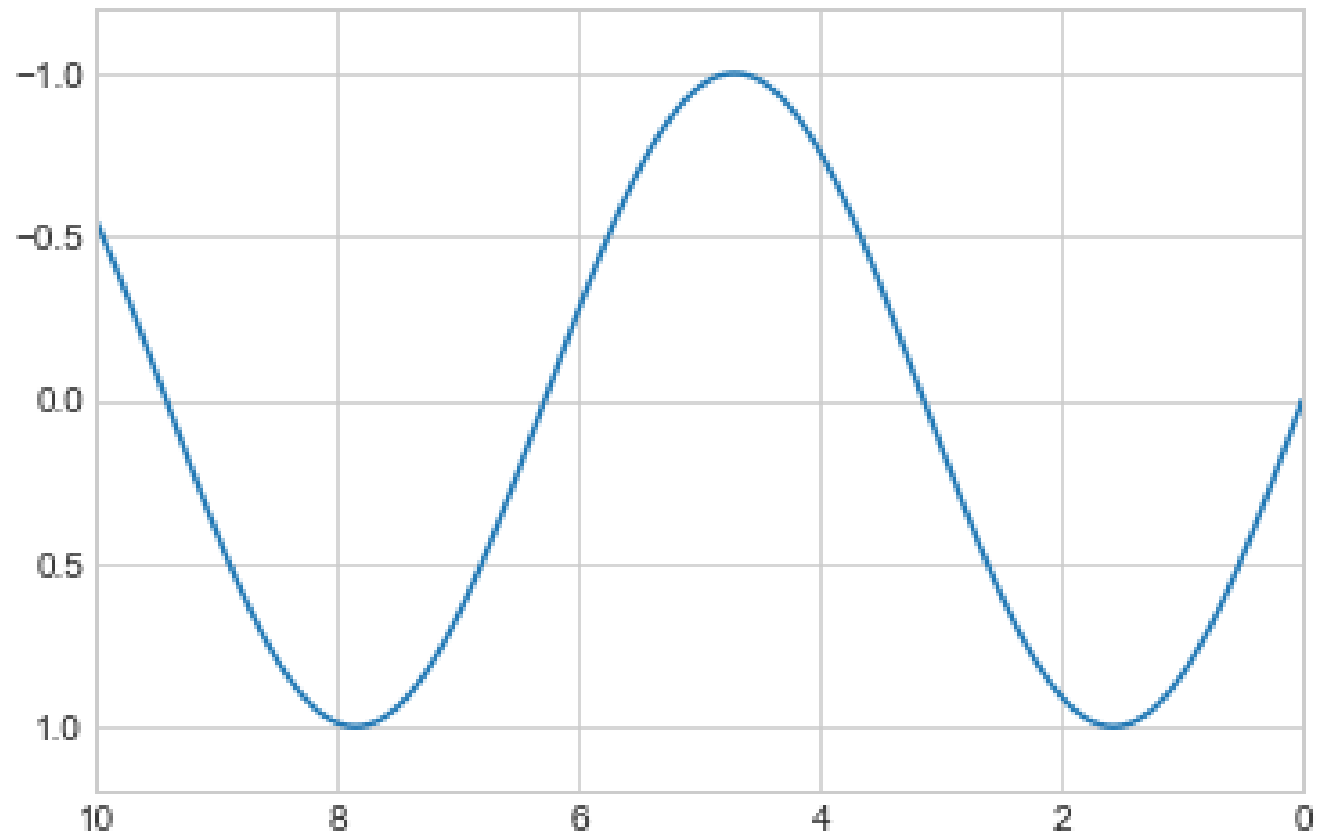


A useful related method is `plt.axis` (note here the potential confusion between **axes** with an *e*, and **axis** with an *i*),

which allows more **qualitative specifications** of axis limits.


For example, you can automatically tighten the bounds around the current content, as shown in the following figure:

```
In [ ]: plt.plot(x, np.sin(x))  
plt.axis('tight');
```

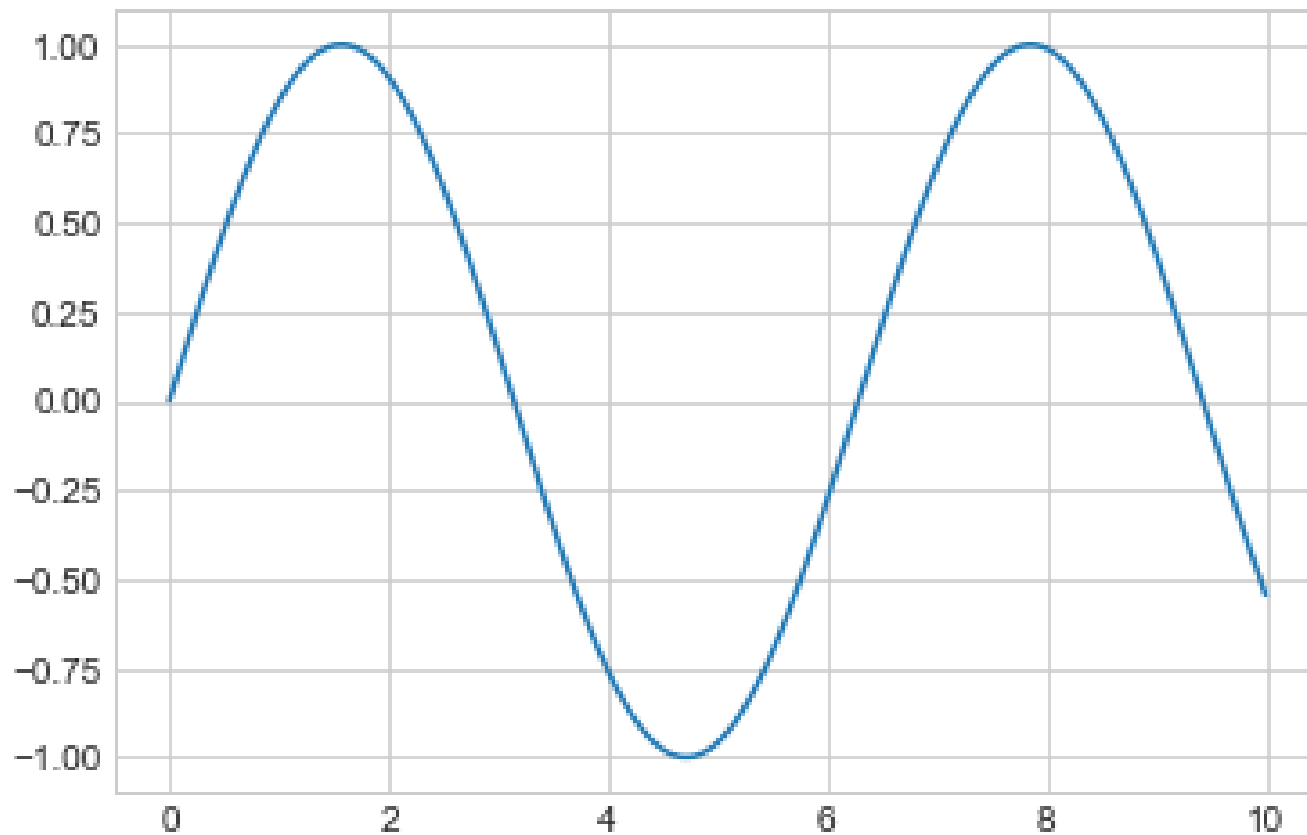Or you can specify that you want an **equal axis ratio**, such that one unit in `x` is visually equivalent to one unit in `y`, as seen in the following figure:

```
In [ ]: plt.plot(x, np.sin(x))  
plt.axis('equal');
```

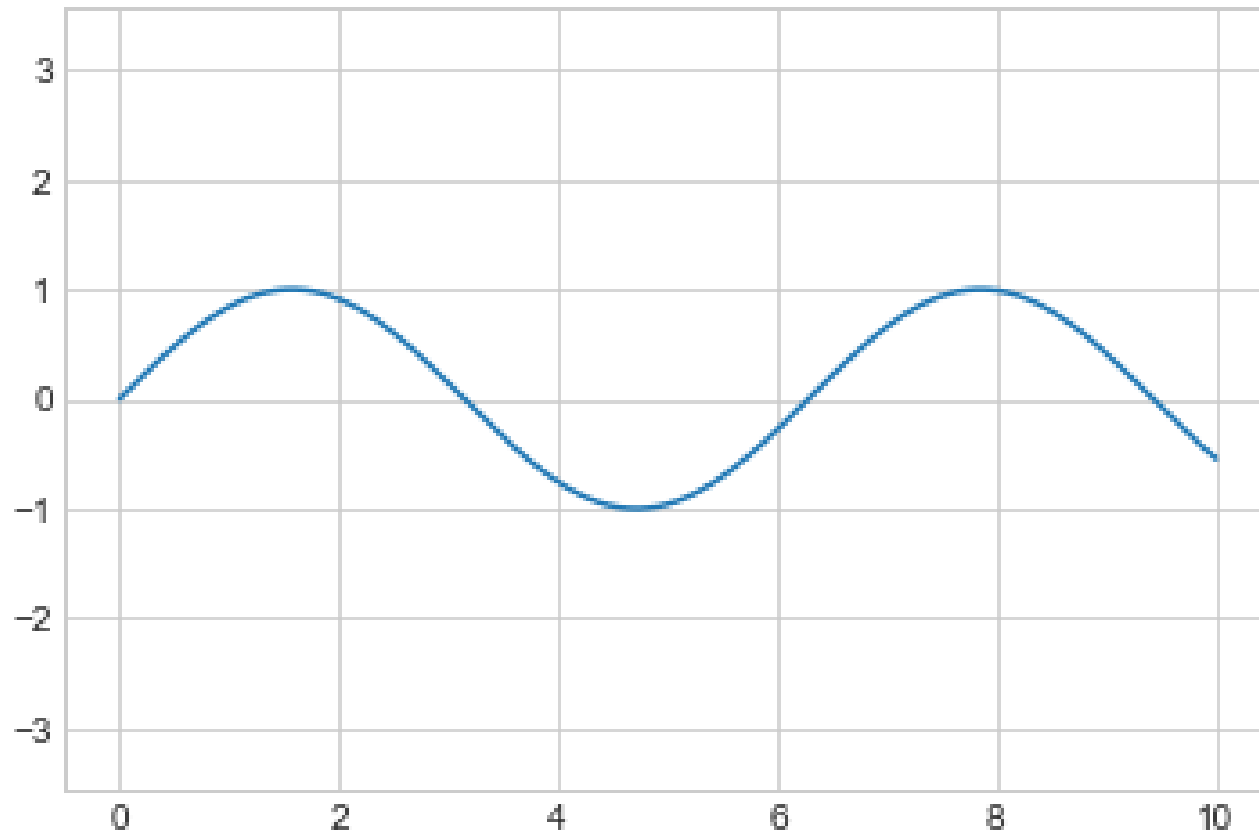

Other axis options include `'on'`, `'off'`, `'square'`, `'image'`, and more.


For more information on these, refer to the `plt.axis` docstring.

Labeling Plots

As the last piece of this chapter, we'll briefly look at the **labeling of plots**: titles, axis labels, and simple legends.

Titles and axis labels are the simplest such labels—there are methods that can be used to quickly set them (see the following figure):

```
In [ ]: plt.plot(x, np.sin(x))  
plt.title("A Sine Curve")  
plt.xlabel("x")  
plt.ylabel("sin(x)");
```

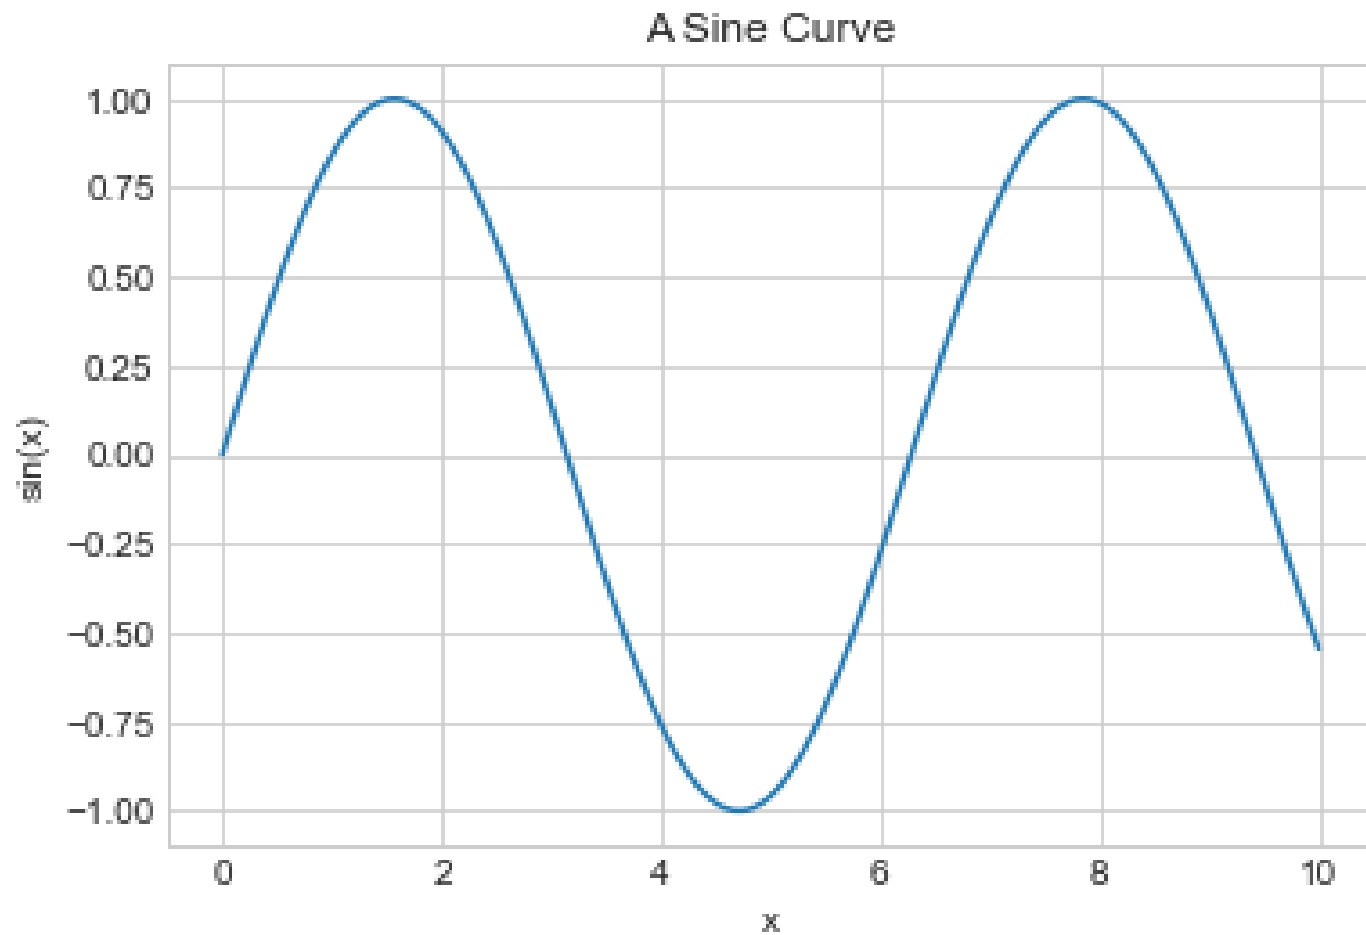

The **position, size, and style** of these **labels** can be adjusted using optional arguments to the functions, described in the docstrings.


When **multiple lines** are being shown within a **single axes**, it can be useful to create a plot legend that labels each line type.

Again, Matplotlib has a built-in way of quickly creating such a legend; it is done via the (you guessed it) `plt.legend` method.

The easiest way to **specify the label** of each line using the `label` keyword of the `plot` function (see the following figure):

```
In [ ]: plt.plot(x, np.sin(x), '-g', label='sin(x)')
plt.plot(x, np.cos(x), ':b', label='cos(x)')
plt.axis('equal')

plt.legend();
```

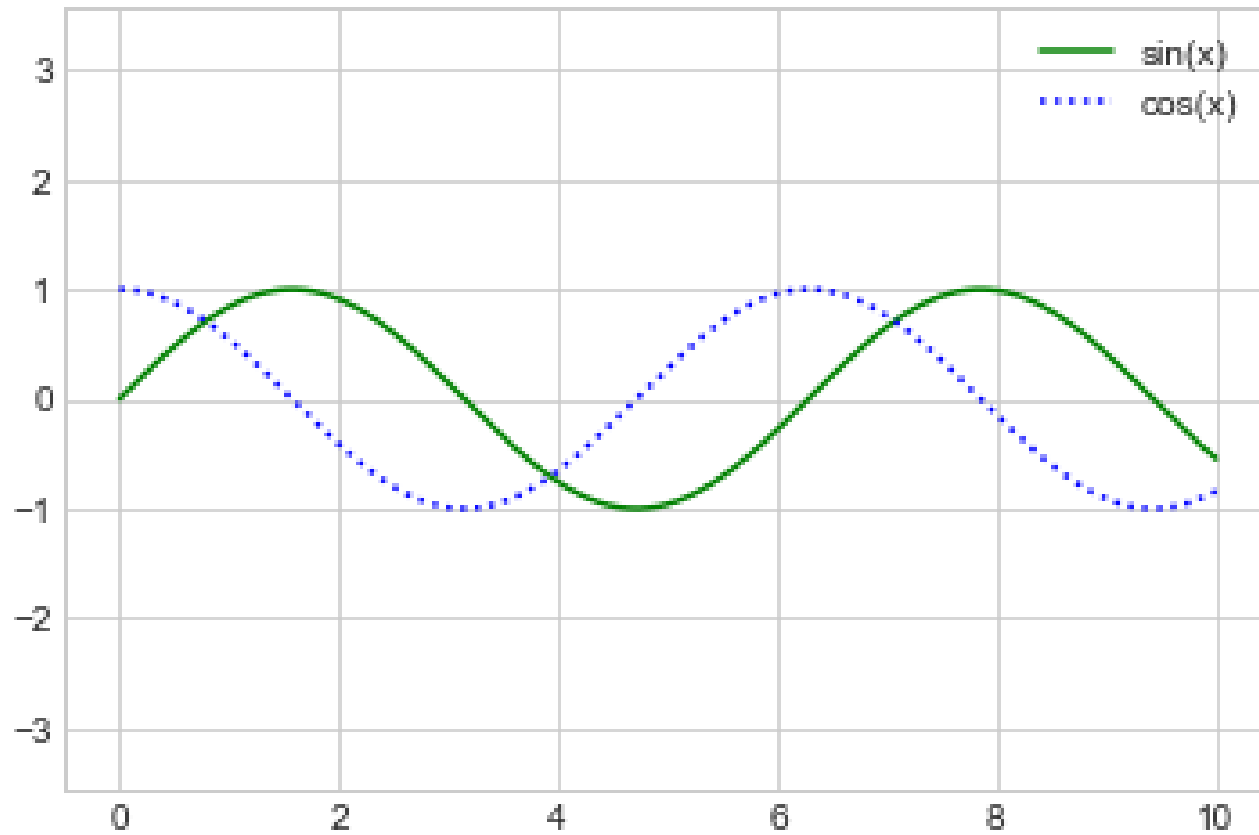

As you can see, the `plt.legend` function **keeps track of the line style and color**, and matches these with the correct label.

Matplotlib Gotchas

While most `plt` functions **translate directly** to `ax` methods (`plt.plot` → `ax.plot`, `plt.legend` → `ax.legend`, etc.), this is **not the case for all commands**.

In particular, functions to set limits, labels, and titles are slightly modified.

For **transitioning** between MATLAB-style functions and object-oriented methods, make the following changes:

- `plt.xlabel` → `ax.set_xlabel`
- `plt.ylabel` → `ax.set_ylabel`
- `plt.xlim` → `ax.set_xlim`
- `plt.ylim` → `ax.set_ylim`
- `plt.title` → `ax.set_title`

In the object-oriented interface to plotting, **rather than** calling these functions **individually**,

it is often more convenient to use the `ax.set` method to set **all these properties at once** (see the following figure):

```
In [ ]: ax = plt.axes()
ax.plot(x, np.sin(x))
ax.set(xlim=(0, 10), ylim=(-2, 2),
       xlabel='x', ylabel='sin(x)',
       title='A Simple Plot');
```


A Simple Plot

